

## MHD Stagnation-Point Flow towards a Stretching Sheet with Prescribed Surface Heat Flux

(Aliran Titik Genangan MHD terhadap Helaian Meregang dengan  
Fluks Haba Permukaan Ditetapkan)

ANUAR ISHAK\*, ROSLINDA NAZAR, NORIHAN M. ARIFIN,  
FADZILAH M. ALI & IOAN POP

### ABSTRACT

*The steady two-dimensional stagnation point flow of an incompressible viscous and electrically conducting fluid, subject to a transverse uniform magnetic field, towards a stretching sheet is investigated. The governing system of partial differential equations are transformed to ordinary differential equations, which are then solved numerically using a finite difference scheme known as the Keller-box method. The effects of the governing parameters on the flow field and heat transfer characteristics are obtained and discussed. It is found that the heat transfer rate at the surface increases with the magnetic parameter when the free stream velocity exceeds the stretching velocity, i.e.  $\varepsilon > 1$ , and the opposite is observed when  $\varepsilon < 1$ .*

*Keywords: Heat transfer; magnetohydrodynamic; stagnation point flow; stretching surface*

### ABSTRAK

*Aliran titik genangan mantap dua matra bagi bendalir likat tak termampatkan dan pengkonduksi elektrik terhadap helaian meregang tertakluk kepada medan magnet melintang seragam diselidik. Sistem menakluk persamaan pembezaan separa dijemakan kepada persamaan pembezaan biasa, yang kemudiannya diselesaikan secara berangka menggunakan skim beza sehingga dikenali sebagai kaedah kotak Keller. Kesan parameter-parameter menakluk terhadap medan aliran dan ciri-ciri pemindahan haba diperoleh dan dibincangkan. Didapati bahawa kadar pemindahan haba pada permukaan meningkat dengan peningkatan parameter magnet apabila halaju aliran bebas melebihi halaju regangan, iaitu  $\varepsilon > 1$ , dan keputusan yang bertentangan diperhatikan apabila  $\varepsilon < 1$ .*

*Kata kunci: Aliran titik genangan; magnetohidrodinamik; pemindahan haba; permukaan meregang*

### INTRODUCTION

The fluid dynamics due to a stretching surface is important in manufacturing processes. Examples are numerous and they include the aerodynamic extrusion of plastic sheets, the boundary layer along a liquid film in condensation processes, paper production, glass blowing, metal spinning and drawing plastic films. The quality of the final product depends on the rate of heat transfer at the stretching surface.

Since the pioneering study by Crane (1970) who presented an exact analytical solution for the steady two-dimensional stretching of a surface in a quiescent fluid, many authors have considered various aspects of this problem and obtained similarity solutions. Gupta and Gupta (1977) extended the problem posed by Crane (1970) to a permeable sheet and obtained closed-form solution, while Grubka and Bobba (1985) studied the thermal field and presented the solutions in terms of Kummer's functions. The 3-dimensional case has been considered by Wang (1984). Chen (1998) studied the case when buoyancy force is taken into consideration, and Magyari and Keller (1999) considered exponentially stretching surface. The

heat transfer over a stretching surface with variable surface heat flux has been considered by Char and Chen (1988), Lin and Chen (1998), Elbasheshy (1998), Ishak et al. (2008a), and very recently by Yacob and Ishak (2010). On the other hand, the flow over an unsteady stretching surface has been studied by Abbas et al. (2008) and Ishak et al. (2006, 2008b, 2009a, 2009b).

The steady laminar flow of an electrically conducting fluid caused by the stretching of an elastic sheet in the presence of a uniform magnetic field has been studied by Pavlov (1974). Andersson (1995) then demonstrated that the similarity solution derived by Pavlov (1974) is not only a solution of the boundary layer equations, but also represents an exact solution of the complete Navier-Stokes equations. Liu (2005) extended Andersson's results by finding the temperature distribution for non-isothermal stretching sheet, both in the prescribed surface temperature and prescribed surface heat flux conditions, in which the surface thermal conditions are linearly proportional to the distance from the origin. The flow and heat transfer characteristics over a stretching sheet in the presence of a uniform magnetic field has also been studied by Char

(1994), Chiam (1997), Liu (2004), Ishak et al. (2008c), and very recently by Prasad et al. (2009).

The above investigations considered the flow solely caused by a stretching sheet immersed in an otherwise quiescent fluid. In the present paper, we study the stagnation flow and heat transfer characteristics over a stretching sheet, with a uniform magnetic field is applied normal to it. The flow is not caused solely by the stretching sheet but also due to the external stream. The governing partial differential equations are transformed into ordinary differential equations using similarity transformation, and then solved numerically by a finite difference scheme, for some values of parameters. The results are then compared with those obtained by Elbashbeshy (1998) and Liu (2005) for some particular cases of the present study, to support their validity. It is worth mentioning that the MHD stagnation-point flow towards a stretching sheet but without considering the heat transfer aspect has been considered by Hayat et al. (2009, 2010).

MATHEMATICAL FORMULATION

Consider a steady, two-dimensional flow of an incompressible electrically conducting fluid near the stagnation point on a stretching sheet as shown in Figure 1. The stretching velocity  $u_w(x)$  and the external velocity  $u_e(x)$  are assumed to vary proportional to the distance  $x$  from the stagnation point O, i.e.  $u_w(x) = ax$  and  $u_e(x) = bx$ , where  $a$  and  $b$  are constants with  $a > 0$  and  $b \geq 0$ . It is also assumed that the surface of the sheet is subjected to a prescribed heat flux  $q_w(x) = cx^n$ , where  $c$  and  $n$  are constants with  $c > 0$ . Further, a uniform magnetic field of strength  $B_0$  is assumed to be applied in the positive  $y$ -direction normal to the stretching sheet. The magnetic Reynolds number is assumed to be small, and thus the induced magnetic field is negligible. The simplified two-dimensional equations governing the boundary layer flow of a steady, laminar and incompressible viscous fluid are:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0, \tag{1}$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = u_e \frac{du_e}{dx} + \nu \frac{\partial^2 u}{\partial y^2} + \frac{\sigma B_0^2}{\rho} (u_e - u), \tag{2}$$

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \alpha \frac{\partial^2 T}{\partial y^2}, \tag{3}$$

where  $u$  and  $v$  are the velocity components along the  $x$  and  $y$  axes, respectively. Further,  $\nu$ ,  $\rho$ ,  $\alpha$  and  $T$  are respectively the kinematic viscosity, fluid density, thermal diffusivity and fluid temperature. We shall assume that the boundary conditions of Eqs. (1)-(3) are:

$$u = u_w(x), v = 0, q_w(x) = -k \frac{\partial T}{\partial y} \text{ at } y = 0, \\ u \rightarrow u_e(x), T \rightarrow T_\infty \text{ as } y \rightarrow \infty, \tag{4}$$

where  $k$  is the thermal conductivity. The continuity equation (1) is satisfied by introducing a stream function  $\psi$  such that:

$$u = \frac{\partial \psi}{\partial y} \text{ and } v = -\frac{\partial \psi}{\partial x}. \tag{5}$$

The momentum and energy equations can be transformed into the corresponding ordinary differential equations by the following transformation:

$$\eta = \left(\frac{a}{v}\right)^{1/2} y, f(\eta) = \frac{\psi}{(av)^{1/2} x}, \theta(\eta) = \frac{k(T - T_\infty)}{cx^n} \left(\frac{a}{v}\right)^{1/2}. \tag{6}$$

The transformed ordinary differential equations are:

$$f''' + ff'' - f'^2 + \varepsilon^2 + M(\varepsilon - f') = 0, \tag{7}$$

$$\frac{1}{Pr} \theta'' + f\theta' - \eta f' \theta = 0, \tag{8}$$

subject to the boundary conditions (4) which become

$$f(0) = 0, f'(0) = 1, \theta'(0) = -1, \\ f'(\eta) \rightarrow \varepsilon, \theta(\eta) \rightarrow 0 \text{ as } \eta \rightarrow \infty. \tag{9}$$

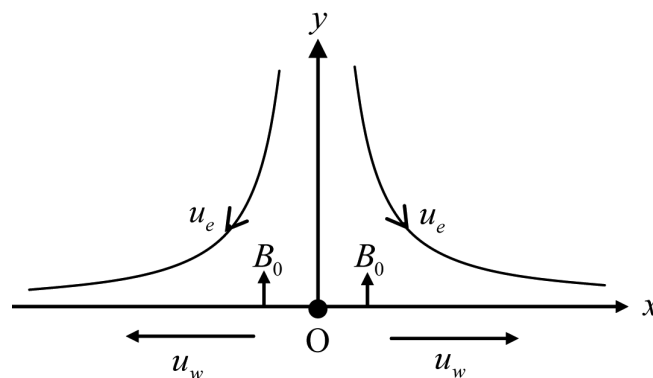


FIGURE 1. Physical model and coordinate system

Here primes denote differentiation with respect to  $\eta$ ,  $\varepsilon = b/a$  is the velocity ratio parameter,  $Pr = \nu/\alpha$  is the Prandtl number and  $M = \sigma B_0^2/(\rho\alpha)$  is the magnetic parameter.

When  $\varepsilon = 1$ , the solution of (7) subject to the appropriate boundary conditions (9) is given by:

$$f(\eta) = \eta, \quad (10)$$

while when  $\varepsilon = 0$ , the solution was obtained by Andersson (1995) as:

$$f(\eta) = \frac{1}{\sqrt{1+M}} \left(1 - e^{-\sqrt{1+M}\eta}\right). \quad (11)$$

Further, for this case ( $\varepsilon = 0$ ), the solution of Eq. (8) is given by:

$$\theta(\eta) = \frac{\sqrt{1+M}}{Pr} e^{-\frac{Pr}{\sqrt{1+M}}\eta} \frac{F\left(\frac{Pr}{1+M} - n, \frac{Pr}{1+M} + 1, -\frac{Pr}{1+M} e^{-\sqrt{1+M}\eta}\right)}{F\left(\frac{Pr}{1+M} - n, \frac{Pr}{1+M}, -\frac{Pr}{1+M}\right)}, \quad (12)$$

where  $F(a, b, z)$  denotes the confluent hypergeometric function (see Abramowitz and Stegun (1965)), with:

$$F(a, b, z) = 1 + \sum_{n=1}^{\infty} \frac{a_n z^n}{b_n n!},$$

$$a_n = a(a+1)(a+2) \dots (a+n-1),$$

$$b_n = b(b+1)(b+2) \dots (b+n-1).$$

Further, from Eqs. (11) and (12), the skin friction coefficient  $f''(0)$  and the wall temperature  $\theta(0)$  can be shown to be given by:

$$f''(0) = -\sqrt{1+M},$$

$$\theta(0) = \frac{\sqrt{1+M}}{Pr} \frac{F\left(\frac{Pr}{1+M} - n, \frac{Pr}{1+M} + 1, -\frac{Pr}{1+M}\right)}{F\left(\frac{Pr}{1+M} - n, \frac{Pr}{1+M}, -\frac{Pr}{1+M}\right)}. \quad (13)$$

We notice that when  $\varepsilon = 0$  (quiescent fluid), the problem under consideration reduces to that considered by Char (1994) for the prescribed heat flux case. Moreover, when  $\varepsilon = 0$  and  $M = 0$  (without magnetic field) the present problem reduces to that of Chen and Char (1988) for impermeable stretching sheet, for which an exact analytical solution was reported, while when  $\varepsilon = 0$ ,  $M = 0$  and  $n = 0$  (uniform surface heat flux), (7)-(9) reduce to that of Dutta et al. (1985), who investigated the heat transfer characteristic in an electrically non-conducting fluid past a stretching sheet with uniform surface heat flux.

The physical quantities of interest are the skin friction coefficient  $C_f$  and the local Nusselt number  $Nu_x$ , which are defined as:

$$C_f = \frac{\tau_w}{\rho u_w^2/2}, \quad Nu_x = \frac{xq_w}{k(T_w - T_\infty)}, \quad (14)$$

where the wall shear stress  $\tau_w$  and the surface heat flux  $q_w$  are given by:

$$\tau_w = \mu \left(\frac{\partial u}{\partial y}\right)_{y=0}, \quad q_w = -k \left(\frac{\partial T}{\partial y}\right)_{y=0}, \quad (15)$$

with  $\mu$  being the dynamic viscosity. Using the non-dimensional variables (6), we obtain:

$$\frac{1}{2} C_f Re_x^{1/2} = f''(0), \quad Nu_x / Re_x^{1/2} = 1/\theta(0), \quad (16)$$

where  $Re_x = u_w x/\nu$  is the local Reynolds number.

## RESULTS AND DISCUSSION

The system of (7)-(9) was solved numerically using the Keller-box method described by Cebeci and Bradshaw (1988) for some values of parameters. Comparison with previously published data available in the literature as well as the series solution given by (13) for a particular case, as presented in Table 1 shows a good agreement.

As can be seen from Figure 2, when  $\varepsilon = 1$ , the velocity profiles for different values of  $M$  coincide, which means for this case the flow field is not influenced by the magnetic field. The numerical results are in agreement with the exact solution given by (10), which produces  $f'(\eta) = 1$  and  $f''(\eta) = 0$  for any values of  $\eta$ . The zero skin friction for this case ( $\varepsilon = 1$ ) is not surprising since the surface and the fluid move with the same velocity. When  $\varepsilon > 1$ , the flow has a boundary layer structure, and the thickness of the boundary layer decreases with  $M$ . On the other hand, when  $\varepsilon < 1$ , the flow has an inverted boundary layer structure, which results from the fact that when  $b/a < 1$ , the stretching velocity  $ax$  of the surface exceeds the velocity  $bx$  of the external stream. For this case too, the thickness of the boundary layer decreases with  $M$ , which implies increasing manner of the magnitude of the velocity gradient at the surface. Thus, the magnitude of the skin friction coefficient  $f''(0)$  increases with increasing  $M$  for both cases  $\varepsilon > 1$  and  $\varepsilon < 1$ . The solution when  $\varepsilon = 0$  is given by (11), which implies  $f''(0) = -\sqrt{1+M}$ .

Examining Table 1, for  $n = -1$ , the surface temperature is infinite, and in fact independent upon  $\varepsilon$ ,  $Pr$  and  $M$ . This observation can also be obtained by integrating (8) with respect to  $\eta$  and applying the appropriate boundary conditions (9), which gives:

$$\int_0^\infty f'\theta d\eta = \frac{1}{(n+1)Pr}. \quad (17)$$

In fact,  $n = -1$  is only possible for the prescribed surface temperature case, and it represents stretching surface subject to an adiabatic situation (Ishak et al. 2007, 2008d).

TABLE 1. Values of surface temperature  $\theta(0)$

$\epsilon$	$n$	$Pr$	$M$	Elbashbeshy (1998)	Liu (2005)	Present results		
						Numerical	Eq. (13)	
0	0	0.72	0	2.13767		2.1591531	2.159153068	
		1		1.71792		1.7182818	1.718281828	
		10		0.43341		0.4332748	0.433274823	
	1	0.72		1.2253		1.2366575	1.236657472	
		1		1.0		1.0	1.0	
		6.7		0.2688	0.333303	0.3333031	0.333303061	
				0.5		0.339715	0.3397152	0.339715220
				1		0.345377	0.3453772	0.345377171
				5		0.380930	0.3809302	0.380930205
	0.1	-1					$\infty$	
		0					1.8155361	
		1					1.0516189	
2	-1					$\infty$		
	0					1.0142316		
	1					0.6673570		

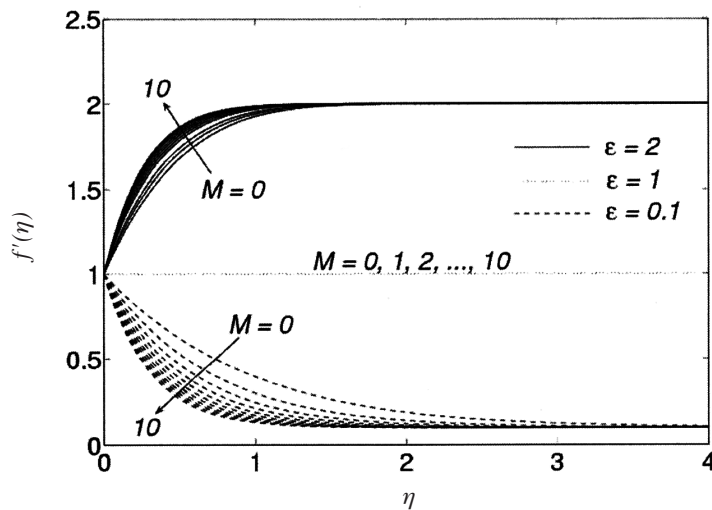


FIGURE 2. Velocity profiles  $f'(\eta)$  for different values of  $M$  and  $\epsilon$

Figures 3 to 6 show the temperature profiles for selected values of parameters. The temperature profiles are found to subside monotonously to zero as  $\eta$  increases. These curves represent the physically realistic case. As can be seen from Figures 3 to 5, the wall temperature  $\theta(0)$  decreases with increasing  $n$ ,  $\epsilon$  and  $Pr$ . Thus, the local Nusselt number  $Nu_x / Re_x^{1/2}$ , which represents the heat transfer rate at the surface increases when  $n$ ,  $\epsilon$  or  $Pr$  increases. Moreover, Figures 3 to 5 show that at a given point in the thermal boundary layer, the temperature decreases with increasing  $n$ ,  $\epsilon$  or  $Pr$ , due to decreasing manner of the thermal boundary layer thickness with increasing these parameters. Different characteristics are observed in Figure 6, where the wall temperature increases as  $M$  increases for  $\epsilon < 1$ , but it decreases with  $M$  for  $\epsilon > 1$ .

CONCLUSION

We have theoretically investigated the effects of magnetic parameter  $M$ , velocity ratio parameter  $\epsilon$ , heat flux index  $n$ , and Prandtl number  $Pr$  on the fluid flow and heat transfer characteristics of the MHD stagnation point flow towards a stretching sheet immersed in a viscous fluid. The numerical results obtained agreed very well with previously published data as well as the series solution for a particular case of the present study. It is found that the magnitude of the skin friction coefficient  $|f''(0)|$  increases with  $M$  when  $\epsilon \neq 1$ , and zero when  $\epsilon = 1$ . Further, the heat transfer rate at the surface  $1/\theta(0)$  increases with  $n$ ,  $\epsilon$  and  $Pr$ , while different behaviors are observed for variation with  $M$ , i.e.  $1/\theta(0)$  increases with  $M$  when  $\epsilon > 1$  and it decreases when  $\epsilon < 1$ .

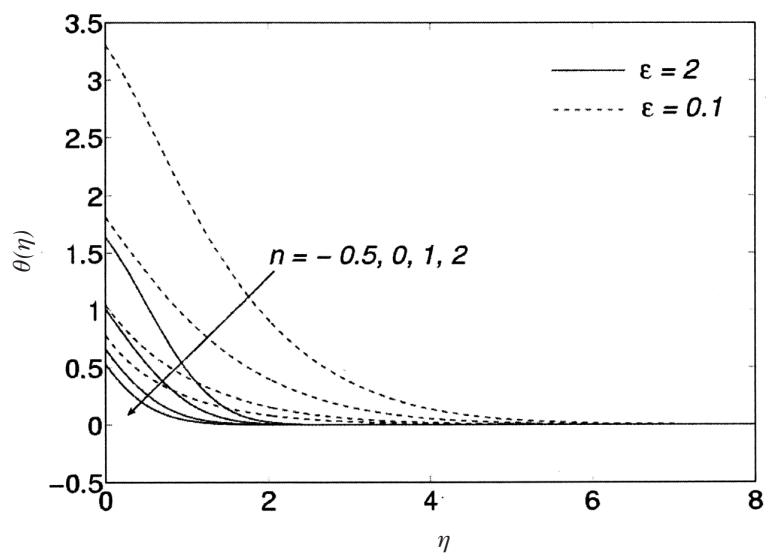


FIGURE 3. Temperature profiles  $\theta(\eta)$  for different values of  $n$  and  $\epsilon$  when  $Pr = 1$  and  $M = 1$

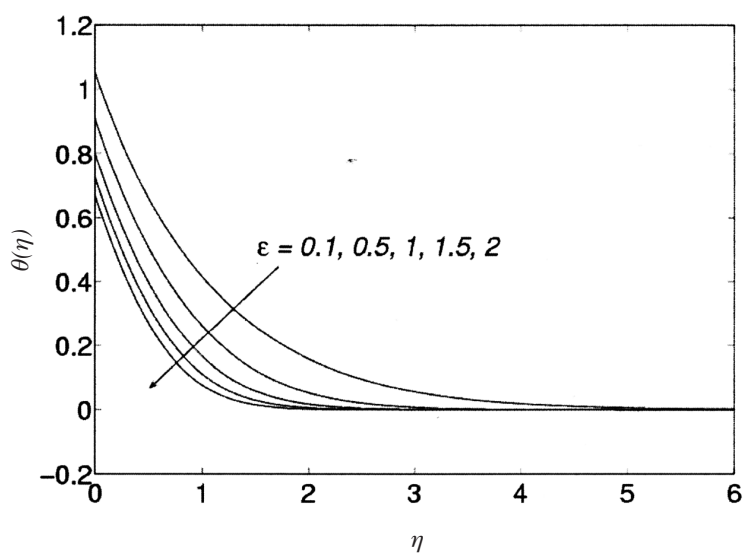


FIGURE 4. Temperature profiles  $\theta(\eta)$  for different values of  $\epsilon$  when  $Pr = 1$ ,  $M = 1$  and  $n = 1$

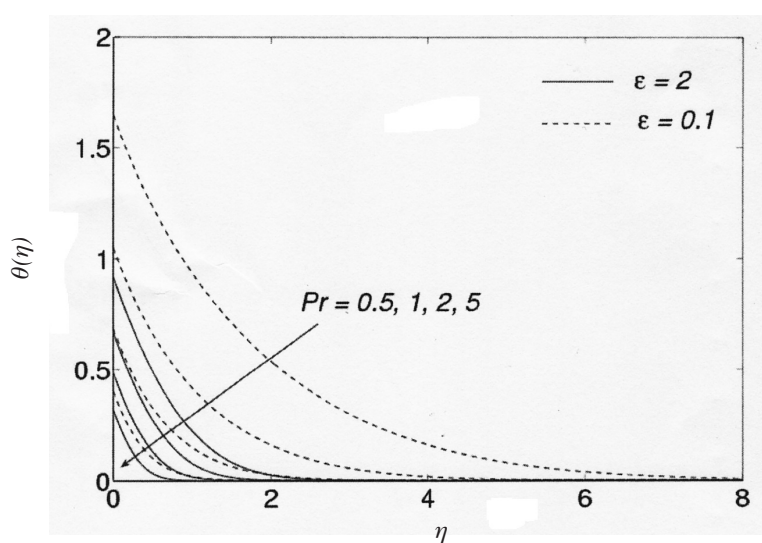


FIGURE 5. Temperature profiles  $\theta(\eta)$  for different values of  $Pr$  and  $\epsilon$  when  $M = 1$  and  $n = 1$

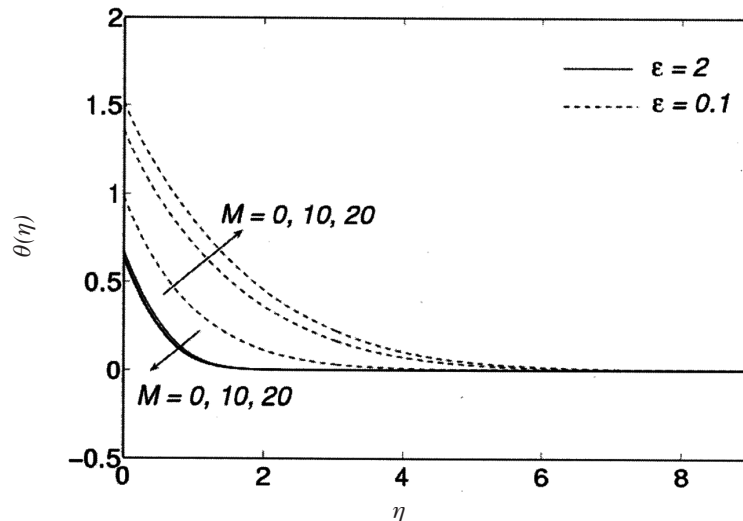


FIGURE 6. Temperature profiles  $\theta(\eta)$  for different values of  $M$  and  $\epsilon$  when  $Pr = 1$  and  $n = 1$

#### ACKNOWLEDGEMENTS

The authors wish to express their very sincere thanks to the referees for their valuable comments and suggestions. This work was supported by a research grant (Project Code: 06-01-02-SF0610) from the Ministry of Science, Technology and Innovation, Malaysia.

#### REFERENCES

- Abbas, Z., Hayat, T., Sajid, M. & Asghar, S. 2008. Unsteady flow of a second grade fluid film over an unsteady stretching sheet. *Mathematical and Computer Modelling* 48: 518-526.
- Abramowitz, M. & Stegun, I.A. 1965. *Handbook of Mathematical Functions*. New York: Dover.
- Andersson, H.I. 1995. An exact solution of the Navier-Stokes equations for magnetohydrodynamic flow. *Acta Mechanica* 113: 241-244.
- Cebeci, T. & Bradshaw, P. 1988. *Physical and Computational Aspects of Convective Heat Transfer*. New York: Springer.
- Char M.I. 1994. Heat transfer in a hydromagnetic flow over a stretching sheet. *Heat and Mass Transfer* 29: 495-500.
- Char, M.I. & Chen, C.K. 1988. Temperature field in non-Newtonian flow over a stretching plate with variable heat flux. *International Journal of Heat and Mass Transfer* 31: 917-921.
- Chen, C.H. 1998. Laminar mixed convection adjacent to vertical, continuously stretching sheets. *Heat and Mass Transfer* 33: 471-476.
- Chen, C.K. & Char, M.I. 1988. Heat transfer of a continuous, stretching surface with suction or blowing. *Journal of Mathematical Analysis and Applications* 135: 568-580.
- Chiam T.C. 1997. Magnetohydrodynamic heat transfer over a non-isothermal stretching sheet. *Acta Mechanica* 122: 169-179.
- Crane, L.J. 1970. Flow past a stretching plate. *Zeitschrift für angewandte Mathematik und Physik* 21: 645-647.
- Dutta, B.K. Roy, P. & Gupta, A.S. 1985. Temperature field in flow over a stretching sheet with uniform heat flux. *International Communications in Heat and Mass Transfer* 12: 89-94.
- Elbashbeshy, E.M.A. 1998. Heat transfer over a stretching surface with variable surface heat flux. *Journal of Physics D: Applied Physics* 31: 1951-1954.
- Grubka, L.J. & Bobba, K.M. 1985. Heat transfer characteristics of a continuous, stretching surface with variable temperature. *ASME Journal of Heat Transfer* 107: 248-250.
- Gupta, P.S. & Gupta, A.S. 1977. Heat and mass transfer on a stretching sheet with suction or blowing. *The Canadian Journal of Chemical Engineering* 55: 744-746.
- Hayat, T., Javed, T. & Abbas, Z. 2009. MHD flow of a micropolar fluid near a stagnation point towards a non-linear stretching surface. *Nonlinear Analysis: Real World Applications* 10: 1514-1526.
- Hayat, T., Javed, T. & Abbas, Z. 2010. Corrigendum to "MHD flow of a micropolar fluid near a stagnation-point towards a non-linear stretching surface" [Nonlinear Anal. RWA 10(2009) 1514-1526]. *Nonlinear Analysis: Real World Applications* 11: 2190.
- Ishak, A., Nazar, R. & Pop, I. 2006. Unsteady mixed convection boundary layer flow due to a stretching vertical surface. *The Arabian Journal for Science and Engineering* 31: 165-182.
- Ishak, A., Nazar, R. & Pop, I. 2007. Mixed convection on the stagnation point flow toward a vertical, continuously stretching sheet. *ASME Journal of Heat Transfer* 129: 1087-1090.
- Ishak, A., Nazar, R. & Pop, I. 2008a. Heat transfer over a stretching surface with variable heat flux in micropolar fluids. *Physics Letters A* 372: 559-561.
- Ishak, A., Nazar, R. & Pop, I. 2008b. Heat transfer over an unsteady stretching surface with prescribed heat flux. *Canadian Journal of Physics* 86: 853-855.
- Ishak, A., Nazar, R. & Pop, I. 2008c. Hydromagnetic flow and heat transfer adjacent to a stretching vertical sheet. *Heat and Mass Transfer* 44: 921-927.
- Ishak, A., Nazar, R. & Pop, I. 2008d. Magnetohydrodynamic (MHD) flow of a micropolar fluid towards a stagnation point on a vertical surface. *Computers and Mathematics with Applications* 56: 3188-3194.
- Ishak, A., Nazar, R. & Pop, I. 2009a. Boundary layer flow and heat transfer over an unsteady stretching vertical surface. *Meccanica* 44: 369-375.



- Ishak, A., Nazar, R. & Pop, I. 2009b. Heat transfer over an unsteady stretching permeable surface with prescribed wall temperature. *Nonlinear Analysis: Real World Applications* 10: 2909-2913.
- Lin, C.R. & Chen, C.K. 1998. Exact solution of heat transfer from a stretching surface with variable heat flux. *Heat and Mass Transfer* 33: 477-480.
- Liu, I.C. 2004. Flow and heat transfer of an electrically conducting fluid of second grade over a stretching sheet subject to a transverse magnetic field. *International Journal of Heat and Mass Transfer* 47: 4427-4437.
- Liu, I.C. 2005. A note on heat and mass transfer for a hydromagnetic flow over a stretching sheet. *International Communications in Heat and Mass Transfer* 32: 1075-1084.
- Magyari, E. & Keller, B. 1999. Heat and mass transfer in the boundary layers on an exponentially stretching continuous surface. *Journal of Physics D: Applied Physics* 32: 577-585.
- Pavlov, K.B. 1974. Magnetohydrodynamic flow of an incompressible viscous fluid caused by deformation of a plane surface. *Magnitnaya Gidrodinamika* 4: 146-147.
- Prasad, K.V., Pal, D. & Datti, P.S. 2009. MHD power-law fluid flow and heat transfer over a non-isothermal stretching sheet. *Communications in Nonlinear Science and Numerical Simulations* 14: 2178-2189.
- Wang, C.Y. 1984. The three-dimensional flow due to a stretching surface. *Physics of Fluids* 27: 1915-1917.
- Yacob, N.A. & Ishak, A. 2010. Stagnation-point flow towards a stretching surface immersed in a micropolar fluid with prescribed surface heat flux. *Sains Malaysiana* 39: 285-290.
- Anuar Ishak\* & Roslinda Nazar  
School of Mathematical Sciences  
Universiti Kebangsaan Malaysia  
43600 UKM Bangi  
Selangor, Malaysia
- Norihan M. Arifin & Fadzilah M. Ali  
Department of Mathematics  
Faculty of Science  
Universiti Putra Malaysia  
43400 UPM Serdang  
Selangor, Malaysia
- Ioan Pop  
Faculty of Mathematics  
University of Cluj  
R-3400 Cluj  
CP 253  
Romania
- \*Corresponding author; email: anuarishak@yahoo.com
- Received: 15 July 2010  
Accepted: 6 September 2010