

Monitoring the effects of disposal of fine sediments from maintenance dredging on suspended particulate matter concentration in the Belgian nearshore area*

Michael Fettweis¹, Matthias Baeye², Frederic Francken¹, Brigitte Lauwaert¹, Dries Van den Eynde¹, Vera Van Lancker¹, Chantal Martens³, Tinne Michielsen³

¹*Royal Belgian Institute for Natural Science (RBINS), Management Unit of the North Sea Mathematical Models (MUMM), Gulledele 100, 1200 Brussels, Belgium*

²*Ghent University, Renard Centre of Marine Geology, Krijgslaan 281 (S8), 9000 Gent, Belgium*

³*Ministry of Public Works and Mobility, Maritime Access Division, Tavernierkaai 3, 2000 Antwerp, Belgium*

*published in Marine Pollution Bulletin (Elsevier)

M. Baeye was responsible for the analysis of HCMS dynamics (SPM and ADV altimetry) and for the interpretation in relation to disposal activity.

Abstract

The impact of continuous disposal of fine-grained sediments from maintenance dredging works on the suspended particulate matter concentration in a shallow nearshore turbidity maximum was investigated during dredging experiment (port of Zeebrugge, southern North Sea). Before, during and after the experiment monitoring of SPM concentration using OBS and ADV altimetry was carried out at a location 5 km west of the disposal site. A statistical analysis, based on the concept of populations and sub-sampling, was applied to evaluate the effect. The data revealed that the SPM concentration near the bed was on average more than 2 times higher during the dredging experiment. The disposed material was mainly transported in the benthic layer and resulted in a long-term increase of SPM concentration and formation of fluid mud layers. The study shows that SPM concentration can be used as an indicator of environmental changes if representative time-series are available.

Keywords: Dredged material disposal; dredging; fluid mud; SPM concentration; suspended sediments; monitoring

7.1. Introduction

The Water Framework Directive (2000/60/EC) and recently adopted EU Marine Strategy Framework Directive (2008/56/EC) (see e.g. Borja 2005, Devlin et al. 2007) identifies human induced changes in the concentration of suspended particulate matter (SPM) as one of the main pollutants. Disposal of fine-grained dredged material at sea has a varying impact on the marine environment (Nichols 1988, Bray et al. 1996, Hill et al. 1999, O'Connor 1999, Smith and Rule 2001, Lohrer and Wetz 2003, Simonini et al. 2005, Lee et al. 2010) and constitutes an important problem in coastal zone management (OSPAR 2008). Dredging activities can be classified as either maintenance or capital dredging. Maintenance dredging typically involves the periodic or continuous removal of sediments deposited in navigation channels and harbours as a result of natural processes. Capital dredging is associated with deepening or with construction activities and consists thus of civil engineering works limited in time. Very often, ports and navigation channels are situated in coastal or estuarine turbidity maximum areas and suffer from rapid sedimentation of fine-grained material (PIANC 2008), necessitating frequent maintenance dredging and disposal operations. The effect of increased turbidity due to disposal operations on the ecosystem are well documented in low-turbidity ($<10 \text{ mg l}^{-1}$) waters (e.g. Orpin et al. 2004); but less obvious in coastal and estuarine areas where suspended particulate matter (SPM) concentration is high as well differences between minima and maxima. Dredging and disposal effects are site-specific (Ware et al. 2010) and require the understanding of the site-specific dynamics in order to evaluate environmental impact of dredging and disposal works. In case of mainly non-cohesive material is the impact of disposal of dredged material at sea most significant at the seabed (Du Four and Van Lancker 2008, Okada et al. 2009) and the impact on the environment may remain near-field and short-term (Fredette and French 2004, Powilleit et al. 2006). When cohesive sediments are disposed then significant increases in turbidity may occur in the water column (Hossain et al. 2004, Van den Eynde 2004, Wu et al. 2006) depending on the mode, timing, quantity, frequency of the disposal activity (Bolam et al. 2006).

The SPM dynamics control processes such as sediment transport, deposition, re-suspension, primary production and the functioning of benthic communities (McCandliss et al. 2002, Murray et al. 2002). It varies as a function of seasonal supply of fine-grained sediments, the interaction between cohesive and non-cohesive sediments, biological activity, remote or local availability of fine sediments, advective processes, erosion, deposition, storms, and human activities (Velegrakis et al. 1997, Bass et al. 2002, Schoellhamer 2002, Le Hir et al. 2007, Fettweis et al. 2010). Deepening of channels and construction of ports increases deposition of fine-grained sediments and has as consequence an increase of maintenance dredging and thus an increase of SPM concentration in and around the disposal site (Truitt 1988, Collins 1990, Wu et al. 2006). During slack water and after storm periods fluid mud layers may be formed by settling of suspended matter or fluidization of cohesive sediment beds (Maa and Mehta 1987, van Kessel and Kranenburg 1998, Li and Mehta 2000). Massive sedimentation of fine-grained sediments in harbours and navigation channel is often related to the occurrence of fluid mud layers (Fettweis and Sas 1999, Verlaan and Spanhoff 2000, Winterwerp 2005, PIANC 2008, Van Maren et al. 2009, De Nijs et al. 2009). Fluid mud is a high concentration aqueous suspension of fine-grained sediment with SPM concentrations of tens to hundreds of grams per litre and bulk densities of 1080 to 1200 kg m^{-3} ; it consists of water, clay-sized particles, and organic materials; and displays a variety of rheological behaviours ranging from elastic to pseudo-plastic (Mac Anally et al. 2007).

The aim of this paper is to present and discuss the impact of continuous disposal of fine-grained sediments on the SPM concentration and on the fluid mud dynamics in a shallow nearshore turbidity maximum area during a one month dredging experiment. The experiment took place in the port of Zeebrugge (Belgian coastal area, southern North Sea) in the framework of studies conducted by the Flemish Ministry of Public Works and Mobility to develop more cost effective methods for dredging fluid mud. Monitoring of the effects on SPM concentration was required as the dredged matter was disposed at sea at a location closer to the shore and the port compared to the existing disposal sites. Previous studies have used numerical simulations to investigate the spatial distribution of material disposed of in the sea (e.g. Gallacher and Hogan

1998, Bai et al. 2003, Van den Eynde 2004), but even with recent progress in sediment transport modelling (e.g. Sanford 2008) limitations related to accurately simulating the dynamics of fluid mud layers and the interaction between the bed and the water column remain. In situ monitoring provides a good opportunity for investigating the impact of fine-grained matter dispersal behaviour and its fate due to disposal operations. In situ measurements of SPM concentration before, during and after the dredging experiment have been carried out at about 5 km from the disposal site together with sediment density and bathymetrical surveys at the dredging location and the disposal site. As the heterogeneity and complexity of the SPM concentrations are high, due to their natural high variability, statistical methods have been used to characterize temporal SPM concentration variation in a way that it can be used as indicator for changes induced by human activities.

7.2. Study area

The Belgian-Dutch nearshore area (southern North Sea, cf. Fig. 1.2, Fig. 2.1 b) is shallow (<10 m Mean Lower Low Water Springs, MLLWS) and characterised by sediment composition varying from pure sand to pure mud (Verfaillie et al. 2006). SPM forms a turbidity maximum between Ostend and the mouth of the Westerscheldt (cf. Fig. 4.1). Measurements indicate variations in SPM concentration in the nearshore area of 20–70 mg l⁻¹; reaching 100 to 3000 mg l⁻¹ near the bed; lower values (<10 mg l⁻¹) occur in the offshore (Fettweis et al. 2010). The most important sources of SPM are the French rivers discharging into the English Channel, coastal erosion of the Cretaceous cliffs at Cap Gris-Nez and Cap Blanc-Nez (France) and the erosion of nearshore Holocene mud deposits (Fettweis et al. 2007). Tides are semi-diurnal with a mean tidal range at Zeebrugge of 4.3 m at spring and 2.8 m at neap tide. The tidal current ellipses are elongated in the nearshore area and become gradually more semi-circular further offshore. The current velocities near Zeebrugge (nearshore) vary from 0.2–1.5 m s⁻¹ during spring tide and 0.2–0.6 m s⁻¹ during neap tide; more offshore they range between 0.2–0.6 m s⁻¹ during spring tide and 0.1–0.3 m s⁻¹ during neap tide. Flood currents are directed towards the Northeast and ebb currents towards the Southwest. Winds blow predominantly from the southwest and the highest waves occur during north-westerly winds. Significant wave heights in the nearshore area exceed 1.5 m during 10% of the time. The strong tidal currents and the low fresh water discharge of the Westerscheldt estuary (yearly average is 100 m³ s⁻¹ with minima of 20 m³ s⁻¹ during summer and maxima of 600 m³ s⁻¹ during winter) result in a well-mixed water column with very limited salinity and temperature stratification. On average 4.46×10⁶ ton dry matter (tdm) is dredged annually in the port of Zeebrugge to maintain navigation depth; this represents about 60% of the total amount of maintenance dredging in the Belgian nearshore area (Lauwaert et al. 2009). The dredged matter consists of muddy sediments and is disposed on the disposal sites S1 (47%), Zeebrugge Oost (44%) and S2 (9%), see Fig 7.1. The sedimentation rate in the outer port of Zeebrugge is, on average, about 1.7 tdm m⁻² per year. In 2007 and 2008, respectively, 0.7×10⁶ tdm and 0.3×10⁶ tdm of sediments were dredged in the Albert II dock (Fig. 7.1).

7.3. Material and Methods

7.3.1. Dredging experiment

Dredging with trailer hopper suction dredgers and open water disposal of the dredged material at designated locations, is inefficient for fluid mud and incur substantial costs (PIANC 2008). An automatic method to intercept and pump away fluid mud using stationary pumping system was evaluated by Berlamont (1989) for mud from the port of Zeebrugge. A similar approach was adopted for the dredging experiment, except that a cutter suction dredger was used instead of stationary pumping systems. The experiment took place in the Albert II dock situated in the outer port of Zeebrugge between 5 May and 2 June 2009 (Fig. 7.1). The dredger continuously dredged for periods of a few days up to a week at a fixed location and a fixed depth before being moved to another location. The dredged matter was pumped using floating pipelines over the harbour breakwater into the sea (see Fig. 7.1). The pumping capacity was

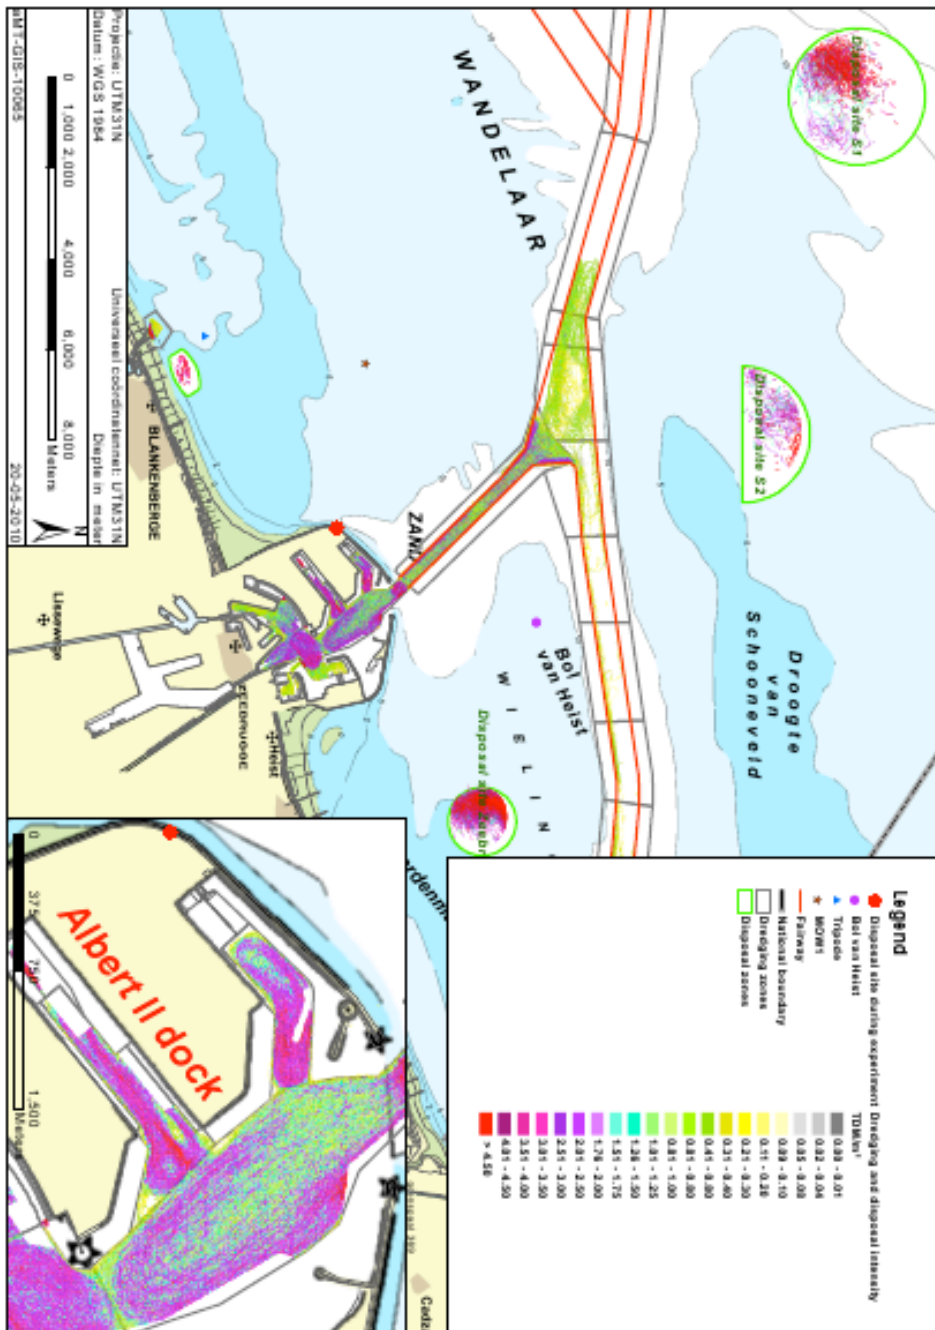


Figure 7.1 Detail of the Zeebrugge area showing the measurement station at Blanzenberge (blue triangle), the wave measurement station at Bol van Heist (purple dot), the location of the disposal site during the field experiment (red dot), the MOW1 site (brown star), the Albert II dock and the existing disposal sites (green circles or half-circles). The background consist of bathymetry and of the dredging and disposal intensity (scale is from 0 to $>4.5 \text{ tdm m}^{-2}$) for 2008 (in ton dry matter TDS)

3000 m³ h⁻¹, resulting thus –using the average density of the pumped matter (including salt and sediment) of 1.055 t m⁻³ – in 60×10³ tdm of sediments that have been disposed during the duration of the experiment. As the density recordings of the dredge material were inaccurate, this should be seen as an estimate. The aim of the experiment was to investigate whether the thickness of the fluid mud layer with a density lower than 1200 kg m⁻³ could efficiently be reduced. This density is derived from ship manoeuvrability studies that aided in the redefinition of the level of dredging required (Delfortherie et al. 2005, PIANC 2008).

7.3.2. In-situ monitoring

The monitoring during the disposal experiment is divided in near and far field measurements. The near field measurements consisted of bathymetrical surveys in the dock and at the disposal site and weekly mud density surveys in the Albert II dock (Fig. 7.1). Density profile measurements were carried out in situ using a gamma-ray densitometer that was pushed in the mud layer. Bathymetrical surveys were performed daily with 33/210 kHz echo sound measurements along fixed transects and weekly with multibeam.

The far field monitoring was carried out at a fixed location near Blankenberge (51.33°N 3.11°E) situated about 1 km offshore and 5 km west of the disposal site (Fig. 7.1) using a tripod which was developed for collecting time-series (up to 50 days) of SPM concentration and current velocity. The water depth at the site is about 6 m MLLWS and the seabed consists of fine sand (D50 = 150 µm) with ephemeral mud patches on top. The tripod was deployed for 240 days during 6 measuring periods before, during and after the experiment, see Table 7.1. 17% of the data have been collected during or shortly after the field experiment. A SonTek 5 MHz Acoustic Doppler Velocimeter (ADV) Ocean, a Sea-Bird SBE37 CT system and two D&A OBS3 sensors were mounted on the frame, one at about 0.2 and the other one 2 m above bottom (mab). Field calibration of the OBS sensors have been carried out during several tidal cycles carried out in the nearshore area in order to obtain SPM concentration. A Niskin bottle was closed every 20 minutes, thus resulting in about 40 samples per tidal cycle. Three sub samples were filtered on board of the vessel from each water sample, using pre-weighted filters (Whatman GF/C). After filtration, the filters were rinsed once with Milli-Q water (±50 ml) to remove the salt, and dried and weighted to obtain the SPM concentration. A linear regression between all OBS signals and SPM concentrations from filtration was assumed. The measuring volume of the ADV was situated at 0.2 mab. The altimetry of the ADV was used to detect variation in bed level due to the occurrence of fluid mud layers. Decreasing distance between probe and bed boundary may correspond with the presence of fluid mud acting as an acoustic reflector. However, the boundary detection may also fail, due to attenuation of the signal before reaching the bottom (Velasco and Huhta, App. Note SonTek).

7.3.3. Statistical analysis

Variation in SPM concentration at Blankenberge is related to tides, storms, seasonal changes and human impacts. SPM concentration can be defined as a statistical population. We can consider the measured SPM concentration time-series as sub-samples that are characterised by statistical properties, such as median, geometrical mean, standard deviation and probability density distribution. Fettweis and Nechad (2010) have shown that SPM concentration has a log-normal distribution. The probability density distributions of the different sub-samples, consisting of the different time-series or other sub-samples, were therefore fitted using log-normal distributions, and the X² test probability calculated to assess how well the distribution fits a log-normal one. By doing so statistical properties can be calculated so that inferences or extrapolations from the sub-sample to the population can be made. E.g. if the data series collected during different periods have similar log-normal distributions, geometric means and standard deviations, then we could conclude that - within the range of natural variability and measuring uncertainties - these data series represent similar sub-samples of the whole SPM concentration population. Consequently, if disposal of dredged material has a significant impact on SPM concentration then this should be detectable in the differences between the statistical parameters of the sub-

sample collected during the dredging experiment and of the whole population. It is well known that waves have an important impact on cohesive sediment transport processes on continental shelves (e.g. Green et al. 1995, Cacchione et al. 1999, Traykovski et al. 2007, Fettweis et al. 2010). In order to assess this effect, sub-samples of the SPM concentration data have been selected based on bottom wave orbital velocities. The wave orbital velocity at the bottom was calculated from significant wave height measured at the station "Bol van Heist" (Fig. 7.1), the measured water depth and the JONSWAP spectrum of waves (Soulsby 1997). Sub-sampling of the data series allows filtering out the effects of random storms from the harmonic SPM concentration variations caused by tides. The statistical properties of sub-samples representing weather conditions can thus be calculated and the SPM concentrations can be correlated with sea state conditions.

Table 7.1 Tripod deployments at Blankenberge and the median and maximum significant wave height (H_s) during the measurement period. Period 6a corresponds with the dredging experiment

	Start (dd/mm/yyyy hh:mm)	End (dd/mm/yyyy hh:mm)	Duration (days)	Median (max) H_s (m)
1	08/11/2006 14:30	15/12/2006 08:30	36.7	0.83 (2.76)
2	18/12/2006 10:47	07/02/2007 13:17	50.1	0.79 (2.96)
3	28/01/2008 15:38	24/02/2008 13:18	26.9	0.44 (2.82)
4	06/03/2008 09:09	08/04/2008 15:29	33.7	0.76 (3.03)
5	15/04/2008 08:58	05/06/2008 07:48	51.0	0.46 (1.69)
6	04/05/2009 09:59	15/06/2009 11:49	41.9	0.57 (1.89)
6a	05/05/2009 12:00	02/06/2009 07:00	27.8	0.55 (1.89)
6b	09/06/2009 00:00	15/06/2009 11:49	7.5	0.42 (1.12)

The statistical analysis is based on the assumption that the data collected before and after the dredging experiment (periods 1-5 and 6b in Table 7.1) are representative for the SPM concentration at this location. 15%, 38% and 47% of the measurements are situated in autumn, winter and spring, respectively.

As the SPM concentration is highest during autumn and winter and lowest during spring and summer (Fettweis et al. 2007, Dobrynin et al. 2010), the measurements are well distributed over the high and low SPM concentration periods. The median significant wave height (H_s) during the tripod measurements (measured at the wave station "Bol van Heist", Fig. 7.1 b) was 0.54 m, with 0.50 m, 0.61 m and 0.53 m during spring, autumn and winter, respectively. These values correspond well with the median H_s during the period 2006-2009 of 0.50 m (whole the period), 0.48 m (spring), 0.62 m (autumn) and 0.60 m (winter), supporting thus the assumption of representativeness.

7.4. Results

7.4.1. Near field monitoring

The dredging effort caused rapid (order of hours) formation of cone formed craters centred on the cutter head location (Fig. 7.2), which disappeared again after relocation of the cutter. Influx of sediment related to shipping activities and spring tide caused at some occasions the filling-up of the crater during a short period. The dredging caused a local deepening of the 1200 kg m⁻³ density surface, however the influence remained local and did not significantly changed the depth of the fluid mud density field in the dock, therefore the evaluation of the dredging experiment was negative in terms of efficiently reducing the thickness of the fluid mud layer (see Lauwaert et al. 2009).

7.4.2. Far field monitoring

The time-series for periods 1, 5 and 6 are shown in Fig. 7.3, 7.4 and 7.5. Generally, the SPM concentration signal is dominated by quarter-diurnal variations due to ebb-flood. The data show that the maximum SPM concentrations during a tidal cycle were sometimes up to 50 times higher than the minimum concentrations. The spring-neap tidal signal is often overprinted by wave effects and can only be identified clearly during calm meteorological conditions. The very high SPM concentrations measured near the bed during winter and autumn are related to storms and suggest that high concentrated benthic suspension layers have been formed that may stay for a few days. The ADV altimetry data show quarter-diurnal variations in bed level during periods with SPM concentration; this is explained as formation and re-suspension of fluffy layers during slack waters.

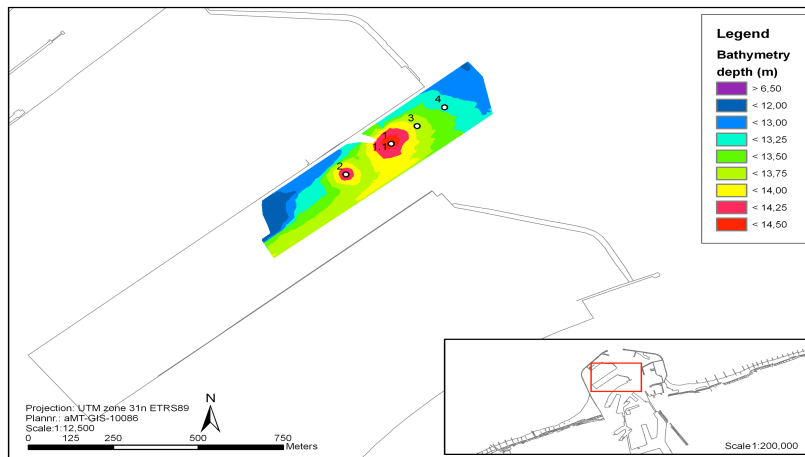


Figure 7.2 Bathymetrical map of the 210 kHz echo soundings in the Albert II dock and the successive position of the cutter suction dredger (1-4) during the experiment. The bathymetrical survey was carried out when the dredger was operating in position 2. In position 1 a relict dredging crater is visible

Period 1 is characterized by the occurrence of different storms (Fig. 7.3). On 12-13 November (day 316-317), a NW storm (winds blowing from NW) generated significant wave heights of about 2.8 m. The highest SPM concentrations were registered only about one day after the storm by the OBS at 0.2 mab and about two days after by the OBS at 2 mab (Fig. 7.3). The OBS data at 0.2 mab are characterised by very high minima in SPM concentrations ($>0.8 \text{ g l}^{-1}$). The OBS at 2 mab measured an increase in SPM concentration only during a short period after the storm. This indicates that vertical mixing was limited. ADV altimetry shows a vertical rise of the acoustic reflective boundary after the storm (day 317 to 321) indicating the formation of a fluid mud. Its appearance coincided with low wave activity and decelerating currents associated with neap tide. The fluid mud layer disappeared around day 321 due to higher wave activity and accelerating currents. The altimetry signal shows then a bed boundary fluctuating with the quarter-diurnal tidal currents; the change in altimeter height on day 336 is probably caused by erosion of the sandy bed. During the deposition event on day 344, the sea floor as detected by the ADV altimetry raised about 10 cm, due to formation of fluid mud.

Period 5 (April – June 2008) was characterised by low meteorological disturbances. SPM concentration follows tidal and neap-spring tidal signal with higher SPM concentration around days 108-114, 124-130 and 142-144 (Fig. 7.4). A clear shift between the signal of the OBS at 0.2 mab and at 2 mab is observed from day 132 on (May 2008). The highest SPM concentrations occur at 0.2 mab during neap tide, whereas at 2 mab the highest values are around spring tide, indicating that SPM was deposited during neap tide and re-suspended during spring tide.

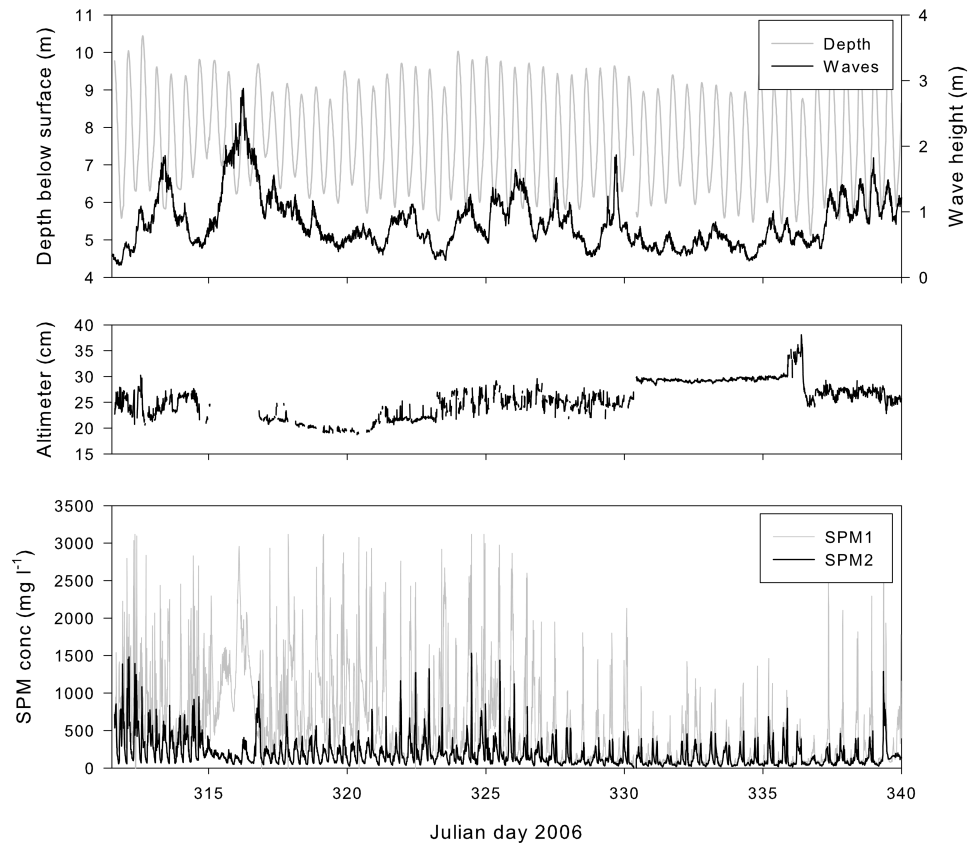


Figure 7.3 Tripod measurements of 8 November - 6 December 2006 (part of measuring period 1). From **up to down**: depth below water surface (m) and significant wave heights at Bol van Heist; ADV altimetry; and SPM concentration derived from OBS at 0.2 mab (SPM1) and 2 mab (SPM2). Saturation of the OBS is at 3.2 g l^{-1}

The acoustic bed boundary remained at the same distance after stabilization of the tripod at the beginning of the deployment. Deposition and consecutive re-suspension occurs as temporal events coinciding with the ebb-flood tidal signal during neap tides and the availability of SPM. During the deposition events, the sea floor as detected by the ADV altimetry raised on average by 10 cm, due deposition of mud. From day 140 on SPM concentration decreased, resulting in no increase of the acoustic bed boundary. May 2009 was marked by alternating W-SW and E-NE and relatively high wave conditions as compared to a similar period in May 2008 (Table 7.1, Fig. 7.4 and 7.5). During the experiment the SPM concentration at 0.2 mab was strikingly high, with tide-averaged values ranging from $0.3\text{-}1.6 \text{ g l}^{-1}$. These high values remained until one week after the end of the dredging experiment before decreasing to tide averaged values lower than 0.5 g l^{-1} . The high SPM concentrations in May 2009 are only partially due to higher waves. SPM concentration at 2 mab differs from the near-bed one, and reveals a dynamic controlled by tidal and neap-spring tidal variation, whereas near the bed high concentrated mud suspension or fluid mud layers have dominated the sediment dynamics. The ADV altimetry revealed also the decrease in acoustic bed boundary of 8-10 cm during neap tide (for day 134-139 and 153-159). For both periods mud was deposited because favourable hydro-meteorological conditions prevailed (i.e. low wave activity and decelerating currents); the mud layers remained during several days. After cessation of the disposal operations, the SPM concentrations at 0.2 mab remained still very high during 1 week and disappeared together with the fluid mud layer.

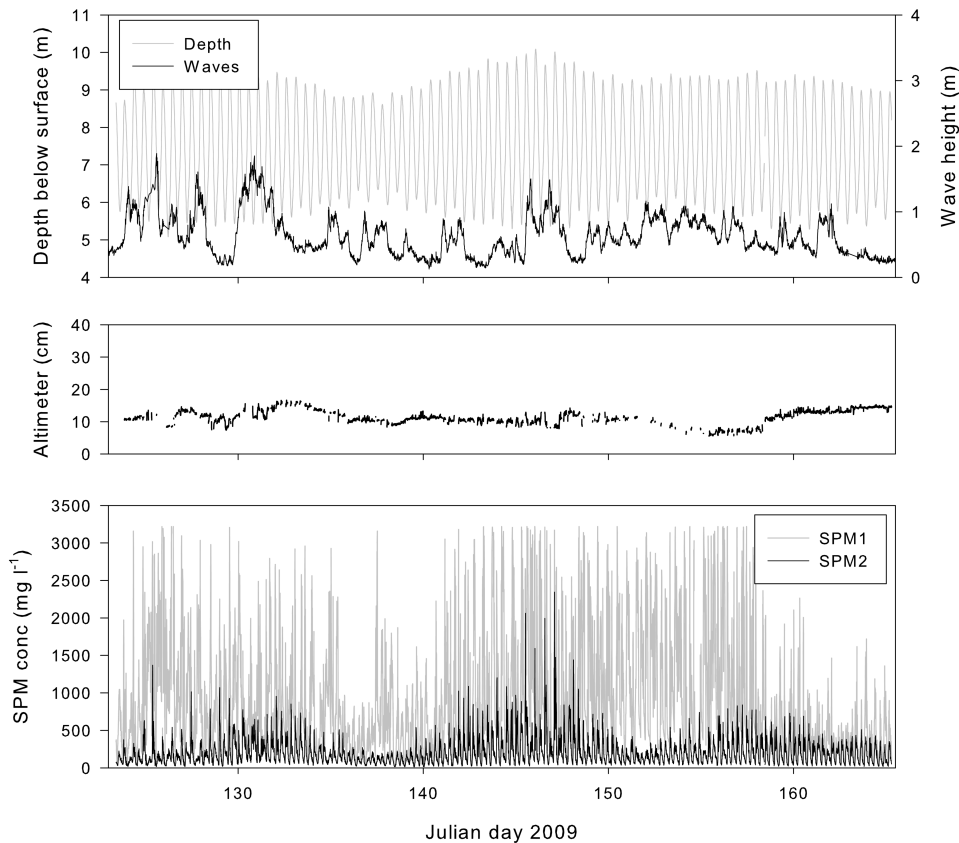


Figure 7.4 Tripod measurements of 15 April – 23 May 2008 (part of measuring period 5). From **up to down**: depth below water surface (m) and significant wave heights at Bol van Heist; ADV altimetry; and SPM concentration derived from OBS at 0.2 mab (SPM1) and 2 mab (SPM2). After day 142, no SPM1 data are available. Saturation of the OBS is at 3.2 g l^{-1}

7.4.3. Statistics of SPM concentration

For each of the 6 measuring period probability distributions were constructed for SPM concentration at 0.2 and 2 mab together with fitted lognormal distributions. The geometric mean (x^*), median (D50) and multiplicative standard deviation (s^*) of these distributions, together with the χ^2 test results is shown in Table 7.2, some of the distributions are presented in Fig. 7.6. If the χ^2 test probability is low ($p < 0.05$), then the distribution would not correspond with a log-normal one. The results confirm that all distributions are log-normally distributed. The results show that the mean SPM concentration during autumn and winter (periods 1, 2, 3, 4) is generally higher than during spring (period 5). The mean and median SPM concentration at 0.2 mab during the field experiment (period 6 a) is significantly higher than during any of the other periods, whereas at 2 mab the same order of magnitude is observed than during a winter situation (periods 1, 2 and 3). During the field experiment (5 May – 2 June) the mean increased to 612 mg l^{-1} (0.2 mab), i.e. more than twice the mean value before and after the experiment; but remained nearly similar at 2 mab (150 mg l^{-1} vs. 128 mg l^{-1}).

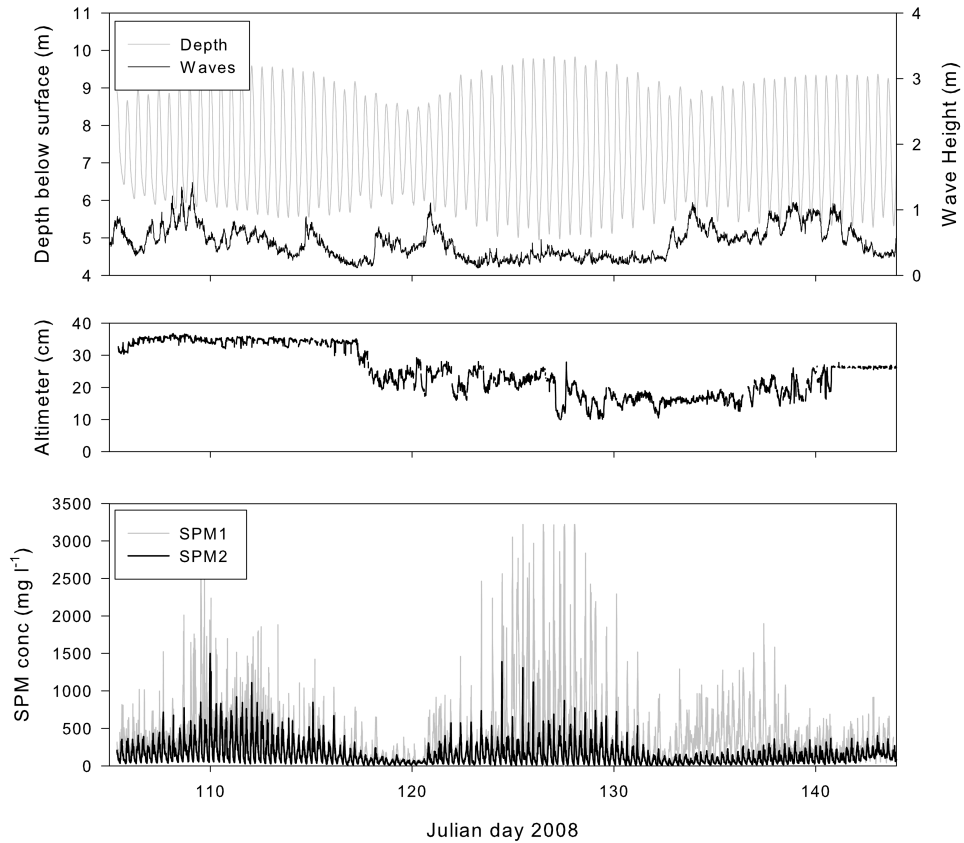


Figure 7.5 Tripod measurements of 4 May – 15 June (measuring period 6). The field experiment lasted from 5 May until 2 June. From **up** to **down**: depth below water surface (m) and significant wave heights at Bol van Heist; ADV altimetry; and SPM concentration derived from OBS at 0.2 mab (SPM1) and 2 mab (SPM2). Saturation of the OBS is at 3.2 g l^{-1}

Table 7.2 Median (D_{50}) and geometric mean SPM concentration (x^*) in mg l^{-1} during the 6 deployments (Table 7.1) together with the X^2 test probability (p) compared with a lognormal distribution and the multiplicative standard deviation (s^*). 1-5, 6b corresponds with all the data before and after the dredging experiment (6a)

	0.2 mab								2 mab							
data	1	2	3	4	5	6a	6b	1-5,6b	1	2	3	4	5	6a	6b	1-5,6b
D_{50}	341	288	199	321	280	672	345	281	137	143	116	150	106	150	158	131
x^*	340	308	183	290	258	612	319	279	144	149	105	150	102	150	135	128
s^*	2.9	3.0	2.4	3.0	2.7	2.6	2.2	2.9	2.3	2.3	2.5	2.5	2.4	2.3	2.3	2.4
p	1.00	0.57	0.77	0.96	0.82	0.99	0.37	0.93	0.93	0.94	0.59	0.99	0.94	0.99	0.12	0.99

The results of sub-sampling the SPM concentration data using as selection criterion a bottom wave orbital velocity (U_w) smaller than 0.03 m s^{-1} and bigger than 0.3 m s^{-1} are shown in Tables 8.3-8.4, respectively. The X^2 test probability is for some periods lower than 0.05, this is due to the fact that the sub-sample does not contain sufficient data. An U_w of 0.03 m s^{-1} (0.3 m s^{-1}) corresponds to a significant wave height of about 0.5 m (1.5 m) in 8 m water depth.

Table 7.3 Median (D50) and geometric mean SPM concentration (x^*) in $mg\ l^{-1}$ during the 6 deployments (Table 7.1) and wave orbital velocities $U_w < 0.03\ m/s$. Also shown is the X^2 test probability (p) of the distributions compared with a lognormal one and the multiplicative standard deviation (s^*). 1-5, 6b corresponds with all the data before and after the dredging experiment (6a)

	0.2 mab								2 mab							
data	1	2	3	4	5	6a	6b	1-5,6b	1	2	3	4	5	6a	6b	1-5,6b
	184	310	206	217	259	559	306	250	91	209	137	126	113	141	130	134
x^*	221	341	181	203	239	470	269	237	103	196	116	127	103	142	121	124
s^*	2.7	2.5	2.3	3.3	3.1	3.0	2.2	2.8	2.5	2.1	2.5	2.8	2.6	2.4	2.3	2.6
p	0.02	1.00	0.49	0.59	0.84	0.99	0.38	0.95	0.18	0.66	0.32	0.83	0.70	0.99	0.11	0.86

The results show that the mean SPM concentration at 0.2 mab is generally lower during low wave activity, except for period 2 and 3, whereas at 2 mab no clear relation can be observed. Before and after the field experiment, lower wave influence is not significantly changing the mean SPM concentration at 2 mab. The low mean SPM concentration during measuring period 3 is the result of calm weather ($H_s = 0.46\ m$). The correlation between median SPM concentration and SPM concentration during higher wave action ($U_w > 0.3\ m\ s^{-1}$) is only obvious for periods 1 and 6 (Table 7.4). For the other periods, the mean has similar values (period 4 and 5) or is even lower than the mean for all data (Table 7.2).

Table 7.4 Median (D50) and geometric mean SPM concentration (x^*) in $mg\ l^{-1}$ during the 6 deployments (see table 1) and wave orbital velocities $U_w > 0.3\ m\ s^{-1}$. Also shown is the X^2 test probability (p) of the distributions compared with a lognormal one and the multiplicative standard deviation (s^*). 1-5, 6b corresponds with all the data before and after the dredging experiment (6a). For period 5 and 6b, not enough data correspond with these wave conditions to give statistical meaningful values

	0.2 mab								2 mab							
data	1	2	3	4	5	6a	6b	1-5,6b	1	2	3	4	5	6a	6b	1-5,6b
D50	763	197	98	303	-	595	-	244	178	117	57	167	-	177	-	130
x^*	609	237	115	288	-	651	-	270	197	114	61	162	-	169	-	129
s^*	2.5	2.6	2.2	2.5	-	2.1	-	2.8	2.0	1.8	2.0	2.1	-	2.2	-	2.1
p	1.00	0.09	0.07	0.98	-	0.99	-	0.52	0.13	0.40	0.08	0.37	-	0.46	-	0.91

The cumulative frequency distributions of SPM concentration are shown in Fig. 7.7. The probability to have a SPM concentration at 0.2 mab higher than the median SPM concentration during the field experiments is on average 0.21 (periods 1-5, 6b), with 0.06 (period 4) and 0.30 (period 1) being the two extreme probabilities. At 2 mab the probabilities are on average higher (0.43: periods 1-5, 6b) and the extreme values are closer together (period 5: 0.32 – 0.52: period 6b).

7.5. Discussions

In this study, the results based on time-series measurements at a fixed location before, during and after an experimental disposal of dredged matter, indicated a significant higher SPM concentration during the disposal. Below we argue that the increase is not due to natural variability. The probability of having a SPM concentration higher than the median SPM concentration at 0.2 mab during the field experiment is low.

7.5.1. Wave influence

SPM transport on many shelves is mainly controlled by currents and waves and high concentrated mud suspensions or fluid mud layers are formed in wave-dominated areas (Li and Mehta 2000). The correlation between median SPM concentration and

SPM concentration during higher wave action ($U_w > 0.3 \text{ m s}^{-1}$) is only obvious for periods 1 and 6a (Table 7.4). For the other periods, the median has a similar value (period 4) or an even lower value than the median for all wave conditions (Table 7.2). This is in contrast with observations made at MOW1 (Fig. 7.1) situated about 7 km offshore and at a water depth of about 10 m MLLWS, where the median SPM concentration was clearly correlated with wave orbital velocity (Fettweis and Nechad 2010). The differences in median SPM concentrations as a function of wave orbital velocity cannot be explained by the further offshore location and thus lower wave influence (Harris and Wiberg 2002) or differences in wave climate during the measurements. It points to our opinion to a time-lag occurring between waves and SPM concentrations at Blankenberge and thus to mainly advection of suspended matter from elsewhere as SPM source rather than local erosion. The mainly non-local sediment availability together with the fact that the median SPM concentration during the dredging experiment (period 6a) was always higher (also for the sub-samples with $U_w > 0.3$ and $U_w < 0.03$, see Table 7.2-7.4) than during the other periods, strengthen the argument that the high SPM concentration during this period was caused significantly by the disposal of dredged material.

As the median H_s during the dredging experiment (period 6a) was higher than during the same season in 2008 (Table 7.1) we could explain the high SPM concentrations during May 2009 (Fig. 7.5) as being partially due to higher wave activity. Increase in SPM concentrations remained, however, limited to the near bed, suggesting that vertical mixing due to waves was low. Fettweis et al. (2010) report that wave effects on SPM concentration are starting to become significant when H_s exceeds 2 m as the thick packages of Holocene and recent muddy sediments, found in the area, are then eroded. It is therefore not very likely that the May 2009 storms (maximum $H_s < 1.8 \text{ m}$) have eroded sufficient sediments to explain the increase in SPM concentrations.

7.5.2. Ebb-flood dynamics

During a tidal cycle, several peaks in SPM concentration are observed; generally, two peaks occurred during ebb and one during flood. The first ebb peak is generally lower and occurred when the increasing current velocity has reached a critical value for re-suspending the fluffy layer. The second one occurred at the end of ebb and is a consequence of settling. This is confirmed by the fact that the SPM concentration peak at 0.2 mab is generally observed after the peak at 2 mab. Maxima in SPM concentration during flood occurred generally after slack water and point thus to re-suspension; the SPM concentration at 2 mab occurred after the peak at 0.2 mab. The mean of the SPM concentration maxima during a tide was at least 1.7 times higher during the dredging experiment than during the other periods (0.2 mab: 2670 mg l^{-1} vs. 1566 mg l^{-1} ; 2 mab: 941 mg l^{-1} vs. 552 mg l^{-1}), whereas the mean of the minima was similar (0.2 mab: 109 mg l^{-1} vs. 99 mg l^{-1} ; 2 mab: 35 mg l^{-1} vs. 40 mg l^{-1}). These processes of re-suspension and rapid deposition have also been identified in the ADV altimetry data. The OBS measurements indicated that the SPM concentration was generally higher during ebb at 0.2 mab, whereas at 2 mab it was generally higher during flood. This was more pronounced during measuring period 6a, where the highest peaks at 0.2 mab occurred more frequently during ebb than flood. The SPM during the disposal experiment was thus concentrated in the near bed layer rather than being well mixed in the water column, as was also observed by others (e.g. Wu et al. 2006, Siegel et al. 2009). The ebb-dominance of the near-bed SPM concentration indicates that SPM transport of fine sediments was from the disposal site towards the measurement location; the measurement location is situated in ebb direction of the disposal site. The SPM concentration and altimetry data both suggest that a lutocline or benthic plume was formed during the field experiment and that the fate of the fluid mud layer was controlled by the differences in bottom shear stress during neap and spring tidal periods.

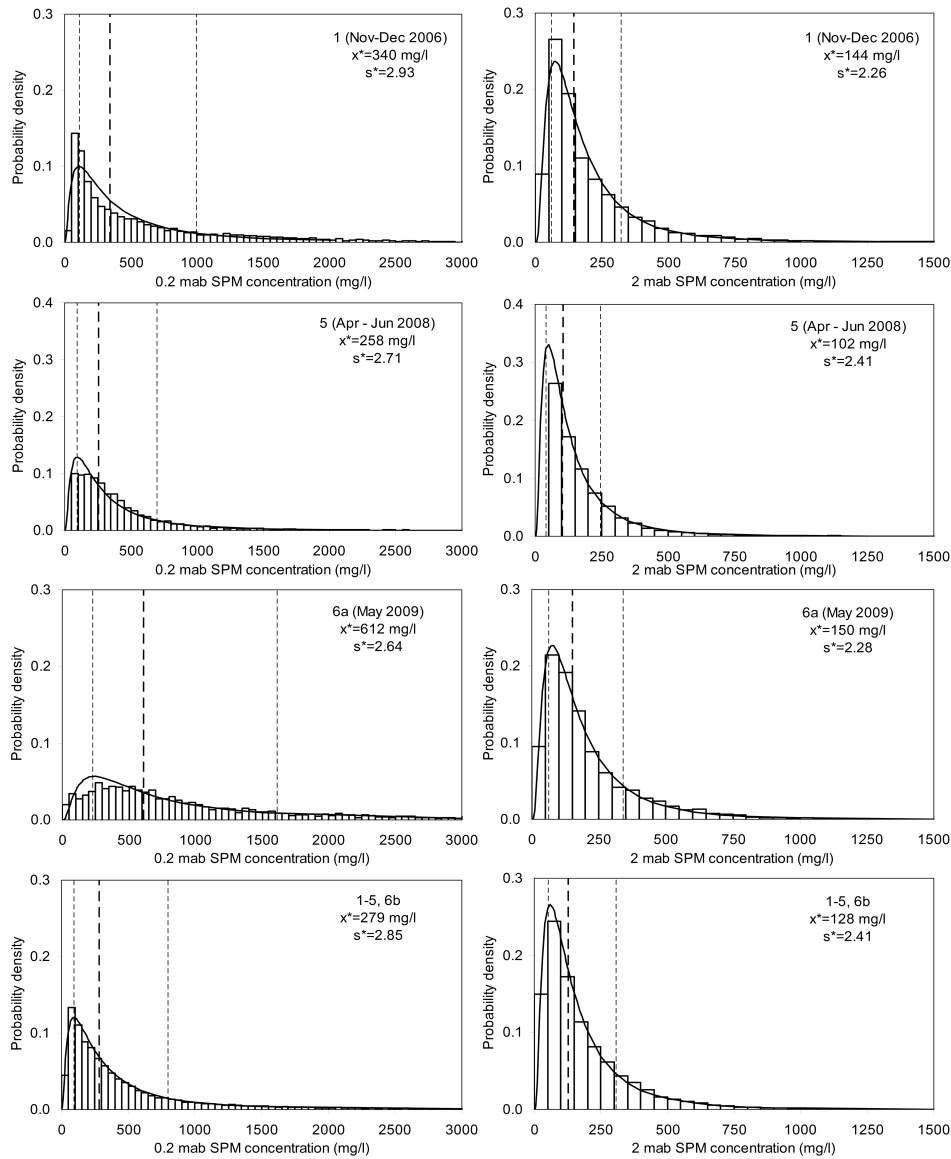


Figure 7.6 Probability density distribution of the SPM concentration data at 0.2 mab (left) and 2 mab (right) for periods 1, 5, 6a (during dredging experiment) and all data except those during the dredging experiment (1 to 5 and 6b) and the corresponding log-normal probability density functions (periods 2-4 are not shown), see Table 1. The data are binned in classes of 50 mg l^{-1} , the dashed lines correspond to the geometric mean x^* times/over the multiplicative standard deviation s^*

7.5.3. Impact of disposal

The natural variability of SPM concentration in the area is very high, which is indicated by the high multiplicative standard deviations of the probability distributions (Table 7.2). Orpin et al. (2004) argue that the natural variability of the system could be used to define the limits of acceptable turbidity levels during dredging or disposal operations. Such an approach assumes that a short-term increase (several hours) that falls within the range of natural variability will not have any significant ecological effect. Orpin et al. (2004) developed this strategy for coral communities, which are

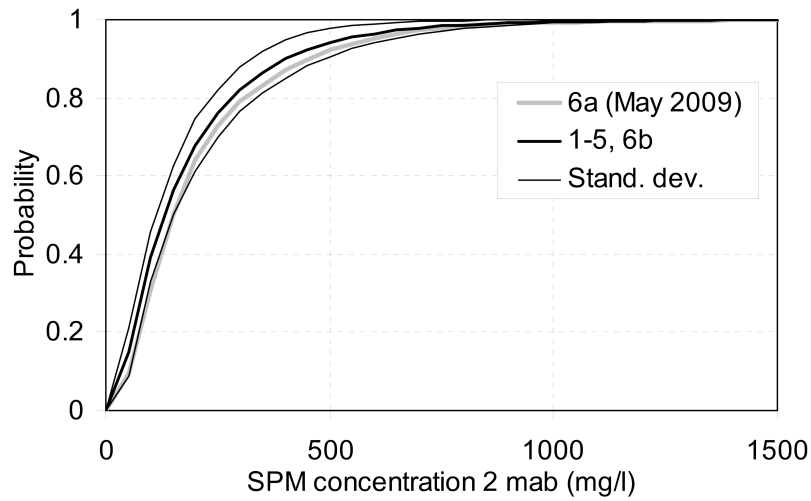


Figure 7.7 Cumulative probability distribution of SPM concentration measured at 2 mab and 0.2 mab. The black line (1 to 5, 6b) shows the data not collected during the field experiment \pm one standard deviation (thin black lines) and the grey one during the field experiment (6a), see Table 7.1

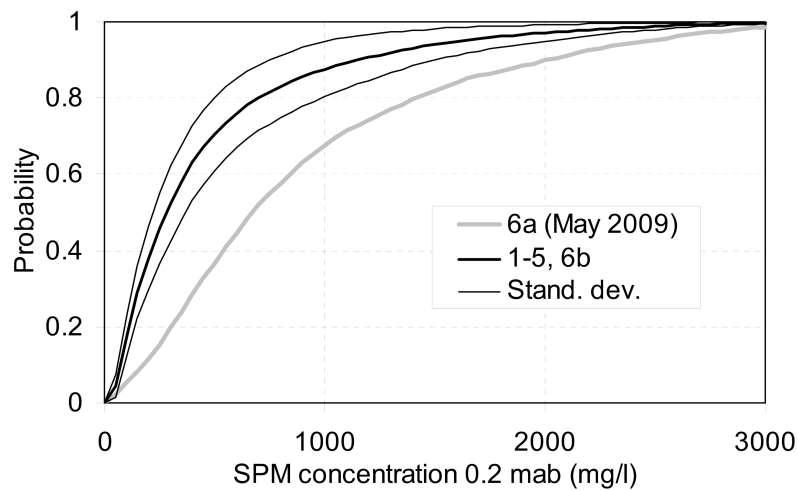


Figure 7.7 (continued) Cumulative probability distribution of SPM concentration measured at 2 mab and 0.2 mab. The black line (1 to 5, 6b) shows the data not collected during the field experiment \pm one standard deviation (thin black lines) and the grey one during the field experiment (6a), see Table 7.1

much more sensitive to turbidity than the *Macoma balthica* community found in the high-turbidity area of the study site (Degraer et al. 2008). Changes in species density or faunal community may be attributable to changes in sediment composition and increased SPM concentration. Nevertheless, applying the same trigger to indicate acceptable upper limits of SPM concentration in the water column (2 mab) indicates that the increase is within natural variability of the system. However, we found that the cumulative frequency of SPM concentration at 0.2 mab during the dredging experiment was not included within one standard deviation of the curve for all the data not collected during the field experiment (Fig. 7.7), showing that significant change in turbidity and possibly bed sediment composition over a large area occurred. The results suggests that if the site would be used as permanent disposal site for maintenance dredging work then the SPM concentration in the near bed layer together

with deposition of mud would increase and might thus negatively affect the macrobenthos of a larger area. Van Hoey et al. (2010) report that on the disposal site Zeebrugge Oost (Fig. 7.1), situated west of the port, lower macro-benthos and epibenthos densities were found than elsewhere in the area.

7.6. Conclusions

Harbour authorities worldwide are obliged to dredge their major shipping channels, and subsequently to dispose the dredged spoil offshore. In this study an analysis method, based on the concept of statistical populations, was applied to evaluate the effects of disposal operations on SPM concentration in the Belgian nearshore area. The method provides a tool to account for the complexities associated with natural dynamics and the need to evaluate quantitatively human impact. SPM concentration can be used as an indicator of environmental changes if sufficiently long time-series are available that are representative of the natural variability. The major site-specific conclusions of the study are: the area has a very high natural variability of SPM concentration (min-max: 10 - 3300 mg l⁻¹); the SPM concentration near the bed (0.2 mab) was exceptionally high (median was more than 2 times higher) during the dredging experiment. Waves were not identified as being responsible for the high SPM concentrations; the disposal site was situated in ebb-direction of the measuring location. During the experiment, a generally higher SPM concentration near the bed during ebb and at 2 mab during flood was observed, suggesting that the disposed material was mainly transported in the benthic layer. The time-lag between high wave heights and high SPM concentration suggests further that the SPM has been advected towards the measuring location rather than eroded locally; the disposal results in a long-term increase of SPM concentration near the bed at the measuring location. This together with ADV altimetry suggest that fluid mud layers have been formed during whole the disposal experiment rather than being limited to neap tidal or storm conditions as observed during the other periods.

7.7. Acknowledgements

This study was funded by the Maritime Access Division of the Ministry of the Flemish Community in the framework of the MOMO project and by the Belgian Science Policy within the framework of the QUEST4D (SD/NS/06A) project. G. Dumon (Coastal Service, Ministry of the Flemish Community) made available wave measurement data. We want to acknowledge the crew of the RV Belgica, Zearend, Zeehond and DN23 for their skilful mooring and recuperation of the tripod. The measurements would not have been possible without A. Pollentier and his team (measuring service of MUMM, Ostend).

7.8. References

- Bai Y, Wang Z, Shen H (2003). Three-dimensional modelling of sediment transport and the effects of dredging in the Haiha Estuary. *Estuarine Coastal Shelf Science* 56, 175-186.
- Bass SJ, Aldridge JN, McCave IN, Vincent CE (2002). Phase relationships between fine sediment suspensions and tidal currents in coastal seas. *Journal of Geophysical Research* 107(C10), 1-14.
- Berlamont J (1989). Pumping fluid mud: Theoretical and experimental considerations. *Journal of Coastal Research* 5, 195-205.
- Borja A (2005). The new European Marine Strategy Directive: Difficulties, opportunities, and challenges. *Marine Pollution Bulletin* 52, 239-242.
- Bolam SG, Rees HL, Somerfield P, Smith R, Clarke KR, Warwick RM, Atkins M, Garnacho E (2006). Ecological consequences of dredged material disposal in the marine environment: A holistic assessment of activities around the England and Wales coastline. *Marine Pollution Bulletin* 52, 415-426.
- Bray RN, Bates AD, Land JM (1996). Dredging and the Environment. In: *Dredging: A Handbook for Engineers*, Elsevier, 371-387.

- Cacchione DA, Wiberg PL, Lynch JF, Irish JD, Traykovski P (1999). Estimates of suspended-sediment flux and bedform activity on the inner portion of the Eel continental shelf. *Marine Geology* 154, 83-97.
- Collins M (1990). The behaviour of cohesive and non-cohesive sediments. In: Alzieu C, Galenne B (Eds.), *Proc. Int. Seminar Environment. Asp. Dredging Act. Port Autonome de Nantes Saint-Nazaire, Nantes*, pp. 15-32.
- Degraer S, Verfaillie E, Willems W, Adriaens E, Vincx M, Van Lancker V (2008). Habitat suitability modelling as a mapping tool for macrobenthic communities: An example from the Belgian part of the North Sea. *Continental Shelf Research* 28, 369-379.
- Delefortrie G, Vantorre M, Eloit K (2005). Modelling navigation in muddy areas through captive model tests. *Journal of Marine Science and Technology* 10, 188-202.
- De Nijs MAJ, Winterwerp J, Pietrzak JD (2009). On harbour siltation in fresh-salt water mixing region. *Continental Shelf Research* 29, 175-193.
- Devlin M, Bets M, Haynes D (2007). Implementation of the Water Framework Directive in European marine waters. *Marine Pollution Bulletin* 55, 1-2.
- Dobrynin M, Gayer G, Pleskachevsky A, Günther G (2010). Effect of waves and currents on the dynamics and seasonal variations of suspended particulate matter in the North Sea. *Journal of Marine Systems* 82, 1-20.
- Du Four I, Van Lancker V (2008). Changes of sedimentological patterns and morphological features due to the disposal of dredge spoil and the regeneration after cessation of the disposal activities. *Marine Geology* 25, 15-29.
- Fettweis M, Sas M (1999). On the sedimentation of mud in access channels to the harbour of Antwerp. *PIANC Bulletin* 101, 53-59.
- Fettweis M, Nechad B, Van den Eynde D (2007). An estimate of the suspended particulate matter (SPM) transport in the southern North Sea using SeaWiFS images, in situ measurements and numerical model results. *Continental Shelf Research* 27, 1568-1583.
- Fettweis M, Francken F, Van den Eynde D, Verwaest T, Janssens J, Van Lancker V (2010). Storm influence on SPM concentrations in a coastal turbidity maximum area with high anthropogenic impact (southern North Sea). *Continental Shelf Research* 30, 1417-1427.
- Fettweis M, Nechad B (2010). Evaluation of *in situ* and remote sensing sampling methods for SPM concentrations, Belgian continental shelf (southern North Sea). *Ocean Dynamics* 61, 157-171.
- Fredette TJ, French GT (2004). Understanding the physical and environmental consequences of dredged material disposal: history in New England and current perspectives. *Marine Pollution Bulletin* 49, 93-102.
- Gallacher PC, Hogan PJ (1998). Hydrodynamical dispersion of dredged materials sequestered on the abyssal seafloor. *Journal of Marine Systems* 14, 305-318.
- Green MO, Vincent CE, McCave IN, Dickson RR, Rees JM, Pearson ND (1995). Storm sediment transport: observations from the British North Sea shelf. *Continental Shelf Research* 15, 889-912.
- Harris CK, Wiberg PL (2002). Across-shelf sediment transport: Interaction between suspended sediment and bed sediment. *Journal of Geophysical Research* 107 (C1) 8-1, 8-12.
- Hill AS, Veale LO, Pennington D, Whyte SG, Brand AR, Hartnoll RG (1999). Changes in Irish Sea benthos: possible effects of 40 years of dredging. *Estuarine, Coastal and Shelf Science* 48, 739-750.
- Hossain S, Eyre BD, McKee LJ (2004). Impacts of dredging on dry season suspended sediment concentration in the Brisbane River estuary, Queensland, Australia. *Estuarine Coastal Shelf Science* 61, 539-545.
- Lauwaert B, Bekaert K, Berteloot M, De Backer A, Derweduwen J, Dujardin A, Fettweis M, Hillewaert H, Hoffman S, Hostens K, Ides S, Janssens J, Martens C, Michielsen T, Parmentier K, Van Hoey G, Verwaest T (2009). Synthesis report on the effects of dredged material disposal on the marine environment (licensing period 2008-2009). MUMM, ILVO, CD, aMT, WL report BL/2009/01, 73 pp.

- Lee D-I, Eom K-H, Kim G-Y, Baeck G-W (2010). Scoping the effective marine environmental assessment of dredging and ocean disposal of coastal sediments in Korea. *Marine Policy* 34, 1082-1092.
- Le Hir P, Monbet Y, Orvain F (2007). Sediment erodability in sediment transport modelling: can we account for biota effects? *Continental Shelf Research* 27, 1116-1142.
- Li Y, Mehta AJ (2000). Fluid mud in the wave-dominated environment revisited. In: McAnally WH, Mehta AJ (Eds.), *Coastal and Estuarine Fine Sediment Dynamics*. *Proceedings Marine Science* 3, 79-93.
- Lohrer AM, Wetz JJ (2003). Dredging-induced nutrient release from sediments to the water column in a southeastern saltmarsh tidal creek. *Marine Pollution Bulletin* 46, 1156-1163.
- Maa P-Y, Mehta AJ (1987). Mud erosion by waves: a laboratory study. *Continental Shelf Research* 7, 1269-1284.
- McAnally WH, Friedrichs C, Hamilton D, Hayter EJ, Shrestha P, Rodriguez H, Sheremet A, Teeter A (2007). Management of fluid mud in estuaries, bays, and lakes. Present state of understanding on character and behavior. *Journal of Hydraulic Engineering* 133, 9-22.
- McCandliss RR, Jones SE, Hearn MR, Latter RJ, Jago CF (2002). Dynamics of suspended particles in coastal waters (southern North Sea) during a spring bloom. *Journal of Sea Research* 47, 285-302.
- Murray JMH, Meadows A, Meadows PS (2002). Biogeochemical implications of microscale interactions between sediment geotechnics and marine benthos: A review. *Geomorphology* 47, 15-30.
- Nichols MM (1988). Consequences of dredging. In: Kjerfve B (Ed.), *Hydrodynamics of Estuaries*. CRC Press, Florida, 89-99.
- Nechad B, Ruddick K, Park Y (2010). Calibration and validation of a generic multisensor algorithm for mapping of total suspended matter in turbid waters. *Remote Sensing of Environment* 114, 854-866.
- O'Connor TP (1999). A wider look at the risk of ocean disposal of dredged matter. *Marine Pollution Bulletin* 38, 760-761.
- Okada T, Larcombe P, Mason C (2009). Estimating the spatial distribution of dredged material disposed of at sea using particle-size distributions and metal concentrations. *Marine Pollution Bulletin* 58, 1164-1177.
- Orpin AR, Ridd PV, Thomas S, Anthony KRN, Marshall P, Oliver J (2004). Natural turbidity variability and weather forecasts in risk management of anthropogenic sediment discharge near sensitive environments. *Marine Pollution Bulletin* 49, 602-612.
- OSPAR (2008). Assessment of the environmental impact of dredging for navigational purposes, OSPAR Commission, Publication nr 366/2008, 17 pp.
- PIANC (2008). Minimising harbour siltation, Report No 102, 75 pp.
- Powilleit M, Kleine J, Leuchs H (2006). Impacts of dredged material disposal on a shallow, sublittoral macrofauna community in Mecklenburg Bay (western Baltic Sea). *Marine Pollution Bulletin* 52, 386-396.
- Sanford LP (2008). Modeling a dynamically varying mixed sediment bed with erosion, deposition, bioturbation, consolidation, and armoring. *Computers & Geosciences* 34, 1263-1283.
- Schoellhamer DA (2002). Variability of suspended-sediment concentration at tidal to annual time scales in San Francisco Bay, USA. *Continental Shelf Research* 22, 1857-1866.
- Shi JZ, Gu W-J, Wang D-Z (2008). Wind wave-forced fine sediment erosion during slack water periods in Hangzhou Bay, China. *Environmental Geology* 55, 629-638.
- Siegel H, Gerth M, Heene T, Ohde T, Rüss D, Kraft H (2009). Hydrography, currents and distribution of suspended matter during a dumping experiment in the western Baltic Sea at a site near Warnemünde. *Journal of Marine Systems* 75, 397-408.

- Simonini R, Ansaloni I, Cavallini F, Graziosi F, Iotti M, Massamba N'Siala G, Mauri M, Montanari G, Preti M, Prevedelli D (2005). Effects of long-term dumping of harbor-dredged material on macrozoobenthos at four disposal sites along the Emilia-Romagna coast (Northern Adriatic Sea, Italy). *Marine Pollution Bulletin* 50, 1595-1605.
- Smith SDA, Rule MD (2001). The effects of dredge-spoil dumping on a shallow water soft-sediment community in the Solitary Islands Marine Park, NSW, Australia. *Marine Pollution Bulletin* 42, 1040-1048.
- Soulsby R (1997). *Dynamics of marine sands*. Thomas Telford Publications, London. 249 pp.
- Traykovski P, Wiberg PL, Geyer WR (2007). Observations and modeling of wave-supported sediment gravity flows on the Po prodelta and comparison to prior observations from the Eel shelf. *Continental Shelf Research* 27, 375-399.
- Truitt CL (1988). Dredged material behaviour during open water disposal. *Journal of Coastal Research* 4, 389-397.
- Van den Eynde D (2004). Interpretation of tracer experiments with fine-grained dredging material at the Belgian Continental Shelf by the use of numerical models. *Journal of Marine Systems* 48, 171-189.
- Van Hoey G, Hostens K, Parmentier K, Robbens J, Bekaert K, De Backer A, Derweduwen J, Devriese L, Hillewaert H, Hoffman S, Pecceu E, Vandendriessche S, Wittoeck J (2009). Biological and chemical effects of the disposal of dredged material in the Belgian Part of the North Sea (period 2007-2008). ILVO-report, Ostend (Belgium), pp. 97.
- van Kessel T, Kranenburg C (1998). Wave-induced liquefaction and flow of subaqueous mud layers. *Coastal Engineering* 34, 109-127.
- Van Maren DS, Winterwerp JC, Sas M, Vanlede J (2009). The effect of dock length on harbour siltation. *Continental Shelf Research* 29, 1410-1425.
- Velasco DW, Huhta CA. Experimental verification of acoustic Doppler velocimeter (ADV) performance in fine-grained, high sediment concentration fluids. Application Note SonTek/YSI.
- Velegakis AF, Gao S, Lafite R, Dupont JP, Huault MF, Nash LA, Collins MB (1997). Re-suspension and advection processes affecting suspended particulate matter concentrations in the central English Channel. *Journal of Sea Research* 38, 17-34.
- Verlaan PAJ, Spanhoff R (2000). Massive sedimentation events at the mouth of the Rotterdam waterway. *Journal of Coastal Research* 16, 458-469.
- Ware S, Bolam SG, Rees HL (2010). Impact and recovery associated with the deposition of capital dredging at UK disposal sites: Lessons for future licensing and monitoring. *Marine Pollution Bulletin* 60, 79-90.
- Winterwerp JC (2005). Reducing harbour siltation I: Methodology. *Journal of Waterway, Port, Coastal and Ocean Engineering* 131, 258-266.
- Wu J, Liu JT, Shen H, Zhang S (2006). Dispersion of disposed dredged slurry in the meso-tidal Changjiang (Yangtze River) Estuary. *Estuarine Coastal Shelf Sciences* 70, 663-672.

