

Nanotechnology in textiles

Yetisen, Ali K; Qu, Hang; Manbachi, Amir; Butt, Haider; Dokmeci, Mehmet R; Hinestroza, Juan P; Skorobogatiy, Maksim; Khademhosseini, Ali; Yun, Seok Hyun

DOI:

[10.1021/acsnano.5b08176](https://doi.org/10.1021/acsnano.5b08176)

License:

None: All rights reserved

Document Version

Peer reviewed version

Citation for published version (Harvard):

Yetisen, AK, Qu, H, Manbachi, A, Butt, H, Dokmeci, MR, Hinestroza, JP, Skorobogatiy, M, Khademhosseini, A & Yun, SH 2016, 'Nanotechnology in textiles', *ACS Nano*, vol. 10, no. 3, pp. 3042-3068.
<https://doi.org/10.1021/acsnano.5b08176>

[Link to publication on Research at Birmingham portal](#)

Publisher Rights Statement:

Checked for eligibility: 20/04/2016

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.

This document is confidential and is proprietary to the American Chemical Society and its authors. Do not copy or disclose without written permission. If you have received this item in error, notify the sender and delete all copies.

Nanotechnology in Textiles

Journal:	ACS Nano
Manuscript ID	nn-2015-08176n
Manuscript Type:	Review
Date Submitted by the Author:	28-Dec-2015
Complete List of Authors:	<p>Yetisen, Ali; Harvard Medical School, Massachusetts General Hospital Qu, Hang; École Polytechnique de Montréal, Engineering Physics Manbachi, Amir; Harvard Medical School Butt, Haider; University of Cambridge, Dokmeci, Mehmet; Brigham and Women's Hospital, Medicine Hinestroza, Juan; Cornell University, Department of Fiber Science, College of Human Ecology Skorobogatiy, Maksim; Ecole polytechnique de Montreal, Department of Engineering physics Khademhosseini, Ali; Harvard Medical School, Brigham and Women's Hospital Yun, Seok Hyun; Harvard Medical School and Wellman Center for Photomedicine, Massachusetts General Hospital</p>

SCHOLARONE™
Manuscripts

Nanotechnology in Textiles

Ali K. Yetisen^{†,}, Hang Qu,[‡] Amir Manbachi^{§,||} Haider Butt,[⊥] Mehmet R. Dokmeci,^{§,||} Juan P. Hinstroza,[#] Maksim Skorobogatiy,[‡] Ali Khademhosseini,^{§,||} and Seok Hyun Yun^{†,||,*}*

[†] Harvard Medical School and Wellman Center for Photomedicine, Massachusetts General Hospital, 65 Landsdowne Street, Cambridge, Massachusetts 02139, USA

[‡] Department of Engineering Physics, École Polytechnique de Montréal, Montréal, Québec, Canada

[§] Biomaterials Innovation Research Center, Division of Biomedical Engineering, Brigham and Women's Hospital, Harvard Medical School, Cambridge, Massachusetts, 02139, USA; Wyss Institute for Biologically Inspired Engineering, Harvard University, Boston, Massachusetts 02115, USA; Department of Physics, King Abdulaziz University, Jeddah, Saudi Arabia; Department of Bioindustrial Technologies, College of Animal Bioscience and Technology, Konkuk University, Hwayang-dong, Gwangjin-gu, Seoul 143-701, Republic of Korea

^{||} Harvard-MIT Division of Health Sciences and Technology, Massachusetts Institute of Technology, Cambridge, Massachusetts 02139, USA

[⊥] Nanotechnology Laboratory, School of Engineering Sciences, University of Birmingham, Birmingham B15 2TT, UK

[#] Department of Fiber Science, College of Human Ecology, Cornell University, Ithaca, New York, 14850, USA

1
2
3
4
5
6
7 KEYWORDS: Nanotechnology; fashion; fabrics; fibers; nanoparticles; carbon nanotubes;
8
9 graphene; energy storage; fiber optics; nanotoxicity
10
11

12
13
14
15 VOCABULARY: **Wearables** - electronics, fiber optics, or nanomaterials embedded in clothing
16 and accessories that offer improved mechanical, chemical, optical performance via sensing
17 external stimuli and/or responding to the environment; **Warp** - to arrange threads in long lengths
18 parallel to one another preparatory to further processing; **Weft** - threads widthways in a fabric as
19 woven; **Finishing** - a process performed on yarn or fabric after weaving to improve the look,
20 performance, or texture of the finished textile; **Lotus effect** - self-cleaning due to
21 hydrophobicity induced by nano or microscale hierarchical structured surfaces;
22
23 **Supercapacitor** - an electrochemical cell that allows storing electrical energy temporarily;
24
25 **Photonic bandgap material** - a nano or microscale structure that controls the optical properties
26 of incident light; **Electromagnetic shielding** - blocking the electromagnetic field by conductive
27 or magnetic materials; **Bragg fiber** - fiber optics incorporating Bragg gratings to filter narrow-
28 band light
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3
4
5
6
7 ABSTRACT
8
9

10
11 Increasing customer demand for durable and functional apparels manufactured in a sustainable
12 manner has created an opportunity for nanomaterials to be integrated into textile substrates.
13
14 Nanomaterials can induce stain-repellence, wrinkle-freeness, static elimination, and electrical
15 conductivity to fibers without compromising their comfort and flexibility. Nanomaterials also
16 offer a wider application potential to create connected garments that can sense and respond to
17 external stimuli via electrical, color, or physiological signals. This Review discusses electronic
18 and photonic nanotechnologies that are integrated with textiles, and shows their applications in
19 displays, sensing and drug release within the context of performance, durability, and
20 connectivity. Risk factors including nanotoxicity, nanomaterial release during washing, and
21 environmental impact of nanotextiles based on life cycle assessments have been evaluated. This
22 Review also provides an analysis of nanotechnology consolidation in textiles market to evaluate
23 global trends and patent coverage, supplemented by case studies of commercial products.
24 Perceived limitations of nanotechnology in the textile industry and future directions are
25 identified.
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3
4
5
6 The concept of clothing is undergoing a transformation through innovation in wearable
7
8 technologies. Intelligent clothing has increasing presence in prominent fashion weeks in New
9
10 York, London, and Paris. Fashion designers are creating functional materials and integrating
11
12 emerging, communication devices, flexible electronics and nanomaterials to garments and
13
14 designer clothes. For example, Philips designed a dress (*Bubelle*) that can tune its colors based
15
16 on the wearer's mood. Black Eyed Peas has also embraced technology at stage, for example, they
17
18 used organic light-emitting diode (OLED) based clothing and adaptive materials in their
19
20 performances. Fashion and technology company Studio XO has created "digital mermaid bra,"
21
22 whose crystals sparkled in time to Azealia Banks' real-time rapping. Recently, TechHaus, the
23
24 technical division of Haus of Gaga, has created a series of performance dresses for Lady Gaga's
25
26 ARTPOP campaign (2013). Gaga's featured artworks included a three-dimensional (3D)-printed
27
28 bubble machine dress (*Anemone*), a Jeff Koons-inspired design called the Parametric Sculpture
29
30 Dress, a piece with animated black mirrors (*Cipher*), and a flying drone-dress (*Volantis*).
31
32 Singers, artists, designers, and fashion icons have directed their interest to new materials that can
33
34 stand out in public events and media. The designers that have pioneered the use of technology in
35
36 fashion include Ralph Lauren, Diane von Furstenberg, Hussein Chalayan, Zac Posen, Rebecca
37
38 Minkoff, Richard Nicoll, and Iris van Herpen.
39
40
41
42
43
44

45
46 Cotton is a widely used fiber type that exhibits high absorbency, softness, and breathability.
47
48 However, the use of cotton in non-classical applications is limited since its fibers have relatively
49
50 low strength, low durability, easy creasing and soiling, and flammability.² Synthetic fibers can be
51
52 antimicrobial, stain/crease-resistant, but generally lack comfort as compared to cotton. The
53
54 development of new fiber types that combine the advantages of both natural and synthetic fibers,
55
56
57
58
59
60

1
2
3 as well as offering novel functions has been desirable since the 1940s.³ Customer demand for
4 improved appearance color, shape, texture, and functionality has also increased.⁴ Flexible
5 electronics and optical devices can be integrated into textiles.² The applications of the
6 functionalized textiles include medical monitoring of body function and metabolism,^{5, 6}
7 rehabilitation,⁷ and electronic devices integrated into clothes.⁸ Furthermore, these technologies
8 allow integrating sensors into textiles.⁹

9
10 A new frontier in clothing technology is nanoengineered functional textiles.¹⁰⁻¹² The
11 advantage of nanomaterials concerns creating function without altering the comfort properties of
12 the substrate.¹³ Textile is an universal interface and ideal substrate for the integration of
13 nanomaterials, electronics, and optical devices. Such integrated materials and technologies offer
14 a platform that responds to mechanical, chemical, electrical, thermal, optical, or magnetic
15 stimuli. Such wearable devices may include sensors, data transmission, and processing units.
16 These engineered materials should seamlessly integrate into garments, and be flexible and
17 comfortable while having no allergic reaction to the body. Additionally, such materials need to
18 satisfy weight, performance, and appearance properties (color). A significant challenge in the
19 textile industry is that conventional approaches to functionalize fabrics do not lead to permanent
20 effects. For example, laundering decreases imparted functional effects. Hence, nanotechnology
21 can play a part to introduce new and permanent functions to fabrics. Textiles can be
22 nanoengineered to have specific functions including hydrophobicity, antibacterial properties,
23 conductivity, antiwrinkle properties, antistatic behavior, and light guidance and scattering
24 (Figure 1). Using nanotechnology, these properties can be achieved without affecting
25 breathability or texture. Such materials may be in the form of surface coatings, voided patterns,
26 fillers, or foams.



Figure 1. Applications of nanotechnology in textiles


NANOENGINEERED TEXTILES

Water and Oil Repellence. Water repellence can be imparted to textiles by forming nanowhiskers consisting of hydrocarbons that are three orders of magnitude smaller than a typical cotton fiber. Nanowhiskers are integrated within the fabric to create a peach fuzz effect.¹⁴ Analogous to the Lotus effect, the spaces between individual whiskers are smaller than drop of water; however larger than water molecules, producing a high surface tension that allows the water to remain in the surface.^{15, 16} The whiskers maintain breathability as they permeate gases. Water repellence can also be induced through creation of 3D surface structures on the fabric by adding gel-forming additives, or coating the textile by nanoparticulate film.¹⁷ For example, audio frequency plasma of fluorocarbon derivatives can be applied to coat cotton fibers with

1
2
3 nanoparticulates.¹⁸ By producing a roughness on the surface of the fabric, superhydrophobicity
4 can be created without affecting abrasion resistance and softness of the fabric. Silica (SiO₂)
5 nanoparticles (NPs) in combination with water-repellent agents can also be utilized to impart
6 hydrophobicity to textiles.¹⁹ SiO₂ NPs (143-378 nm) were synthesized via sol-gel process.
7 Cotton fabrics treated with both SiO₂ NPs and water-repellent agent produced contact angles
8 above 130°. SiO₂ NPs could be coated over cotton in the presence of perfluorooctylated
9 quaternary ammonium silane coupling agent (PQASCA) to produce hydrophobicity.²⁰ While the
10 SiO₂ NPs create roughness on the surface of cotton fibers, PQASCA lowered the surface energy.
11 The resulting textiles exhibited water repellence with a water contact angle of 145°. Oil
12 repellency of the fabric also improved showing a 131° contact angle for a diiodomethane (CH₂I₂)
13 droplet on the fabric surface. In another study, amphiphilic Janus micro/NPs were chemically
14 immobilized on textile surfaces.²¹ While microparticles bound between fibers, NPs attached to
15 fiber surface. Janus particle immobilized textiles showed water-repellence.
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33

34 Bioinspired design has also motivated the investigation of water-repellent materials. For
35 example, duck feathers consist of multiscale structures having preening oil to repel water. The
36 microstructure of duck feathers were simulated by coating cotton and polyester textiles with
37 chitosan using a surface solution precipitation method followed by modification with a silicone
38 compound to achieve a low surface energy.²² Figure 2a shows a scanning electron microscope
39 (SEM) image of polyester and chitosan-treated polyester having nanosized roughness on the
40 surface. Chitosan-treated polyester textiles provided flexibility and water repellence. Lotus leaf
41 nanostructures also inspired biomimetic studies for application in textiles.²³ Cotton fibers were
42 coated with pristine and surface-modified carbon nanotubes (CNTs) to mimic the nanostructure
43 of lotus leaves. The resulting cotton fabrics had contact angles greater than 150°. Another study
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 that was inspired from lotus leaves involved the development of a nanocoating (20 nm) to create
4 hydrophobic textiles.²⁴ The nanocoating consisted of epoxy-containing poly(glycidyl
5 methacrylate) (PGMA) and SiO₂ NPs for the initial surface modification and generation of the
6 primary reactive layer. Polymers with different functional groups (*e.g.*, carboxy, anhydride,
7 amino and hydroxyl) could be grafted on the reactive layer.
8
9
10
11
12
13
14

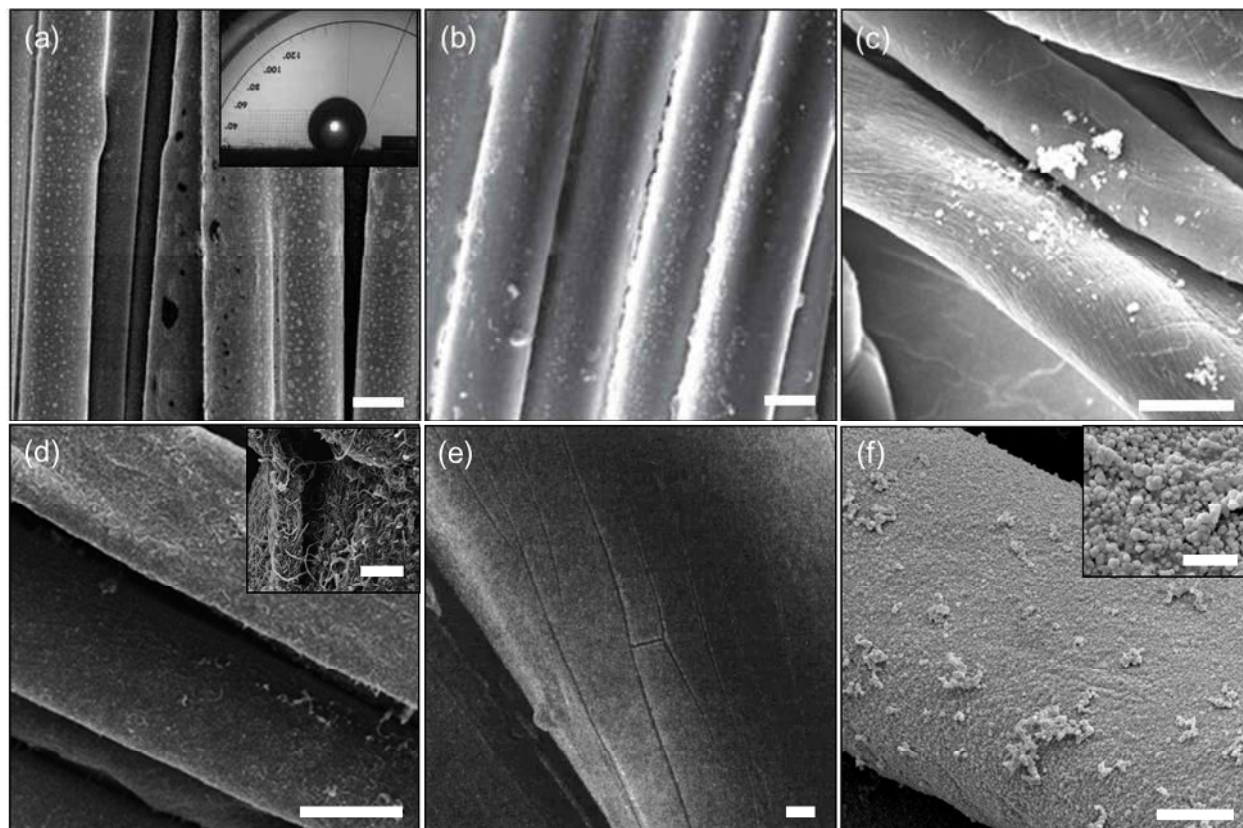

43 **Figure 2.** SEM images of nanoparticle functionalized fibers. (a) Water repellence: chitosan-
44 treated polyester with nanoscale roughness on the surface. Scale bar = 10 μm. The inset shows
45 the profile of a water droplet on the treated polyester fabric. Reprinted with permission from ref
46 ²². Copyright 2008 IOP Publishing. (b) Antistatic properties: polyester fiber surfaces treated with
47 NPs and fluorine. Scale bar = 20 μm. Reprinted with permission from ref ²⁵. Copyright 2010
48 Sage Publications. (c) Wrinkle resistance: cotton fibers treated with 1,2,3,4-BCA and TiO₂ NPs.
49 Scale bar = 10 μm. Reprinted with permission from ref ²⁶. Copyright 2010 Springer Publishing.
50
51
52
53
54
55
56
57
58
59
60

1
2
3 (d) Strength enhancement: CNT coated cotton fibers. Scale bar = 10 μm . Reprinted with
4 permission from ref ²⁷. Copyright 2008 The Royal Society of Chemistry. The inset shows the
5 magnified view of the fiber surface. Inset scale bar = 1 μm . (e) UV blocking: TiO_2 treated cotton
6 fiber. Scale bar = 1 μm . Reprinted with permission from ref ²⁸. Copyright 2004 Sage
7 Publications. (f) Antibacterial properties and odor control: cotton fibers treated with Ag NPs.
8 Scale bar = 5 μm . The inset shows the magnified Ag NPs on the surface. Inset scale bar = 1 μm .
9 Reprinted with permission from ref ²⁹. Copyright 2012 Elsevier.

10
11
12
13
14
15
16
17
18
19
20
21 Oil repellent textiles have been also produced. Polyester fabric could be coated with silicone
22 nanofilaments and treated with plasma fluorination to impart superoleophobic properties.³⁰ The
23 produced fabric samples had oil repellency grade of 8, and repelled alkanes. Hydrophobic and
24 oleophobic properties could be simultaneously imparted to textiles. For example, cotton fibers
25 were impregnated with SiO_2 particles to produce a dual-size surface roughness, followed by
26 hydrophobization with poly(dimethylsiloxane) (PDMS), resulting in a static water contact angle
27 of 155° for a droplet.³¹ To induce oleophobicity, the SiO_2 particles on the fibers were treated
28 with perfluoroalkyl chain, which was demonstrated by a static contact angle of 140° and a roll-
29 off angle of 24° for oil droplets.

30
31
32
33
34
35
36
37
38
39
40
41
42 **Antistatic Properties.** Synthetic fibers such as polyester and nylon have high static charge as
43 they are not hydrophilic. On the other hand, cellulosic fibers limit the static charges due to their
44 high moisture content. TiO_2 NPs,³² ZnO whiskers,³³ and antimony (Sb) doped tin oxide (SnO_2)
45 particles³⁴ were utilized to impart antistatic properties to synthetic fibers. These materials are
46 electrically conductive and dissipate the static charge accumulated on the textile. Additionally,
47 silane nanosol enhances antistatic properties, as it absorbs moisture in the air through hydroxyl
48 groups.³⁵ In commercial products, poly(tetrafluoroethylene) (PTFE) (W.L. Gore) developed an
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 antistatic membrane that consisted of electrically conductive NPs anchored in the fibrils of the
4 membrane.³⁶ This membrane limited the formation of isolated chargeable areas and voltage
5 peaks. This approach is advantageous over other antistatic agents since it does not wash off
6 during laundry. Sol-gel coatings could be applied as a surface treatment to impart antistatic
7 properties combined with hydrophobic properties.³⁷ Sol-gel composition consisted of
8 hydrophobic compounds such as alkoxy silanes modified with alkyl chains and hydrophilic
9 compounds including amino-functionalized alkoxy silanes. This combination allowed forming
10 hydrophobic groups at the fiber-air interface while the deeper regions were hydrophilic. Sol-gel
11 coated textiles had water repellence, but contained humidity in deeper regions of the coatings to
12 produce antistatic properties. Antistatic charges with hydrophobicity could be achieved by
13 treating polyester fabric with silver (Ag) NPs and fluorine water-repellent finish (Figure 2b).²⁵
14 After 10 washings, the polyester fabric had FTTS-FA-009 A grade antistatic property, and
15 AATCC 22 spray rating 90 grade for its hydrophobic quality.

16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34 ZnO NPs have been utilized to produce antistatic properties.³⁸ ZnO NPs, prepared by direct
35 precipitation using zinc chloride (ZnCl_2), were immobilized both on polyester fabrics through
36 pad-dry-cure process with antistatic finishing agent. The charge density of polyester fabrics
37 reduced from 58 to 0.95 (units in $\times 10^{-7} \text{ C m}^{-2}$). As the concentration of ZnO NPs increased in the
38 finishing agent, the antistatic property of the fabric decreased due to reduced dispersion of NPs.
39 Additionally, the addition of Ag NPs decreased the static voltage of polyester fabric by 60.4 %.³⁹
40 The combination of Ag, gold (Au) and Zn oxide particles decreased the static voltage by 77.7 %.
41 In another study, Sb nanoparticle doped SnO_2 particles were utilized to impart antistatic
42 properties to polyacrylonitrile (PAN) fibers.⁴⁰ These particles were dispersed in water using
43 polyethyleneimine (PEIN), and this solution was added to the pre-heating bath during spinning
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 of PAN fibers. The particles diffused into the fibers create electrically conductive channels,
4
5 which produced antistatic properties.
6
7

8 **Wrinkle Resistance.** Cellulose molecules in the cotton linearly organize themselves passing
9 through the crystalline and amorphous sections of the fibers. Hydrogen bonds hold together
10 cellulose molecules in their positions. Upon applying a force to the fibers, the cellulose chains
11 displace from their original positions and hydrogen bonds reform at new locations. Nanocoatings
12 that prevent crease while maintaining comfort is desirable in textile products. Traditionally,
13 fabrics are impregnated with resin to impart wrinkle resistance to textiles. However, this
14 approach decreases tensile strength of the fiber, abrasion resistance, and dyeability while
15 inducing hydrophobicity. To impart wrinkle resistance, NPs have been applied to cotton and silk.
16
17 TiO₂ NPs with carboxylic acid as a catalyst were utilized to form crosslinks between cellulose
18 molecules and the acidic groups.^{41, 42} The use of 1,2,3,4-butane tetracarboxylic acid (BCA) and
19 succinic acid as crosslinking agents had the highest dry crease recovery angle and wet crease
20 recover angles, respectively. Additionally, carboxylic acid treated fabrics with TiO₂ NPs were
21 softer as compared to untreated fabric.⁴² TiO₂ through its catalytic property can be used as a co-
22 catalyst with sodium hypophosphite (NaPO₂H₂) to treat cotton with 1,2,3,4-BCA.^{26, 43-45} Figure
23 2c shows SEM images of cotton fibers treated with BTCA and TiO₂ NPs. This increased the
24 effectiveness of NaPO₂H₂, hence the wrinkle recovery of the cotton fabric. However, tear and
25 tensile strength of the cotton fabric decreased due to the presence of TiO₂ NPs. *Bombyx mori* silk
26 was also treated with TiO₂ NPs in chitosan by crosslinking reactions of citric acid and maleic
27 anhydride.⁴⁶ Dry and wet delay-wrinkle recovery angles of the treated silk were 267° and 250° as
28 compared to untreated fabric of 235° and 178°, respectively. Additionally, SiO₂ NPs and maleic
29 anhydrate as a catalyst have been applied to silk to improve wrinkle resistance.⁴⁷
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3
4 **Strength Enhancement.** CNT reinforced polymer composite fibers have been developed to
5 improve strength, toughness, and decrease weight. These composite fibers could be produced
6 through melt-spinning of polypropylene and carbon particles.⁴⁸ Controlling the parameters in
7 melt-spinning, the morphology, crystallinity and mechanical properties of nanostructured
8 polycaprolactone non-woven mats were optimized.⁴⁹ Melt extrusion also produced a wide range
9 of nanoadditive yarns with improved mechanical properties and various textures.⁵⁰

10
11
12
13
14
15
16
17 Wet-dry spinning or jet melt spinning through spinnerets have been used to produce ordinary
18 and fine denier textile fibers (1-100 μm in diameter). Nanoscale fibers require electrospinning, in
19 which a solution is extruded through nanoscale spinnerets and the spun fibers are collected on a
20 grounded plate. The fiber strength and conductivity can be increased by post-treatment
21 approaches (*e.g.*, heat). Synthetic nanofibers can also be produced through coagulation-based
22 CNT electrospinning by controlling the fiber diameter and increasing twist. Such composite
23 fibers can consist of multiwalled CNTs (5-20). Highly twisted yarns have high strength,
24 toughness, and energy damping capability for application in electronic textiles including
25 actuators, electrostatic discharge protection, energy storage, heating, and radio and microwave
26 absorption. The integration of CNTs into fibers has been shown to improve the strength and
27 performance. For example, super-aligned arrays of CNTs have Young's modulus in the TPa
28 scale, tensile strength of 200 GPa, breaking strain of 20 %, and elastic strain of 5 %.⁵¹

29
30
31
32
33
34
35
36
37
38
39
40
41 Dipping and coating method was also utilized to immobilize CNTs on cotton.²⁷ CNTs were
42 modified with poly(butylacrylate) using surface grafting, and this composite was applied to
43 cotton fabrics by dipping, drying, curing, and finishing. Figure 2d illustrates SEM images of
44 CNT coated cotton fibers. The tensile strength of the CNT-coated cotton fabrics was improved
45 along the weft and warp directions, showing enhancement in both the loading capability and
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 flexibility (displacement). For example, the tensile strength of the CNT coated cotton was 0.5 kN
4
5 at 13.5 cm displacement as compared to 0.25 kN for untreated fabrics.²⁷
6
7

8 **UV Blocking.** Inorganic UV blockers are non-toxic and chemically stable operating at high
9
10 temperatures. Nanoscale semiconductor oxides such as TiO₂ and ZnO efficiently absorb and
11 scatter UV radiation.^{28, 52-54} Figure 2e shows a SEM image of a TiO₂ (~100 nm) treated cotton
12
13 fiber. At nanoscale, scattering depends on the wavelength and the size of the NP, where the
14
15 scattering is inversely proportional to the wavelength of the fourth power of the wavelength. For
16
17 example, to scatter UV light (200-400 nm), the optimum particle size is 20-40 nm.⁵⁵ Sol-gel
18
19 method can be used to form a thin layer of TiO₂ on the surface of the treated cotton. The UV-
20
21 protection effect may be maintained up to 50 launderings.⁵⁶ Furthermore, ZnO nanorods (10-50
22
23 nm) have been incorporated in cotton to induce scattering at a high UV protective factor rating.⁵⁷
24
25 Additionally, ZnO NPs synthesized through sedimentation and peptization were immobilized on
26
27 dyed polyester/cotton fabrics.^{58, 59} The resulting fabric absorbed the light in the UV region.⁵⁸
28
29
30
31
32
33

34 **Antibacterial Properties.** Ag, TiO₂ and ZnO NPs can be utilized to impart antibacterial and
35
36 fungicidal properties to textiles.^{53, 55, 60-62} Ag NPs have large surface areas that increase their
37
38 contact with bacteria and fungi. The antiseptic mechanism of Ag NPs is based on reacting with
39
40 proteins in these organisms and adversely affecting their cellular function and inhibiting cell
41
42 growth. They also reduce respiration, limiting the activity of the basal metabolism of the electron
43
44 transfer system, and substrate transport into the cell membrane. When Ag NPs contact with
45
46 moisture or bacteria, they adhere to the cell wall and membrane.⁶³ While the Ag NPs in their
47
48 metallic state are inert, they ionize in the presence of moisture. The Ag⁺ ions are reactive and
49
50 they diffuse through the cell wall and membrane into cytoplasm. Ag⁺ ions bind to sulphur
51
52 containing proteins on the cell membrane to structurally change the cell wall.⁶⁴ These structural
53
54
55
56
57
58
59
60

1
2
3 changes result in the release of the cellular components to extracellular fluid due to the changes
4
5 in the osmotic pressure. Additionally, the Ag^+ ions bind to phosphate containing proteins to
6
7
8 condense DNA, leading to a reaction with thiol group proteins to cause cell death. They also
9
10 suppress the function of enzymes and inhibit the cell to produce ATP.⁶⁵ Ag NPs slow down the
11
12 growth and multiplication of bacteria and fungi that are involved in odor creation and itchiness.
13
14 Figure 2f shows cotton fibers treated with Ag NPs.²⁹ For example, Ag NPs can be applied to
15
16 socks to prevent the growth of bacteria and fungi.
17
18

19
20 The antimicrobial efficacy of Ag additives depends on the concentration, surface area, and
21
22 the release rate of the Ag^+ ions.⁶⁶⁻⁶⁸ Ag-containing textiles can release dissolved and particulate
23
24 Ag (20-30%) into washing liquid in the first cycle.⁶⁹⁻⁷¹ In fabrics comprising Ag metal, oxidation
25
26 from Ag(0) to Ag(I) is required for releasing Ag^+ ions in solution.⁷⁰ Ion release from Ag NPs is a
27
28 cooperative oxidation process involving dissolved oxygen and protons to produce peroxide
29
30 intermediates and complete reactive dissolution. The presence of oxygen is essential for the
31
32 release of dissolved Ag through the surface oxidation of Ag NPs. The ion release rates increase
33
34 as the temperature is increased and as the pH is decreased.⁷² For example, Ag NPs (2 mg L^{-1})
35
36 released 0.3 mg L^{-1} dissolved Ag after 24 h incubation in air-saturated solution (9.1 mg L^{-1}
37
38 dissolved oxygen) at pH 5.68. The release of dissolved Ag was 0.6 and 0.1 mg L^{-1} at pH 4.0 and
39
40 8.0 after 24 h incubation, respectively.⁷² Additionally, the change in ionic strength has negligible
41
42 effect on the release kinetics.
43
44
45
46
47

48
49 TiO_2 NPs can also be utilized to impart textiles with antibacterial properties. Upon
50
51 illumination with light with energy higher than its bandgap (3.2 eV), TiO_2 as a photocatalyst has
52
53 the ability to have its electrons jump from the valence band to the conduction band. The electron
54
55 and electric hole pairs form on the surface of the photocatalyst, where the electrons and oxygen
56
57
58
59
60

1
2
3 form O_2^- and the positive electric holes and water create hydroxyl radicals.⁵² The unstable
4 substances on the surface of the photocatalyst are oxidized into CO_2 and water. Through this
5 mechanism, the photocatalyst decompose organic matters including odor molecules, bacteria,
6 and viruses. The catalytic activity of TiO_2 NPs has been utilized in textiles to provide
7 antibacterial properties.^{56, 73} The photocatalytic activity might be improved by creating
8 TiO_2/SiO_2 nanocomposites or Au-doped TiO_2 nanocomposites in cotton fabrics with self-
9 cleaning properties.^{74, 75} Furthermore, ZnO behaves similar to TiO_2 to produce antibacterial
10 properties.⁷⁶ ZnO NPs (21-25 nm) have been synthesized in reverse micelle cores of polystyrene
11 (PS) and polyacrylic acid.⁷⁷ ZnO NPs coated onto textiles showed self-cleaning properties in the
12 presence of gram-negative *E. coli* and aerobic gram-positive *S. aureus*. Additionally, SiO_2 and
13 Ag NPs with core-corona structure were electrostatically assembled onto cotton surfaces with
14 high packing density to impart antibacterial properties to fabrics.⁷⁸ The coronas of NPs can be
15 loaded with antibacterial moieties such as quaternary ammonia salts as well as metal coatings on
16 cotton fabrics.⁷⁹ Discussions focusing on self-cleaning and antimicrobial nanomaterials in
17 textiles can be found elsewhere.^{17, 80, 81}

40 41 **ELECTRONICS IN TEXTILES**


42
43 **Electrical Conductivity.** Conducting polymers are attractive for creating textiles that enable
44 the incorporation of sensors and actuators. For example, conducting polymers can change their
45 resistivity and produce electrical signals in response to external stimuli. A range of dopants can
46 be incorporated in these polymers. For example, polypyrrole (PPy) has high mechanical strength
47 and is electroactive in organic and aqueous solutions. Another widely studied conductive
48 polymer is polyaniline (PANI), which exist in three possible configurations: leucoemeraldine
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 base (fully reduced), emeraldine base (partly oxidized), and pernigraniline base (fully oxidized).
4
5 In its oxidized form, the conductivity of PANI increases about 10 orders of magnitude.
6
7
8 Additionally, polythiophene (PTs) and its derivatives can be in *p* or *n* type forms for application
9
10 in field-effect transistors in flexible logic circuits. The low production costs, light weight and
11
12 flexibility allow these materials to be easily integrated in textiles.
13
14

15 The surface structure of synthetic fibers can be modified to produce diverse functionalities.⁸²
16
17 SiO₂ NPs can be incorporated in polyimidoamide fibers through spinning. Incorporation of
18
19 nanoparticles in PAN fibers can create electrically conductive channels with enhanced
20
21 mechanical and antistatic properties.^{40, 83} Fiber porosity, thermal and absorption characteristics
22
23 can be controlled by chemically modifying the fibers. To improve thermal resistance and
24
25 tenacity, the fibers can be coated with diamine (diaminodiphenyl methane), montmorillonite, and
26
27 SiO₂ NPs.⁸⁴⁻⁸⁶ Synthetic fibers can also be functionalized through chemical oxidative deposition,
28
29 in which conducting electroactive polymers such as PANI, PPy, PTs are used to coat textiles for
30
31 improving tensile strength and thermal stability.^{87, 88} Furthermore, surface deposition of
32
33 electroactive polymers increases conductivity of the fibers one order of magnitude.⁸⁹⁻⁹¹ Such
34
35 composite fibers have application in the reduction of static electrical charge, microwave
36
37 attenuation, and electromagnetic shielding.
38
39
40
41
42

43 Finding the balance between electrical conductivity, flexibility and comfort of the textile is a
44
45 challenge. Coatings have been developed to impart electrical conductivity to cotton. One
46
47 approach involved polyelectrolyte-based coating with multiwalled carbon nanotubes
48
49 (MWCNTs).⁹² Figure 3a shows SEM images of MWCNT-Nafion coated cotton threads. Charge
50
51 transport through the network of nanotubes was 20 Ω cm⁻¹. Another strategy used a combination
52
53 of metal NPs conformally coated around the heterogeneous contour of cotton fibers.⁹³ In-situ
54
55
56
57
58
59
60

1
2
3 polymerization was utilized to create polymeric bridges between the NPs. These flexible bridges
4 allowed for the creation of coatings that were durable and resilient to mechanical deformation for
5 application in cotton-based transistors. Figure 3b shows a Transmission Electron Microscope
6 (TEM) image of cross-section of the conductive cotton fibers, showing uniform coating with Au
7 NPs and poly(3,4-ethylenedioxihiophene) (PEDOT).
8
9
10
11
12
13
14
15
16
17

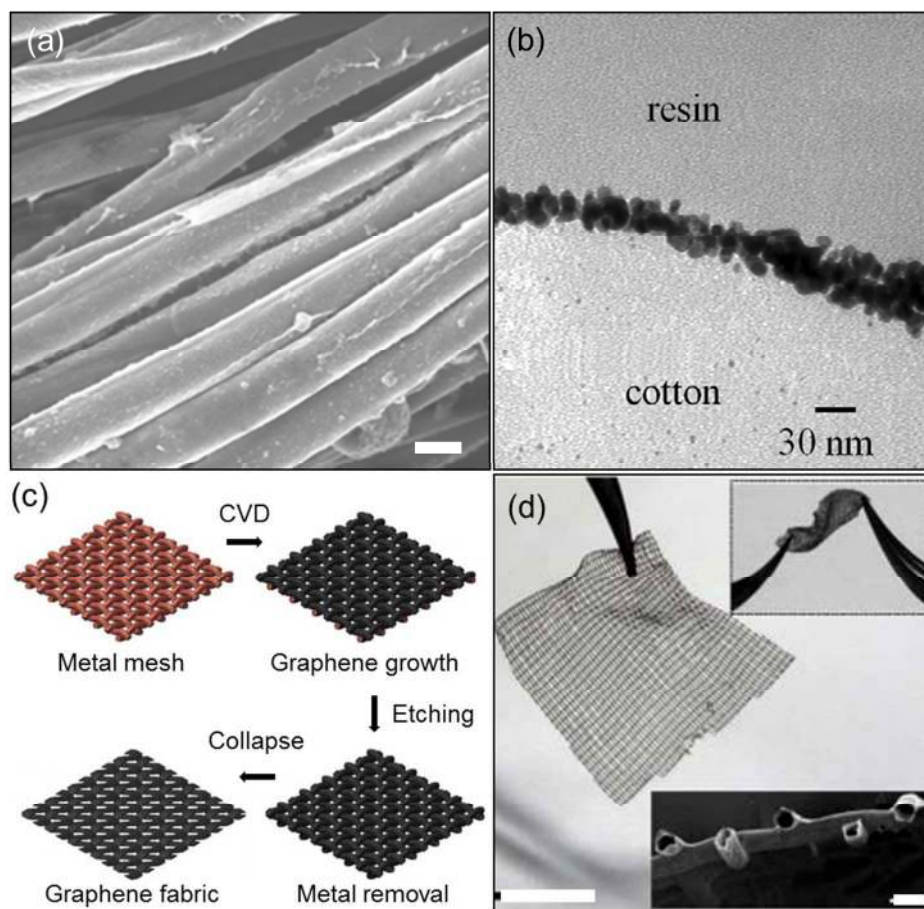

33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48 **Figure 3.** Conductive nanomaterials in textiles. (a) A SEM image of MWNT-Nafion coated
49 thread. Scale bar = 10 μm . Reprinted with permission from ref ⁹². Copyright 2008 American
50 Chemical Society. (b) A TEM image of cross-section of the conductive Au NP and PEDOT
51 coated cotton fibers. Reprinted with permission from ref ⁹³. Copyright 2011 Elsevier. (c)
52 Fabrication of graphene woven fabric by CVD using copper (Cu) wire meshes as substrates.
53
54
55
56
57
58
59
60

1
2
3 Reprinted with permission from ref⁹⁴. Copyright 2012 Nature Publishing Group. (d) Graphene
4 woven fabric in PDMS. Scale bar = 5 mm. The top inset illustrates the twisted graphene fabric
5
6
7
8 film. The bottom inset shows an SEM image of graphene fabric cross-section. Scale bar = 100
9
10 μm . Reprinted with permission from ref⁹⁴. Copyright 2012 Nature Publishing Group.
11
12

13
14 Graphene-based woven fabrics have been prepared by interlacing two sets of graphene
15 microribbons.⁹⁴ The resulting textile had dimensional stability in both the warp and the weft
16 directions. The conductivity was optimized by tuning the ribbon packing density. Graphene
17 woven fabrics were synthesized through atmospheric chemical vapor deposition (CVD) using Cu
18 meshes consisting of wires with $\sim 60 \mu\text{m}$ in diameter as substrates. The fabrication of the textiles
19 involved growing graphene on the substrate, removing the Cu mesh wires, and subsequently
20 collapsing the graphene to form double-layer microribbons (Figure 3c). Such polymers could be
21 also embedded in PDMS or PET films (Figure 3d). The constructed fabric had a transparency of
22 $1000 \Omega \text{ sq}^{-1}$.⁹⁴ Conductive textiles could also be produced by immobilizing graphene via
23 reduction from graphene oxide on cotton fabric by using a conventional dip and dry method.⁹⁵
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
The electrical conductivity of the fabric enhanced three orders of magnitude as the number of
coating cycles was increased from 1 to 20. The surface conductivity of the resulting graphene
depended on the reducing agent type and concentration. The electrical resistivity of the graphene
immobilized cotton ranged from 10^3 to $10^6 \text{ k}\Omega \text{ cm}^{-1}$.⁹⁵

Power Sources. Flexible and lightweight fabric supercapacitor electrodes have been
designed for energy storage.⁹⁶ Activated carbon in poly(methyl methacrylate) (PMMA) and
polyethylene glycol (PEG) were incorporated in woven cotton and polyester fabrics. The
supercapacitor cells were assembled in a conventional symmetrical two electrode setup by screen
printing on polyester microfibers. Electrodes coated with activated carbon had a gravimetric and

1
2
3 areal capacitance of 85 F g^{-1} at 0.25 A g^{-1} on cotton lawn and polyester microfiber.⁹⁶ Recently, a
4 flexible supercapacitor textile consisting of CNTs/PANI composite fiber was developed.⁹⁷ The
5 supercapacitor was integrated with a photoelectric conversion function to create a self-powering
6 energy textile that converted solar energy into electrical energy and stored it in a stacked
7 multilayer structure. The CNT array was synthesized by CVD. Aligned CNT sheets were dry-
8 drawn from the array and stacked into a thicker film along the length direction, and twisted into
9 an aligned fiber, which was woven into textiles. The resulting textiles were electrodeposited with
10 PANI to create an electrode, followed by coating with a layer of gel electrolyte to create a
11 supercapacitor. The resulting material had a capacitance of 272 F g^{-1} with 96% maintenance after
12 200 bending cycles.⁹⁷ Another study that aimed to improve the performance of textile-based
13 supercapacitors involved embedding a metal wire (monofilament) in the center a CNT yarn.⁹⁸
14 One-step continuous spinning allowed forming a core/sheath structured CNT yarn architecture to
15 create linear supercapacitors. CNTs formed a layer around the conductive metal filament core.
16 The filament core acted as a current collector to transport charges. Foldable nanopatterned
17 wearable triboelectric nanogenerators were also reported.⁹⁹ Figure 4a shows the device and its
18 fabrication process using nanopatterned PDMS structure. Ag-coated textile and PDMS
19 nanopatterns based on ZnO nanorod arrays were used as triboelectric materials. The
20 nanopatterned structures produced 120 V (output) at $65 \mu\text{A}$, and four-layered triboelectric
21 nanogenerators produced 170 V (output) at $120 \mu\text{A}$. No significant drift was observed after
22 120,000 cycles.⁹⁹ Another study reported the development of carbon-activated cotton threads on
23 textile for energy generation.¹⁰⁰ The device harvested electrostatic energy from the environment
24 through contact and friction electrifications. It was fabricated by treating carbon black NPs and
25 encapsulating them with a thin layer of PDMS for stability. By rubbing and tapping with a PTFE
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 sheet, electrostatic charges were collected from the carbon-functionalized threads in textiles. The
4
5 device had an open-circuit voltage of -60.9 V.¹⁰⁰ Piezoelectricity via electrostatic forces were
6
7 also utilized in textiles to create a nanogenerator.¹⁰¹ ZnO nanowires and discharge films were
8
9 incorporated into a textile to hybridize electrostatic and piezoelectric effects (Figure 4b). This
10
11 nanogenerator had an output voltage of 8 V at 2.5 μ A. The produced power source was utilized
12
13 to power an OLED and a Liquid Crystal Displays (LCD) panel.¹⁰¹ Recently, pristine soft
14
15 conductive yarns were produced via a twist-bundle-drawing technique (Figure 4c).¹⁰² Conductive
16
17 yarns modified with reduced graphene oxide (rGO), MnO₂ nanosheets, and PPy films were used
18
19 to produce weavable supercapacitors. The yarns had specific capacitances of 31 mF cm⁻¹ and 411
20
21 mF cm⁻¹ in solid-state two electrode cells with energy densities of 9.2 μ Wh cm⁻² and 1.1 mWh
22
23 cm⁻³.¹⁰²
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

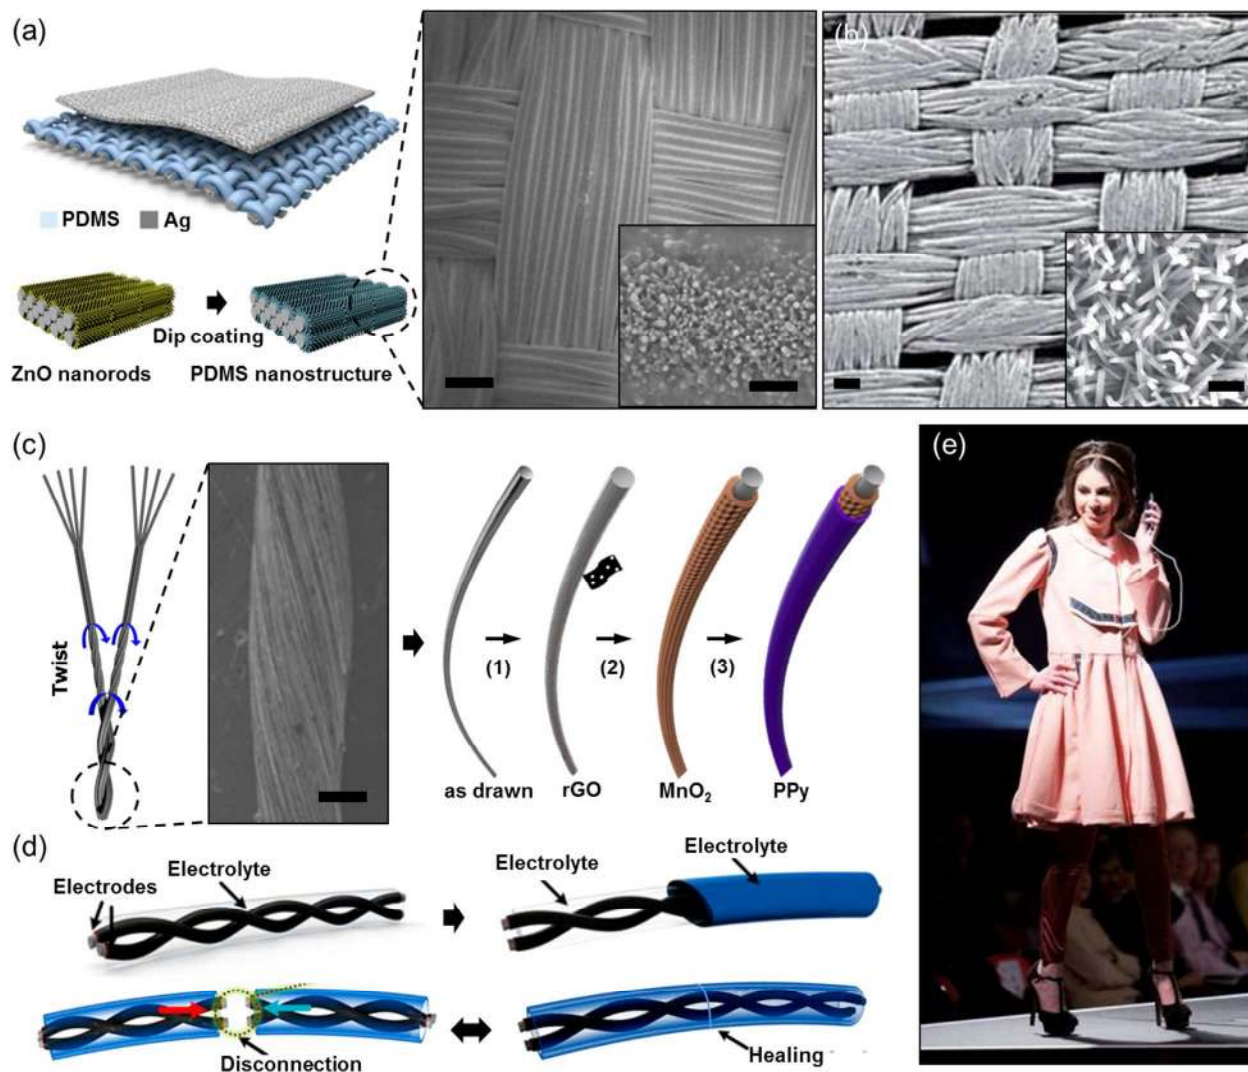


Figure 4. Energy generation and storage in textiles. (a) Fabrication of nanopatterned wearable triboelectric nanogenerator showing SEM images of ZnO nanorod-templated PDMS nanopatterns. The inset shows a magnified image of surface morphology. Scale bar = 500 μm , inset scale bar = 1 μm . Reprinted with permission from ref ⁹⁹. Copyright 2015 American Chemical Society. (b) SEM images of a textile electrostatic-piezoelectric hybrid nanogenerator containing ZnO nanowires. The inset shows magnified nanowires on the surface. Scale bar = 500 μm , inset scale bar = 1 μm . Reprinted with permission from ref ¹⁰¹. Copyright 2012 The Royal Society of Chemistry. (c) Twisted yarn fabrication and illustration of the yarn functionalized by

1
2
3 rGO, MnO₂, and PPy. (1) Hydrothermal treatment (2-3) Electrodeposition. Reprinted with
4 permission from ref ¹⁰². Copyright 2015 American Chemical Society. (d) Fabrication and
5 operation principle of magnetic-assisted, self-healable, yarn-based supercapacitors. Reprinted
6 with permission from ref ¹⁰³. Copyright 2015 American Chemical Society. (e) A garment using
7 cotton yarns coated with nanolayers of PEDOT-PSS. Copyright Abbey Liebman.
8
9
10
11
12
13
14
15
16
17

18 Stretchable PPy-based supercapacitors with cycling stability were also fabricated.¹⁰⁴
19
20 Electrochemical deposition of PPy on stretchable stainless steel meshes allowed producing solid
21 state supercapacitors reaching 170 F g⁻¹ at 0.5 A g⁻¹. Under 20% strain, the capacitance can be
22 enhanced up to 214 F g⁻¹. These supercapacitors were operated at a scan rate of 10 V s⁻¹, which is
23 a magnitude higher than PPy electrodes in aqueous solutions. These solid-state supercapacitors
24 under no-strain and 20% strain had capacitance retentions 98% and 87% at 10 A g⁻¹ after 10,000
25 cycles.¹⁰⁴
26
27
28
29
30
31
32
33
34

35 In conventional planar or structures, the reconnection of the broken yarn electrode and the
36 restoration of the electrical conductivity are challenging.¹⁰³ To improve the mechanical
37 properties, yarns-based supercapacitors with self-healing properties have been developed. The
38 electrodes fabricated by wrapping magnetic electrodes around a self-healing polymer shell
39 (Figure 4d). The magnetic attraction reconnected broken fibers in the yarn electrodes to store
40 electrical conductivity while polymer shell recovered mechanical strength and configuration
41 integrity. The magnetic yarns allowed restoring the specific capacitance up to 71.8% after four
42 breaking cycles by maintaining mechanical properties.¹⁰³
43
44
45
46
47
48
49
50
51
52
53

54 Conductive fabrics have been incorporated in garments. Figure 4e shows a garment using
55 cotton yarns coated with nanolayers of PEDOT-poly(styrenesulphonate) (PSS) deposited over an
56
57
58
59
60

1
2
3 array of Au NPs. These nanolayers allow the cotton yarns to become electrically conductive and
4 transfer energy from solar cells attached to the exterior of the dress. A comprehensive discussion
5
6 about energy storage technologies can be found elsewhere.¹⁰
7
8
9

10
11
12 Fabrication of multifunctional composite fibers has received attention due to their
13 applications in conductive structures and batteries in the textile industry. Here “fiber” refers to
14 wire-like composite structures produced via drawing techniques used in the production of fiber
15 optics. Composite fibers can be fabricated through preform heating and drawing. A
16 geometrically complex fiber preforms at a length of tens of centimeters is assembled by stacking
17 of tubes, rods, multilayered films, or functional components within a hollow structured rod that
18 serve as cladding.¹⁰⁵ The preform tip is then placed into the vertical furnace, where the
19 temperature is increased above the softening or melting temperature of the preform materials. As
20 a consequence, the preform tip melts, and then it is pulled downward, thus creating a slender rod
21 that can be continuously pulled from the molten preform tip. Typically, a clamp tractor or a
22 spooler is used to pull the fiber at a constant speed and tension. Geometry of the resultant fiber
23 depends on parameters in the drawing process such as temperature distribution in a furnace, fiber
24 drawing speed and preform feed velocity, pressurization of the preform, and electromagnetic
25 fields.¹⁰⁶ This process creates both non-optical fiber and optical fibers. Fibers drawn from the
26 macroscopic preform would generally retain the preform structure; however, sizes of the
27 constituent structures (*e.g.*, layers, rods) will be reduced to micro- or nanoscale. Therefore, a
28 geometrically complex, composite transverse structure could be realized within a fiber on a sub-
29 micron scale by controlling the preform structure and optimizing the conditions of the fiber
30 drawing process. This, generally, may not be accomplished by traditional yarn-spinning methods
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 such as melt-spinning,¹⁰⁷ wet-spinning,¹⁰⁸ or electro-spinning,^{109, 110} which are typically utilized
4
5 to produce fibers and yarns with simple structures in textile manufacturing. Moreover, materials
6
7 including biofunctional polymers,¹¹¹⁻¹¹³ low-melting-temperature metal alloys,¹¹⁴ optical
8
9 plastics,¹¹⁴⁻¹²³ conductive polymers,¹²⁴⁻¹²⁶ and electrochemical materials,¹²⁷⁻¹³⁰ could be
10
11 integrated into a composite fiber during drawing.
12
13
14

15 Flexible fiber or stripe batteries which can be directly weaved into a textile constitute a
16
17 promising solution toward seamless integration with functional textiles. Flexible fiber batteries
18
19 using both a simple inorganic chemistry^{127, 128} as well as Li-ion chemistry^{129, 130} have been
20
21 proposed. The simplest fiber battery consisted of a microstructured low density polyethylene
22
23 (LDPE) jacket with several intercommunicating channels running along the fiber. Aluminum
24
25 (Al) and Cu wires were immobilized to produce a double stranded fiber as anode and cathode,
26
27 respectively. The voids between these two channels were then filled with sodium hypochlorite
28
29 (NaOCl) electrolyte. This fiber constituted a typical Al/air galvanic cell. To fabricate a fiber
30
31 battery, the fiber jacket preform was prepared by drilling several interconnected channels
32
33 throughout a LDPE rod. The two electrode wires (Al and Cu) were embedded into the two
34
35 extreme channels of the fiber during production (*i.e.* drawing). Open cell voltage of a fiber
36
37 battery was ~1.5 V with a linear capacity of 10^{-2} – 10^{-1} mAh cm⁻¹. Flexible lithium (Li)-ion
38
39 batteries could be built by from polyethylene oxide (PEO) as a thermoelastic polymer ionic
40
41 electrolyte in all the electrodes and a separator layer. To assemble such a battery, solvent-casting
42
43 method could be used to deposit an anode layer (Li₄Ti₅O₁₂ + PEO), a separator layer (PEO+LiI),
44
45 and a cathode layer (LiFePO₄ + PEO) in sequence. The thermoelastic nature of PEO allows the
46
47 production of such batteries in fiber drawing. This Li-ion battery could be cut into stripes that
48
49 may be directly weaved into a textile.
50
51
52
53
54
55
56
57
58
59
60

1
2
3 Two prototypes of textiles based on fiber and stripe batteries have been demonstrated. The
4 first prototype was fabricated by weaving fiber batteries into a wool textile matrix.¹²⁷ The
5 maximum output power of a fiber battery textile could be achieved by optimizing series and
6 parallel connections of the fiber batteries in the textile. Applications of this fiber battery
7 integrated textile included lighting up a LED, driving a wireless mouse,¹²⁷ and actuating a
8 shape-memory alloy.¹²⁷ The second prototype used flexible stripe Li-ion batteries.¹²⁹ The Li-ion
9 battery stripes were woven into a textile. Each stripe had an open cell voltage of ~0.3V. A
10 textile battery made of eight battery stripes woven with wool threads and connected in series
11 using Cu and Al wires were used to light up a 3V LED. The flexible fiber or stripe batteries
12 constitute a promising technique toward the realization of on-garment power supply. In fashion
13 industry, LEDs or electroluminescent wires are used as light emitting elements; and shape-
14 memory alloys may be woven into garments to provide kinetic features. The fiber and stripe
15 batteries could be used as an efficient power source for these electronics.
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33

34 Conductive fiber are widely used to interface with other electronic devices integrated into
35 textiles. To fabricate conductive fiber, conductive fillers such as carbon black (CB)¹²⁵ or
36 CNTs¹³¹ are impregnated into plastic preform material. Fabrication of all-fiber electronic
37 components is however a challenging task. The fabrication of a fiber electric capacitor using CB-
38 impregnated LDPE films as compliant electrodes have been reported.¹²⁴⁻¹²⁶ The fiber preform
39 was fabricated by consecutive stacking of two conductive and two isolating LDPE layers and
40 then turning the multilayer into a Swiss-roll configuration featuring a large central hole. A
41 tension-adjustable reel was installed on the top of the fiber drawing tower that hosted a spool of
42 Cu wires. These wires were then passed through the preform core, pulled down and embedded
43 into the fiber center during drawing by collapsing the plastic cladding. The as-drawn fiber
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 capacitors featured one or two Cu wires as inner electrodes, and the outmost conductive LDPE
4 layer constituted the outer electrode. The fiber capacitance was measured in the 60-100 nF m⁻¹
5
6 range. The fiber capacitors were also demonstrated to build touch sensitive textiles.
7
8
9

10 **Digital Components.** OLEDs have been incorporated in soft fabrics.¹³² OLEDs fabricated by
11 thermal evaporation were mechanically stable over 1000 cycle bending test with a bending
12 radius of 5 mm, an emission angle of 70°, and a current efficiency of ~8 cd A⁻¹.¹³² Schottky
13 diodes were also fabricated on textiles.¹³³ ZnO nanorods were grown on a Ag-coated textile
14 fabric using a hydrothermal method, and Zn nitrate and hexamethylenetetramine were used to
15 produce ZnO nanorods. The Schottky diode was prepared by applying photoresist and reactive
16 plasma ion etching of the ZnO nanorods. A shadow mask was used to deposit Cu using thermal
17 evaporation. The resulting diodes had performance comparable to glass-based diodes.¹³³
18 Schottky diode integrated textiles have potential applications in switched-mode power supplies,
19 voltage clamping, and reverse current and discharge protection.
20
21
22
23
24
25
26
27
28
29
30
31
32
33

34 Polymer yarns/fibers that are twisted/embedded with metal wires have been used for
35 production of electromagnetic shield garments and fabrics. These metal wires could be
36 embedded into polymer rods during a drawing process. The metal components in such rods
37 generally have a melting temperature similar to that of polymers. A polycarbonate cable
38 containing arrays of the bismuth-tin (Bi₄₂Sn₅₈, melting temperature ~140 °C) micro/nanowires
39 has been fabricated using the stack-and-draw technique.¹¹⁴ For preform fabrication, molten
40 Bi₄₂Sn₅₈ alloy was first filled into a polycarbonate tube to produce a preform that was
41 subsequently drawn into cable. The resulting cable had a cross section featuring a metal core
42 surrounded by a polycarbonate cladding. By stacking these cables within another polycarbonate
43 tube, and by repeating the drawing process, metal wire arrays could be produced at smaller
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 dimensions. After several drawings, nanowires separated into NPs. Recently, the fabrication of
4
5 polymer/wire composites containing indium,^{134, 135} or tin-zinc¹³⁶⁻¹⁴⁴ has been demonstrated based
6
7
8 on the same drawing technique. While such polymer/metal wire composites are mainly used for
9
10 electromagnetic shielding, they also have a potential for producing metamaterials and optical
11
12 components.
13


14 15 16 17 18 **PHOTONIC TECHNOLOGIES FOR TEXTILES**

19
20 Integration of optical technologies into garments and apparels is desirable in the fashion industry.
21
22 Photonic materials and devices including films, nanoadditives or optical fibers have been
23
24 adopted in the fabrication of textiles and garments to not only enhance the aesthetic performance
25
26 but also endow the garments with additional functionalities. The most distinctive and basic
27
28 application of optical technologies on fabrics or garments is perhaps tuning their appearance by
29
30 controlling the intensity, color, and pattern of light. For example, optical films made of
31
32 periodical dielectric multilayers could be directly coated on fabrics, thus offering highly
33
34 reflective colorful appearance and enabling different color perceptions depending on the angle of
35
36 observation. Holographic films may also achieve similar functions and even provide a more
37
38 complex 3D visual effect.^{145, 146} Additionally, phosphorescent films can allow fabrics glow in the
39
40 dark.¹⁴⁷ Optical additives such as thermochromic and photochromic inks could be applied to
41
42 yarns or textile, thus enabling the change of a textile color in response to ambient heat or
43
44 illumination.¹⁴⁸ Retro-reflective inks that could provide a high reflection directly toward a light
45
46 source are widely used for security clothing.¹⁴⁵ Moreover, electroluminescent wires or optical
47
48 fibers serving as light emitting elements could be seamlessly weaved into a textile or garment.
49
50
51
52
53
54
55
56
57
58
59
60
Textiles based on electroluminescent wires,^{149, 150} traditional single- or multi- mode optical

1
2
3 fibers,¹⁵¹ fluorescent fibers¹⁵² and photonic bandgap fibers¹⁵³ have been demonstrated. In
4
5 addition to promoting aesthetics, multifunctional fibers could offer textiles with functionalities
6
7 such as sensing of temperature,^{154, 155} humidity,¹⁵⁶ strain,¹⁵⁷ bending,¹⁵⁸ and pressure,¹⁵⁹ optical
8
9 displays,¹⁶⁰ data transfer and communication,¹⁶¹ lasing,¹⁶² and illumination.^{160, 163}
10
11

12
13 **Color-Tunable Optical Fibers.** Bragg fibers, a subset of photonic bandgap fibers, have a
14
15 hollow- or solid- core surrounded by periodic dielectric nanolayers with high- and low-
16
17 refractive indexes (Figure 5a).¹¹⁵⁻¹²⁰ Recently, two methodologies have been reported for the
18
19 fabrication of the all-polymer hollow-core Bragg fiber preforms.¹²³ One approach utilized
20
21 consecutive deposition of layers of two different polymers by solvent evaporation inside a
22
23 rotating polymer cladding tube. The other approach adopted co-rolling of two different polymer
24
25 films inside a plastic tube. Solid-core Bragg fiber preforms were fabricated by co-rolling the
26
27 multilayer around a rod.^{155, 158, 159, 164} To fabricate Bragg reflectors, PMMA/PS or PVDF
28
29 (polyvinylidene fluoride)/polycarbonate have been used. Solid-core Bragg fibers were
30
31 manufactured by preform heating and drawing, while hollow-core fibers required core
32
33 pressurization. Bragg fibers typically guide the light by the bandgap effect.¹⁶⁵ Bandgaps of Bragg
34
35 fibers are defined as spectral regions of high diffraction efficiency caused by the interference
36
37 effects inside a periodic multilayer. Upon launching spectrally broadband light into a Bragg
38
39 fiber, only the spectral components within the reflector bandgaps would be strongly confined and
40
41 thus guided in the optical fiber core (Figure 5b). For the wavelengths outside the reflector
42
43 bandgap, the light penetrated deeply into the multilayer region exhibits high propagation loss due
44
45 to scattering from the imperfections inside the multilayer structure. Therefore, narrow-band
46
47 colors were observed at the output end of a Bragg fiber (Figure 5b inset). Spectral position of the
48
49 bandgap was affected by the core refractive index and multilayer geometry. Thus, bandgap
50
51
52
53
54
55
56
57
58
59
60

1
2
3 guidance mechanism renders Bragg fibers suitable for application in spectral filtering,^{118, 119}
4
5 optical sensing,^{117, 119-121, 166} and photonic textiles.^{116, 122, 153}
6
7

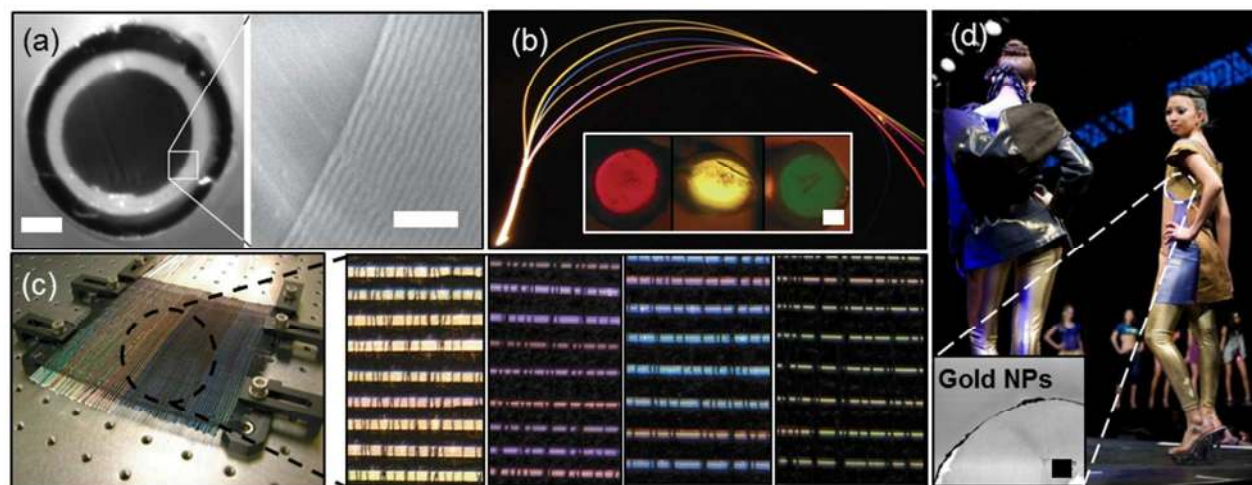

25 **Figure 5.** Fiber optic and plasmonic technologies for textiles. (a) Cross section of a solid-core
26 Bragg fiber and its multilayer structure. Scale bar = 50 μm . Inset scale bar = 10 μm . Reprinted
27 with permission from Ref. ¹¹⁶. Copyright 2008 The Optical Society of America. (b) Light
28 scattered from solid-core Bragg fibers. The inset shows Bragg fibers with different bandgaps.
29 Scale bar = 200 μm . Reprinted with permission from Ref. ¹²². Copyright 2008 CTT Group. (c)
30 PBG Bragg fibers woven into a black silk textile. The inset shows color of the fibers tuned by
31 mixing the emitted guided color with the diffracted color from ambient illumination. Reprinted
32 with permission from ref ¹¹⁶. Copyright 2008 The Optical Society of America (d) The use of
33 plasmonic NPs in a garment. The inset shows an SEM image of Au NPs on the surface of a
34 cotton fiber. Scale bar = 500 nm. Reprinted with permission from ref ¹⁶⁷. Copyright 2009 The
35 American Chemical Society. Reprinted with permission from Olivia Ong.
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53

54 The key feature of bandgap guidance of a Bragg fiber is wavelength filtering. When
55 launching broadband light into a Bragg fiber, only a specific color defined by the spectral
56
57
58
59
60

1
2
3 position of the reflector bandgaps is guided. All the other colors are scattered out of the fiber
4 after several centimeters of propagation. Moreover, due to the finite number of multilayers in the
5 Bragg reflector, guided light partially leaks out from the fiber core. The leakage rate could be
6 controlled by changing the number of multilayers. The spectral position of the reflector
7 bandgaps, and hence the guided color, could be varied by changing the thicknesses of the
8 reflector layers, with thicker layers shifting bandgaps to longer wavelengths. Layer thicknesses
9 have been varied by drawing geometrically-similar preforms to optical fibers of different
10 diameters.^{116, 122, 153} Furthermore, under ambient (external) illumination, the Bragg fibers are
11 colored depending on their diffraction properties. Therefore, the fiber color under ambient
12 illumination is typically different from the fiber color due to emission of the guided light. This
13 offers an opportunity to tune the overall fiber color by controlling the relative intensities of the
14 ambient and propagating light. A ribbon of Bragg fiber diffracted green under ambient
15 illumination while an emission of guided light diffracted red. In the far field (defocused view),
16 the resultant color of a fiber ribbon was yellow.^{116, 122}

17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37 **Photonic Textiles Based on Bragg Fibers.** A photonic textile based on solid-core Bragg
38 fibers was hand woven on a Dobby loom.¹¹⁶ The photonic textile showed colors when externally
39 illuminated (Figure 5c). The textile exhibited colored bands made of optical fibers with similar
40 diameters and coloration. Upon launching broadband light, the textile sample showed a number
41 of brightly lit bands of distinct colors. Figure 6c inset shows textile samples under the ambient
42 illumination. The textile sample had different colors depending on whether the textile was lit or
43 not. This opens the possibility of controlling the resultant textile color by balancing the
44 intensities of the guided and ambient light. When used in fashion industry, Bragg fibers and
45 photonic textiles based on these optical fibers could be conveniently weaved into garments.
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 Compared to yarns or fabrics decorated by optical coatings or pigments, Bragg fiber-based
4
5 textiles are resistant to mechanical abrasion and would not fade in color even under repeated
6
7 washing.
8
9

10 **Plasmonic Textiles.** Cotton fabrics were also colored using arrays of plasmonic Ag, Au and
11
12 Ru NPs.¹⁶⁷ The color in the fabrics originates from the closely packing of NPs, which were
13
14 displayed on a garment (Figure 5d). TEM micrographs of the cotton fibers show the presence of
15
16 conformal coatings of NPs assembled on the perimetries of the cotton fibers (Figure 5d inset).
17
18
19
20
21

22 SENSING AND DRUG RELEASE IN TEXTILES

23

24 Plasmonic bio/chemical optical fiber sensors can be fabricated via drawing techniques.
25
26 Plasmonic sensors have been studied due to their high sensitivities for bio/chemical sensing.¹⁶⁸⁻
27
28 ¹⁷⁰ In a plasmonic fiber sensor, a lossy surface plasmon mode propagating along a
29
30 metal/dielectric interface could be excited at its resonance by an optical fiber core-guided mode
31
32 *via* evanescent-wave coupling when the phase matching condition between the two modes is
33
34 satisfied at certain frequency. The presence of such a plasmonic mode manifests itself as a
35
36 spectral dip in the fiber transmission spectrum with its spectral location corresponding to the
37
38 phase-matching frequency. Variations in the refractive index of an analyte adjacent to the metal
39
40 layer could significantly modify the phase-matching condition, thus displacing the spectral dip in
41
42 the optical fiber transmission spectrum. This constitutes the general sensing principle of a
43
44 plasmonic fiber sensor. In the fabrication of a plasmonic sensor using conventional single- or
45
46 multi-mode optic fibers, a series of modifications such as cladding etching or polishing followed
47
48 by a subsequent deposition of several tens of metal nanolayer are generally required, in addition
49
50 to the interfacing with a microfluidic system in the proximity of the fiber sensing head.¹⁷¹⁻¹⁷³
51
52
53
54
55
56
57
58
59
60

1
2
3 These procedures bring challenges to the development of plasmonic fiber sensors. However, a
4 complete plasmonic sensor fiber can be fabricated using stack-and-draw technique (Figure 6a). A
5 fiber preform is first assembled at the microscale and it contains a plastic fiber core rod
6 surrounded by the plastic tubes with one of them hosting a low melting temperature metal foil
7 functionalized with a thermoplastic sensing layer. The inner channel of that tube is later used as a
8 channel for analyte delivery. Next the preform assembly is drawn into fiber under pressure to
9 keep the microfluidic channels in the fiber open. Finally, an additional wire can be passed
10 through one of the tubes during drawing to be later used for active temperature control of the
11 device. Additionally, high voltage supply can be connected to the wire and a foil to tune the
12 distance between the fiber optic core and the plasmonic layer during drawing. Such fibers may
13 contain multiscale features ranging from nano to macroscale, and consist of nano-additives for
14 functionalization.
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

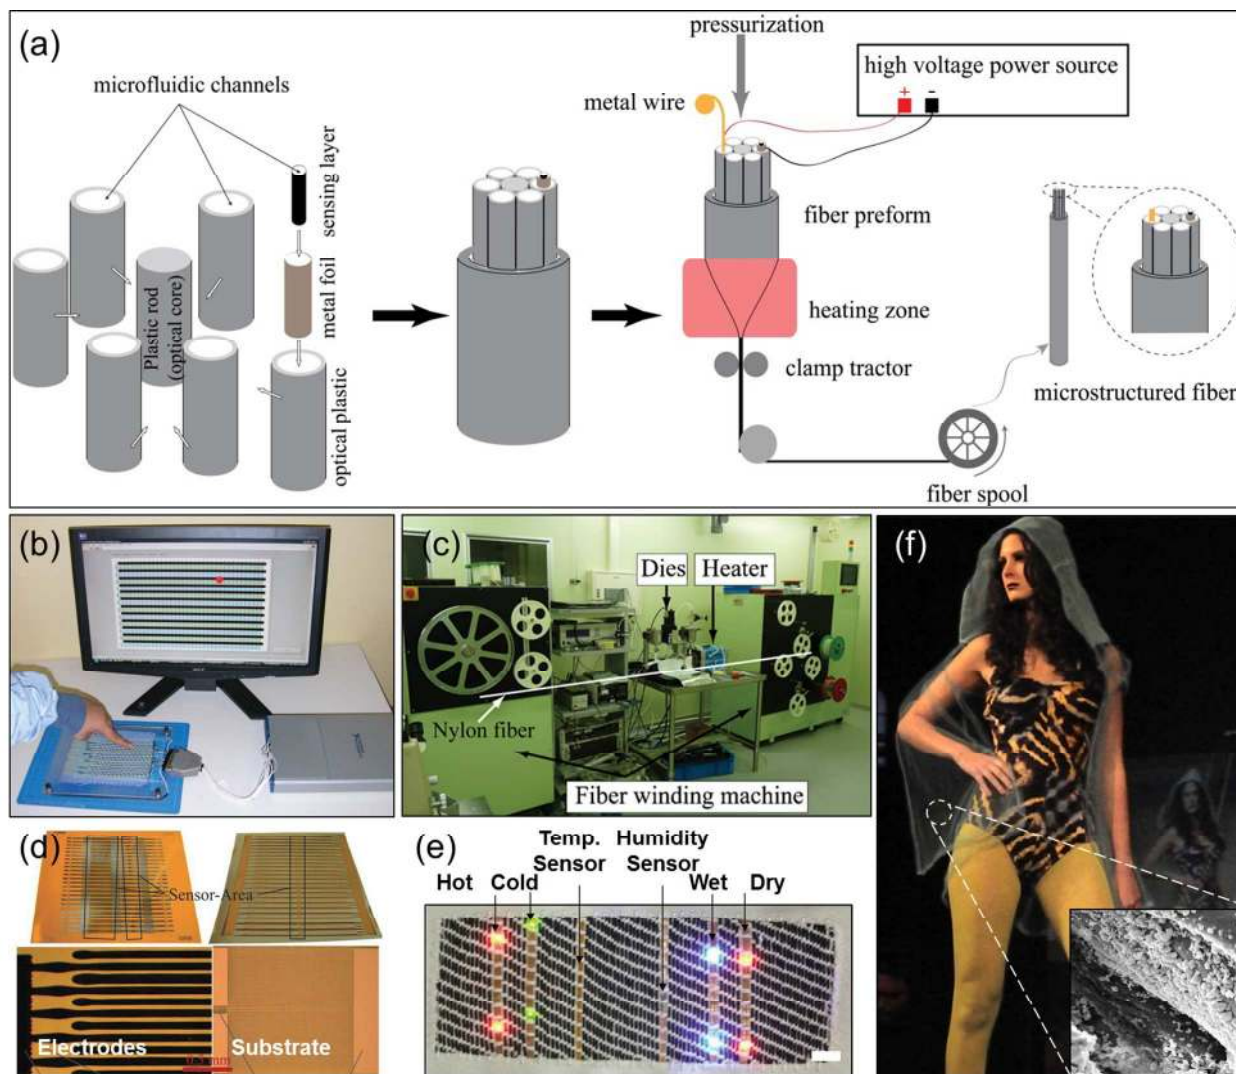


Figure 6. Sensors and insecticide-releasing textiles. (a) Fabrication of multifunctional fiber composites for sensing applications. Reprinted with permission from Ref. ¹⁰⁵. Copyright 2010 The International Society of Optics and Photonics. (b) Woven touchpad sensor with a 1D array of capacitor fibers connected to the ADC board to monitor an image of a textile with a reconstructed touch position. Reprinted with permission from ref ¹²⁴. Copyright 2012 IOP Publishing. (c) Die-coating system used in forming PEDOT:PSS and Cytop film on fibers. Reprinted with permission from ref ¹⁷⁴. Copyright 2012 Elsevier. (d) Fabrication of electrodes via photolithography for sensing applications. Reprinted with permission from ref ¹⁷⁵. Copyright

1
2
3 2013 IEEE. (e) Temperature and humidity sensors woven in a tablecloth. Scale bar=1 cm.
4
5 Reprinted with permission from ref ¹⁷⁵. Copyright 2013 IEEE. (f) Permethrin-releasing textile
6
7 net. Reprinted with permission from ref ¹⁷⁶. Copyright 2012 Springer. Reprinted with permission
8
9 from Matilda Ceesay.
10
11
12
13
14

15 Using flexible fiber capacitors, touch sensor fabrics have been developed.^{124, 125} Flexible and
16
17 elastic fiber capacitors are well suited for a conventional weaving process. A Dobby loom was
18
19 used to weave the capacitor fibers into a 1D sensor array integrated into a wool textile matrix.
20
21 The touch sensor fabric consisted of 15 capacitor fibers (Figure 6b). The inner electrodes of all
22
23 the fibers (Cu wires) were connected to the voltage source integrated into an Analog-to-Digital
24
25 Converter (ADC) card. One end of the outer plastic electrode of each fiber was grounded, while
26
27 the other end was connected to the individual channels of the ADC card to measure the voltage
28
29 at the fiber endpoint. The human body could be approximated by an equivalent electrical circuit
30
31 comprising a resistor connected in series to a capacitor. Touching a capacitor fiber with finger
32
33 modified the local current flow and voltage distribution, thus sensing the measured voltage to
34
35 touch. Moreover, a 1 cm spatial resolution was achieved with a single fiber, thus allowing the
36
37 fabrication of 2D touch sensitive textiles with a 1D array of capacitor fibers. The fiber capacitors
38
39 may also interface with other fiber electronics such as conductive fibers or battery fibers to
40
41 constitute a functional on-garment electric circuit. Potential application of such on-garments
42
43 electronics may include fashion, safety clothes as well as programmable and computing textiles.
44
45
46
47
48
49

50 Pressure-sensitive fabrics were also developed.¹⁷⁴ To fabricate the sensors, fibers were coated
51
52 with organic conductive polymer poly(3,4-ethylenedioxythiophene) and poly(styrene sulfonate)
53
54 and a dielectric film of perfluoropolymer using a die coating system (Figure 6c). The coated
55
56
57
58
59
60

1
2
3 fibers were woven as wefts and warps, and the rest of the matrix was filled with pristine nylon
4 fibers. Capacitors were formed at the nodes, where the fibers intersected. When a pressure of 4.9
5 N cm⁻² was applied on the fabric, capacitance increased from 0.22 to 0.63 pF with a sensitivity
6 ranging from 0.98 to 9.80 N cm⁻².¹⁷⁴
7
8
9
10
11

12 Temperature, humidity and pressure sensors have been incorporated in textiles.¹⁷⁷ These
13 studies have utilized photolithography and inkjet printing to create the sensors woven into
14 textiles (Figure 6d). Capacitive humidity and resistive temperature sensors were developed on
15 flexible polymer foils and integrated into textiles.¹⁷⁵ To fabricate the sensors, metal films were
16 deposited on polyimide sheets. In photolithography, a double metal layer of Cr/Au was electron
17 beam evaporated under vacuum on polyimide sheets and patterned using a lift-off process. The
18 sensing elements included an interdigitated thin-film capacitive transducer, and temperature
19 sensitive thin-film meander-resistor. The inkjet printing of the sensors involved depositing Ag
20 NP ink on the polyimide. Bus lines and interdigitated finger electrodes were printed in two
21 separate printing steps (500-4000 dpi). The resulting line width and electrode gaps for resistors
22 and capacitors were 80 μm, and the thickness of the printed layer was 400 nm. Sensing materials
23 were encapsulated by laminating a photoresist film on the substrate. For the detection of
24 humidity, cellulose acetate butyrate as the sensing medium was spray-coated on the capacitor
25 through a stencil mask. In inkjet printing, the cellulose acetate butyrate in hexyl acetate was
26 printed over the substrate to achieve a 5 μm film. The device was capped with a hydrophobic,
27 gas permeable membrane. Subsequently, a commercial machine was used to weave the sensors
28 into a textile band in weft direction with twill (1/8) pattern. Humidity and temperature sensors
29 were inserted into the textile along the weft direction as replacement for weft yarn. Warp threads
30 were replaced by conductive yarns to contact with the sensors inside the textile. The temperature
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 sensors operated from 10 to 80 °C with a sensitivity of 5 °C. Humidity sensors had a detection
4 range from 25 to 85 % with 10 % sensitivity.¹⁷⁵ These textiles were combined with LEDs to give
5 visual sensing information (Figure 6e).¹⁷⁸
6
7
8
9

10 Metal-Organic Frameworks (MOF) built with rare earth elements and/or quantum nanorods
11 have been immobilized on cotton fabrics at high concentrations.¹⁷⁹ These materials have shown
12 the potential to be used as colorimetric sensors to detect the presence of toxic gases via the
13 luminescence of the MOFs or the electrical conductivity of the nanorods.¹⁸⁰ These chemical
14 sensors can be incorporated into uniforms, apparels or any textile substrate. A dress designed by
15 Matilda Ceesay using cotton mesh coated with a Cu benzene tricarboxylic acid MOF-199
16 customized for capturing and controlled-release of permethrin (an insecticide) (Figure 6f). The
17 designer aimed at functionalizing mosquito bed-nets commonly used as preventive measures in
18 areas with high prevalence of malaria.¹⁷⁶
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33

34 TOXICITY OF NANOMATERIALS IN TEXTILES

35
36 The forms of NP released in washing liquid depend on the nanomaterial characteristics
37 originally incorporated into the textile, the composition of the washing liquid, the washing
38 procedure (*e.g.* rotation speed). Ag-containing textiles release significant amounts of dissolved
39 and particulate Ag into washing liquid. The potential exposure to Ag NPs from a blanket has
40 been evaluated. For a blanket containing 109.8 ± 4.1 mg Ag kg^{-1} , 4.8 ± 0.3 mg Ag kg^{-1} was
41 released into sweat in 1 h.¹⁸¹ Commercial NP-impregnated socks ($1360 \mu\text{g-Ag g}^{-1}$) leached up to
42 $650 \mu\text{g}$ of Ag in distilled water (500 mL) in 24 h.⁷¹ However, other commercial socks containing
43 large amounts of Ag ($2105 \mu\text{g}$ and $31242 \mu\text{g}$) released small percentages (1 wt%) of total Ag into
44 the ultrapure wash water while some brands released ~100 wt% of the Ag after four consecutive
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 steps. These studies indicate that the manufacturing processes of these socks differ
4
5 fundamentally. The socks released 155 μg and 15 μg of Ag into ultrapure water and tap water,
6
7 respectively. Hence, tap water was less aggressive in stripping Ag from the textile than ultrapure
8
9 water, which was attributed to differences in water corrosivity.¹⁵ Artificial sweat was also used to
10
11 test the concentration of the Ag released from fabrics.¹⁸² The concentration of Ag released from
12
13 Ag-impregnated fabrics was measured up to 322 mg kg^{-1} of fabric weight. The release rate
14
15 depended on the concentration of the Ag in the fabric and pH of sweat. In another study, shirts
16
17 and pants impregnated with TiO_2 NPs ranging from 2.9-8.5 g Ti kg^{-1} textile.¹⁸³ The release of
18
19 TiO_2 into sweat per gram of textile after 30 min incubation in 120 mL of sweat was evaluated.
20
21 Substances released into acidic sweat were $63 \pm 13 \mu\text{g g}^{-1}\text{L}^{-1}$ (particulate size <450 nm) and $725 \pm$
22
23 $30 \mu\text{g g}^{-1}\text{L}^{-1}$ (particulate size >450 nm); whereas in alkaline sweat, the release amounts were 38
24
25 $\pm 13 \mu\text{g g}^{-1}\text{L}^{-1}$ (particulate size <450 nm) and $188 \pm 213 \mu\text{g g}^{-1}\text{L}^{-1}$ (particulate size >450 nm).¹⁹
26
27 External dermal exposure for TiO_2 was as maximal 11.6 $\mu\text{g kg}^{-1}$ body weight for total (mainly
28
29 particulate) TiO_2 . When Ag was released from textiles, Ag-chloro complexes were the major
30
31 dissolved species due to the presence of high chloride concentration in sweat. Figure 7 shows
32
33 potential scenarios for Ag release from nanomaterial treated textiles.
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

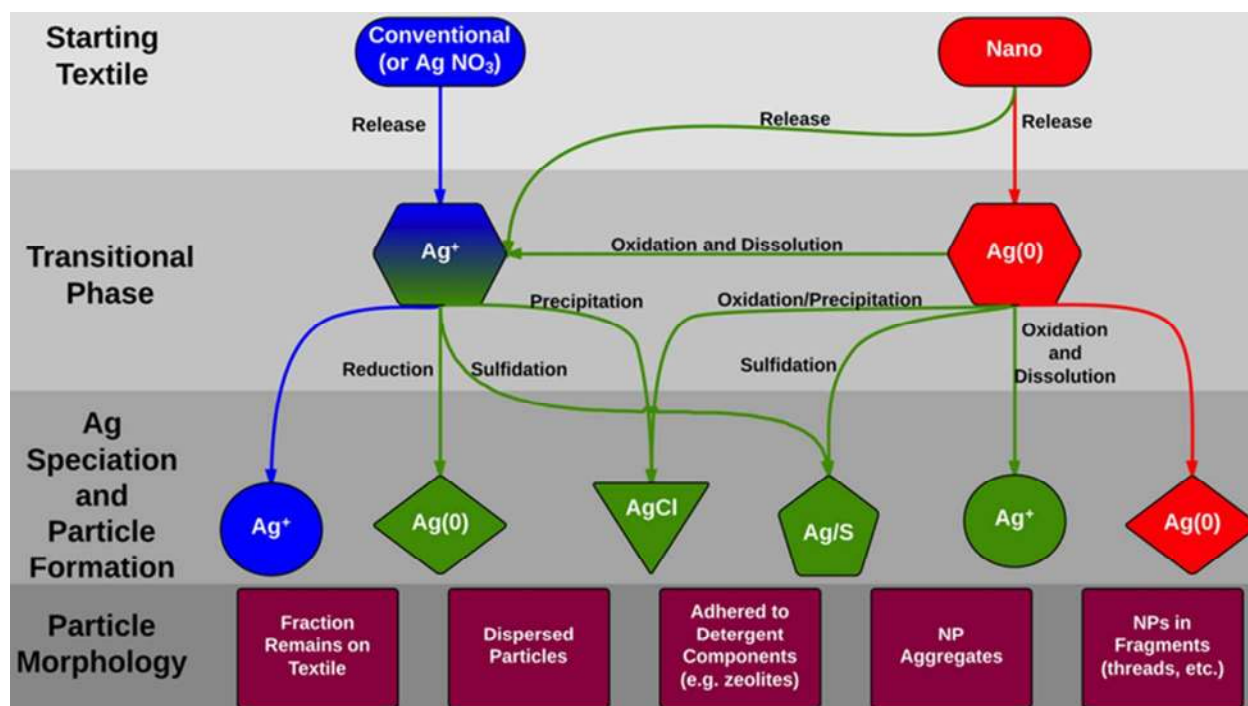


Figure 7. Scenarios for Ag release and subsequent transformation from nanomaterial-treated textiles. Blue shading indicate conventional materials or silver nitrate (AgNO_3) that persists through the transformation process, and red shading indicate pristine nanomaterials. Green shading show a transformation product. Reprinted with permission from ref¹⁸⁴. Copyright 2014 American Chemical Society.

The release of NPs to the environment is a concern. Ag NPs are toxic to aquatic animals including fish, crayfish, and plankton.¹⁸⁵⁻¹⁸⁸ Furthermore, the antibacterial properties of Ag NPs might disrupt the bacterial habitat in sewage treatment plants.¹⁸⁹ Nanowashing machines were shown to release Ag in effluent at a concentration of $\sim 11 \mu\text{g L}^{-1}$.¹⁹⁰ Recent life cycle assessments involved comparing environmental benefits and negative effects of nanoAg T-shirts with conventional textiles treated with triclosan (a biocide).¹⁹¹ Figure 8 shows lifecycle stages of one T-shirt (1.56 m^2 textile, 130 g). The “cradle-to-gate” climate footprints of the manufacturing of

1
2
3 nanoAg T-shirt were 2.70 kg of CO₂-equiv for flame spray pyrolysis, and 7.67-166 kg of CO₂-
4
5 equiv for plasma polymerization with Ag co-sputtering. However, conventional T-shirts
6
7 produced by triclosan had emissions of 2.55 kg of CO₂-equiv. Additionally, the toxic releases
8
9 from washing and disposal stages had minor relevance. However, the production phase holds
10
11 importance due to toxic Ag emissions at mining sites. Overall, the use phase was the most
12
13 important in terms of climate footprint in both nanoAg and triclosan cases. A limitation of these
14
15 studies was that variation in Ag release rates was not taken into consideration. Also, current life
16
17 cycle impact assessment methods do not distinguish colloiddally bound phases of metals.^{192, 193}
18
19 Up to now, the life cycle assessments took into account only NP form. Considering other forms
20
21 of nanomaterials such as ionic forms, agglomerated forms, and oxidized forms will provide
22
23 improve life cycle assessments. While these assessments provide estimated effect of
24
25 nanomaterials on the environment, public awareness holds importance in washing practices. For
26
27 example, efficient washing procedures such as using tumblers less, and operating washing
28
29 machine at lower temperatures with appropriate detergents may reduce the environmental
30
31 impact. The increase in the awareness for recycling rate of NP embedded textiles may reduce the
32
33 carbon footprint. Furthermore, exposure to NPs is a significant concern at workplace.¹⁹⁴ For
34
35 example, spraying methods may result in exposure to inhalation of NPs.¹⁹⁵ The development of
36
37 improved life cycle assessments will allow comparing nanoengineered textiles with conventional
38
39 products in the market to prevent environmental consequences.
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

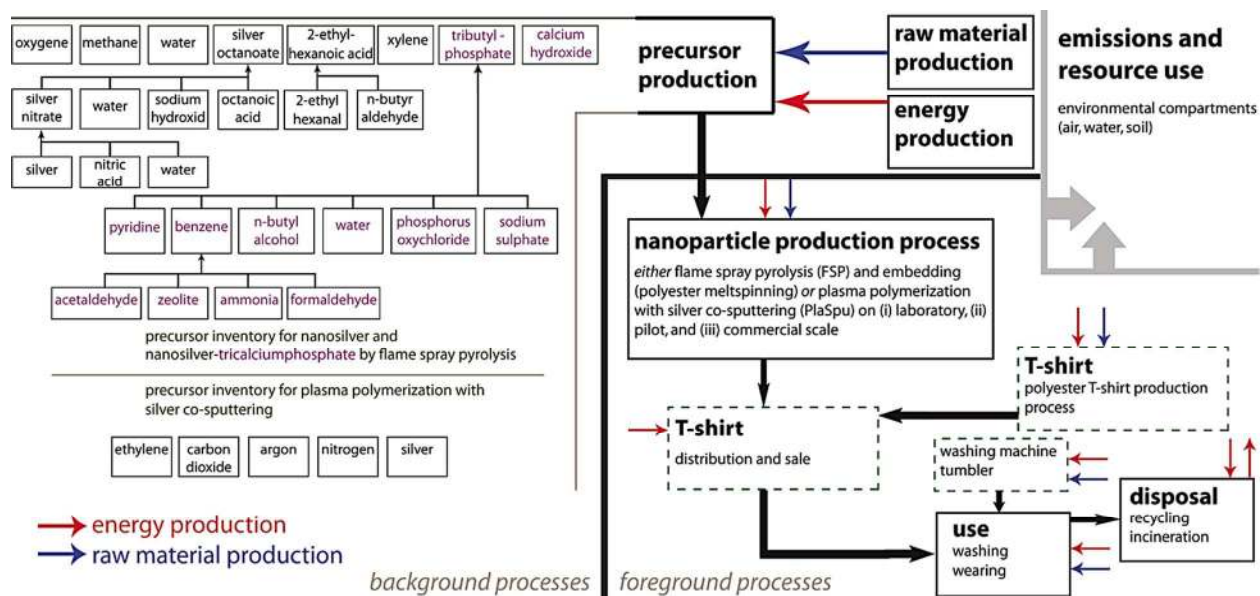


Figure 8. Lifecycle stages of one nanoAg T-shirt showing system boundaries (dashed boxes).

Reprinted with permission from ref ¹⁹¹. Copyright 2011 American Chemical Society.

CONSOLIDATION OF NANOTECHNOLOGY IN TEXTILES MARKET

Fashion and apparel industries were valued at \$1.2 trillion globally in 2014, and the market size is expected to have a Compound Annual Growth Rate (CAGR) of 4.8% until 2025, mainly driven by emerging markets.^{196,197} In the United States, 1.9 million people are employed, and \$250 million is spent in fashion industry annually.²⁵ In 2014, the global smart textiles market was assessed as \$795 million, which is anticipated to reach \$4.72 billion by 2020 with a CAGR of 33%.¹⁹⁸ Major drivers for the smart textiles market are wearable electronics, increasing demand for devices with advanced functions, miniaturization of electronics, and rapid growth of low-cost wireless sensor networks. Military and security sectors have the largest shares of the smart textiles, accounting for about 27% of the total market. The market shares for the sports and fitness segments are expected to increase at a CAGR of 40% until 2020.¹⁹⁸ Americas was accounted for 41% of the global smart textiles market in 2014, followed by Europe (25%), and

1
2
3 Asia-Pacific (21%) in 2014 (Figure 9). However, Asia-Pacific market is expected to have highest
4
5 CAGR (44%) in the next five years. The United States market is projected to grow at a CAGR of
6
7 31% until 2020.¹⁹⁸ High growth rates may be attributed to trends outside conventional apparels.
8
9 This is because in the traditional apparels, there is more demand for cost reduction, as oppose to
10
11 performance enhancement. In the case of innovative and functional applications of wearables,
12
13 the customer motivation is opposite.¹⁹⁹ Furthermore, the market for nanofiber-based products is
14
15 expected to reach over \$1 billion by 2020.²⁰⁰ However, this market is not limited to textile and
16
17 apparel industry.^{198, 201} With a demanding market for wearables and a growing trend for nano-
18
19 fiber based products, the applications are diverse for the nanotextile products ranging from
20
21 consumer apparels to medical wearables.²⁰²

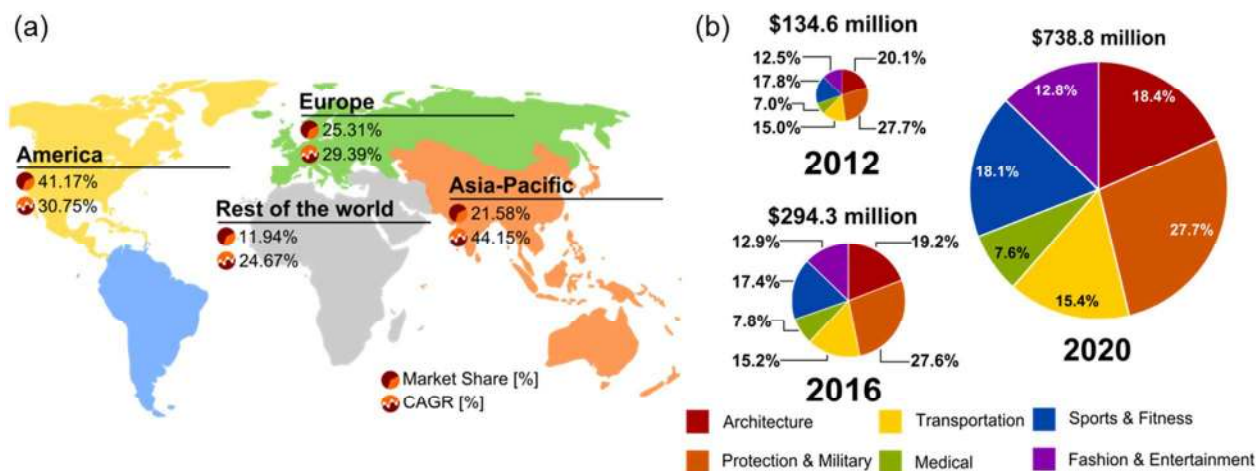


Figure 9. Smart textiles market. (a) Market shares and CAGRs by region in 2014¹⁹⁸. (b) North America smart textiles market revenue by end-use, 2012–2020¹⁹⁸

48 A driving force for the smart textiles industry is sensing technologies with Internet
49 connection. This capability can be used to communicate data such as location, as well as
50 physiological parameters (*e.g.* heart rate), which are important in healthcare, sports, and fitness.
51
52 Therefore, this trend is expected to affect the market globally. For example, the use of functional
53
54
55
56
57
58
59
60

1
2
3 materials in textiles has led to electrophysical characteristics such as piezoresistive and
4 conductivity. These technologies can aim to evaluate the patient's synoptic data. The process
5 involves the development of smart textiles, communicating the data over the network, and using
6 it to make informed decisions. One of the challenges facing the apparel industry in the use of
7 such communication devices is ensuring simultaneous wearability, and functionality of efficient
8 and portable power supplies.
9

10
11
12
13
14
15
16
17 In general, fashionable functional products transcending the traditional functions of fabric are
18 highly desirable. Growth in the fashion and entertainment industry is expected to contribute to
19 overall market growth. Additionally, the demand from the sports and fitness sector has increased
20 due to growing awareness about healthy lifestyles. End users participating in extreme sports,
21 running, skiing, have also contributed to the demand for smart textiles. To increase the
22 competitiveness with respect to Asia, European Union has created initiatives for promoting
23 incentives.²⁰³ The European Commission has co-financed a number of projects such as Wealthy,
24 MyHeart and Biotex. For example, Wealthy aims to create a wearable device for monitoring
25 patient's vital signs.
26
27
28
29
30
31
32
33
34
35
36
37

38
39 To meet a wide range of end user needs, it is vital to market smart wearables that offer
40 various levels of performance and comfort to wide customer base. The necessity for various
41 levels of performance stems from global customers who are willing to pay a premium price for
42 smart functional garments. However, in another market segment, the target customer may
43 demand affordable functional textiles. One possible reason for the interest in innovation in
44 textiles is that porous materials, synthetic microfibers and membranes used commercially over
45 the past 30 years have been commodified. This may be attributed to the accessibility of
46 blockbuster technologies due to patent expirations. The commodification subsequently reduced
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3 profit margin and market share.²⁰⁰ As a result, companies in the textile industry need to offer
4
5 competitive advantage through innovation by either enhancing performance or reducing the
6
7 production cost.
8
9

10 11 **CASE STUDIES**

12
13
14 **Gore-Tex** is a lightweight, waterproof, breathable fabric membrane comprising of expanded
15
16 polytetrafluoroethylene (ePTFE) for application in medical devices, fabrics, and electronics.^{44, 204}
17
18 W. L. Gore & Associates (Newark, DE) invented ePTFE in the 1970s. Gore-Tex was originally a
19
20 microporous structure that could be stretched up to 800% of its original length.²⁰⁵ Gore-Tex is
21
22 used in products manufactured by various enterprises including Patagonia, L.L. Bean, Oakley,
23
24 Inc., Galvin Green, Marmot, Vasque, Arc'teryx, Haglöfs, and The North Face.^{206,207} W. L. Gore
25
26 & Associates holds more than 71 issued patents related to Gore-Tex or the use of PTFE, in which
27
28 18 patents are for use in garments. Although the basis for the Gore-Tex technology originated
29
30 from microporous structures, the company has recently incorporated nanostructures into their
31
32 products for the apparels market. For example, Nano and NanoPro jackets have been
33
34 manufactured in conjunction with Marmot LLC.²⁰⁸ Other nanotechnology-based examples could
35
36 be seen in the company's patent portfolio. Examples include Nyagraph 351 (Nyacol Nano
37
38 Technologies, Inc) for burn protective materials,²⁰⁹ nanoemulsions of functionalized PTFE,²¹⁰
39
40 prefiltration layers comprising of nanofibers,²¹¹ and NPs for improved insulated electrical
41
42 conductors.²¹² These cases serve to illustrate the importance of nanotechnology to a well-
43
44 established innovative company in the apparel industry.
45
46
47
48
49
50

51
52 **NanoSphere®** marketed by Schoeller Textiles AG (Sevelen, Switzerland) is a finishing
53
54 technology with hydrophobic surface properties that mimic the self-cleaning effect of lotus
55
56 leaves.³⁹ Schoeller claims that NanoSphere® has improved water/oil and dirt repelling properties,
57
58
59
60

1
2
3 and washing performance as compared to traditional textile impregnation-based manufacturing.
4
5 Furthermore, the protective function of NanoSphere® may be retained after frequent use and
6
7 numerous washing cycles without affecting comfort, texture, and breathability. The textiles
8
9 finished with NanoSphere® require less frequent washing at lower temperatures as compared to
10
11 conventional textiles. Additionally, it has high abrasion resistance. The company's other
12
13 products address a variety of applications ranging from stretch fabrics, sun reflectors, and
14
15 temperature resistance, and bionic climate conditioning.²¹³ Their patent portfolio in
16
17 nanotechnology includes PEIN NPs for antibacterial finishing of electrospinnable polymers,²¹⁴
18
19 NPs and CNTs for finishing of substrates,²¹⁵ and nanofibers having microbicidal properties.²¹⁶
20
21

22
23
24 **Aquapel**, marketed by Nanotex LLC (Bloomfield Hills, MI), reproduces natural water-
25
26 repellency of plant surfaces and animal coats.¹⁷⁹ Aquapel technology involves permanent
27
28 attachment of hydrophobic 'whiskers' to individual fibers at the molecular level. Aquapel
29
30 features a hydrocarbon polymer that is ecologically friendly and low-cost. Nanotex's portfolio
31
32 consists of 28 WO patent applications and addresses textile sectors including repellency/stain
33
34 resistance, moisture management, odor control, static elimination, and wrinkle resistance. In
35
36 2013, Nano-Tex products were on \$280 million in branded products at retail.¹⁰ In the same year,
37
38 Nanotex was acquired by soft-surface technology company Crypton Inc.²¹⁷
39
40
41

42
43 **SmartSilver**® is an antimicrobial yarn marketed by NanoHorizons (Bellefonte, PA). It
44
45 develops and manufactures Ag NP additives that provide antimicrobial characteristics to their
46
47 products. The company markets Oeko-Tex® antimicrobial solution under the SmartSilver®
48
49 brand.^{218,219}
50
51

52
53 **Nanosan**, marketed by SNS-Nano Fiber Technology (Hudson, OH) and Schill & Seilacher
54
55 (Germany), consists of spun polymers for application in filters and adsorbent fabrics.²²⁰ SNS-
56
57
58
59
60

Nano Fiber Technology integrates microscale particles into the nanofiber structure at high-volume production. Nanosan fibers can be engineered to be function as high-strength, absorbent, or flexible material. Its product line consists of nanofiber matrixes with different absorption properties. The applications of Nanosan include filters, medical and military products and personal care products such as cosmetics. Its patent portfolio includes debris and particle absorbent materials.^{221,222,223,224} The company is currently exploring the use of nanofibers for skin decontamination.

Wearable Motherboard™ (electronic shirt), marketed by Sarvint Technologies, Inc. (Atlanta, GA), uses engineered fibers to sense body signs, such as heart rate, temperature, skin conductivity, muscle exertion, blood pressure, and respiration rate.¹⁶⁴ Its patent portfolio includes the use of engineered fabric-based sensors (*e.g.* conductive fibers) for monitoring vital signs. Its technology comprises microporous elastic Spandex fiber, a polyester-polyurethane copolymer invented in 1958.²²⁵⁻²²⁷ Table 1 shows the companies involved in smart textiles and wearables market.²²⁸ Some of these companies use microtechnology as opposed to nanotechnology in apparels.

Table 1. Companies that have commercialized micro and nanotechnology-based apparels, their major products and applications.

Company	Year founded	Number of Pending patents /granted	Area (μ /Nano)	Technology & Products	Applications	Ref.
Auxetic Technologies Ltd (UK)	2004	3	μ /Nano	Auxetic materials (becomes thinner when stretched, and thicker when compressed)	Composite material, auxetic foams	229-231
Brandix Lanka	2002	N/A	Nano	Functional clothing	Fabric and garment accessories	N/A

Limited (Sri Lanka)						
Clothing Plus Ltd (Finland)	2001	2	μ	Heart rate sensing shirt (Combined textiles and electronics)	Comfortable biometric sensor electronics for sports and medical applications	232, 233
DuPont (US)	1802 (sold its textiles business to Koch Industries in 2004)	>100, out of which 32 is related to garment	μ /Nano	Lycra (spandex), a stretch fiber	Stretchable, compression and shaped garments, home furnishings	234-243
Exo2 (US)	2007	N/A	Nano	FabRoc™ and ThermoKnitt™ heating technology	Wireless heated outdoor clothing	N/A
FibeRio Technology Corporation (US)	2009	2	μ /Nano	Micro- and nanofibers	Apparel, filtration, healthcare, and electronics	244, 245
Fibretronic limited (Hong Kong)	2004	N/A	μ	Textile electronics	Wearable electronics and smart fabrics (sensors, heating and cooling elements)	N/A
Freudenberg Group (Germany)	1849	N/A	μ /Nano	Housewares and cleaning products, automobile parts, and textile	Nonwoven fabrics and textile materials	N/A
Gentherm Incorporated (US)	1960	18	μ	Heating and cooling comfort	Thermoelectrically heated and cooled seat system (automotive, medical, bedding)	246-255
Google Inc. (US)	1998, partnered with Levi Strauss & Co.	N/A	μ	Jacquard: a microfiber-woven textile	Textile with digital sensing microfibers	N/A
Hollingsworth and Vose (US)	1843	3	μ /Nano	Filtration and nonwoven materials	Composite materials, home furnishings, apparel	256-258
HeiQ (Switzerland)	2005	6	μ /Nano	Dynamic cooling, water and oil repellency on textiles	Outdoor products, medical implants	1259-264
Interactive Wear AG (Germany)	2005	2	μ	Functional textile products: textile cable, heating pads, interactive wearable solar energy source	Integrated textile systems	265, 266
International Fashion Machines, Inc. (US)	2002	2	μ	Electronically controllable flexible substrate	Electronic textiles, which behave as an electronic circuit or device	267, 268

1	Midé					
2	Technolog					
3	Corporation					
4	(US)	1989	11	μ	Piezo cooling, haptic actuators, energy harvesting, data logging)	General wearables
5						269-279
6	Nanohorizo					
7	ns (US)	2002	2	Nano	Ag NPs	NanoAg textiles
8						218, 219
9	Nanotex					
10	(US)	1998	22	Nano	Nanoengineered polymers	Moisture resistance, odor management
11						280-301
12	Ohmatex					
13	Aps					
14	(Denmark)	2004	N/A	μ	Elastic textile cables, conductive textiles, textile-based sensors	Textiles combined with IT technology
15						N/A
16	Peratech Ltd					
17	(UK)	1996	12	Nano	Electroactive polymeric material QTC (Quantum Tunnelling Composites)	Force and touch sensing within electronic circuits
18						302-313
19	Sarvint					
20	Technologie					
21	s, Inc. (US)	2014	6	μ/Nano	Functional wearables	Garment with intelligence capability
22						226, 227, 314-317
23	Schoeller					
24	Textiles AG					
25	(Germany)	1967	9	μ/Nano	Stretchable fabrics, protection fabrics, soft shells, protective fabrics	NP-containing fibers
26						214-216, 318-323
27	Sensium					
28	Healthcare					
29	(UK)	2000	N/A	μ	SensiumVitals®, a lightweight patch reading of patients' heart rate, respiration and temperature	Wireless monitoring of vital signs
30						N/A
31	Sensoria					
32	Inc. (US)	2010	3	μ	Body -sensing wearable devices	Anklet and sensor infused socks and fitness bras and t-shirts with heart rate monitor
33						324-326
34	SNS Nano					
35	(US)	2007	4	Nano	Debris and particle absorbent materials	Textile composite material
36						221-224
37	Texas					
38	Instruments					
39	(US)	1951	>100	μ	Semiconductors, microcontrollers DLP Products & MEMS	Wearable displays, Bluetooth wearable watch
40						N/A
41	Textronics,					
42	Inc. (US)	2005	13	μ/Nano	NuMetrex, soft textile sensors	Health and fitness monitoring
43						327-332
44	Thermosoft					
45	International					
46	(US)	1996	6	μ	Flexible electric heaters	Heated fabric, conductive textile, heated bedding and clothing
47						333-344
48	VivoMetrics					
49	Inc (US)	2009	8	μ	Body worn sensors: Hexoskin (Sports Shirt), Nonin (Wrist worn Bluetooth pulse oximeter), Onyx (Finger clip Wireless pulse oximeter, LifeShirt (garment with embedded sensors)	Continuous ambulatory physiological monitoring sensor systems
50						345-352
51	Wearable					
52	Information					
53	Technologie					
54	s (Weartech)	2007	1	μ	Smart fabrics and interactive textiles	Sports, fitness, health prevention, healthcare, and industrial safety
55						353
56						
57						
58						
59						
60						

(Spain)						
W. L. Gore & Associates	1958	48 (Gore-Tex or PTFE): 13 in garments	μ /Nano	Gore-Tex is a waterproof, breathable fabric membrane	Widespread products, including fashion and apparel	205, 354-372

FUTURE DIRECTIONS

The integration of high-computing microprocessors and miniaturized computers can enable the capability to collect information throughout a garment. For example, the physiology of the body and posture data collection in garments could allow for correcting the unhealthy posture. Wearing high heels shifts the center of gravity forward, and this causes disturbances in the posture. This produces strains on the calf muscles and thigh muscles, and a forward tilt in the pelvis. These changes have negative implications in the body including misalignment of hips and spine and increase in the pressure on the forefoot, leading to degenerative arthritis in the knee. New wearable technologies can be incorporated in garments and shoes to measure the pressure and posture pattern and alert the user. Such technologies can be imparted to be active to loosen or stiffen the dress, or shoe based on the motion to prevent pain or sag. Weight loss is another potential area that can be explored with nanomaterials. For example, vibration motors can be integrated in textiles to promote blood circulation and weight loss. These devices may also achieve wireless powering of the internal or external electrical components. For example, self-winding mechanisms developed in automatic watches can be utilized to generate energy from the movement of the body. A significant area that nanotechnology-based energy sources can provide a solution is cooling. Highly-dense fabric batteries or solar cells need to be developed to power cooling without compromising comfort. Such powering mechanisms can be coupled with phase-change materials to cool the body in hot environments, or cool the electronic components in the textile.

1
2
3 Interactive garments in fashion will also evolve. Programmable visual components, LEDs
4 and fiber optics in garments will find increasing use in fashion and entertainment industries.
5
6 Incorporation of new approaches including structural colors, luminescence, plasmonics,
7
8 metamaterials, holography, photonic crystals (PCs) and LED displays in textiles can create
9
10 mesmerizing effects on garments. These dresses can be combined with pressure or motion
11
12 sensors that can change the color of the dress based on touch, movement, temperature, light,
13
14 electric field, or other external stimuli. The material may also include bioinspired patterns and
15
16 chemical reactions with the environment.
17
18
19
20

21
22 In addition to serving as light emitting elements to enable the shining and colorful
23
24 appearance for fashion apparels, optical fibers offer more capabilities. For example, an array of
25
26 fibers can be weaved into a garment to constitute a programmable fiber-optic display that is able
27
28 to show dynamic graphics. Optical fibers can also be used as sensing components in
29
30 multifunctional garments for sports and fashion. Recently, Cambridge Consultants has developed
31
32 Xelflex fabric that was equipped with optical fiber sensors for tracking movements of human
33
34 body.³⁷³ Xelflex could be used in fitness and sports coaching as well as part of physiotherapy.
35
36 Additionally, fiber sensor-based gloves and garments that can recognize postures of human hand
37
38 and body have been demonstrated.³⁷⁴ Physical or biological measurements may be detected by
39
40 on-garment fiber sensors such as strain, pressure, temperature, humidity, and metabolites.³⁷⁵
41
42 Thus, in the near future a fully functionalized sportswear based on fiber-optics sensors will be
43
44 produced for monitoring of physiological conditions of human body including heart beating rate,
45
46 blood pressure, sweating, body motions, temperature, and even potential disease risks. Such
47
48 garments can also be used for increasing the interaction and connectivity of user with gaming
49
50 consoles and virtual reality platforms.
51
52
53
54
55
56
57
58
59
60

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Integration of optical displays into textiles or garments is desirable for many applications. Current textile displays are mostly based on LEDs. Although LEDs are low cost, small, and available in an array of different colors, they are not truly compatible with textiles due to their rigidity. Additionally, the resolution of the LED textile displays is typically low (LED pitch: 1-100 mm).³⁷⁶ The LCDs that are commonly used in current smartphones, tablets and computers are usually inflexible.³⁷⁷ Considering the flexibility and light weight required for textile displays, OLEDs composed of thin films of organic molecules constitute a potential candidate.³⁷⁸ Another promising technology for the fabrication of textile displays is quantum-dot light emitting diode (QLED), which is similar to OLED in structure but have an additional active layer consisting of quantum dots.^{379, 380} In textile displays, QLEDs could offer higher luminance efficiency and consume less energy than OLEDs. These technologies maybe combined with optical components such as diffraction gratings, diffusers, lenses, or microcavities.³⁸¹⁻³⁸⁴

31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Photonic crystals are nanostructures in which the dielectric constant has a periodic variation in one, two or in all three orthogonal directions.³⁸⁵⁻³⁸⁷ In such structures, one observes formation of the spectral photonic bandgaps, which are the spectral regions where photons are unable to propagate in the bulk of the periodic structure. Therefore, narrow-band colors could be seen in the light diffracted or transmitted by PCs. They can be incorporated into flexible thin films that may be conveniently attached to a fabric or garment.^{388, 389} These PC films may have their color changed when stimulated by external stimuli such as current, compression, stretch, or temperature and humidity. The structural parameters of PCs or the effective refractive index of PCs are modified by these stimuli, thus shifting the PC spectral bandgaps.^{390, 391} This color-tuning property may be utilized for garments to not only promote the aesthetic performance, but also enable the garments for sensing applications.³⁹²

1
2
3 Combining holograms with garments and wearable devices is another potential research
4 direction.^{393, 394} A hologram is first produced by encoding interference information of an object
5 on a recording medium. A 3D image of the recorded object could be reconstructed by
6 illuminating the holographic film with a broadband light.^{395, 396} To date, a variety of holographic
7 films have been used as decorative coatings that are able to provide garments with iridescent
8 appearances and 3D graphics.¹⁴⁵ Holograms may also be used in other wearable gadgets such as
9 helmets and glasses for virtual-reality applications. In Hololens (Microsoft), holographic gears
10 are equipped on a headset.³⁹⁷ Thus, wearers of Hololens may appreciate a virtual life experience
11 by visualizing and interacting with the environment on demand. Moreover, holographic sensors
12 that are fabricated into thin films could also be integrated into garments for detecting metabolic
13 function.³⁹⁸⁻⁴⁰³

14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Metamaterials are artificial structured substances made by assembling composite materials such as metals and plastics in periodic patterns at scales that are smaller than the wavelength of interest.⁴⁰⁴ Metamaterials due to their extraordinary structures exhibit complex behavior to electromagnetic waves (*e.g.* negative refractive index). Many intriguing features could be offered by metamaterials when used in textiles and garments. For example, metamaterials have potential for the development of cloaking devices that are used to make a defined region invisibly isolated from the passing electromagnetic waves. While some progress on metamaterial-based cloaking devices was made at microwave⁴⁰⁵ and THz frequencies,^{406, 407} truly invisible garments may be realized in the visible spectral region. Moreover, many thin-film metamaterial sensors have been demonstrated.⁴⁰⁸ These sensors could be potentially integrated into textiles and garments for monitoring physiological biomarkers.

1
2
3 Nanotextiles can be functionalized with molecular dyes and analyte-sensitive compounds.
4
5 For example, microfluidics can be incorporated in thread-based channels for application in point-
6
7 of-care diagnostics.⁴⁰⁹⁻⁴¹⁷ In the future, we expect many functional components being seamlessly
8
9 integrated into textile architecture. Accordingly, production processes will also evolve to
10
11 combine electronics, biomaterials, and optics into textile weaving. Applications in fashion and
12
13 arts will also be realized.^{418, 419} These sensing and display technologies may be controlled by
14
15 smartphones.⁴²⁰⁻⁴²²
16
17
18

19
20 Another potential research area is to create green chemistries and fabrication approaches to
21
22 synthesize nanomaterials that stay intact after laundering. For example, development of new
23
24 covalent binding mechanics to attach nanomaterials to cotton or synthetic fibers is desirable.
25
26 These nanomaterials may also require new surface finishing processes to ensure their
27
28 immobilization in textiles and maintenance any environmental condition. Additionally,
29
30 agglomeration of deposited nanomaterials is a major challenge and this requires the development
31
32 of new nanoadditives and stabilizers in formulations and finishing treatments. These approaches
33
34 may require functional surface-activated polymer or cotton composites to immobilize
35
36 nanomaterials on textile without comprising their chemical, optical, and electrical properties.
37
38 Furthermore, recycling of clothing is generally carried out by creating landfills. A significant
39
40 concern about the nanomaterials is potential contamination of water or soil.¹⁸⁴ Hence, life cycle
41
42 assessments should also focus on identifying risk factors for laundering, recycling and particle
43
44 release after degradation while accounting different forms of nanoparticles and release rates.
45
46 Effects of uncontrolled release of nanomaterials to the environment, and toxicity to humans,
47
48 marine life needs to be evaluated before the introduction of nanoproducts to the market. Since
49
50 these nanomaterial-based textiles are likely to be produced in the emerging economies, the safety
51
52
53
54
55
56
57
58
59
60

1
2
3 of the workers and exposure to nanomaterials warrant nanotoxicity analyses. The
4 commercialization of nanotechnology-based textiles may be limited due to government
5 regulations. For example, Biocidal textiles containing nanoAg are registered by the Environment
6 Protection Agency (EPA) in the United States.¹⁹³ ISO catalogue enlists a number of standards for
7 formulating and testing nanoproducts.⁴²³
8
9
10
11
12
13
14
15
16
17

18 CONCLUSIONS

19
20 The customer demand in improved appearance, functionality, and connectivity in fashion has
21 motivated the development of nanotechnology-based textiles. Over the last two decades,
22 numerous nanostructures and nanomaterials including NPs, CNTs, Bragg diffraction gratings,
23 and nano-electronic components have been deposited or woven into textiles. The development of
24 these nanomaterials also created new fabrication methods involving particle impregnation, spray
25 coating, multifunctional composite fiber drawing, and direct weaving at industrial scale. The
26 application of nanomaterials in the form of surface modifications, electronics and optics offers
27 functionality as well as the potential of improved appearance. Realized nanotechnology
28 applications in textiles include antibacterial properties, odor control, UV protection, water
29 repellence, wrinkle resistance, antistatic properties, and strength enhancements. Advanced
30 technologies included incorporation of moisture, temperature, pressure sensors, drug release, and
31 fiber optics powered by textile-based batteries. With the emergence of nanomaterials, these
32 technologies are transitioning from rigid to seamlessly integrated flexible substrates while
33 offering light weight.
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51

52
53 In parallel to the development of nanotextiles, life cycle assessments and toxicity of released
54 nanomaterials from textiles are being critically evaluated. Nanotechnology-based products will
55
56
57
58
59
60

1
2
3 continue to emerge with new applications; however, manufacturers and regulatory agencies must
4 ensure that these technologies will not have a negative effect on human health and the planet
5 during their manufacture and life cycle. The textile industry is under scrutiny due its impact on
6 climate change.⁴²⁴ Today textiles and apparels account for ~10% of the total carbon emissions.⁴²⁵
7
8 17-20% of industrial water pollution originates from dyeing and finishing agents in textile
9 industry, negatively affecting people inhabiting regions around textile production plants,
10 particularly in the developing world.⁴²⁶ The use of dyes and fixing agents (*e.g.*, chromium) in
11 textile manufacturers and tanneries are major pollutants, particularly in Southeast Asia.⁴²⁷ Hence,
12 the effect of nanoproducts on the production dynamics and pollution remains questionable.
13
14 Growing concerns among customers has begun forcing the manufacturers to reduce the
15 environmental impact of their production methods, which will also involve the use of
16 nanomaterials.^{428, 429} Social awareness among customers has probed companies to invest in
17 corporate social responsibility to offer environmentally sustainable products with reduced carbon
18 footprints.⁴³⁰⁻⁴³² These trends in customer behavior and climate change will involve the use of
19 nanotextiles, which need to be climate neutral and recyclable aimed at reducing greenhouse
20 emissions. Nanotechnology will undoubtedly evolve textiles transcending style changes to shape
21 the next big concept: the connected couture.
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44

45 AUTHOR INFORMATION

46 47 48 **Corresponding Author**

49
50
51 * e-mail: ayetisen@mgh.harvard.edu, syun@mgh.harvard.edu
52
53

54 55 **Author Contributions**

1
2
3 A.K.Y. designed the project. A.K.Y. and H.Q. wrote the article. A.M. contributed to Market and
4
5 Case Studies sections. S.H.Y., A.K., H.B., J.H., and M.S. made intellectual contributions and
6
7 edited the manuscript.
8
9

10 11 Notes

12
13 The authors declare no competing financial interests.
14
15

16 17 ACKNOWLEDGMENT

18
19 We thank Huseyin Avci for discussions.
20
21

22 23 REFERENCES

- 24
25
26 1. Lee, J. A. Cotton as a world crop. *Cotton* 1984, 1-25.
27 2. Cherenack, K.; van Pieterse, L. Smart textiles: challenges and opportunities. *Journal of Applied Physics* 2012, 112, 091301.
28 3. Sawhney, A.; Condon, B.; Singh, K.; Pang, S.; Li, G.; Hui, D. Modern applications of
29 nanotechnology in textiles. *Textile Research Journal* 2008, 78, 731-739.
30 4. Gould, P. Textiles gain intelligence. *Materials Today* 2003, 6, 38-43.
31 5. Paradiso, R.; Loriga, G.; Taccini, N.; Gemignani, A.; Ghelarducci, B. WEALTHY-a
32 wearable healthcare system: new frontier on e-textile. *Journal of Telecommunications and*
33 *Information Technology* 2005, 105-113.
34 6. Cheng, M.-H.; Chen, L.-C.; Hung, Y.-C.; Yang, C. M. In *A real-time maximum-*
35 *likelihood heart-rate estimator for wearable textile sensors*, Engineering in Medicine and
36 Biology Society, 2008. EMBS 2008. 30th Annual International Conference of the IEEE, IEEE:
37 2008; pp 254-257.
38 7. Mattmann, C.; Amft, O.; Harms, H.; Tröster, G.; Clemens, F. In *Recognizing upper body*
39 *postures using textile strain sensors*, Wearable Computers, 2007 11th IEEE International
40 Symposium on, IEEE: 2007; pp 29-36.
41 8. Jung, S.; Lauterbach, C.; Strasser, M.; Weber, W. Enabling technologies for disappearing
42 electronics in smart textiles. *Proceedings of IEEE ISSCC03* 2003, 1, 386-387.
43 9. Catrysse, M.; Puers, R.; Hertleer, C.; Van Langenhove, L.; Van Egmond, H.; Matthys, D.
44 Towards the integration of textile sensors in a wireless monitoring suit. *Sensors and Actuators A:*
45 *Physical* 2004, 114, 302-311.
46 10. Hu, L.; Cui, Y. Energy and environmental nanotechnology in conductive paper and
47 textiles. *Energy & Environmental Science* 2012, 5, 6423-6435.
48 11. Brown, P.; Stevens, K. *Nanofibers and nanotechnology in textiles*. Elsevier: 2007.
49 12. Hinestroza, J. P. Can nanotechnology be fashionable? *Materials Today* 2007, 10, 64.
50 13. Avila, A. G.; Hinestroza, J. P. Smart textiles: Tough cotton. *Nature nanotechnology*
51 2008, 3, 458-459.
52
53
54
55
56
57
58
59
60

14. Russell, E. Nanotechnologies and the shrinking world of textiles. *Textile Horizons* 2002, 9, 7-9.
15. Marmur, A. The lotus effect: superhydrophobicity and metastability. *Langmuir* 2004, 20, 3517-3519.
16. Gao, L.; McCarthy, T. J. The "lotus effect" explained: two reasons why two length scales of topography are important. *Langmuir* 2006, 22, 2966-2967.
17. El-Khatib, E. Antimicrobial and Self-cleaning Textiles using Nanotechnology. *Research Journal of Textile & Apparel* 2012, 16.
18. Zhang, J.; France, P.; Radomyselskiy, A.; Datta, S.; Zhao, J.; van Ooij, W. Hydrophobic cotton fabric coated by a thin nanoparticulate plasma film. *Journal of Applied Polymer Science* 2003, 88, 1473-1481.
19. Bae, G. Y.; Min, B. G.; Jeong, Y. G.; Lee, S. C.; Jang, J. H.; Koo, G. H. Superhydrophobicity of cotton fabrics treated with silica nanoparticles and water-repellent agent. *Journal of colloid and interface science* 2009, 337, 170-175.
20. Yu, M.; Gu, G.; Meng, W.-D.; Qing, F.-L. Superhydrophobic cotton fabric coating based on a complex layer of silica nanoparticles and perfluorooctylated quaternary ammonium silane coupling agent. *Applied surface science* 2007, 253, 3669-3673.
21. Synytska, A.; Khanum, R.; Ionov, L.; Cherif, C.; Bellmann, C. Water-repellent textile via decorating fibers with amphiphilic janus particles. *ACS applied materials & interfaces* 2011, 3, 1216-1220.
22. Liu, Y.; Chen, X.; Xin, J. Hydrophobic duck feathers and their simulation on textile substrates for water repellent treatment. *Bioinspiration & biomimetics* 2008, 3, 046007.
23. Liu, Y.; Tang, J.; Wang, R.; Lu, H.; Li, L.; Kong, Y.; Qi, K.; Xin, J. Artificial lotus leaf structures from assembling carbon nanotubes and their applications in hydrophobic textiles. *Journal of Materials chemistry* 2007, 17, 1071-1078.
24. Ramaratnam, K.; Tsyalkovsky, V.; Klep, V.; Luzinov, I. Ultrahydrophobic textile surface via decorating fibers with monolayer of reactive nanoparticles and non-fluorinated polymer. *Chemical Communications* 2007, 4510-4512.
25. Shyr, T.-W.; Lien, C.-H.; Lin, A.-J. Coexisting antistatic and water-repellent properties of polyester fabric. *Textile Research Journal* 2011, 81, 254-263.
26. Lam, Y. L.; Kan, C. W.; Yuen, C. W. M. Effect of concentration of titanium dioxide acting as catalyst or co-catalyst on the wrinkle-resistant finishing of cotton fabric. *Fibers Polym* 2010, 11, 551-558.
27. Liu, Y.; Wang, X.; Qi, K.; Xin, J. Functionalization of cotton with carbon nanotubes. *Journal of Materials Chemistry* 2008, 18, 3454-3460.
28. Xin, J.; Daoud, W.; Kong, Y. A new approach to UV-blocking treatment for cotton fabrics. *Textile Research Journal* 2004, 74, 97-100.
29. Xue, C.-H.; Chen, J.; Yin, W.; Jia, S.-T.; Ma, J.-Z. Superhydrophobic conductive textiles with antibacterial property by coating fibers with silver nanoparticles. *Applied Surface Science* 2012, 258, 2468-2472.
30. Artus, G. R.; Zimmermann, J.; Reifler, F. A.; Brewer, S. A.; Seeger, S. A superoleophobic textile repellent towards impacting drops of alkanes. *Applied Surface Science* 2012, 258, 3835-3840.
31. Hoefnagels, H.; Wu, D.; De With, G.; Ming, W. Biomimetic superhydrophobic and highly oleophobic cotton textiles. *Langmuir* 2007, 23, 13158-13163.

32. Dong, W.; Huang, G. Research on properties of nano polypropylene/TiO₂ composite fiber. *Journal of Textile Research* 2002, 23, 22-23.
33. Zhou, Z.; Chu, L.; Tang, W.; Gu, L. Studies on the antistatic mechanism of tetrapod-shaped zinc oxide whisker. *Journal of electrostatics* 2003, 57, 347-354.
34. Wu, Y.; Chi, Y.-b.; Nie, J.-x. Preparation and application of novel fabric finishing agent containing nano ATO. *Journal of Functional Polymers* 2002, 15, 43-47.
35. Xu, P.; Wang, W.; Chen, S. Application of nanosol on the antistatic property of polyester. *Melliand International* 2005, 11, 56-59.
36. Shishoo, R. Recent developments in materials for use in protective clothing. *International Journal of Clothing Science and Technology* 2002, 14, 201-215.
37. Textor, T.; Mahltig, B. A sol-gel based surface treatment for preparation of water repellent antistatic textiles. *Applied Surface Science* 2010, 256, 1668-1674.
38. Zhang, F.; Yang, J. Preparation of nano-ZnO and its application to the textile on antistatic finishing. *International Journal of Chemistry* 2009, 1, p18.
39. Qiaozhen, Y. Influence of nano-particles treatment on the antistatic property of polyester fabric. *Journal of Textile Research* 2007, 12, 007.
40. Wang, D.; Lin, Y.; Zhao, Y.; Gu, L. Polyacrylonitrile fibers modified by nano-antimony-doped tin oxide particles. *Textile research journal* 2004, 74, 1060-1065.
41. Chien, H.; Chen, H.; Wang, C. The study of non-formaldehyde crease-resist finishing fabrics treated with the compound catalyst of nanometer grade TiO₂ under UV light and different polycarboxylic acid. *Journal of the Hwa Gang Textile* 2003, 10, 104-114.
42. Wang, C. C.; Chen, C. C. Physical properties of crosslinked cellulose catalyzed with nano titanium dioxide. *Journal of Applied Polymer Science* 2005, 97, 2450-2456.
43. Yuen, C.; Ku, S.; Kan, C.; Cheng, Y.; Choi, P.; Lam, Y. Using nano-tio 2 as co-catalyst for improving wrinkle-resistance of cotton fabric. *Surface Review and Letters* 2007, 14, 571-575.
44. Lam, Y.; Kan, C.; Yuen, C. Wrinkle-resistant finishing of cotton fabric with BTCA-the effect of co-catalyst. *Textile Research Journal* 2010, 81, 482-493.
45. Yuen, C.; Ku, S.; Li, Y.; Cheng, Y.; Kan, C.; Choi, P. Improvement of wrinkle-resistant treatment by nanotechnology. *The Journal of The Textile Institute* 2009, 100, 173-180.
46. Lu, Y.; Lin, H.; Chen, Y.; Wang, C.; Hua, Y. Structure and performance of Bombyx mori silk modified with nano-TiO₂ and chitosan. *Fibers Polym* 2007, 8, 1-6.
47. Song, X.; Liu, A.; Ji, C.; Li, H. The effect of nano-particle concentration and heating time in the anti-crinkle treatment of silk. *Journal of Jilin Institute of Technology* 2001, 22, 24-27.
48. Kumar, S.; Doshi, H.; Srinivasarao, M.; Park, J. O.; Schiraldi, D. A. Fibers from polypropylene/nano carbon fiber composites. *Polymer* 2002, 43, 1701-1703.
49. Lee, K.; Kim, H.; Khil, M.; Ra, Y.; Lee, D. Characterization of nano-structured poly (ϵ -caprolactone) nonwoven mats via electrospinning. *Polymer* 2003, 44, 1287-1294.
50. Schaerlaekens, M. Melt extrusion with nano-additives. *Chem. Fib. Int.* 2003, 53, 100.
51. Jiang, K.; Li, Q.; Fan, S. Nanotechnology: Spinning continuous carbon nanotube yarns. *Nature* 2002, 419, 801-801.
52. Yang, H.; Zhu, S.; Pan, N. Studying the mechanisms of titanium dioxide as ultraviolet-blocking additive for films and fabrics by an improved scheme. *Journal of Applied Polymer Science* 2004, 92, 3201-3210.
53. Saito, M. Antibacterial, deodorizing, and UV absorbing materials obtained with zinc oxide (ZnO) coated fabrics. *Journal of Industrial Textiles* 1993, 23, 150-164.

- 1
 - 2
 - 3
 - 4
 - 5
 - 6
 - 7
 - 8
 - 9
 - 10
 - 11
 - 12
 - 13
 - 14
 - 15
 - 16
 - 17
 - 18
 - 19
 - 20
 - 21
 - 22
 - 23
 - 24
 - 25
 - 26
 - 27
 - 28
 - 29
 - 30
 - 31
 - 32
 - 33
 - 34
 - 35
 - 36
 - 37
 - 38
 - 39
 - 40
 - 41
 - 42
 - 43
 - 44
 - 45
 - 46
 - 47
 - 48
 - 49
 - 50
 - 51
 - 52
 - 53
 - 54
 - 55
 - 56
 - 57
 - 58
 - 59
 - 60
54. Xiong, M.; Gu, G.; You, B.; Wu, L. Preparation and characterization of poly (styrene butylacrylate) latex/nano-ZnO nanocomposites. *Journal of Applied Polymer Science* 2003, 90, 1923-1931.
55. Burniston, N.; Bygott, C.; Stratton, J. Nano technology meets titanium dioxide. *Surface coatings international. Part A* 2004, 87, 179-184.
56. Daoud, W. A.; Xin, J. H. Low temperature sol-gel processed photocatalytic titania coating. *Journal of Sol-Gel Science and Technology* 2004, 29, 25-29.
57. Wang, R.; Xin, J. H.; Tao, X. M.; Daoud, W. A. ZnO nanorods grown on cotton fabrics at low temperature. *Chemical Physics Letters* 2004, 398, 250-255.
58. Kathirvelu, S.; D'souza, L.; Dhurai, B. UV protection finishing of textiles using ZnO nanoparticles. *Indian J Fibre Text Res* 2009, 34, 267-273.
59. Moroni, M.; Borrini, D.; Calamai, L.; Dei, L. Ceramic nanomaterials from aqueous and 1, 2-ethanediol supersaturated solutions at high temperature. *Journal of colloid and interface science* 2005, 286, 543-550.
60. Yeo, S. Y.; Lee, H. J.; Jeong, S. H. Preparation of nanocomposite fibers for permanent antibacterial effect. *Journal of Materials Science* 2003, 38, 2143-2147.
61. Lee, H.; Yeo, S.; Jeong, S. Antibacterial effect of nanosized silver colloidal solution on textile fabrics. *Journal of Materials Science* 2003, 38, 2199-2204.
62. Yeo, S. Y.; Jeong, S. H. Preparation and characterization of polypropylene/silver nanocomposite fibers. *Polymer International* 2003, 52, 1053-1057.
63. Klasen, H. J. Historical review of the use of silver in the treatment of burns. I. Early uses. *Burns* 2000, 26, 117-130.
64. Feng, Q. L.; Wu, J.; Chen, G. Q.; Cui, F. Z.; Kim, T. N.; Kim, J. O. A mechanistic study of the antibacterial effect of silver ions on Escherichia coli and Staphylococcus aureus. *Journal of Biomedical Materials Research* 2000, 52, 662-668.
65. Yamanaka, M.; Hara, K.; Kudo, J. Bactericidal actions of a silver ion solution on Escherichia coli, studied by energy-filtering transmission electron microscopy and proteomic analysis. *Applied and environmental microbiology* 2005, 71, 7589-7593.
66. Nowack, B.; Krug, H. F.; Height, M. 120 years of nanosilver history: implications for policy makers. *Environmental science & technology* 2011, 45, 1177-1183.
67. Kumar, R.; Howdle, S.; Münstedt, H. Polyamide/silver antimicrobials: effect of filler types on the silver ion release. *Journal of Biomedical Materials Research Part B: Applied Biomaterials* 2005, 75, 311-319.
68. Pal, S.; Tak, Y. K.; Song, J. M. Does the antibacterial activity of silver nanoparticles depend on the shape of the nanoparticle? A study of the gram-negative bacterium Escherichia coli. *Applied and environmental microbiology* 2007, 73, 1712-1720.
69. Lorenz, C.; Windler, L.; Von Goetz, N.; Lehmann, R.; Schuppler, M.; Hungerbühler, K.; Heuberger, M.; Nowack, B. Characterization of silver release from commercially available functional (nano) textiles. *Chemosphere* 2012, 89, 817-824.
70. Geranio, L.; Heuberger, M.; Nowack, B. The behavior of silver nanotextiles during washing. *Environmental Science & Technology* 2009, 43, 8113-8118.
71. Benn, T. M.; Westerhoff, P. Nanoparticle silver released into water from commercially available sock fabrics. *Environmental science & technology* 2008, 42, 4133-4139.
72. Liu, J.; Hurt, R. H. Ion Release Kinetics and Particle Persistence in Aqueous Nano-Silver Colloids. *Environmental Science & Technology* 2010, 44, 2169-2175.

- 1
2
3 73. Bozzi, A.; Yuranova, T.; Kiwi, J. Self-cleaning of wool-polyamide and polyester textiles
4 by TiO₂ 2-rutile modification under daylight irradiation at ambient temperature. *Journal of*
5 *Photochemistry and Photobiology A: Chemistry* 2005, 172, 27-34.
- 6 74. Qi, K.; Chen, X.; Liu, Y.; Xin, J. H.; Mak, C. L.; Daoud, W. A. Facile preparation of
7 anatase/SiO₂ spherical nanocomposites and their application in self-cleaning textiles. *Journal of*
8 *Materials Chemistry* 2007, 17, 3504-3508.
- 9 75. Uddin, M. J.; Cesano, F.; Scarano, D.; Bonino, F.; Agostini, G.; Spoto, G.; Bordiga, S.;
10 Zecchina, A. Cotton textile fibres coated by Au/TiO₂ films: Synthesis, characterization and self
11 cleaning properties. *Journal of Photochemistry and Photobiology A: Chemistry* 2008, 199, 64-
12 72.
- 13 76. Wang, R.; Xin, J. H.; Yang, Y.; Liu, H.; Xu, L.; Hu, J. The characteristics and
14 photocatalytic activities of silver doped ZnO nanocrystallites. *Applied Surface Science* 2004,
15 227, 312-317.
- 16 77. Çakır, B. A.; Budama, L.; Topel, Ö.; Hoda, N. Synthesis of ZnO nanoparticles using PS-
17 b-PAA reverse micelle cores for UV protective, self-cleaning and antibacterial textile
18 applications. *Colloids and Surfaces A: Physicochemical and Engineering Aspects* 2012, 414,
19 132-139.
- 20 78. Song, J.; Wang, C.; Hinestroza, J. P. Electrostatic assembly of core-corona silica
21 nanoparticles onto cotton fibers. *Cellulose* 2013, 20, 1727-1736.
- 22 79. Song, J.; Birbach, N. L.; Hinestroza, J. P. Deposition of silver nanoparticles on cellulosic
23 fibers via stabilization of carboxymethyl groups. *Cellulose* 2012, 19, 411-424.
- 24 80. Simoncic, B.; Tomsic, B. Structures of novel antimicrobial agents for textiles-a review.
25 *Textile Research Journal* 2010.
- 26 81. Tung, W. S.; Daoud, W. A. Self-cleaning fibers via nanotechnology: a virtual reality.
27 *Journal of Materials Chemistry* 2011, 21, 7858-7869.
- 28 82. Halbeisen, M.; Schift, H. *Chem. Fib. Int.* 2004, 54, 378.
- 29 83. Stegmaier, T.; Dauner, M.; Dinkelmann, A.; Scherrieble, A.; von-Arnim, V.; Schneider,
30 P.; Planck, H. *Techn. Textil.* 2004, 47.
- 31 84. Kojima, Y.; Usuki, A.; Kawasumi, M.; Okada, A.; Kurauchi, T.; Kamigaito, O. *J. Polym.*
32 *Sci., Part A: Polym. Chem.* 1995, 31, 1755.
- 33 85. Janowska, G.; Mikołajczyk, T. Thermal properties of fibres from a new polymer of the
34 polyimideamide group. *Journal of thermal analysis and calorimetry* 2003, 71, 549-558.
- 35 86. Mikołajczyk, T.; Janowska, G.; Urbaniak, W.; Szczapin'ska, M. *Fib. & Text. in East.*
36 *Eur.* 2004, 13, 30.
- 37 87. Malinauskas, A. Chemical deposition of conducting polymers. *Polymer* 2001, 42, 3957-
38 3972.
- 39 88. Li, H.; Shi, G.; Ye, W.; Li, C.; Liang, Y. Polypyrrole-carbon fiber composite film
40 prepared by chemical oxidative polymerization of pyrrole. *Journal of applied polymer science*
41 1997, 64, 2149-2154.
- 42 89. Anbarasan, R.; Vasudevan, T.; Kalaignan, G. P.; Gopalan, A. Chemical grafting of
43 aniline and o-toluidine onto poly (ethylene terephthalate) fiber. *Journal of applied polymer*
44 *science* 1999, 73, 121-128.
- 45 90. Yin, X.; Kobayashi, K.; Yoshino, K.; Yamamoto, H.; Watanuki, T.; Isa, I. Percolation
46 conduction in polymer composites containing polypyrrole coated insulating polymer fiber and
47 conducting polymer. *Synthetic Metals* 1995, 69, 367-368.
- 48
49
50
51
52
53
54
55
56
57
58
59
60

91. Bhadani, S. N.; Sen Gupta, S. K.; Sahu, G. C.; Kumari, M. Electrochemical formation of some conducting fibers. *Journal of applied polymer science* 1996, 61, 207-212.
92. Shim, B. S.; Chen, W.; Doty, C.; Xu, C.; Kotov, N. A. Smart electronic yarns and wearable fabrics for human biomonitoring made by carbon nanotube coating with polyelectrolytes. *Nano letters* 2008, 8, 4151-4157.
93. Mattana, G.; Cosseddu, P.; Fraboni, B.; Malliaras, G. G.; Hinestroza, J. P.; Bonfiglio, A. Organic electronics on natural cotton fibres. *Organic Electronics* 2011, 12, 2033-2039.
94. Li, X.; Sun, P.; Fan, L.; Zhu, M.; Wang, K.; Zhong, M.; Wei, J.; Wu, D.; Cheng, Y.; Zhu, H. Multifunctional graphene woven fabrics. *Scientific reports* 2012, 2, 395.
95. Shateri-Khalilabad, M.; Yazdanshenas, M. E. Fabricating electroconductive cotton textiles using graphene. *Carbohydrate polymers* 2013, 96, 190-195.
96. Jost, K.; Perez, C. R.; McDonough, J. K.; Presser, V.; Heon, M.; Dion, G.; Gogotsi, Y. Carbon coated textiles for flexible energy storage. *Energy & Environmental Science* 2011, 4, 5060-5067.
97. Pan, S.; Lin, H.; Deng, J.; Chen, P.; Chen, X.; Yang, Z.; Peng, H. Novel wearable energy devices based on aligned carbon nanotube fiber textiles. *Advanced Energy Materials* 2015, 5.
98. Zhang, D.; Miao, M.; Niu, H.; Wei, Z. Core-spun carbon nanotube yarn supercapacitors for wearable electronic textiles. *ACS nano* 2014, 8, 4571-4579.
99. Seung, W.; Gupta, M. K.; Lee, K. Y.; Shin, K.-S.; Lee, J.-H.; Kim, T. Y.; Kim, S.; Lin, J.; Kim, J. H.; Kim, S.-W. Nanopatterned Textile-Based Wearable Triboelectric Nanogenerator. *ACS nano* 2015, 9, 3501-3509.
100. Kim, B. H.; Barnhart, B. S.; Kwon, J. W. Electrostatic power generation using carbon-activated cotton thread on textile. *Micro and Nano Systems Letters* 2015, 3, 1-7.
101. Kim, H.; Kim, S. M.; Son, H.; Kim, H.; Park, B.; Ku, J.; Sohn, J. I.; Im, K.; Jang, J. E.; Park, J.-J. Enhancement of piezoelectricity via electrostatic effects on a textile platform. *Energy & Environmental Science* 2012, 5, 8932-8936.
102. Huang, Y.; Hu, H.; Huang, Y.; Zhu, M.; Meng, W.; Liu, C.; Pei, Z.; Hao, C.; Wang, Z.; Zhi, C. From Industrially Weavable and Knittable Highly Conductive Yarns to Large Wearable Energy Storage Textiles. *ACS nano* 2015.
103. Huang, Y.; Huang, Y.; Zhu, M.; Meng, W.; Pei, Z.; Liu, C.; Hu, H.; Zhi, C. Magnetic-assisted, self-healable, yarn-based supercapacitor. *ACS nano* 2015, 9, 6242-6251.
104. Huang, Y.; Tao, J.; Meng, W.; Zhu, M.; Huang, Y.; Fu, Y.; Gao, Y.; Zhi, C. Super-high rate stretchable polypyrrole-based supercapacitors with excellent cycling stability. *Nano Energy* 2015, 11, 518-525.
105. Skorobogatiy, M. Single step fabrication of highly sensitive biosensors. *SPIE Newsroom* 2010.
106. Pone, E.; Dubois, C.; Gu, N.; Gao, Y.; Dupuis, A.; Boismenu, F.; Lacroix, S.; Skorobogatiy, M. Drawing of the hollow all-polymer Bragg fibers. *Optics express* 2006, 14, 5838-52.
107. Oh, T. H.; Lee, M. S.; Kim, S. Y.; Shim, H. J. Studies on melt-spinning process of hollow fibers. *J Appl Polym Sci* 1998, 68, 1209-1217.
108. East, G. C. M., J. E.; Patel, G. C.;. The dry-jet wet-spinning of an acrylic-fibre yarn. *Journal of the Textile Institute* 1984, 75, 196-200.
109. Chronakis, I. S. Novel nanocomposites and nanoceramics based on polymer nanofibers using electrospinning process - A review. *J Mater Process Tech* 2005, 167, 283-293.

- 1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
110. Teo, W. E.; Ramakrishna, S. A review on electrospinning design and nanofibre assemblies. *Nanotechnology* 2006, 17, R89-R106.
111. Dupuis, A.; Guo, N.; Gao, Y.; Godbout, N.; Lacroix, S.; Dubois, C.; Skorobogatiy, M. Prospective for biodegradable microstructured optical fibers. *Optics letters* 2007, 32, 109-11.
112. Mazhorova, A.; Markov, A.; Ng, A.; Chinnappan, R.; Skorobogata, O.; Zourob, M.; Skorobogatiy, M. Label-free bacteria detection using evanescent mode of a suspended core terahertz fiber. *Optics express* 2012, 20, 5344-55.
113. Dupuis, A.; Guo, N.; Gao, Y.; Skorobogata, O.; Gauvreau, B.; Dubois, C.; Skorobogatiy, M. Fabrication strategies and potential applications of the "green" microstructured optical fibers. *J Biomed Opt* 2008, 13.
114. Mazhorova, A.; Gu, J. F.; Dupuis, A.; Peccianti, M.; Tsuneyuki, O.; Morandotti, R.; Minamide, H.; Tang, M.; Wang, Y. Y.; Ito, H.; Skorobogatiy, M. Composite THz materials using aligned metallic and semiconductor microwires, experiments and interpretation. *Optics express* 2010, 18, 24632-24647.
115. Dupuis, A.; Guo, N.; Gauvreau, B.; Hassani, A.; Pone, E.; Boismenu, F.; Skorobogatiy, M. Guiding in the visible with "colorful" solid-core Bragg fibers. *Optics letters* 2007, 32, 2882-4.
116. Gauvreau, B.; Guo, N.; Schicker, K.; Stoeffler, K.; Boismenu, F.; Ajji, A.; Wingfield, R.; Dubois, C.; Skorobogatiy, M. Color-changing and color-tunable photonic bandgap fiber textiles. *Optics express* 2008, 16, 15677-93.
117. Li, J.; Qu, H.; Skorobogatiy, M. Simultaneous monitoring the real and imaginary parts of the analyte refractive index using liquid-core photonic bandgap Bragg fibers. *Optics express* 2015, 23, 22963-76.
118. Dupuis, A.; Guo, N.; Gauvreau, B.; Hassani, A.; Pone, E.; Boismenu, F.; Skorobogatiy, M. All-fiber spectral filtering with solid core photonic band gap Bragg fibers. *2008 Conference on Optical Fiber Communication/National Fiber Optic Engineers Conference, Vols 1-8* 2008, 1954-1956.
119. Hang, Q.; Ung, B.; Syed, I.; Guo, N.; Skorobogatiy, M. Photonic bandgap fiber bundle spectrometer. *Applied optics* 2010, 49, 4791-800.
120. Qu, H.; Skorobogatiy, M. Liquid-core low-refractive-index-contrast Bragg fiber sensor. *Appl Phys Lett* 2011, 98.
121. Qu, H.; Ung, B.; Roze, M.; Skorobogatiy, M. All photonic bandgap fiber spectroscopic system for detection of refractive index changes in aqueous analytes. *Sensor Actuat B-Chem* 2012, 161, 235-243.
122. Gauvreau, B. S., K.; Guo, N.; Dubois, C.; Wingfield, R.; Skorobogatiy, M.; . Color-on-demand photonic textiles. *The Textile Journal* 2008, 125, 70-81.
123. Gao, Y.; Guo, N.; Gauvreau, B.; Rajabian, M.; Skorobogata, O.; Pone, E.; Zabeida, O.; Martinu, L.; Dubois, C.; Skorobogatiy, M. Consecutive solvent evaporation and co-rolling techniques for polymer multilayer hollow fiber preform fabrication. *J Mater Res* 2006, 21, 2246-2254.
124. Gorgutsa, S.; Gu, J. F.; Skorobogatiy, M. A woven 2D touchpad sensor and a 1D slide sensor using soft capacitor fibers. *Smart Materials and Structures* 2012, 21.
125. Gu, J. F.; Gorgutsa, S.; Skorobogatiy, M. Soft capacitor fibers using conductive polymers for electronic textiles. *Smart Mater Struct* 2010, 19.
126. Gu, J. F.; Gorgutsa, S.; Skorobogatiy, M. Soft capacitor fibers for electronic textiles. *Appl Phys Lett* 2010, 97, 133305.

- 1
2
3 127. Qu, H.; Semenikhin, O.; Skorobogatiy, M. Flexible fiber batteries for applications in
4 smart textiles. *Smart Materials and Structures* 2015, 24.
- 5 128. Qu, H. B., J-P.; Rolland, J.; Vlad, A.; Gohy, J-F.; Skorobogatiy, M. Flexible fiber
6 batteries for applications in smart textiles. *MRS Online Proceedings Library* 2013, 1489.
- 7 129. Liu, Y.; Gorgutsa, S.; Santato, C.; Skorobogatiy, M. Flexible, Solid Electrolyte-Based
8 Lithium Battery Composed of LiFePO₄ Cathode and Li₄Ti₅O₁₂ Anode for Applications in
9 Smart Textiles. *J Electrochem Soc* 2012, 159, A349-A356.
- 10 130. Qu, H.; Hou, J.; Tang, Y.; Semenikhin, O.; Skorobogatiy, M. Thin flexible lithium ion
11 battery featuring graphite paper based current collectors with enhanced conductivity.
12 *arXiv:1511.03949 (2015)*. 2015.
- 13 131. Potschke, P.; Brunig, H.; Janke, A.; Fischer, D.; Jehnichen, D. Orientation of multiwalled
14 carbon nanotubes in composites with polycarbonate by melt spinning. *Polymer* 2005, 46, 10355-
15 10363.
- 16 132. Kim, W.; Kwon, S.; Lee, S.-M.; Kim, J. Y.; Han, Y.; Kim, E.; Choi, K. C.; Park, S.; Park,
17 B.-C. Soft fabric-based flexible organic light-emitting diodes. *Organic Electronics* 2013, 14,
18 3007-3013.
- 19 133. Khan, A.; Hussain, M.; Abbasi, M. A.; Ibutoto, Z. H.; Nur, O.; Willander, M. Study of
20 transport properties of copper/zinc-oxide-nanorods-based Schottky diode fabricated on textile
21 fabric. *Semiconductor Science and Technology* 2013, 28, 125006.
- 22 134. Tuniz, A.; Kuhlmeier, B. T.; Lwin, R.; Wang, A.; Anthony, J.; Leonhardt, R.; Fleming, S.
23 C. Drawn metamaterials with plasmonic response at terahertz frequencies. *Appl Phys Lett* 2010,
24 96.
- 25 135. Tuniz, A.; Lwin, R.; Argyros, A.; Fleming, S. C.; Pogson, E. M.; Constable, E.; Lewis, R.
26 A.; Kuhlmeier, B. T. Stacked-and-drawn metamaterials with magnetic resonances in the terahertz
27 range. *Optics express* 2011, 19, 16480-16490.
- 28 136. Weinberg, B. D.; Milne, G. R.; Andonova, Y. G.; Hajjat, F. M. Internet of Things:
29 Convenience vs. privacy and secrecy. *Business Horizons* 2015, 58, 615-624.
- 30 137. Radic, K. Google Project Glass Debuts at NY Fashion Week, *Branding Magazine*. 2012.
- 31 138. Pedersen, I.; Trueman, D. In *Sergey Brin is Batman: google's project glass and the*
32 *instigation of computer adoption in popular culture*, CHI'13 Extended Abstracts on Human
33 Factors in Computing Systems, ACM: 2013; pp 2089-2098.
- 34 139. Quinn, B. A note: Hussein Chalayan, fashion and technology. *Fashion Theory* 2002, 6,
35 359-368.
- 36 140. Sung, J. W.; Heebum, Y.; Gunju, R. Design Transforming Dress based on pneumatic
37 systems. *Journal of Arts and Imaging Science* 2014, 1, 5-9.
- 38 141. Silina, Y.; Haddadi, H. In *New directions in jewelry: a close look at emerging trends &*
39 *developments in jewelry-like wearable devices*, Proceedings of the 2015 ACM International
40 Symposium on Wearable Computers, ACM: 2015; pp 49-56.
- 41 142. White, J.; Foley, M.; Rowley, A. A Novel Approach to 3D-Printed Fabrics and Garments.
42 *3D Printing and Additive Manufacturing* 2015, 2, 145-149.
- 43 143. Orf, N. D.; Shapira, O.; Sorin, F.; Danto, S.; Baldo, M. A.; Joannopoulos, J. D.; Fink, Y.
44 Fiber draw synthesis. *P Natl Acad Sci USA* 2011, 108, 4743-4747.
- 45 144. Orf, N. D.; Danto, S.; Shapira, O.; Sorin, F.; Fink, Y.; Joannopoulos, J. D. Fiber draw
46 synthesis. US8663522 B2, 2014.
- 47 145. O'Mahony, M.; Braddock-Clarke, S. *Techno textiles 2: revolutionary fabrics for fashion*
48 *and design*. Thames and Hudson: 2005.
- 49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
146. Vasconcellos, F. d. C.; Yetisen, A. K.; Montelongo, Y.; Butt, H.; Grigore, A.; Davidson, C. A. B.; Blyth, J.; Monteiro, M. J.; Wilkinson, T. D.; Lowe, C. R. Printable Surface Holograms via Laser Ablation. *ACS Photonics* 2014, 1, 489-495.
147. McCann, J.; Bryson, D. *Smart clothes and wearable technology*. Elsevier: 2009.
148. Seymour, S. *Fashionable technology: The intersection of design, fashion, science, and technology*. Springer: 2008.
149. Hurwitz, M. Safety and sports equipment, apparel and accessories using electroluminescent fibers for illumination, US20010004808 A1. 2000.
150. Yei, W. Y. Garment with an electroluminescent circuit, US6116745 A. 2000.
151. Mitachi, S.; Shiroishi, D.; Nakagawa, M.; Satoh, K. In *Development of a sleep apnea syndrome sensor using optical fibers*, Lasers and Electro-Optics Society, 2007. LEOS 2007. The 20th Annual Meeting of the IEEE, IEEE: 2007; pp 294-295.
152. Huang, C.; Chang, C.; Chen, P. Fabric material having fluorescent fibers, US20040157520 A1. 2003.
153. Sayed, I. B., J.; Skorobogatiy, M.; . Jacquard-woven photonic bandgap fiber displays. *Research Journal of Textile and Apparel* 2010, 14.
154. Krebber, K.; Liehr, S.; Witt, J. In *Smart technical textiles based on fibre optic sensors*, OFS2012 22nd International Conference on Optical Fiber Sensor, International Society for Optics and Photonics: 2012; pp 84212A-84212A-10.
155. El-Sherif, M. A.; Yuan, J.; Macdiarmid, A. Fiber optic sensors and smart fabrics. *Journal of intelligent material systems and structures* 2000, 11, 407-414.
156. Esmailzadeh, H.; Rivard, M.; Arzi, E.; Legare, F.; Hassani, A. Smart textile plasmonic fiber dew sensors. *Optics express* 2015, 23, 14981-14992.
157. Yang, B.; Tao, X. M.; Yu, J.; Ho, H. Compression force measured by fiber optic smart cellular textile composites. *Textile research journal* 2004, 74, 305-313.
158. Rantala, J.; Hännikäinen, J.; Vanhala, J. Fiber optic sensors for wearable applications. *Personal and Ubiquitous Computing* 2011, 15, 85-96.
159. Rothmaier, M.; Luong, M. P.; Clemens, F. Textile pressure sensor made of flexible plastic optical fibers. *Sensors* 2008, 8, 4318-4329.
160. Harlin, A.; Makinen, M.; Vuorivirta, A. Development of polymeric optical fibre fabrics as illumination elements and textile displays. *Autex Res J* 2003, 3, 1-8.
161. Harlin, A.; Myllymaki, H.; Grahn, K. Polymeric optical fibres and future prospects in textile integration. *Autex Res. J* 2002, 2, 1.
162. Balachandran, R.; Pacheco, D.; Lawandy, N. Photonic textile fibers. *Applied optics* 1996, 35, 1991-1994.
163. Selm, B.; Gürel, E. A.; Rothmaier, M.; Rossi, R. M.; Scherer, L. J. Polymeric optical fiber fabrics for illumination and sensorial applications in textiles. *Journal of intelligent material systems and structures* 2010, 21, 1061-1071.
164. Esmailzadeh, H.; Rivard, M.; Arzi, E.; Légaré, F.; Hassani, A. Smart textile plasmonic fiber dew sensors. *Optics express* 2015, 23, 14981-14992.
165. Johnson, S.; Ibanescu, M.; Skorobogatiy, M.; Weisberg, O.; Engeness, T.; Soljacic, M.; Jacobs, S.; Joannopoulos, J.; Fink, Y. Low-loss asymptotically single-mode propagation in large-core OmniGuide fibers. *Optics express* 2001, 9, 748-79.
166. Farandos, N. M.; Yetisen, A. K.; Monteiro, M. J.; Lowe, C. R.; Yun, S. H. Contact lens sensors in ocular diagnostics. *Advanced healthcare materials* 2015, 4, 792-810.

- 1
2
3 167. Dong, B. H.; Hinestroza, J. P. Metal nanoparticles on natural cellulose fibers:
4 electrostatic assembly and in situ synthesis. *ACS applied materials & interfaces* 2009, 1, 797-
5 803.
6
7 168. Hassani, A.; Skorobogatiy, M. Design criteria for microstructured-optical-fiber-based
8 surface-plasmon-resonance sensors. *J. Opt. Soc. Am. B* 2007, 24, 1423-1429.
9
10 169. Hassani, A.; Skorobogatiy, M. Design of the microstructured optical fiber-based surface
11 plasmon resonance sensors with enhanced microfluidics. *Optics express* 2006, 14, 11616-11621.
12
13 170. Gauvreau, B.; Hassani, A.; Fassi Fehri, M.; Kabashin, A.; Skorobogatiy, M. A. Photonic
14 bandgap fiber-based Surface Plasmon Resonance sensors. *Optics express* 2007, 15, 11413-
15 11426.
16
17 171. Lin, Y.-C. Characteristics of optical fiber refractive index sensor based on surface
18 plasmon resonance. *Microwave and Optical Technology Letters* 2013, 55, 574-576.
19
20 172. Bhatia, P.; Gupta, B. D. Surface-plasmon-resonance-based fiber-optic refractive index
21 sensor: sensitivity enhancement. *Applied optics* 2011, 50, 2032-2036.
22
23 173. Ahmed, R.; Rifat, A. A.; Yetisen, A. K.; Yun, S. H.; Khan, S.; Butt, H. Mode multiplexed
24 waveguide sensor. *Journal of Electromagnetic Waves and Applications*
25 *DOI:10.1080/09205071.2015.1117025 (in press)* 2015.
26
27 174. Takamatsu, S.; Kobayashi, T.; Shibayama, N.; Miyake, K.; Itoh, T. Fabric pressure
28 sensor array fabricated with die-coating and weaving techniques. *Sensors and Actuators A:*
29 *Physical* 2012, 184, 57-63.
30
31 175. Mattana, G.; Kinkeldei, T.; Leuenberger, D.; Ataman, C.; Ruan, J. J.; Molina-Lopez, F.;
32 Vasquez Quintero, A.; Nisato, G.; Troster, G.; Briand, D. Woven temperature and humidity
33 sensors on flexible plastic substrates for e-textile applications. *Sensors Journal, IEEE* 2013, 13,
34 3901-3909.
35
36 176. da Silva Pinto, M.; Sierra-Avila, C. A.; Hinestroza, J. P. In situ synthesis of a Cu-BTC
37 metal-organic framework (MOF 199) onto cellulosic fibrous substrates: cotton. *Cellulose* 2012,
38 19, 1771-1779.
39
40 177. Cherenack, K.; Zysset, C.; Kinkeldei, T.; Münzenrieder, N.; Tröster, G. Woven electronic
41 fibers with sensing and display functions for smart textiles. *Advanced materials* 2010, 22, 5178-
42 5182.
43
44 178. Cherenack, K. H.; Kinkeldei, T.; Zysset, C.; Troster, G. Woven Thin-Film Metal
45 Interconnects. *Electron Device Letters, IEEE* 2010, 31, 740-742.
46
47 179. Ozer, R.; Hinestroza, J. One-step growth of isorecticular luminescent metal-organic
48 frameworks on cotton fibers. *RSC Advances* 2015, 5, 15198-15204.
49
50 180. Zhukovskyi, M.; Sanchez-Botero, L.; McDonald, M. P.; Hinestroza, J.; Kuno, M.
51 Nanowire-functionalized cotton textiles. *ACS applied materials & interfaces* 2014, 6, 2262-2269.
52
53 181. Quadros, M. E.; Pierson IV, R.; Tulve, N. S.; Willis, R.; Rogers, K.; Thomas, T. A.;
54 Marr, L. C. Release of silver from nanotechnology-based consumer products for children.
55 *Environmental science & technology* 2013, 47, 8894-8901.
56
57 182. Kulthong, K.; Srisung, S.; Boonpavanitchakul, K.; Kangwansupamonkon, W.;
58 Maniratanachote, R. Determination of silver nanoparticle release from antibacterial fabrics into
59 artificial sweat. *Part Fibre Toxicol* 2010, 7, 1-9.
60
183. von Goetz, N.; Lorenz, C.; Windler, L.; Nowack, B.; Heuberger, M.; Hungerbühler, K.
Migration of Ag- and TiO₂-(Nano)particles from Textiles into Artificial Sweat under Physical
Stress: Experiments and Exposure Modeling. *Environmental Science & Technology* 2013, 47,
9979-9987.

- 1
2
3 184. Mitrano, D. M.; Rimmele, E.; Wichser, A.; Erni, R.; Height, M.; Nowack, B. Presence of
4 nanoparticles in wash water from conventional silver and nano-silver textiles. *ACS nano* 2014, 8,
5 7208-7219.
6
7 185. Davies, P.; Goettl, J.; Sinley, J. Toxicity of silver to rainbow trout (*Salmo gairdneri*).
8 *Water Research* 1978, 12, 113-117.
9
10 186. Wood, C. M.; Hogstrand, C.; Galvez, F.; Munger, R. The physiology of waterborne silver
11 toxicity in freshwater rainbow trout (*Oncorhynchus mykiss*) 1. The effects of ionic Ag⁺. *Aquatic*
12 *Toxicology* 1996, 35, 93-109.
13
14 187. Grosell, M.; Brauner, C. J.; Kelly, S. P.; McGeer, J. C.; Bianchini, A.; Wood, C. M.
15 Physiological responses to acute silver exposure in the freshwater crayfish (*Cambarus diogenes*
16 *diogenes*)—a model invertebrate? *Environmental Toxicology and chemistry* 2002, 21, 369-374.
17
18 188. Bianchini, A.; Wood, C. M. Physiological effects of chronic silver exposure in *Daphnia*
19 *magna*. *Comparative Biochemistry and Physiology Part C: Toxicology & Pharmacology* 2002,
20 133, 137-145.
21
22 189. Choi, O.; Deng, K. K.; Kim, N.-J.; Ross, L.; Surampalli, R. Y.; Hu, Z. The inhibitory
23 effects of silver nanoparticles, silver ions, and silver chloride colloids on microbial growth.
24 *Water research* 2008, 42, 3066-3074.
25
26 190. Farkas, J.; Peter, H.; Christian, P.; Urrea, J. A. G.; Hassellöv, M.; Tuoriniemi, J.;
27 Gustafsson, S.; Olsson, E.; Hylland, K.; Thomas, K. V. Characterization of the effluent from a
28 nanosilver producing washing machine. *Environment international* 2011, 37, 1057-1062.
29
30 191. Walser, T.; Demou, E.; Lang, D. J.; Hellweg, S. Prospective Environmental Life Cycle
31 Assessment of Nanosilver T-Shirts. *Environmental Science & Technology* 2011, 45, 4570-4578.
32
33 192. Gandhi, N.; Diamond, M. L.; van de Meent, D.; Huijbregts, M. A.; Peijnenburg, W. J.;
34 Guinée, J. New method for calculating comparative toxicity potential of cationic metals in
35 freshwater: application to copper, nickel, and zinc. *Environmental science & technology* 2010,
36 44, 5195-5201.
37
38 193. Diamond, M. L.; Gandhi, N.; Adams, W. J.; Atherton, J.; Bhavsar, S. P.; Bulle, C.;
39 Campbell, P. G.; Dubreuil, A.; Fairbrother, A.; Farley, K. The clearwater consensus: the
40 estimation of metal hazard in fresh water. *The International Journal of Life Cycle Assessment*
41 2010, 15, 143-147.
42
43 194. Brouwer, D. Exposure to manufactured nanoparticles in different workplaces. *Toxicology*
44 2010, 269, 120-127.
45
46 195. Demou, E.; Stark, W. J.; Hellweg, S. Particle emission and exposure during nanoparticle
47 synthesis in research laboratories. *Annals of occupational hygiene* 2009, 53, 829-838.
48
49 196. LeadFerret Releases a Directory of Contacts in the Fashion and Apparel Industry. prweb:
50 2014.
51
52 197. Remy, N.; Schmidt, J.; Werner, C.; Lu, M. *Unleashing fashion, Growth city by city*; 23
53 Apr 2013, 2013.
54
55 198. Markets, M. a. *Smart Textiles Market by Type, Function, Industry, & Geography - Global*
56 *Forecast to 2020*; July 2015, 2015; p 142.
57
58 199. Científica. Nanotechnologies for the Textile Market. 2012.
59
60 200. Corporation, F. T. Nanofibers. <http://fiberiotech.com/technology/nanofibers/>.
201. PRNewswire. Smart Textiles Market Worth 4,722.81 Million USD by 2020. *PRNewswire*
2015.
202. Ltd, C. *Smart Textiles and Nanotechnologies: Applications Technologies and Markets*;
Sept 2015, 2015; p 277.

- 1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
203. Yetisen, A. K.; Volpatti, L. R.; Coskun, A. F.; Cho, S.; Kamrani, E.; Butt, H.; Khademhosseini, A.; Yun, S. H. Entrepreneurship. *Lab Chip* 2015, 15, 3638-60.
204. Gore, R. W. Process for producing porous products. US 3953566 A, United States Patent, 1976.
205. Gore, R. W.; Allen, S. B. Waterproof laminate. US4194041 A, 1980.
206. Nowakowski, N. Arc'Teryx a perfect fit for adidas' Salomon business. *Portland Business Journal* 2002.
207. SALOMON SOLD TO AMER SPORTS. *Transworld Business* Aug 9, 2005, 2005.
208. Marmot's Nano AS Jacket: GORE-TEX® Active Products. <http://www.gore-tex.com/product/marmot-nano-as-jacket/1415318110420/> (accessed 24 Nov 2015).
209. Panse, D. Burn protective materials. US 8383528 B2, United States Patent, 2013.
210. Xu, P.; Hegenbarth, J. High Purity Perfluoroelastomer Composites and A Process To Produce The Same. US 20140088235 A1, United States Patent Application, 2014.
211. Gebert, R. Filter assembly and mounting flange extension for gas turbine filter assembly. US 8753414 B2, United States Patent, 2014.
212. Cotter, M. A.; Zuckerbrod, D.; Kesler, M. C.; Reynolds, J. S. Insulated electrical conductor. US 5580654 A, United States Patent, 1996.
213. Schoeller Textiles AG website. <http://www.schoeller-textiles.com>.
214. Greiner, A.; Röcker, T. Polyethylenimine nanoparticle-containing microbicidal electrospun polymer fibers for textile applications. US 20100292623 A1, United States Patent Application, 2010.
215. Tabellion, F.; Steingröver, K.; Waeber, P.; Lottenbach, R. Finishing of Substrates. US 20110021098 A1, United States Patent Application, 2011.
216. Greiner, A.; Hehl, J. Mikrobizide nano- und mesopolymerfasern aus polymeren und honig für textile anwendungen. WO 2008049251 A1, Worldwide Patent Application, 2008.
217. Performance Textile Leader CRYPTON INC. Purchases NANO-TEX. Market Watch: 2014.
218. Delattre, J. L.; Hayes, D. J.; Cuiffi, J.; Henry, M.; Kundrat, J.; Carrigan, P. Wash-durable, antimicrobial and antifungal textile substrates. US 8183167 B1, United States Patent, 2012.
219. Delattre, J.; Kundrat, J.; Henry, M.; Haupt, R. Wash-durable antimicrobial textiles and methods of manufacture. US 20150233049 A1, United States Patent Application, 2015.
220. Nanotechnology in Ohio, USA: Market Report. <http://www.azonano.com/article.aspx?ArticleID=3240>.
221. Smith, D. J.; Ring, H. Absorbent non-woven fibrous mats and process for preparing same. US 20090093585 A1, United States Patent Application, 2009.
222. Lademann, J.; Frazier, L. M.; Kataphinan, W. Textile Composite Material Comprising Nanofiber Nonwoven. US 20110172507 A1, United States Patent Application, 2011.
223. Lademann, J.; Frazier, L. M.; Kataphinan, W. Method for decontaminating the skin with textile composite material. US 20140093548 A1, United States Patent Application, 2014.
224. Chun, I.; Frazier, L. M.; Kataphinan, W. Three-dimensional structures for cell or tissue culture. US 20140363890 A1, United States Patent Application, 2014.
225. Shivers, J. J. C. Segmented copolyetherester elastomers. US 3023192 A, United States Patent, 1962.
226. Jayaraman, S.; Park, S.; Rajamanickam, R.; Gopalsamy, C. Fabric or garment with integrated flexible information infrastructure. US 6381482 B1, United States Patent, 2002.

- 1
2
3 227. Jayaraman, S.; Park, S. Fabric-based sensor for monitoring vital signs. US 6970731 B1,
4 United States Patent, 2005.
5
6 228. *Smart Textiles Industry Trends and Market, Segment Forecasts To 2020*; January 2014,
7 2014; p 31.
8 229. Alderson, A.; Alderson, K.; Chirima, G. Multi-layer adhesive interfaces. US
9 20110250445 A1 United States Patent Application, 2011.
10 230. Alderson, A.; Alderson, K. L.; Davies, P. J.; Smart, G. M. Process for the preparation of
11 auxetic foams. US 8277719 B2 United States Patent, 2012.
12 231. Alderson, A.; Alderson, K. L.; Hudson, G. D.; Skertchly, D. E. Composite material. US
13 20110281481 A1 United States Patent Application, 2011.
14 232. Reho, A.; Impiö, J. Wearable projector and intelligent clothing. US 6830344 B2 United
15 States Patent Application, 2004.
16 233. Reho, A.; Karinsalo, T. Distance meter. US 20060098772 A1 United States Patent
17 Application, 2006.
18 234. Bianca, D. Bonding with polyisocyanates. US3945876 A, 1976.
19 235. Burns, J. T. Delustered nylon fiber containing segmented striations of polypropylene.
20 US4711812 A, 1987.
21 236. DiCosimo, R.; Gavagan, J. E.; Payne, M. S. Perhydrolase for enzymatic peracid
22 production. US 8222012 B2, 2012.
23 237. Gale, D. M. Cement reinforcement. US4693749 A, 1987.
24 238. Hiramatsu, S.; Moriyama, H.; Asaoka, R.; Morita, K.; Tanaka, T.; Yamada, K.; Obrien, J.
25 P.; Fahnestock, S. R. Silk Thread Containing Spider Thread Protein and Silk Worm Producing
26 the Silk Thread. United States Patent Application US20080287651 A1, 2008.
27 239. Paulson, C. M. Method for measuring shape parameters of yarn. US4634280 A, 1987.
28 240. Samuelson, H. V. Hollow fibers having curved members projecting therefor. US4956237
29 A, 1990.
30 241. Schubert, K. V.; Liu, A. H.; Scheen, H. Washable leather with repellency. United States
31 Patent Application US20080196168 A1, 2008.
32 242. Shah, C. S. Mixed cross-section staple filament mixtures and yarn therefrom. US3994122
33 A, 1976.
34 243. Simmonds, G. E. Staple yarn manufacturing process. United States Patent Application
35 US20090183487 A1, 2009.
36 244. Kay, S.; Ner, Y.; Castellano, L. Devices and methods for the production of microfibers
37 and nanofibers in a controlled environment. US 20140159262 A1, United States Patent
38 Application, 2014.
39 245. Peno, E.; Lipton, R.; Kay, S. Method of making a device for use in a microfiber and/or
40 nanofiber producing system. US 20150013141 A1, United States Patent Application, 2015.
41 246. Brykalski, M. J.; Terech, J.; Petrovski, D. Environmentally-conditioned bed. United
42 States Patent Application US20140310874 A1, 2014.
43 247. Crane, D. T. Crossmember thermoelectric generator with improved thermal expansion
44 protection. United States Patent Application US20130327368 A1, 2013.
45 248. Goenka, L. N. Thermoelectric-based air conditioning system. United States Patent
46 Application US20150176872 A1, 2015.
47 249. Jovovic, V.; Poliquin, E. Thermoelectric system with mechanically compliant element.
48 United States Patent Application US20130327369 A1, 2013.
49
50
51
52
53
54
55
56
57
58
59
60

- 1
 - 2
 - 3
 - 4
 - 5
 - 6
 - 7
 - 8
 - 9
 - 10
 - 11
 - 12
 - 13
 - 14
 - 15
 - 16
 - 17
 - 18
 - 19
 - 20
 - 21
 - 22
 - 23
 - 24
 - 25
 - 26
 - 27
 - 28
 - 29
 - 30
 - 31
 - 32
 - 33
 - 34
 - 35
 - 36
 - 37
 - 38
 - 39
 - 40
 - 41
 - 42
 - 43
 - 44
 - 45
 - 46
 - 47
 - 48
 - 49
 - 50
 - 51
 - 52
 - 53
 - 54
 - 55
 - 56
 - 57
 - 58
 - 59
 - 60
250. Lofy, J.; Marquette, D. Devices, systems and methods of cooling the skin. United States Patent Application US20140260331 A1, 2014.
251. Lofy, J.; Marquette, D. Systems and methods for cooling inductive charging assemblies. United States Patent Application US20140062392 A1, 2014.
252. Lofy, J. D. Condensation and humidity sensors for thermoelectric devices. United States Patent Application US20150013346 A1, 2015.
253. Petrovski, D. Thermal module. United States Patent Application US20140305625 A1, 2014.
254. Ranalli, M. Thermoelectric assembly using a cartridge support fixture. United States Patent Application US20140096807 A1, 2014.
255. Ranalli, M.; Adldinger, M.; Crane, D. T. High efficiency thermoelectric generation. United States Patent Application US20140034102 A1, 2014.
256. Badger, J. P. Recombinant battery and plate separator therefor. US 4908282 A, United States Patent, 1990.
257. Lawson, G. C.; Wilson, J. C. Filter paper and method of making same. US 4161422 A, United States Patent, 1979.
258. Lifshutz, N.; Klauber, D.; Gahan, R. High Capacity Filter Medium. US 20070220852 A1, United States Patent Application, 2007.
259. Height, M. J. Method for producing nanoparticle loaded powders using flame spray pyrolysis and applications thereof 2008.
260. Marte, O.; Meyer, M.; Angehrn, S.; Bienz, A. Water-, oil-, and dirt-repellent finishes on fibers and textile fabrics. WO2008124960A1, 2008.
261. Marte, O.; Meyer, M.; Height, M. Multifunctional, responsive functional layers on solid surfaces and method for the production thereof. WO2010006457A1, 2010.
262. Marte, O.; Meyer, M.; Height, M.; Bienz, A. Carrier system for subsequent application onto substrates and method therefor. WO2010015096A1, 2010.
263. Odermatt, E.; Berndt, I.; Centonze, C. R.; Height, M. Textile implant of sheath-core construction and method of forming it. US20100092531 A1, 2010.
264. Centonze, C. R.; Height, M.; Berndt, I.; Odermatt, E. Medical implant. WO2009056281A2, 2010.
265. Jung, S.; Lauterbach, C. Construction and electrical connection technique in textile structures. US 7022917 B2, United States Patent, 2006.
266. Glaser, R. H.; Jung, S.; Lauterbach, C. Modular microelectronic-system for use in wearable electronics. US 20070178716 A1, United States Patent Application, 2007.
267. Orth, M.; Berzowska, J. Electronically controllable, visually dynamic textile, fabric, or flexible substrate. US 20030224155 A1, United States Patent Application, 2003.
268. Orth, M. Electronic textile touch light controller. US 7054133 B2, United States Patent, 2006.
269. Du Plessis, A. J.; Jessiman, A. W.; Muller, G. J. Position control actuator system. US7246489 B2, 2007.
270. Lengyel, A. J.; van Schoor, M. C.; Court, J. R. Aerial refueling hose. United States Patent Application US20150096642 A1, 2015.
271. Masters, B. P.; Rodgers, J. P.; van Schoor, M. C. Laser machining of electroactive ceramics. US7205707 B2, 2007.
272. Rock, M.; Hunt, V.; Durant, B.; Gilbert, D. Temperature responsive smart textile. US8389100 B2, 2013.

- 1
2
3 273. Serra, M.; Bromberg, L.; van Reenen Pretorius, J.; Masters, B. Article and method for
4 temperature regulation using a thermosensitive reactive hydrogel material. United States Patent
5 Application US20040131838 A1, 2004.
6
7 274. van Schoor, M.; Cutler, A. M.; Muller, G. J.; Lengyel, A.; Radighieri, B. Method and
8 apparatus for determining electrical properties of structures. US7167009 B2, 2007.
9
10 275. van Schoor, M.; Gilbert, D.; Cutler, A.; Klepper, S. Fluid-activated shaft seal.
11 US7828299 B2, 2010.
12
13 276. van Schoor, M.; Klepper, S.; Cutler, A. Bulkhead seal. US8608172 B2, 2013.
14
15 277. van Schoor, M.; Ludlow, C. C.; Klepper, S. A.; Cutler, A. M. Fluid activated shaft seal.
16 US8419020 B2, 2013.
17
18 278. van Schoor, M.; Thomas, S. Variable geometry heat sink assembly. United States Patent
19 Application US20140360699 A1, 2014.
20
21 279. van Schoor, M. C. Fluid-activated shaft seal. US7686308 B2, 2010.
22
23 280. Hu, C.; Offord, D.; Ware, W. Durable treatment for fabrics. United States Patent
24 Application US20060021150 A1, 2006.
25
26 281. Hultin, R. D. L.; Joyce, C.; Brutten, M.; Houchens, K. Educational tools and methods for
27 demonstrating enhanced performance characteristics of a textile product to a person. United
28 States Patent Application US20060110719 A1, 2006.
29
30 282. Linford, M. L.; Soane, D. S.; Offord, D. A. Water-repellent and soil-resistant finish for
31 textiles. US6855772 B2, 2005.
32
33 283. Linford, M. R.; Soane, D. S.; Offord, D. A.; Ware, W. Durable finishes for textiles.
34 US6872424 B2, 2005.
35
36 284. McNamara, J. J.; Ware, W.; Yu, W. Modification of cellulosic substrates to control body
37 odor. US8778321 B2, 2014.
38
39 285. Offord, D. Odor-absorbing cellulosic fibrous substrates. United States Patent Application
40 US20060162090 A1, 2006.
41
42 286. Offord, D.; Ware, W.; Millward, D.; Soane, D.; Young, M. Composite fibrous substrates
43 having protein sheaths. United States Patent Application US20040055093 A1, 2004.
44
45 287. Offord, D.; Ware, W.; Millward, D.; Soane, D.; Young, M. Composite fibrous substrates
46 having carbohydrate sheaths. United States Patent Application US20040048541 A1, 2004.
47
48 288. Offord, D. A. Durable press cellulosic fibrous substrates with improved physical
49 properties. US7037441 B2, 2006.
50
51 289. Offord, D. A.; Ware, W. Methods for marking fibrous substrates. US7662873 B2, 2010.
52
53 290. Soane, D.; Houston, M. Microcellular foam and foamed composite material. United
54 States Patent Application US20020071947 A1, 2002.
55
56 291. Soane, D.; Linford, M.; Lau, R.; Green, E. Fiber-reactive polymeric dyes. United States
57 Patent Application US20030079302 A1, 2003.
58
59 292. Soane, D.; Millward, D.; Linford, M.; Lau, R.; Green, E.; Ware, W. Hydrophilic finish
60 for fibrous substrates. United States Patent Application US20060090648 A1, 2006.
293. Soane, D.; Offord, D. Oil-and water-repellent finishes for textiles. United States Patent
Application US20030008078 A1, 2003.
294. Soane, D.; Ware, W.; Offord, D. Abrasion-and wrinkle-resistant finish for textiles. United
States Patent Application US20020120988 A1, 2002.
295. Soane, D. S.; Houston, M. R. Microcellular foams, their method of production, and uses
and products thereof. US6638984 B2, 2003.

- 1
2
3 296. Soane, D. S.; Linford, M. R.; Offord, D. A.; Millward, D. B.; Ware, W. Hybrid polymer
4 materials. US6517933 B1, 2003.
5
6 297. Soane, D. S.; Millward, D. B.; Linford, M. R.; Lau, R.; Green, E. G.; Ware, W.
7 Hydrophilic finish for fibrous substrates. US7427300 B2, 2008.
8
9 298. Soane, D. S.; Offord, D. A. Modified textile and other materials and methods for their
10 preparation. US6617267 B2, 2003.
11
12 299. Soane, D. S.; Offord, D. A.; Linford, M. R.; Millward, D. B.; Ware, W.; Erskine, L.;
13 Green, E.; Lau, R. Nanoparticle-based permanent treatments for textiles. US6607994 B2, 2003.
14
15 300. Stockton, W. B.; Ware, W. Methods for treating fabric to facilitate moisture transfer from
16 one side to the other. US7842625 B1, 2010.
17
18 301. Ware, W.; Soane, D. S.; Millward, D. B.; Linford, M. R. Dye fixatives. US6679924 B2,
19 2004.
20
21 302. Burkitt, J. Position detection. US8089336 B2, 2012.
22
23 303. Crispin, P. G. Sensor assembly. US7554051 B2, 2009.
24
25 304. Graham, M.; Lussey, C. Full-axis sensor for detecting input force and torque. US7603917
26 B2, 2009.
27
28 305. Kilburn, G.; Beagley, T. J. Fabric bag including control device. US8300868 B2, 2012.
29
30 306. Lussey, C. J.; Laughlin, P. J.; Graham, A.; Bloor, D.; Lussey, D. Composite material.
31 United States Patent Application US20140109698 A1, 2014.
32
33 307. Lussey, D. Polymer composition. US6291568 B1, 2001.
34
35 308. Lussey, D.; Bloor, D.; Laughlin, P.; Hilsum, C. Polymer composition. US8765027 B2,
36 2014.
37
38 309. Lussey, D.; Bloor, D.; Laughlin, P. J.; Graham, A.; Hilsum, C. Electrically responsive
39 composite material, a method of manufacture and a transducer produced using said material.
40 US8449974 B2, 2013.
41
42 310. Lussey, D.; Jones, D.; Leftly, S. Flexible switching devices. US7301435 B2, 2007.
43
44 311. Walkington, S. M. Interfacing Sensors to a Processing Device. United States Patent
45 Application 20100283749 A1, 2010.
46
47 312. Walkington, S. M. Manually operable position sensor. US8169295 B2, 2012.
48
49 313. Walkington, S. M. Woven manually operable input device. US8373079 B2, 2013.
50
51 314. Jayaraman, S.; Park, S.; Rajamanickam, R. Full-fashioned weaving process for
52 production of a woven garment with intelligence capability. US 6145551 A, United States
53 Patent, 2000.
54
55 315. Jayaraman, S.; Park, S. Method and Apparatus to Create Electrical Junctions for
56 Information Routing in Textile Structures. US 20080083481 A1, United States Patent
57 Application, 2008.
58
59 316. Jayaraman, S.; Park, S. Full-fashioned garment in a fabric and optionally having
60 intelligence capability. US 6474367 B1, United States Patent, 2002.
317. Jayaraman, S.; Park, S. Full-fashioned garment with sleeves having intelligence
capability. US 6315009 B1, United States Patent, 2001.
318. Waeber, P.; Klaus, A.; Marte, W.; Meyer, U. Finishing of textile fibers, tissues and
fabrics. US 20090137171 A1, United States Patent Application, 2009.
319. Sutter, S.; Lottenbach, R. Method for producing temperature-regulating surfaces with
phase change material. US 20050227047 A1, United States Patent Application, 2005.
320. Marte, O.; Marte, W.; Angehrn, S.; Meyer, M.; Meyer, U.; Von Arx, U.; Weber, R.;
Kunzi, O.; Clivaz, C.; Hochstrasser, M. Finishings For Textile Fibers and Fabrics to Give

1
2
3 Hydrophobic Oleophobic and Self-Cleaning Surfaces. US 20080214075 A1, United States Patent
4 Application, 2008.

5 321. Marte, O.; Marte, W.; Angehrn, S.; Meyer, M.; Meyer, U.; Von Arx, U.; Weber, R.;
6 Kunzi, O.; Clivaz, C.; Hochstrasser, M. Dressings Which Can Be Applied Several Times To
7 Textile Fibers And Textile Fabrics. US 20080044580 A1, United States Patent Application,
8 2008.

9 322. Hubner, H. J.; Lottenbach, R. Textile surface. US 7867571 B2, United States Patent,
10 2011.

11 323. Holzdörfer, U.; Gaupp, T.; Lottenbach, R.; Hübner, H. J. Reloadable finishes for textiles
12 and formulations for loading such finishes. US 20130102943 A1, United States Patent
13 Application, 2013.

14 324. Mestrovic, M. A.; Petersen, P. M.; Cranston, R. W.; Stannard, W. B.; D'Arcy, P. B.
15 System, garment and method. US 20110015498 A1, United States Patent Application, 2011.

16 325. Esposito, M.; Macagno, M.; Vigano', D. G.; Rizzi, M. M. Methods and systems for data
17 collection, analysis, formulation and reporting of user-specific feedback. US 20150182843 A1,
18 United States Patent Application, 2015.

19 326. Esposito, M.; Macagno, M.; Vigano', D. G. Sensors, interfaces and sensor systems for
20 data collection and integrated remote monitoring of conditions at or near body surfaces. US
21 20150177080 A1, United States Patent Application, 2015.

22 327. Kochman, A.; Gurevich, A. Multi-conductor soft heating element. US 6452138 B1
23 United States Patent, 2002.

24 328. Kochman, A.; Gurevich, A. Soft electrical textile heater. US 6369369 B2 United States
25 Patent, 2002.

26 329. Kochman, A.; Kochman, D. Soft electrical heater with continuous temperature sensing.
27 US 6563094 B2 United States Patent, 2003.

28 330. Kochman, A.; Lavit, M.; Kochman, D. Soft heating element and method of its electrical
29 termination. US 6403935 B2 United States Patent, 2002.

30 331. Kochman, E.; Gerrard, G.; Kochman, D. Heater with simultaneous hot spot and
31 mechanical intrusion protection. US 6713733 B2 United States Patent, 2005.

32 332. Kochman, E.; Kochman, D. Textile heater with continuous temperature sensing and hot
33 spot detection. US 6713733 B2 United States Patent, 2004.

34 333. Burr, S. B. Wearable article with band portion adapted to include textile-based electrodes
35 and method of making such article. US8082762 B2, 2011.

36 334. Gal, Y. Band-like garment for physiological monitoring. United States Patent Application
37 20080015454 A1, 2008.

38 335. Hassonjee, Q. N.; Burr, S. B. Functional textile structures. US8709185 B2, 2014.

39 336. Hassonjee, Q. N.; Cera, J.; Bartecki, R. M.; Micka, T. A.; Schultze, C.; Burr, S. B.;
40 Karayianni, E. Textile-based electrode. US8214008 B2, 2012.

41 337. Karayianni, E.; Chaudron, P.; Coulston, G. W. Elastic composite yarn, methods for
42 making the same, and articles incorporating the same. US7765835 B2, 2010.

43 338. Karayianni, E.; Consoli, O.; Coulston, G. W.; Regenstein, K. J. Electrically conductive
44 elastic composite yarn, methods for making the same, and articles incorporating the same.
45 US7926254 B2, 2011.

46 339. Karayianni, E.; Coulston, G. W.; Burr, S. B.; Micka, T. A. Functional elastic composite
47 yarn, methods for making the same and articles incorporating the same. US7946102 B2, 2011.
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3 340. Karayianni, E.; Coulston, G. W.; Micka, T. A. Energy active composite yarn, methods for
4 making the same and articles incorporating the same. US7665288 B2, 2010.
5 341. Karayianni, E.; Munoz, E.; Coulston, G. W.; Burr, S. B.; Micka, T. A. Surface functional
6 electro-textile with functionality modulation capability, methods for making the same, and
7 applications incorporating the same. US7849888 B2, 2010.
8 342. Kuo, C.; Coulston, G. W. Extended optical range system for monitoring motion of a
9 member. US8428686 B2, 2013.
10 343. Wheeler, B.; Gormley, J.; Micka, T. A. Textile laminate structures including conductive
11 elements and method for making such structures. US7560671 B2, 2009.
12 344. Wijisiriwardana, R. Physiological Monitoring Wearable Having Three Electrodes.
13 US20070078324 A1, 2007.
14 345. Sackner, M. A.; Inman, D. M. Systems and methods for ambulatory monitoring of
15 physiological signs. US 7670295 B2 United States Patent, 2010.
16 346. Sackner, M. A.; Inman, D. M. Quantitative calibration of breathing monitors with
17 transducers placed on both rib cage and abdomen. US 6413225 B1 United States Patent, 2002.
18 347. Sackner, M.; Keenan, D.; Inman, D. M. Method and system for extracting cardiac
19 parameters from plethysmographic signals. US7604603 B2, 2009.
20 348. Keenan, D.; Coyle, M. Method and system for processing data from ambulatory
21 physiological monitoring. US 20050240087 A1 United States Patent Application, 2005.
22 349. Istook, C. L. Composite elastic and wire fabric for physiological monitoring apparel. US
23 6341504 B1 United States Patent, 2002.
24 350. Gal, Y. Physiological signal processing devices and associated processing methods. US
25 20070270671 A1 United States Patent Application, 2007.
26 351. Coyle, M.; Keenan, D. B.; Derchak, P. A.; Sackner, M.; Wilhelm, F.; Gilroy, K.;
27 Gummels, E. M.; Inman, D. M.; Kennedy, P.; Mitchnick, M. Systems and methods for
28 respiratory event detection. US 7267652 B2 United States Patent, 2007.
29 352. Coyle, M.; Derchak, P. A.; Myers, L. J. Systems and methods for monitoring cough. US
30 7727161 B2 United States Patent, 2010.
31 353. Arredondo, J. G.; Barrionuevo, S. G. Sensor apparatus adapted to be incorporated in a
32 garment. US 20130041272 A1 United States Patent Application, 2013.
33 354. Bacino, J. Porpous PTFE film and a manufacturing method therefor. US5476589 A,
34 1995.
35 355. Berman, A. B. Resorbable interposition arthroplasty implant. US6017366 A, 2000.
36 356. Branca, P. A.; Hubis, D. E.; Buerger, W.; Rudolf, C.; Tillmanns, R. Strong, air permeable
37 membranes of polytetrafluoroethylene. US5814405 A, 1998.
38 357. Campbell, C. V.; Chastain, J. H.; Kovach, L. J.; Laguna, A. J.; Pond, D. B. Method of
39 insitu bypass to hold open venous valves. US5843171 A, 1998.
40 358. Culler, G. D.; Pheris, J. G.; Register, J. M. Invertible Camouflage Construction. United
41 States Patent Application US20130040114 A1, 2013.
42 359. Dolan, J.; Murphy, M.; Minor, R.; Shahkarami, S.; Krummel, J. Protective
43 Undergarment. United States Patent Application US20130273343 A1, 2013.
44 360. Gifford, R. B.; Keough, M. Vent installation method. US8968063 B2, 2015.
45 361. Gore, R. W. Porous products and process therefor. US4187390 A, 1980.
46 362. Gore, S. A.; Zador, D. T. Waterproof shoe and insole strip. US5426869 A, 1995.
47 363. Hanrahan, J. R. Electrically conductive composite article. US6210789 B1, 2001.
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3 364. Hendershot, W. J.; McDonald, M. L.; Timian, V. J. Method of ultrasonically welding
4 articles of porous polytetrafluoroethylene. US5746856 A, 1998.
5
6 365. Holliday, A. J. Venting Array and Manufacturing Method. United States Patent
7 Application US20150114555 A1, 2015.
8 366. Hubner, T.; Bleimhofer, W. Wearing apparel with ventilation material. US5014363 A,
9 1991.
10 367. Pacanowsky, D. J.; Williams, R. S. Waterproof breathable sock. US4809447 A, 1989.
11 368. Scanlon, J. J.; Wnenschak, R. M.; Giannetta, R. W. Filter for a wet/dry vacuum cleaner for
12 wet material collection. US5783086 A, 1998.
13 369. Sharber, N. J.; Moll, K. W.; Schwarz, K. E.; Sparling, C. M. Carvable PTFE implant
14 material. US6075180 A, 2000.
15 370. Thompson, R. M. Method to reduce the damage caused by ionizing radiation to
16 polyurethane/porous expanded polytetrafluoroethylene composites by use of hindered phenols.
17 US4963416 A, 1990.
18 371. Wiener, R. J. Strobel Footwear Construction. United States Patent Application
19 US20130232818 A1, 2013.
20 372. Yamazaki, E. Production of porous sintered PTFE products. US4110392 A, 1978.
21 373. Innovation in wearable tech, Cambridge Consultants.
22 <http://www.cambridgeconsultants.com/media/press-releases/innovation-wearable-tech> (accessed
23 December 28, 2015).
24 374. Koyama, Y.; Nishiyama, M.; Watanabe, K. In *Multi-channel measurement for hetero-*
25 *core optical fiber sensor by using CMOS camera*, Fifth Asia Pacific Optical Sensors Conference,
26 International Society for Optics and Photonics: 2015; pp 965525-965525-4.
27 375. Shah, R.; Agrawal, Y. Introduction to fiber optics: Sensors for biomedical applications.
28 *Indian journal of pharmaceutical sciences* 2011, 73, 17.
29 376. Cochrane, C.; Meunier, L.; Kelly, F. M.; Koncar, V. Flexible displays for smart clothing:
30 Part I-Overview. *Indian journal of fibre and textile research* 2011, 36, 422.
31 377. Lee, J.-H.; Liu, D. N.; Wu, S.-T. *Introduction to flat panel displays*. John Wiley & Sons:
32 2008; Vol. 20.
33 378. Geffroy, B.; Le Roy, P.; Prat, C. Organic light-emitting diode (OLED) technology:
34 materials, devices and display technologies. *Polymer International* 2006, 55, 572-582.
35 379. Kim, T.-H.; Cho, K.-S.; Lee, E. K.; Lee, S. J.; Chae, J.; Kim, J. W.; Kim, D. H.; Kwon,
36 J.-Y.; Amaratunga, G.; Lee, S. Y. Full-colour quantum dot displays fabricated by transfer
37 printing. *Nature Photonics* 2011, 5, 176-182.
38 380. Kim, L.; Anikeeva, P. O.; Coe-Sullivan, S. A.; Steckel, J. S.; Bawendi, M. G.; Bulovic,
39 V. Contact printing of quantum dot light-emitting devices. *Nano letters* 2008, 8, 4513-4517.
40 381. Butt, H.; Yetisen, A. K.; Ahmed, R.; Yun, S. H.; Dai, Q. Carbon nanotube biconvex
41 microcavities. *Appl. Phys. Lett.* 2015, 106, 121108.
42 382. Kong, X.-T.; Khan, A. A.; Kidambi, P. R.; Deng, S.; Yetisen, A. K.; Dlubak, B.; Hiralal,
43 P.; Montelongo, Y.; Bowen, J.; Xavier, S.; Jiang, K.; Amaratunga, G. A. J.; Hofmann, S.;
44 Wilkinson, T. D.; Dai, Q.; Butt, H. Graphene-Based Ultrathin Flat Lenses. *ACS Photonics* 2015,
45 2, 200-207.
46 383. Deng, S.; Yetisen, A. K.; Jiang, K.; Butt, H. Computational modelling of a graphene
47 Fresnel lens on different substrates. *RSC Adv.* 2014, 4, 30050-30058.
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3 384. Kong, X.-T.; Butt, H.; Yetisen, A. K.; Kangwanwatana, C.; Montelongo, Y.; Deng, S.;
4 Cruz Vasconcellos, F. d.; Qasim, M. M.; Wilkinson, T. D.; Dai, Q. Enhanced reflection from
5 inverse tapered nanocone arrays. *Appl. Phys. Lett.* 2014, 105, 053108.
6
7 385. Joannopoulos, J. D.; Johnson, S. G.; Winn, J. N.; Meade, R. D. *Photonic crystals:*
8 *molding the flow of light.* Princeton university press: 2011.
9
10 386. Yetisen, A. K.; Butt, H.; Volpatti, L. R.; Pavlichenko, I.; Humar, M.; Kwok, S. J. J.; Koo,
11 H.; Kim, K. S.; Naydenova, I.; Khademhosseini, A.; Hahn, S. K.; Yun, S. H. Photonic hydrogel
12 sensors. *Biotechnology Advances* 2015.
13
14 387. Butt, H.; Yetisen, A. K.; Mistry, D.; Khan, S.; Hassan, M. U.; Yun, S. H. Morpho
15 Inspired Nanostructures. *Advanced Optical Materials* 2016.
16
17 388. You, A.; Cao, Y.; Cao, G. Facile fabrication of a magnetically assembled colloidal
18 photonic crystal film via radical polymerization. *RSC Advances* 2015, 5, 93945-93950.
19
20 389. Iliw, R.; Etrich, C.; Peschel, U.; Lederer, F.; Augustin, M.; Fuchs, H.-J.; Schelle, D.;
21 Kley, E.-B.; Nolte, S.; Tünnermann, A. Diffractionless propagation of light in a low-index
22 photonic-crystal film. *Appl Phys Lett* 2004, 85, 5854.
23
24 390. Xuan, R.; Wu, Q.; Yin, Y.; Ge, J. Magnetically assembled photonic crystal film for
25 humidity sensing. *Journal of Materials Chemistry* 2011, 21, 3672-3676.
26
27 391. Arsenault, A.; Ozin, G. A.; Von Freymann, G. Compressible photonic crystal.
28 US8676016 B2, 2014.
29
30 392. Tsangarides, C. P.; Yetisen, A. K.; da Cruz Vasconcellos, F.; Montelongo, Y.; Qasim, M.
31 M.; Wilkinson, T. D.; Lowe, C. R.; Butt, H. Computational modelling and characterisation of
32 nanoparticle-based tuneable photonic crystal sensors. *RSC Adv.* 2014, 4, 10454-10461.
33
34 393. Zhao, Q.; Yetisen, A. K.; Sabouri, A.; Yun, S. H.; Butt, H. Printable Nanophotonic
35 Devices via Holographic Laser Ablation. *ACS nano* 2015, 9, 9062-9069.
36
37 394. Zhao, Q.; Yetisen, A. K.; Anthony, C. J.; Fowler, W. R.; Yun, S. H.; Butt, H. Printable
38 ink holograms. *Applied Physics Letters* 2015, 107, 041115.
39
40 395. Toal, V. *Introduction to holography.* CRC Press: 2011.
41
42 396. Butt, H.; Montelongo, Y.; Butler, T.; Rajesekharan, R.; Dai, Q.; Shiva-Reddy, S. G.;
43 Wilkinson, T. D.; Amaratunga, G. A. Carbon nanotube based high resolution holograms.
44 *Advanced Materials* 2012, 24, OP331-OP336.
45
46 397. Microsoft HoloLens. <http://www.microsoft.com/microsoft-hololens/en-us> (accessed
47 December 28, 2015).
48
49 398. Yetisen, A. K.; Naydenova, I.; da Cruz Vasconcellos, F.; Blyth, J.; Lowe, C. R.
50 Holographic Sensors: Three-Dimensional Analyte-Sensitive Nanostructures and Their
51 Applications. *Chemical Reviews* 2014, 114, 10654-10696.
52
53 399. Yetisen, A. K.; Montelongo, Y.; Qasim, M. M.; Butt, H.; Wilkinson, T. D.; Monteiro, M.
54 J.; Yun, S. H. Photonic Nanosensor for Colorimetric Detection of Metal Ions. *Analytical*
55 *Chemistry* 2015, 87, 5101-5108.
56
57 400. Yetisen, A. K.; Montelongo, Y.; da Cruz Vasconcellos, F.; Martinez-Hurtado, J. L.;
58 Neupane, S.; Butt, H.; Qasim, M. M.; Blyth, J.; Burling, K.; Carmody, J. B.; Evans, M.;
59 Wilkinson, T. D.; Kubota, L. T.; Monteiro, M. J.; Lowe, C. R. Reusable, robust, and accurate
60 laser-generated photonic nanosensor. *Nano Lett* 2014, 14, 3587-93.
401. Yetisen, A. K.; Butt, H.; da Cruz Vasconcellos, F.; Montelongo, Y.; Davidson, C. A.;
Blyth, J.; Chan, L.; Carmody, J. B.; Vignolini, S.; Steiner, U. Light-Directed Writing of
Chemically Tunable Narrow-Band Holographic Sensors. *Adv. Opt. Mater.* 2014, 2, 250-254.

- 1
2
3 402. Yetisen, A. K.; Montelongo, Y.; Farandos, N. M.; Naydenova, I.; Lowe, C. R.; Yun, S.
4 H. Mechanism of multiple grating formation in high-energy recording of holographic sensors.
5 *Appl. Phys. Lett.* 2014, 105, 261106.
6
7 403. Yetisen, A. K.; Qasim, M. M.; Nosheen, S.; Wilkinson, T. D.; Lowe, C. R. Pulsed laser
8 writing of holographic nanosensors. *J. Mater. Chem. C* 2014, 2, 3569-3576.
9
10 404. Smith, D. R.; Pendry, J. B.; Wiltshire, M. C. Metamaterials and negative refractive index.
11 *Science* 2004, 305, 788-792.
12
13 405. Schurig, D.; Mock, J.; Justice, B.; Cummer, S. A.; Pendry, J. B.; Starr, A.; Smith, D.
14 Metamaterial electromagnetic cloak at microwave frequencies. *Science* 2006, 314, 977-980.
15
16 406. Liang, D.; Gu, J.; Han, J.; Yang, Y.; Zhang, S.; Zhang, W. Robust large dimension
17 terahertz cloaking. *Advanced Materials* 2012, 24, 916-921.
18
19 407. Zhou, F.; Bao, Y.; Cao, W.; Stuart, C. T.; Gu, J.; Zhang, W.; Sun, C. Hiding a realistic
20 object using a broadband terahertz invisibility cloak. *Scientific reports* 2011, 1.
21
22 408. Upadhyay, A.; Prajapati, Y.; Singh, V.; Saini, J. Comprehensive study of reverse index
23 waveguide based sensor with metamaterial as a guiding layer. *Optics Communications* 2015,
24 348, 71-76.
25
26 409. Li, X.; Tian, J.; Shen, W. Thread as a versatile material for low-cost microfluidic
27 diagnostics. *ACS applied materials & interfaces* 2009, 2, 1-6.
28
29 410. Safavieh, R.; Zhou, G. Z.; Juncker, D. Microfluidics made of yarns and knots: from
30 fundamental properties to simple networks and operations. *Lab on a Chip* 2011, 11, 2618-2624.
31
32 411. Nilghaz, A.; Ballerini, D.; Shen, W. Exploration of microfluidic devices based on multi-
33 filament threads and textiles: A review. *Biomicrofluidics* 2013, 7, 051501.
34
35 412. Yetisen, A. K.; Akram, M. S.; Lowe, C. R. Paper-based microfluidic point-of-care
36 diagnostic devices. *Lab Chip* 2013, 13, 2210-51.
37
38 413. Yetisen, A. K.; Volpatti, L. R. Patent protection and licensing in microfluidics. *Lab on a*
39 *Chip* 2014, 14, 2217-2225.
40
41 414. Volpatti, L. R.; Yetisen, A. K. Commercialization of microfluidic devices. *Trends in*
42 *biotechnology* 2014, 32, 347-50.
43
44 415. Zhou, G.; Mao, X.; Juncker, D. Immunochromatographic assay on thread. *Analytical*
45 *chemistry* 2012, 84, 7736-7743.
46
47 416. Akram, M. S.; Daly, R.; da Cruz Vasconcellos, F.; Yetisen, A.; Hutchings, I.; Hall, E. A.
48 H. Applications of Paper-Based Diagnostics. In *Lab-on-a-Chip Devices and Micro-Total*
49 *Analysis Systems*, Castillo-León, J.; Svendsen, W. E., Eds. Springer International Publishing:
50 2015; pp 161-195.
51
52 417. Yetisen, A. K. Point-of-Care Diagnostics. In *Holographic Sensors*, Springer International
53 Publishing: 2015; pp 1-25.
54
55 418. Yetisen, A. K.; Davis, J.; Coskun, A. F.; Church, G. M.; Yun, S. H. Bioart. *Trends in*
56 *biotechnology* 2015.
57
58 419. Yetisen, A. K.; Coskun, A. F.; England, G.; Cho, S.; Butt, H.; Hurwitz, J.; Kolle, M.;
59 Khademhosseini, A.; Hart, A. J.; Folch, A.; Yun, S. H. Art on the Nanoscale and Beyond. *Adv*
60 *Mater* 2015.
420. Yetisen, A. K.; Martinez-Hurtado, J. L.; Garcia-Melendrez, A.; da Cruz Vasconcellos, F.;
Lowe, C. R. A smartphone algorithm with inter-phone repeatability for the analysis of
colorimetric tests. *Sens. Actuators, B* 2014, 196, 156-160.

- 1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
421. Yetisen, A. K.; Martinez-Hurtado, J. L.; da Cruz Vasconcellos, F.; Simsekler, M. C.; Akram, M. S.; Lowe, C. R. The regulation of mobile medical applications. *Lab Chip* 2014, 14, 833-40.
422. Yetisen, A. K. Mobile Medical Applications. In *Holographic Sensors*, Springer International Publishing: 2015; pp 135-148.
423. ISO Standards catalogue: ISO/TC38 Textile. 2015.
424. Lin, B.; Moubarak, M. Decomposition analysis: Change of carbon dioxide emissions in the Chinese textile industry. *Renewable and Sustainable Energy Reviews* 2013, 26, 389-396.
425. WWF. Cutting cotton carbon emissions. 2013.
426. Kant, R. Textile dyeing industry an environmental hazard. *Natural Science* 2011.
427. Kanagaraj, J.; Chandra Babu, N. K.; Mandal, A. B. Recovery and reuse of chromium from chrome tanning waste water aiming towards zero discharge of pollution. *Journal of Cleaner Production* 2008, 16, 1807-1813.
428. Leire, C.; Thidell, Å. Product-related environmental information to guide consumer purchases – a review and analysis of research on perceptions, understanding and use among Nordic consumers. *Journal of Cleaner Production* 2005, 13, 1061-1070.
429. Pickett-Baker, J.; Ozaki, R. Pro-environmental products: marketing influence on consumer purchase decision. *Journal of Consumer Marketing* 2008, 25, 281-293.
430. Young, W.; Hwang, K.; McDonald, S.; Oates, C. J. Sustainable consumption: green consumer behaviour when purchasing products. *Sustainable Development* 2010, 18, 20-31.
431. Becker-Olsen, K. L.; Cudmore, B. A.; Hill, R. P. The impact of perceived corporate social responsibility on consumer behavior. *Journal of Business Research* 2006, 59, 46-53.
432. Mainieri, T.; Barnett, E. G.; Valdero, T. R.; Unipan, J. B.; Oskamp, S. Green Buying: The Influence of Environmental Concern on Consumer Behavior. *The Journal of Social Psychology* 1997, 137, 189-204.

Table of Contents Graphic




1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60




Applications of nanotechnology in textiles
145x160mm (150 x 150 DPI)

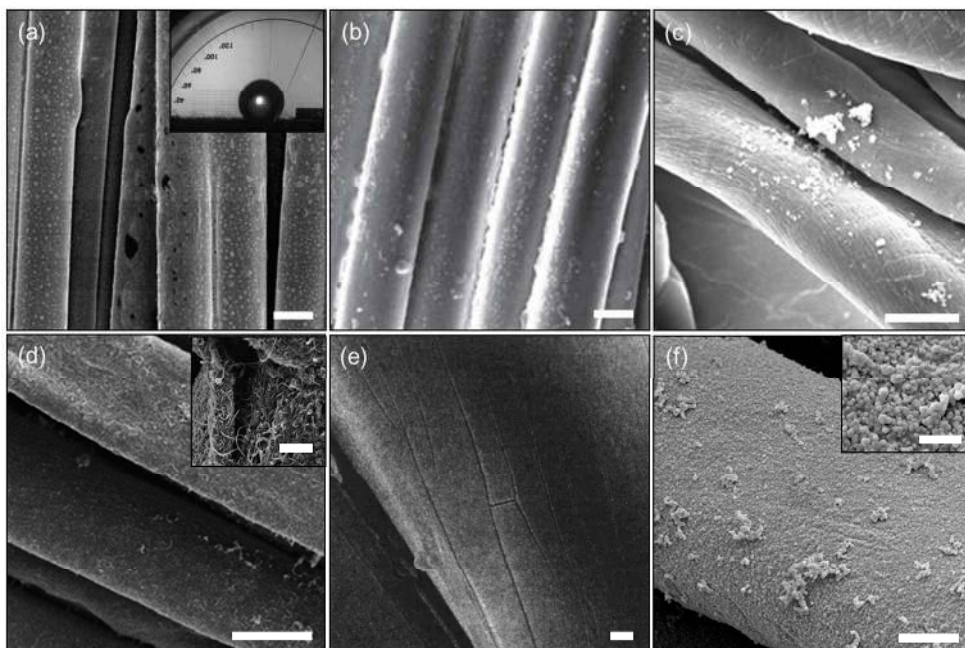


SEM images of nanoparticle functionalized fibers
239x160mm (150 x 150 DPI)

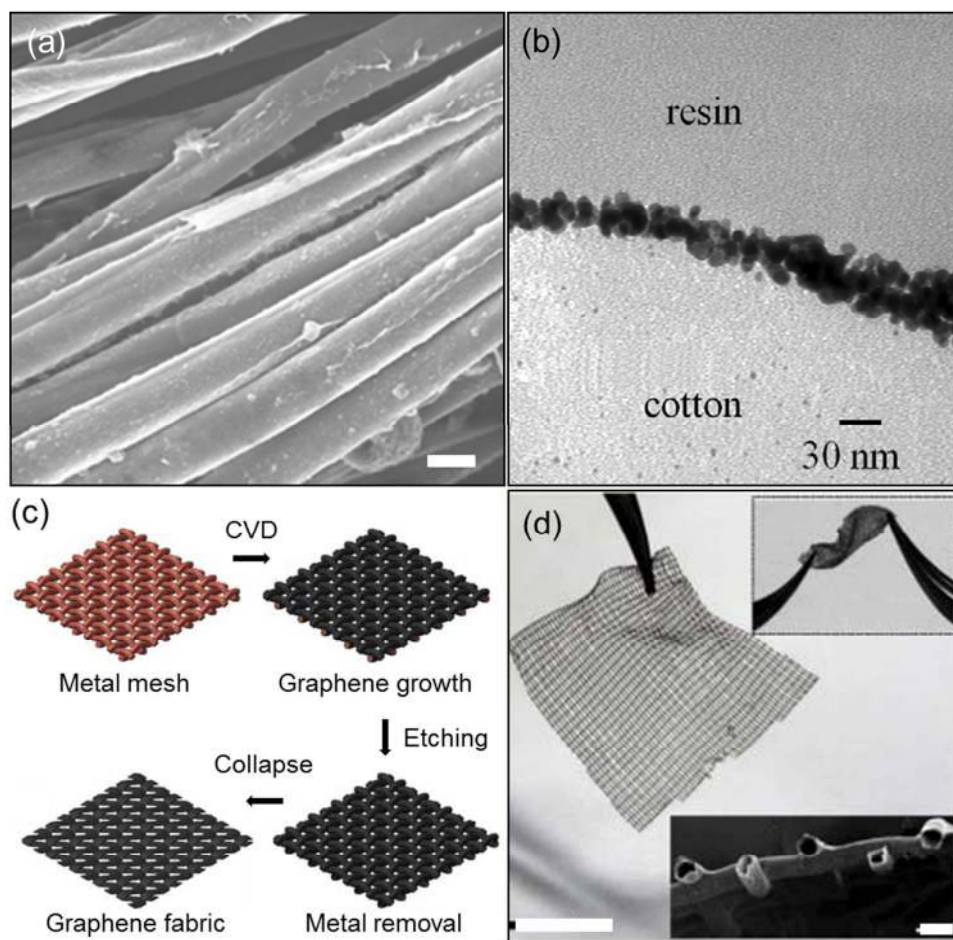


Conductive nanomaterials in textiles
168x163mm (150 x 150 DPI)

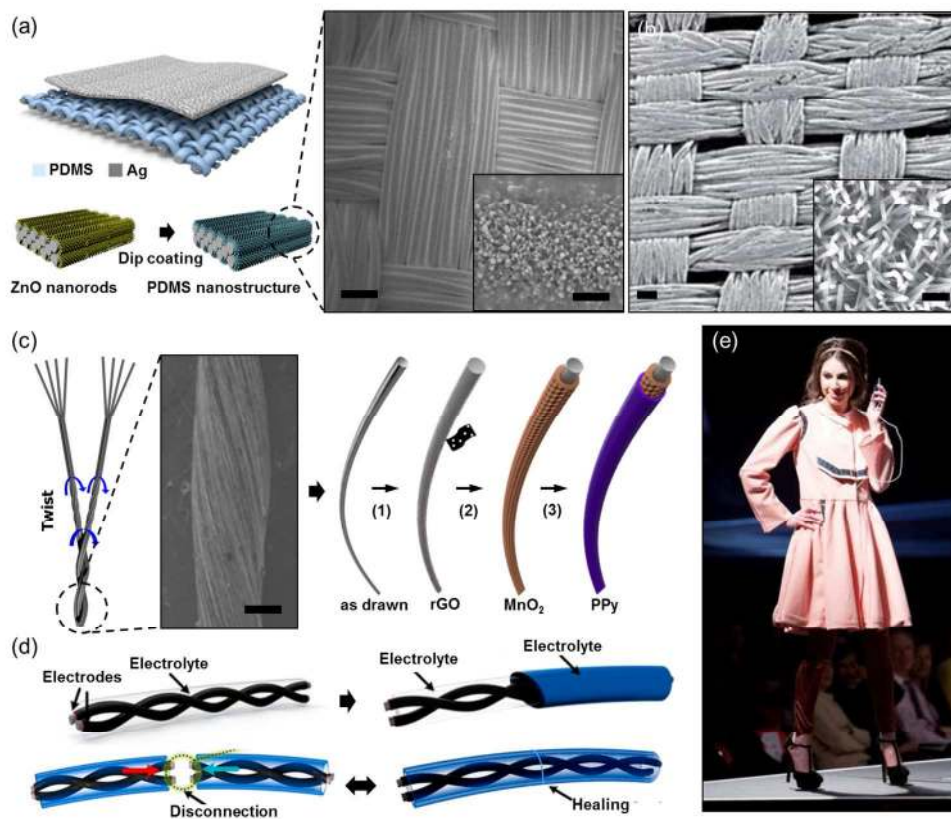


Energy generation and storage in textiles
253x213mm (150 x 150 DPI)

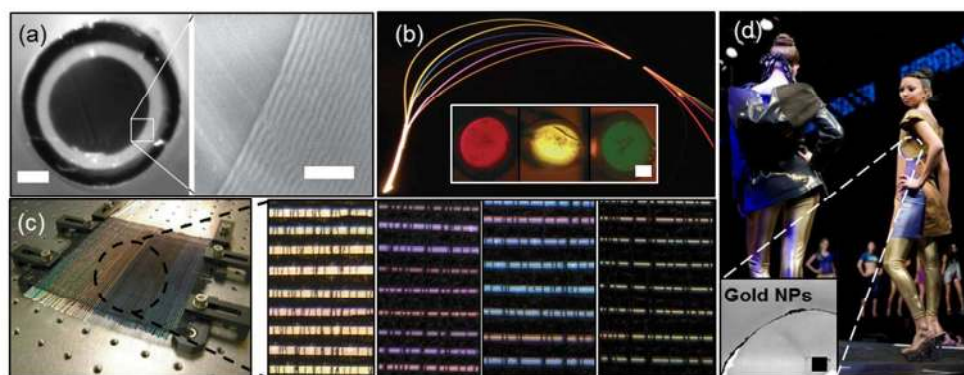


Fiber optic and plasmonic technologies for textiles
177x71mm (150 x 150 DPI)

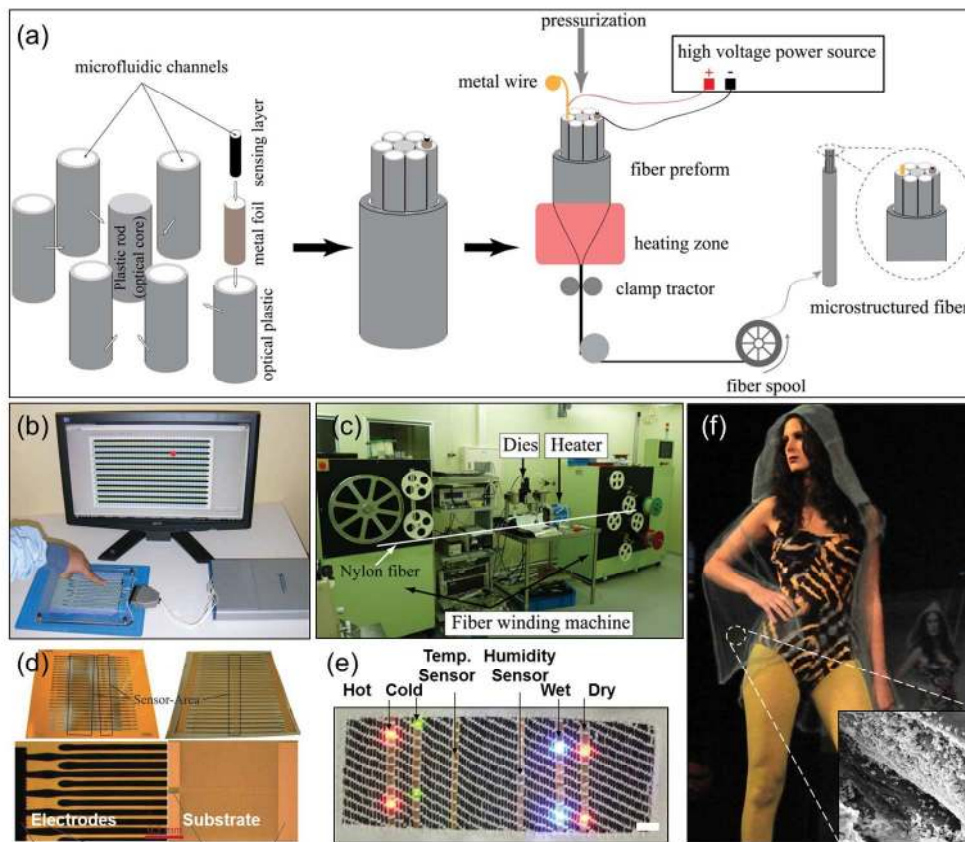

Sensors and insecticide-releasing textiles
292x251mm (150 x 150 DPI)

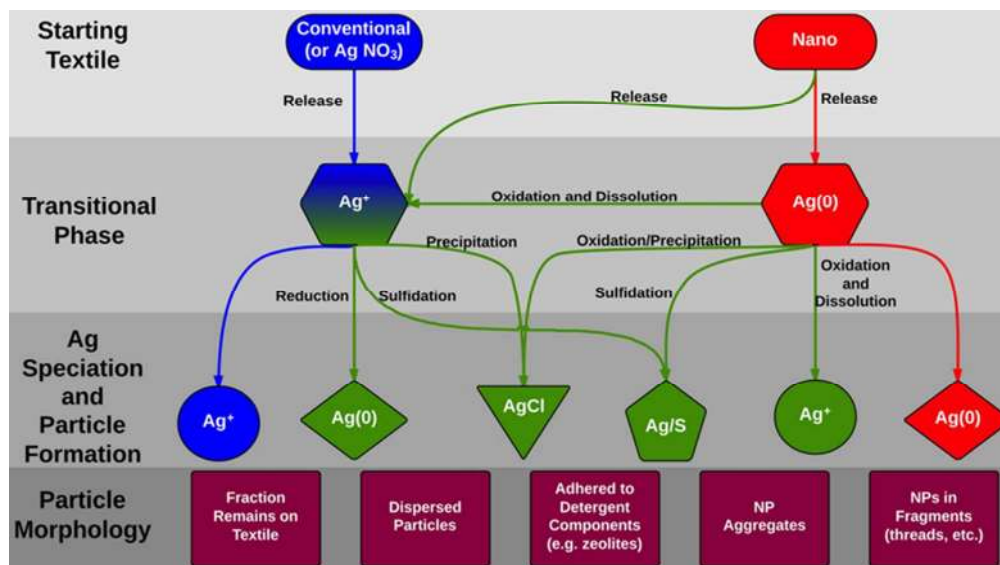


Scenarios for Ag release and subsequent transformation from nanomaterial-treated textiles
147x82mm (150 x 150 DPI)

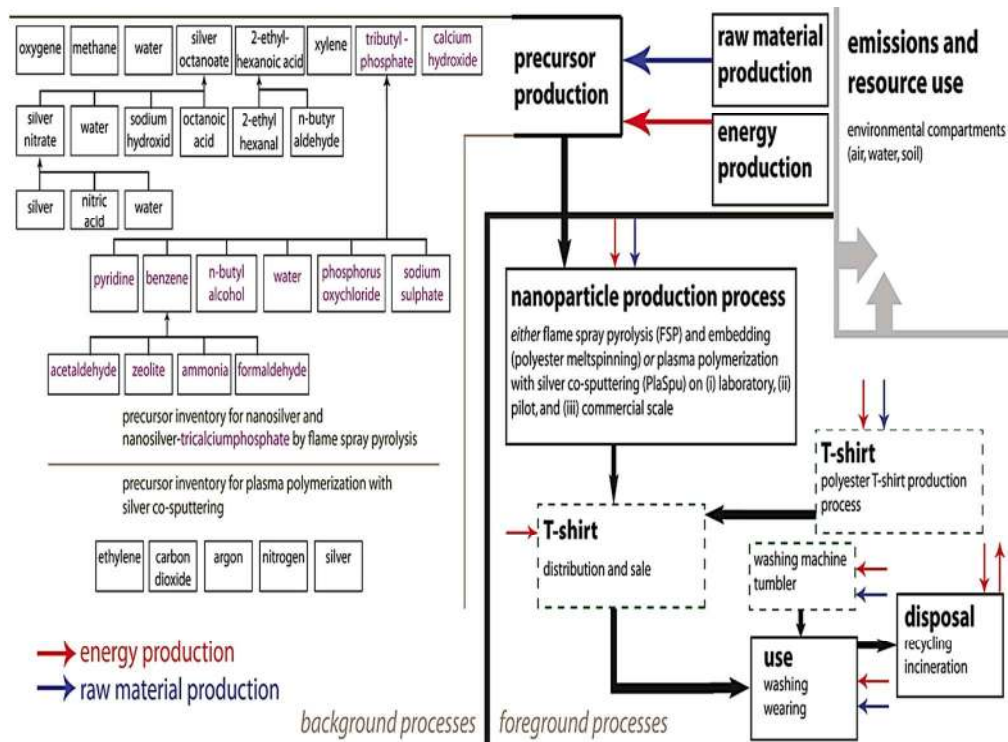

Lifecycle stages of one nanoAg T-shirt showing system boundaries
457x214mm (95 x 150 DPI)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

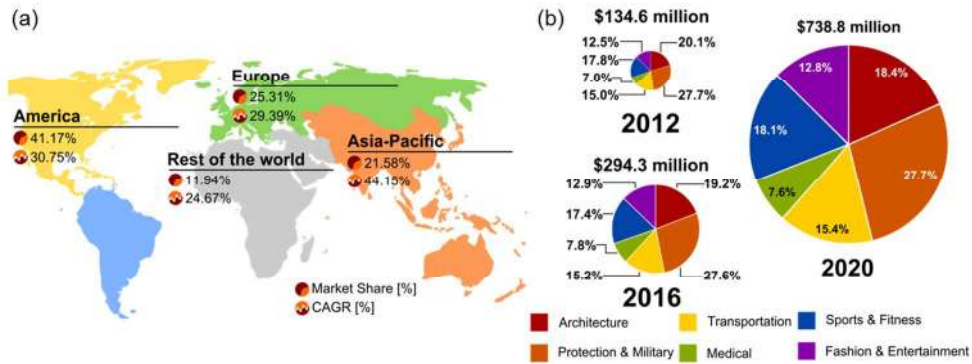

Smart textiles market
224x88mm (150 x 150 DPI)