

10/7-21-97
QSO ①

SANDIA REPORT

SAND96-8243 • UC-1409
Unlimited Release
Printed May 1997

M99053779

OPPDIF: A Fortran Program for Computing Opposed-Flow Diffusion Flames


A. E. Lutz, R. J. Kee, J. F. Gracar, F. M. Rupley

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

- Prepared by Sandia National Laboratories, Albuquerque, New Mexico 87185 and Livermore, California 94550
- Sandia is a multiprogram laboratory operated by Sandia Corporation, a Lockheed Martin Company, for the United States Department of Energy under Contract DE-AC04-94AL85000.

MASTER

Approved for public release; distribution is unlimited.

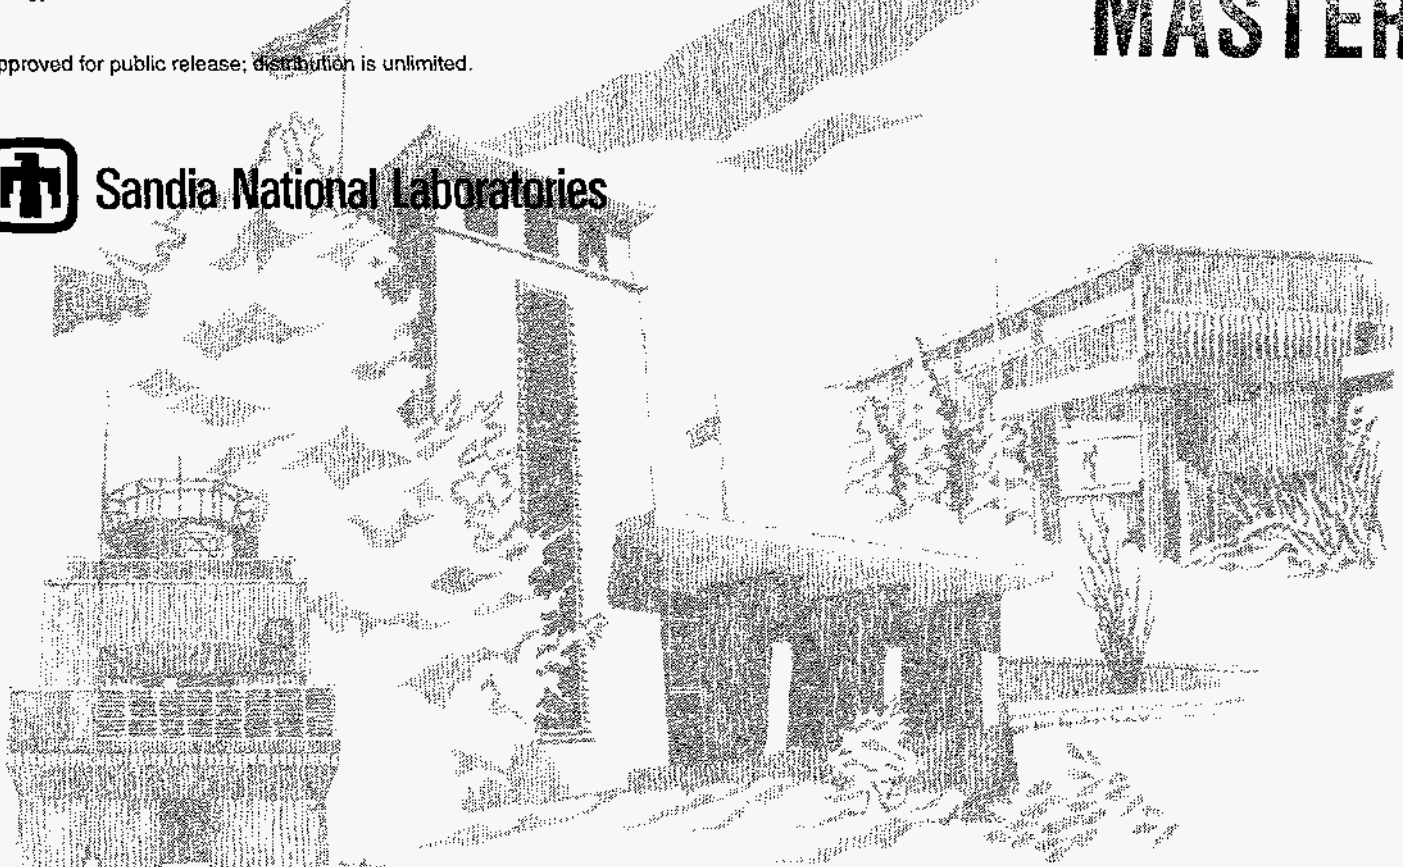

Issued by Sandia National Laboratories, operated for the United States Department of Energy by Sandia Corporation.

NOTICE: This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government, any agency thereof, or any of their contractors or subcontractors. The views and opinions expressed herein do not necessarily state or reflect those of the United States Government, any agency thereof, or any of their contractors.

Printed in the United States of America. This report has been reproduced directly from the best available copy.

Available to DOE and DOE contractors from
Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831

Prices available from (615) 576-8401, FTS 626-8401

Available to the public from
National Technical Information Service
U.S. Department of Commerce
5285 Port Royal Rd
Springfield, VA 22161

NTIS price codes
Printed copy: A03
Microfiche copy: A01

DISCLAIMER

Portions of this document may be illegible electronic image products. Images are produced from the best available original document.

SAND96-8243
Unlimited Release
Printed May 1997

**OPPDIF: A FORTRAN PROGRAM FOR COMPUTING
OPPOSED-FLOW DIFFUSION FLAMES**

Andrew E. Lutz, Robert J. Kee, Joseph F. Grcar, Fran M. Rupley
Thermal & Plasma Processes Department
Sandia National Laboratories
Livermore, CA 94551-0969

ABSTRACT

Oppdif is a Fortran program that computes the diffusion flame between two opposing nozzles. A similarity transformation reduces the two-dimensional axisymmetric flow field to a one-dimensional problem. Assuming that the radial component of velocity is linear in radius, the dependent variables become functions of the axial direction only. Oppdif solves for the temperature, species mass fractions, axial and radial velocity components, and radial pressure gradient, which is an eigenvalue in the problem. The Twopnt software solves the two-point boundary value problem for the steady-state form of the discretized equations. The Chemkin package evaluates chemical reaction rates and thermodynamic and transport properties.

ACKNOWLEDGMENTS

Development of Oppdif benefited from interactions with several of our colleagues at Sandia. Notably, Greg Evans assisted Robert Kee with the transformation of the equations. In addition, we appreciate the experience and feedback that we received from users of pre-release versions of the program. Development of Oppdif was supported by the U. S. Department of Energy, Office of Basic Energy Sciences.

OPPDIF: A FORTRAN PROGRAM FOR COMPUTING OPPOSED-FLOW DIFFUSION FLAMES

INTRODUCTION

This report describes Oppdif: a Fortran computer program that computes the steady-state solution for axisymmetric diffusion flames between two opposing nozzles. The one-dimensional model predicts the species, temperature, and velocity profiles in the core flow between the nozzles (excluding edge effects). The model was originally developed by Kee *et al*¹ for premixed opposed flow flames; Oppdif extends the model to non-premixed flames.

The geometry consists of two concentric, circular nozzles directed towards each other, as in Fig. 1. This configuration produces an axisymmetric flow field with a stagnation plane between the nozzles. The location of the stagnation plane depends on the momentum balance of the two streams. When the streams are premixed, two premixed flames exist, one on either side of the stagnation plane. When one stream contains fuel and the other oxidizer, a diffusion flame is established. Since most fuels require more air than fuel by mass, the diffusion flame usually sits on the oxidizer side of the stagnation plane; fuel diffuses through the stagnation plane to establish the flame in a stoichiometric mixture.

The opposed-flow geometry makes an attractive experimental configuration, because the flames are flat, allowing for detailed study of the flame chemistry and structure. The two-dimensional flow is reduced to one dimension by assuming that the radial velocity varies linearly in the radial direction, which leads to a simplification in which the fluid properties are functions of the axial distance only.

The reduction of the two-dimensional stagnation flow is based upon similarity solutions advanced for incompressible flows by von Karman², which are more easily available in Schlichting.³ Numerical solutions for diffusion flames in this geometry were produced by Hahn *et al*.^{4,5} Solutions on the similar geometry of a counter-flow stagnating on a porous cylinder, originally studied by Tsuji,⁶ were advanced by the GAMM workshop.⁷ Miller *et al*⁸ wrote a Tsuji-flame model to participate in the workshop, and much of the experience with solution techniques was gained during that effort.

The formulation used as part of the GAMM workshop imposed an outer flow solution for the stagnation flow from a point source at infinity onto the solution for the compressible boundary layer. The point-source solution used a single strain rate, which sets both components of the velocity and pressure gradient. While the single strain rate is useful for parameterizing the solutions for use in flamelet models, the disadvantage is that there is no length scale for the problem. The point-source formulation cannot consider the finite distance between the nozzles in experiments.

In contrast, the more general formulation in Oppdif does use the nozzle separation. The disadvantages are that an eigenvalue must be included in the solution of the equations, and the strain rate varies, so a characteristic strain rate must be defined from the velocity profile. Chapman and Bauer⁹ used this more general formulation for numerical solution of an incompressible flow. Seshadri and Williams¹⁰ used essentially this formulation in asymptotic studies. Hahn and Wendt⁵ were the first to use this formulation in numerical solutions of compressible flames. Following the analysis of Evans and Grief¹¹, Kee *et al*¹ showed that this formulation allowed more accurate predictions of the extinction limits for premixed flames.

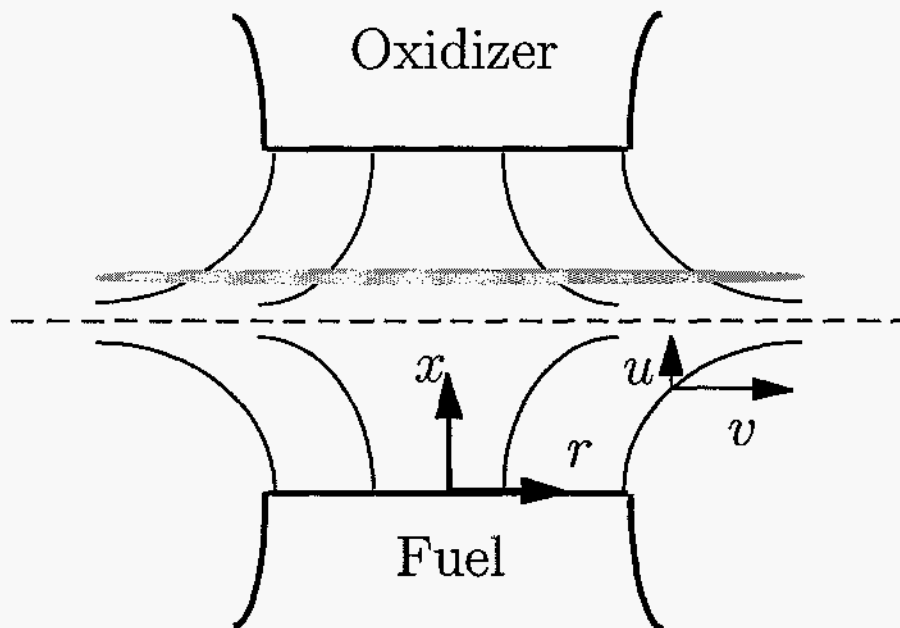


Figure 1. Geometry of the opposed-flow diffusion flame. The dashed line represents the stagnation plane; the dotted region suggests the flame.

As an example of an Oppdif solution, Fig. 2 shows the computed temperature profile of a methane-air diffusion flame examined by Puri *et al.*¹² The fuel and air velocities are 76.82 and 73.39 cm/s, separated by 1.49 cm. The plot compares the data (circles),¹² the single strain-rate solution (dashed curve),¹² and the Oppdif solution (solid curve). While there may be differences in the chemical mechanisms used in the two solutions, it does appear that the formulation in Oppdif provides a closer match of the flame location.

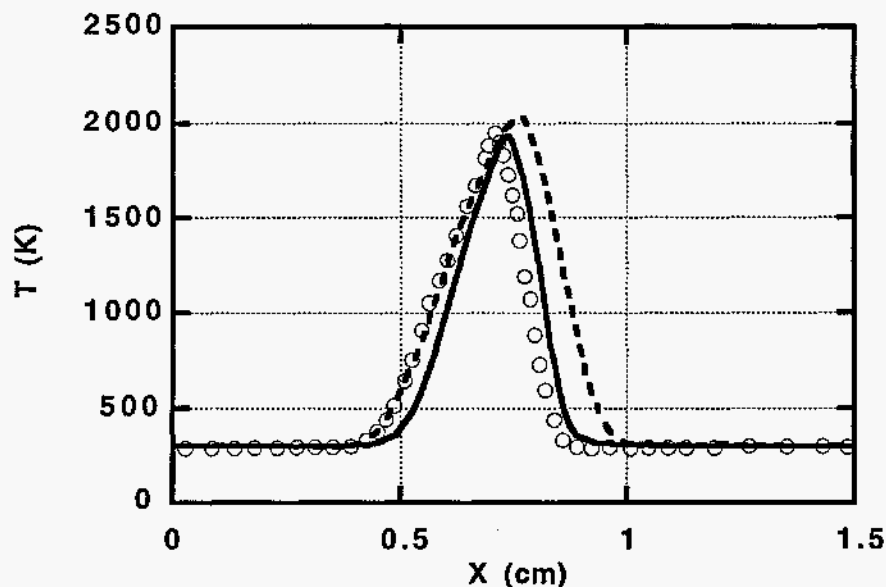


Figure 2. Temperature profile for CH₄-air flame. Symbols are measurements of Puri *et al.*¹² Dashed curve single strain-rate solution (also in Puri *et al.*).

EQUATIONS

A derivation of the governing equations for the opposed-flow geometry is given in Kee *et al.*,¹ so the derivation here is brief. The geometry and axes are sketched in Fig. 1.

At steady-state, conservation of mass in cylindrical coordinates is

$$\frac{\partial}{\partial x}(\rho u) + \frac{1}{r} \frac{\partial}{\partial r}(\rho v r) = 0$$

where u and v are the axial and radial velocity components and ρ is the mass density. Following von Karman,² who recognized that v/r and other variables should be functions of x only, we define

$$G(x) = -\frac{\rho v}{r} \quad \text{and} \quad F(x) = \frac{\rho u}{2}$$

for which continuity reduces to

$$G(x) = \frac{dF(x)}{dx} \quad (1)$$

for the axial velocity u . Since F and G are functions of x only, so are ρ , u , T , and Y_k .

The radial momentum equation is satisfied by the eigenvalue

$$H = \frac{1}{r} \frac{\partial p}{\partial r} = \text{constant} \quad (2)$$

The axial momentum equation is

$$H - 2 \frac{d}{dx} \left(\frac{FG}{\rho} \right) + \frac{3G^2}{\rho} + \frac{d}{dx} \left[\mu \frac{d}{dx} \left(\frac{G}{\rho} \right) \right] = 0 \quad (3)$$

Energy and species conservation are

$$\rho u \frac{dT}{dx} - \frac{1}{c_p} \frac{d}{dx} \left(\lambda \frac{dT}{dx} \right) + \frac{\rho}{c_p} \sum_k c_{p_k} Y_k V_k \frac{dT}{dx} + \frac{1}{c_p} \sum_k h_k \dot{\omega}_k = 0 \quad (4)$$

$$\rho u \frac{dY_k}{dx} + \frac{d}{dx} (\rho Y_k V_k) - \dot{\omega}_k W_k = 0 \quad k = 1, K \quad (5)$$

where the diffusion velocities are given by either the multicomponent formulation

$$V_k = \frac{1}{X_k \bar{W}} \sum_{j=1}^K W_j \mathcal{D}_{kj} \frac{dX_j}{dx} - \frac{D_k^T}{\rho Y_k T} \frac{dT}{dx} \quad (6)$$

or the mixture-averaged formulation

$$V_k = -\frac{1}{X_k} D_{km} \frac{dX_k}{dx} - \frac{D_k^T}{\rho Y_k T} \frac{dT}{dx} \quad \text{where} \quad D_{km} = \frac{1 - Y_k}{\sum_{j \neq k}^K X_j / \mathcal{D}_{jk}} \quad (7)$$

and D_{kj} , D_{km} , and D_k^T are the multicomponent, mixture averaged, and thermal diffusion coefficients, respectively.

The boundary conditions for the fuel (F) and oxidizer (O) streams at the nozzles are

$$\begin{aligned}x = 0: \quad F &= \frac{\rho_F u_F}{2}, \quad G = 0, \quad T = T_F, \quad \rho u Y_k + \rho Y_k V_k = (\rho u Y_k)_F \\x = L: \quad F &= \frac{\rho_O u_O}{2}, \quad G = 0, \quad T = T_O, \quad \rho u Y_k + \rho Y_k V_k = (\rho u Y_k)_O\end{aligned}\quad (8)$$

The inflow boundary condition specifies the total mass flux, including diffusion and convection, rather than the species fraction ($Y_k = Y_{k,F}$). If gradients exist at the boundary, these conditions allow diffusion into the nozzle.

The differential equations (1) through (5) and boundary conditions (8) form a boundary value problem for the dependent variables (F, G, H, T, Y_k). The Chemkin¹³ library of subroutines provides the reaction rates and thermodynamic properties. A Chemkin based package¹⁴ evaluates the transport properties.

SOLUTION

Discretization of the differential equations uses conventional finite differencing techniques for non-uniform mesh spacing. Diffusive terms use central differences, with truncation error that is second-order in the mesh spacing. For better convergence, convective terms use upwind differencing, which uses the sign of the velocity to choose which direction the spatial difference will go. If $u_j > 0$, for example, then the convective term in the energy equation is differenced

$$\rho u \frac{dT}{dx} \approx \rho_j u_j \frac{T_j - T_{j-1}}{x_j - x_{j-1}}.$$

The truncation error of this approximation is first-order in the mesh spacing, leading to what is often called "artificial diffusion", but this form avoids unwanted oscillations during the solution on the coarse mesh. Alternatively, the convective terms can be central differenced using the keyword CDIF, but the default windward differencing is recommended.

The Twopnt¹⁵ (for "two-point") boundary value solver solves the discretized equations. Twopnt uses Newton's method to attempt solution of the steady-state equations, and resorts to time integration when the Newton iteration is not converging. After time integration evolves the solution toward the steady state, Twopnt returns to Newton's method to rapidly converge on the steady solution. In computing the first solution of a new flame, Twopnt may jump back and forth between time integration and Newton's method several times before converging. However, once one flame is solved, others can be solved much more efficiently by changing a boundary condition and re-starting from the previous solution. In order to speed convergence, experience shows that it is best to begin a new computation on a coarse mesh. Once the solution converges on the first mesh, Twopnt refines the solution by adding new points into the regions of gradient or curvature in the solution. The degree of refinement is controlled by the GRAD and CURV parameters.

RUNNING OPPDIF

Oppdif requires subroutines from the Chemkin,¹³ transport,¹⁴ and Twopnt¹⁵ software packages. To solve a problem using Oppdif, the user must:

1. execute the Chemkin reaction interpreter, which reads the mechanism and the thermodynamic data base, and writes the Chemkin linking file;
2. execute the transport interpreter, which reads the Chemkin linking file and the transport data base, and writes the transport linking file;
3. compile and link Oppdif with the Chemkin, transport, and Twopnt libraries;
4. execute Oppdif, which reads the Chemkin and transport linking files, and a text input file, and writes both text and binary output files.

Figure 3 shows the relationships between the routines and files. Sharp-edged rectangles represent programs to be executed; rounded-edges denote files. Figure 3 contains default names for some of the files; files not labeled read or write to standard input or output.

The first step is to execute the Chemkin Interpreter, which reads user-supplied information about the species and chemical reactions for a particular reaction mechanism. It then extracts information about the species' thermodynamic properties from a data base. All this information is stored in the Chemkin linking file, which is read by the Chemkin library when Oppdif starts running. Refer to the Chemkin manual for more details.

The input that defines a particular problem and the parameters needed to solve it are read by Oppdif, using a Keyword format described in the next section.

Oppdif writes output in two forms: text and binary. Text output includes a summary of the initial solution guess, printouts of the partial solutions, and statistics that describe the progress of the computation. Oppdif writes two separate binary files:

1. the Save file contains the last successful solution,
2. the Recover file contains the latest solution for restart purposes (in case a successful solution is not reached). The data sequences of these binary files are discussed below.

The Save File

The binary file is written using the following Fortran statements. At the start of a run:

```
WRITE (LSAVE) 'CKLINK'  
WRITE (LSAVE) ( ICKWRK(L), L = 1, LENI )  
WRITE (LSAVE) ( RCKWRK(L), L = 1, LENR )  
WRITE (LSAVE) ( CCKWRK(L), L = 1, LENC )
```

where LENI, LENR, and LENC can be obtained by a call to the Chemkin routine CKPNT.

```
WRITE (LSAVE) 'MCLINK'  
WRITE (LSAVE) ( IMCWRK(L), L = 1, LENI )  
WRITE (LSAVE) ( RMCWRK(L), L = 1, LENR )
```

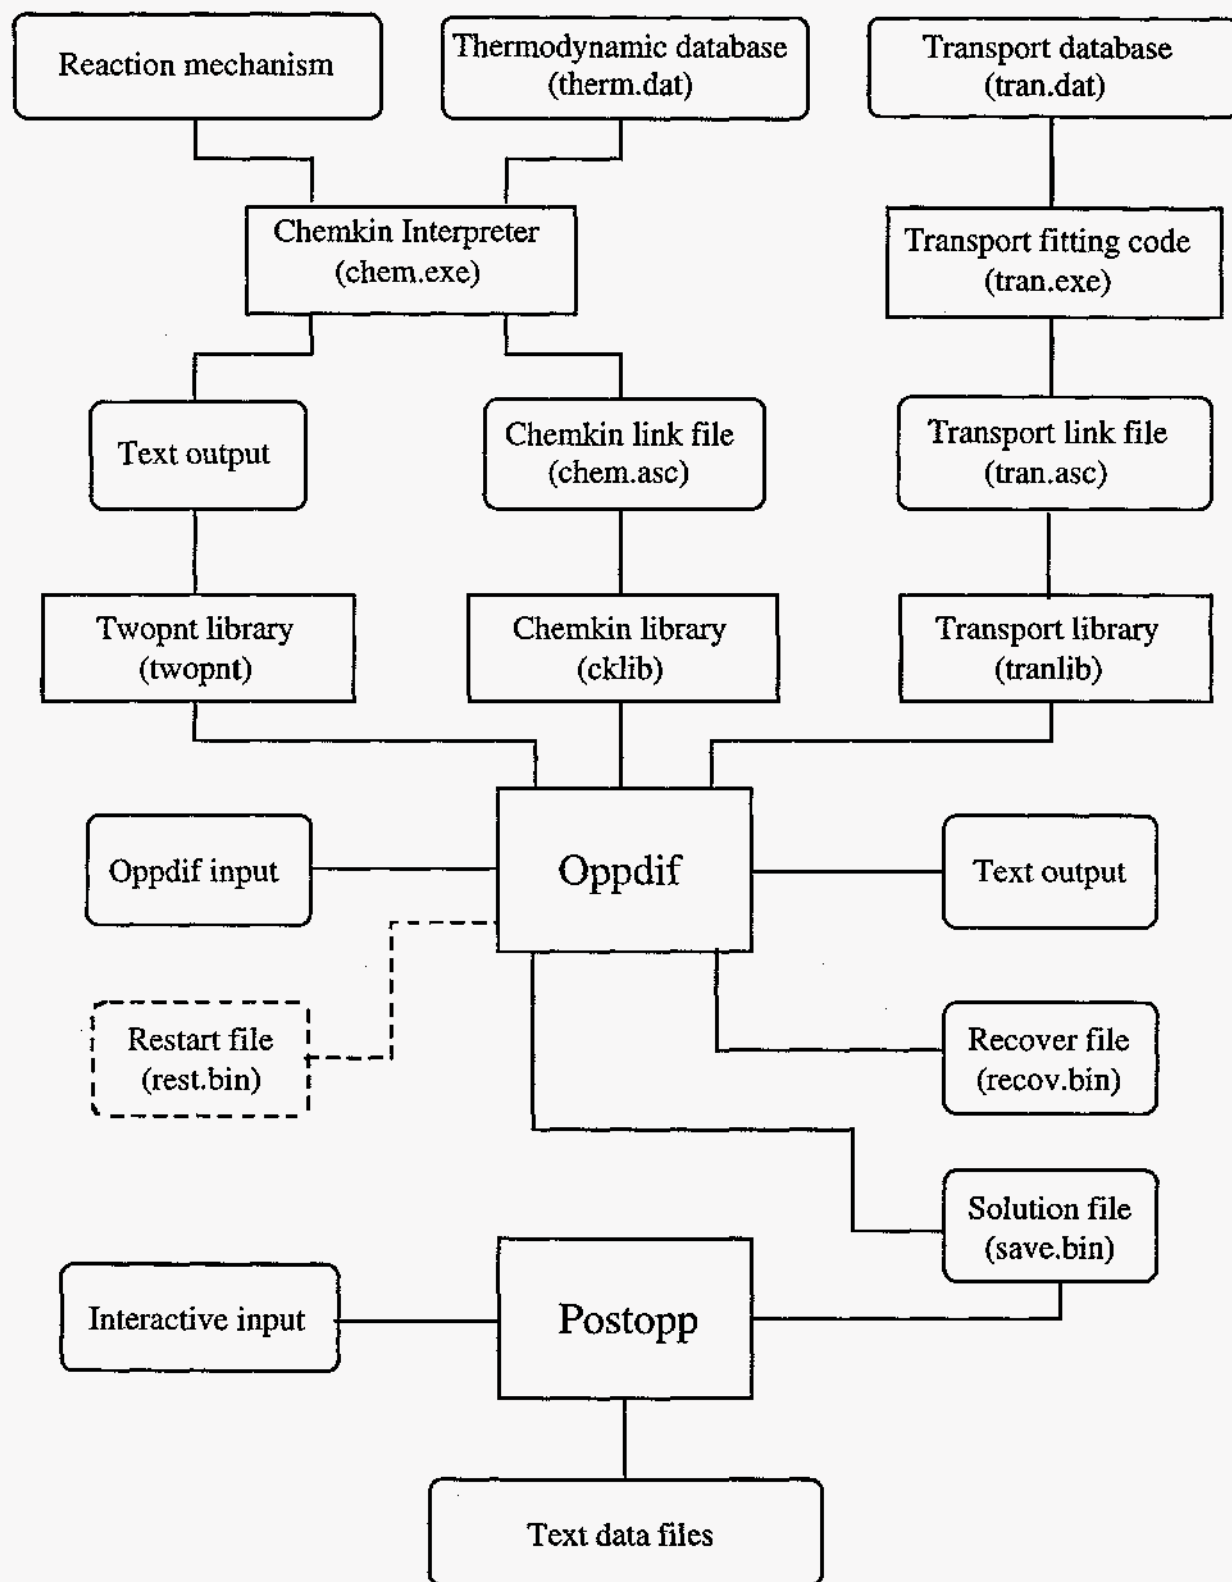


Figure 3. Diagram of Oppdif execution.

where here LENI and LENR can be obtained by a call to the routine MCPNT.

The solutions from Oppdif are then written in the form

```
WRITE (LSAVE) 'SOLUTION'  
WRITE (LSAVE) NATJ, JJ, P, AFUEL, AOXID, VFUEL, VOXID  
WRITE (LSAVE) ( X(J), J = 1, JJ )  
WRITE (LSAVE) ( ( S(N,J), N = 1, NATJ ), J = 1, JJ )
```

The Recover File

The Recover file is the same as the Save file, without the Chemkin and transport linking data; the first record is 'SOLUTION'. The important difference between the Recover and Save files is that the Recover file is updated by Oppdif during time integration, whereas the Save file only receives converged steady-state solutions. If Oppdif should make some progress by time integration, but fail to converge to a steady solution, then you can copy the Recover file to the Restart file, and restart simply by including the RSRT keyword. Depending on why Twopnt quit in its attempt to compute a steady solution, it maybe useful to perform a Regrid when restarting from the Recover solution, as discussed below.

User-modifications

Some parts of the program, such as dimensions and file handling, depend on the machine or problem. To accomodate changes, the programs were written as subroutines to be called by a short "driver" program. Program compilation details are provided in a script or makefile with the software distribution.

Regrid Operation

Using the JJRG keyword invokes a Regrid operation that is useful for changing the number of gridpoints when restarting from one flame to another. Another use for Regrid is to revise the solution guess when a previous Oppdif job made some progress towards a solution (by time integration, for example), but failed to converge to a steady solution.

Twopnt's grid refinement adds points in regions where they are needed to resolve the first and second derivatives of the solution, using criteria controlled by the GRAD and CURV keywords. Twopnt never moves or removes points. If it reaches a maximum number of points (internally defined by the dimensions), it simply prints a message and quits. Sometimes it may be necessary to reduce the number of points when starting a new solution. The Regrid operation redefines the solution guess on a specified number of mesh points; include the JJRG keyword, followed by the number of points.

The Regrid operation is different from the gridpoint insertion operation performed by Twopnt. Both operations attempt to resolve the gradient and curvature in the solution, except that Twopnt considers all solution components, whereas Regrid only considers the temperature profile. Twopnt only adds points, leaving the old points as they where, but Regrid alters the location and solution of all the points interior to the boundaries. Regrid computes new locations for the given number of points, then interpolates the solution from

the previous grid to obtain a new solution. Regrid does not conserve any properties of the solution; in fact, it tends to smooth the solution by the error inherent in the interpolation.

Regrid redistributes a weighting function of the first and second derivatives of the temperature. The profiles of the other dependent variables are ignored on the assumption that the temperature profile defines the flame location well enough for the purposes of realigning the mesh. The redistribution uses a transformation from the physical coordinate x to a new coordinate η ,

$$\frac{dx}{d\eta} W(x, T) = C \quad (9)$$

with the weighting function,

$$W(x, T) = 1 + b_1 \left| \frac{dT}{dx} \right| + b_2 \left| \frac{d^2T}{dx^2} \right|.$$

Integration over the entire domain defines the constant.

$$C = \frac{1}{N-1} \int_0^L W(x, T) dx$$

Integrating over a portion of the domain gives an expression for the point locations in η -space.

$$\eta = 1 + \frac{1}{C} \int_0^x W(x, T) dx$$

The new grid locations x come by interpolation between the computed values of η defined using the old mesh, onto a uniform mesh in η -space. Since $d\eta$ is constant on this uniform mesh, the solution to Eqn. (9) states that $W(x, T) \cdot dx$ is constant, so the new values of x will be concentrated where the weighting function is large.

To direct Oppdif to perform the Regrid operation at restart, include the keywords:

```
JJRG  20
PCAD  0.6
RGTC  1.0
```

This sequence will create a new solution guess on 20 points, devoting 60 percent of the points to resolving gradients, with equal weighting of gradient and curvature in the temperature profile. From experience, we recommend that RGTC be greater than or equal to 1. Depending on the resolution of the existing solution, PCAD should be in the neighborhood of 1/2. Note that PCAD equal to zero generates a uniform mesh.

INPUT

Oppdif reads input in a keyword format. The keyword must appear first on each input line. Some lines require only the keyword itself, while others need additional information. Keyword lines may be in any order. Syntax rules for the input file follow.

1. The first four columns of the card image are reserved for the keyword, and it must begin in the first column.
2. Any further input associated with the keyword can appear anywhere in columns 5 through 80.
3. When more than one piece of information is required, the order in which the information appears is important, and the pieces are delimited by one or more blank spaces.
4. Numbers may be stated in either integer, floating point, or E format. The program converts the numbers to the proper type, including conversion to double precision if the compiled version of the source code requests double precision.
5. Species names must appear exactly as they are specified in the Chemkin input.
6. If more information is input than required, then the last read inputs are used. For example, if contradictory keywords are encountered, the last one read is taken.
7. A comment line can be inserted by placing either a period (.), a slash (/), or an exclamation mark (!) in the first column. Such a line is ignored by the code, but it is echoed back in the printed output. In addition, on any keyword line, any input that follows the required input and is enclosed in parentheses is taken as a comment.
8. The keyword END must be the last line.

KEYWORDS

The keywords Oppdif recognizes are listed with a description of their function and default values. Some keywords require real, integer, or character input, which are denoted by x , n , and c in the list.

Problem Type Keywords

TGIV – Energy equation is not included. User specifies a temperature profile using the TEMP keyword.

ENRG – Energy equation is included.

NOFT – Skip the fixed temperature problem and include the energy equation on the first attempt.

LINE – Linear profile used to set up initial solution.
Default – PLAT

PLAT - Plateau profile used to set up initial solution.
Default - PLAT

Method Option Keywords

ATOL x - Absolute convergence criteria for Newton iteration.
Default - 1.E-9

RTOL x - Relative convergence criteria for Newton iteration.
Default - 1.E-4

ATIM x - Absolute convergence criteria for time stepping.
Default - 1.E-9

RTIM x - Relative convergence criteria for time stepping.
Default - 1.E-4

TIME $n x$ - Number of steps and time step for time stepping for the starting procedure.
Default - 50, 1.E-6

TIM2 $n x$ - Number of steps and time step for time stepping after adding the energy equation.
Default - 50, 1.E-6

TRAN $n x$ - Perform timestepping only, without attempting Newton iteration for a steady solution.

NDPR x - Increment for output during time integration.
Default - 100 steps

UFAC x - Time step increase when time integration proceeds without changing the solution rapidly.
Default - 2.

DFAC x - Time step decrease when time integration experiences difficulties.
Default - 2.2

DTMN x - Minimum allowable time step.
Default - 1.E-10

DTMX x - Maximum allowable time step.
Default - 1.E-4

WDIF - Use windward differencing on convective terms in the equations.

Default – Windward differencing.

CDIF – Use central differencing on convective terms in the equations.
Default – Windward differencing.

SFLR x – Floor, or minimum, value for the species mass fractions.
Default – -1.E-4

SPOS x – Small positive value used to replace negative species upon restart or regridding.
Default – -1.E-10

GFAC x – Multiply all reaction rates by x .
Default – 1

IRET n – Retirement period for a given time step, or number of time steps prior to increasing the step size.
Default – 50

ISTP n – Directs Twopnt to take n time steps before attempting the Newton search for the steady-state solution.
Default – 0

NJAC n – Retirement age for the Jacobian during the Newton search.
Default – 20

TJAC n – Retirement age for the Jacobian during the time integration.
Default – 20

KOUT c – Species names for text output.
Default – All species printed

Grid Parameter Keywords

NPTS n – Number of initial mesh points. This specification gets overwritten by GRID input.
Default – 6

GRID x – Location of an initial mesh point.
Units – cm

GRAD x – Parameter that controls mesh adaptation on the first gradient in the solution.
Default – 0.1

CURV x – Parameter that controls mesh adaptation on the second gradient, or curvature, in the solution.

Default - 0.5

NADP n - Number of mesh points that Twopnt can add during each grid refinement.
Default - 10

XEND x - Physical length of the grid, or value of x at the end of the domain.
Units - cm

XCEN x - Center of the mixing region; used in defining the initial profile for the LINE or PLAT options.
Units - cm

WMIX x - Width of the mixing region; used in defining the initial profile for the LINE or PLAT options.
Units - cm

Flame Definition Keywords

VFUE x - Fuel inlet velocity (at $x = 0$).
Units - cm/s

VOXI x - Oxidizer inlet velocity (at $x = \text{XEND}$).
Units - cm/s

AFUE x - Radial gradient in fuel inlet velocity (at $x = 0$).
Units - cm/s
Default - 0.

AOXI x - Radial gradient in oxidizer inlet velocity (at $x = \text{XEND}$).
Units - cm/s
Default - 0.

TFUE x - Fuel inlet temperature (at $x = 0$).
Units - Kelvin
Default - 300.

TOXI x - Oxidizer inlet temperature (at $x = \text{XEND}$).
Units - Kelvin
Default - 300.

TMAX x - Maximum temperature for use with profiles defined by the LINE or PLAT options.
Units - Kelvin
Default - 2200.

PRES x - The initial pressure of the gas mixture.

Units - atmospheres

Default - 1.

FUEL $c x$ - Species name, c , and moles of the species in the fuel mixture. The mole fractions of the species will be normalized from the input mole quantities, so the absolute magnitudes of the input quantities are unimportant.

Units - moles or mole fraction.

Default - None, species input is required.

OXID $c x$ - Species name, c , and moles of the species in the oxidizer mixture. The mole fractions of the species will be normalized from the input mole quantities, so the absolute magnitudes of the input quantities are unimportant.

Units - moles or mole fraction.

Default - None, species input is required.

PROD $c x$ - Species name, c , and moles of the species in the products of combustion of the fuel and oxidizer in stoichiometric proportions. The product mixture is used to define the initial profiles specified using the LINE or PLAT keywords. The mole fractions of the species will be normalized from the input mole quantities, so the absolute magnitudes of the input quantities are unimportant.

Units - moles or mole fraction.

Default - None, species input is required.

TEMP $x x$ - Specifies a temperature profile in pairs of grid location and temperature, (x, T) .

USTG - On a restart, use the given temperature profile, not the temperature solution from the restart file.

Transport Option Keywords

MULT - Use the multicomponent formula for diffusion velocities, equation (6).

MIX - Use the mixture-averaged formula for diffusion velocities, equation (7).

TDIF - Include thermal diffusion in the diffusion velocities.

Printing and Restarting Keywords

PRINT n - Integer controls the level of printing and diagnostics from Twopnt. $n = 0, 1,$ and 2 provide increasing amounts of output.

RSTR - Read a solution from the restart file.

JJRG n - Perform a regrid operation on the restart solution prior to attempting to solve the new problem. Use n points for the new mesh. The new grid is adapted to the temperature profile according to the weighting parameters PCAD and RGTC
Default - 40

PCAD x - Specifies the fraction of available mesh points to be used for adapting the mesh to the temperature profile in a regrid operation. Requires $0 \leq x < 1$. If x is zero, then a regrid will produce a uniform grid.
Default - 0.75

RGTC x - Specifies the ratio of weighting for adaption to first gradient to curvature (or second derivative) in the temperature profile. Theoretically, there is no limit on this ratio, but values $x \geq 1$ are recommended, because adaption to curvature is usually less important than gradient.
Default - 1.0

END - This keyword must appear at the end of the input data.

EXAMPLE

This section presents an example run for a hydrogen-air flame. You can use the example as a test case to prove you have Oppdif running properly on your machine. In addition, the input file can serve as a template for your own specific input files.

The chemical reaction mechanism used for the hydrogen flame example follows.

Example Input to Chemkin Interpreter

```
ELEMENTS
H O N
END
SPECIES
H2 H O2 O OH HO2 H2O2 H2O N2
END
REACTIONS
H+O2+M=HO2+M      3.61E17  -0.72      0.      !DIXON-LEWIS
H2O/18.6/ H2/2.86/
H+H+M=H2+M        1.0E18   -1.0      0.      !D-L
H+H+H2=H2+H2      9.2E16   -0.6      0.
H+H+H2O=H2+H2O    6.0E19   -1.25     0.
H+OH+M=H2O+M      1.6E22   -2.0      0.      !D-L
H2O/5/
H+O+M=OH+M        6.2E16   -0.6      0.      !D-L
H2O/5/
O+O+M=O2+M        1.89E13   0.0     -1788.   !NBS
H2O2+M=OH+OH+M    1.3E17   0.0     45500.
H2+O2=2OH         1.7E13   0.0     47780.
OH+H2=H2O+H       1.17E9    1.3     3626.   !D-LW
O+OH=O2+H         3.61E14  -0.5     0.      !JAM 1986
O+H2=OH+H         5.06E4    2.67    6290.   !KLEMM,ET AL 1986
OH+HO2=H2O+O2     7.5E12   0.0     0.0     !D-L
H+HO2=2OH         1.4E14   0.0     1073.   !D-L
O+HO2=O2+OH       1.4E13   0.0     1073.   !D-L
2OH=O+H2O         6.0E+8    1.3     0.      !COHEN-WEST.
H+HO2=H2+O2       1.25E13   0.0     0.      !D-L
HO2+HO2=H2O2+O2   2.0E12   0.0     0.
H2O2+H=HO2+H2     1.6E12   0.0     3800.
H2O2+OH=H2O+HO2   1.0E13   0.0     1800.
END
```

Example Oppdif Input

```
MIX
PCAD 0.7
RGTC 1.0
ENRG
PLAT
AFUE      0
AOXI      0
VFUE     100
VOXI     100
TFUE     300
TOXI     300
TMAX     2400
GRID      0.
GRID     0.05
GRID     0.1
GRID     0.25
GRID     0.5
GRID     0.75
GRID     0.9
GRID     1.0
GRID     1.1
GRID     1.25
GRID     1.5
GRID     1.75
GRID     1.9
GRID     1.95
GRID     2.0
XEND     2.0
XCEN     1.0
WMIX     1.5
PRES     1.0
IRET     20
UFAC     2.
SFLR    -1.E-4
PRNT     11
TIME    200 1.E-6
TIM2    200 1.E-6
GRAD    0.5
CURV    0.5
FUEL H2  1.0
OXID N2  0.79
OXID O2  0.21
PROD H2O  0.347
PROD N2   0.653
KOUT H2 O2 H2O
RTOL    1.E-3
ATOL    1.E-6
ATIM    1.E-6
RTIM    1.E-3
END
```

Example Oppdif Output

////////////////////////////////////

OPPDIF: DOUBLE PRECISION VERSION 4.04 OF MARCH 1997

```
00000 PPPPPP PPPPPP DDDDDD III FFFFFFFF
O   O P   P P   P D   D   I   F
O   O P   P P   P D   D   I   F
O   O PPPPPP PPPPPP D   D   I   FFFFF
O   O P   P   D   D   I   F
O   O P   P   D   D   I   F
00000 P   P   DDDDDD III F
```

WRITTEN BY:

DR. ANDREW E. LUTZ
SANDIA NATIONAL LABORATORIES
THERMAL & PLASMA PROCESSES DEPARTMENT 8345
MS-9042
LIVERMORE, CA 94551-0969 USA
aelutz@california.sandia.gov

WITH THE ASSISTANCE OF:

DR. JOSEPH F. GRCAR
DR. ROBERT J. KEE
MS. FRAN M. RUPLEY

////////////////////////////////////

CKLIB: CHEMKIN-III GAS-PHASE CHEMICAL KINETICS LIBRARY,
DOUBLE PRECISION Vers. 5.8 97/03/01
Copyright 1995, Sandia Corporation.
The U.S. Government retains a limited license in this software.

TRANLIB: CHEMKIN-III MULTICOMPONENT TRANSPORT LIBRARY,
DOUBLE PRECISION Vers. 4.1 96/05/24
Copyright 1995, Sandia Corporation.
The U.S. Government retains a limited license in this software.

OPPDIF: THE WORK SPACE REQUIREMENTS ARE AS FOLLOWS.

	CHARACTER	INTEGER	LOGICAL	REAL
USED	22	2104	103	125065
EXCESS	178	18396	97	2233935

TOTAL 200 20500 200 2359000

////////////////////////////////////

RDKEY: READING THE KEYWORD INPUT.

MIX
PCAD 0.7
RGTC 1.0
ENRG
PLAT
AFUE 0
AOXI 0
VFUE 100
VOXI 100
TFUE 300
TOXI 300
TMAX 2400
GRID 0.
GRID 0.05
GRID 0.1
GRID 0.25
GRID 0.5
GRID 0.75
GRID 0.9
GRID 1.0
GRID 1.1
GRID 1.25
GRID 1.5
GRID 1.75
GRID 1.9
GRID 1.95
GRID 2.0
XEND 2.0
XCEN 1.0
WMIX 1.5
PRES 1.0
IRET 20
UFAC 2.
SFLR -1.E-4
PRNT 11
TIME 200 1.E-6
TIM2 200 1.E-6
GRAD 0.5
CURV 0.5
FUEL H2 1.0
OXID N2 0.79
OXID O2 0.21
PROD H2O 0.347
PROD N2 0.653
KOUT H2 O2 H2O
RTOL 1.E-3
ATOL 1.E-6

ATIM 1.E-6
 RTIM 1.E-3
 END

TWOPNT: DOUBLE PRECISION (TWO POINT BOUNDARY VALUE PROBLEM) SOLVER,
 VERSION 3.27 OF FEBRUARY 1997 BY DR. JOSEPH F. GRCAR.

TWOPNT: INITIAL GUESS:

X(cm)	F	V(cm/s)	G	H	T(K)	RHO
0.00	4.095E-03	1.000E+02	-3.135E-02	-1.000E+02	3.000E+02	8.189E-05
0.05	2.527E-03	1.209E+02	-3.135E-02	-1.000E+02	7.200E+02	4.179E-05
0.10	9.599E-04	5.638E+01	-3.135E-02	-1.000E+02	1.140E+03	3.405E-05
0.25	-3.742E-03	-6.005E+01	-3.135E-02	-1.000E+02	2.400E+03	1.246E-04
0.50	-1.158E-02	-1.858E+02	-3.135E-02	-1.000E+02	2.400E+03	1.246E-04
0.75	-1.941E-02	-3.116E+02	-3.135E-02	-1.000E+02	2.400E+03	1.246E-04
0.90	-2.412E-02	-3.870E+02	-3.135E-02	-1.000E+02	2.400E+03	1.246E-04
1.00	-2.725E-02	-4.373E+02	-3.135E-02	-1.000E+02	2.400E+03	1.246E-04
1.10	-3.039E-02	-4.876E+02	-3.135E-02	-1.000E+02	2.400E+03	1.246E-04
1.25	-3.509E-02	-5.631E+02	-3.135E-02	-1.000E+02	2.400E+03	1.246E-04
1.50	-4.292E-02	-6.888E+02	-3.135E-02	-1.000E+02	2.400E+03	1.246E-04
1.75	-5.076E-02	-1.776E+02	-3.135E-02	-1.000E+02	6.000E+02	5.716E-04
1.90	-5.546E-02	-1.338E+02	-3.135E-02	-1.000E+02	4.200E+02	8.288E-04
1.95	-5.703E-02	-1.174E+02	-3.135E-02	-1.000E+02	3.600E+02	9.718E-04
2.00	-5.860E-02	-1.000E+02	-3.135E-02	-1.000E+02	3.000E+02	1.172E-03

X(cm)	H2	O2	H2O
0.00	1.000E+00	0.000E+00	0.000E+00
0.05	9.799E-01	0.000E+00	6.982E-03
0.10	9.481E-01	0.000E+00	1.801E-02
0.25	0.000E+00	0.000E+00	3.470E-01
0.50	0.000E+00	0.000E+00	3.470E-01
0.75	0.000E+00	0.000E+00	3.470E-01
0.90	0.000E+00	0.000E+00	3.470E-01
1.00	0.000E+00	0.000E+00	3.470E-01
1.10	0.000E+00	0.000E+00	3.470E-01
1.25	0.000E+00	0.000E+00	3.470E-01
1.50	0.000E+00	0.000E+00	3.470E-01
1.75	0.000E+00	1.756E-01	5.684E-02
1.90	0.000E+00	1.960E-01	2.308E-02
1.95	0.000E+00	2.030E-01	1.160E-02
2.00	0.000E+00	2.100E-01	0.000E+00

TWOPNT: SOLVE THE PROBLEM.

TASK	LOG10 NORM F	LOG10 COND J	REMARK
START	2.01		
SEARCH		7.82	GOING OUT OF BOUNDS
EVOLVE	-0.04	7.83	200 TIME STEPS, 1.0E-04 LAST STRIDE
SEARCH	-2.45	7.68	6 SEARCH STEPS

TWOPNT: FINAL SOLUTION:

X(cm)	F	V(cm/s)	G	H	T(K)	RHO
0.00	2.634E-03	6.179E+01	0.000E+00	-3.143E+01	3.000E+02	8.525E-05
0.05	2.366E-03	1.205E+02	-1.069E-02	-3.143E+01	7.200E+02	3.929E-05
0.10	1.736E-03	1.150E+02	-1.453E-02	-3.143E+01	1.140E+03	3.018E-05
0.25	-1.174E-03	-6.870E+01	-2.427E-02	-3.143E+01	2.400E+03	3.417E-05
0.50	-9.208E-03	-2.079E+02	-4.001E-02	-3.143E+01	2.400E+03	8.860E-05
0.75	-2.002E-02	-2.942E+02	-4.645E-02	-3.143E+01	2.400E+03	1.361E-04
0.90	-2.675E-02	-3.696E+02	-4.328E-02	-3.143E+01	2.400E+03	1.447E-04
1.00	-3.089E-02	-4.228E+02	-3.958E-02	-3.143E+01	2.400E+03	1.461E-04
1.10	-3.464E-02	-4.732E+02	-3.552E-02	-3.143E+01	2.400E+03	1.464E-04
1.25	-3.953E-02	-5.397E+02	-2.957E-02	-3.143E+01	2.400E+03	1.465E-04
1.50	-4.574E-02	-6.244E+02	-2.013E-02	-3.143E+01	2.400E+03	1.465E-04
1.75	-5.293E-02	-1.806E+02	-3.739E-02	-3.143E+01	6.000E+02	5.860E-04
1.90	-5.739E-02	-1.371E+02	-2.217E-02	-3.143E+01	4.200E+02	8.371E-04
1.95	-5.827E-02	-1.193E+02	-1.300E-02	-3.143E+01	3.600E+02	9.766E-04
2.00	-5.860E-02	-1.000E+02	0.000E+00	-3.143E+01	3.000E+02	1.172E-03

X(cm)	H2	O2	H2O
0.00	9.951E-01	1.382E-09	2.177E-03
0.05	9.836E-01	5.025E-09	7.456E-03
0.10	9.581E-01	2.491E-08	1.793E-02
0.25	7.722E-01	5.211E-07	7.976E-02
0.50	2.841E-01	2.678E-04	2.196E-01
0.75	5.259E-03	1.244E-01	9.994E-02
0.90	2.032E-04	1.960E-01	1.445E-02
1.00	1.257E-05	2.072E-01	2.784E-03
1.10	9.027E-07	2.095E-01	5.326E-04
1.25	6.371E-08	2.099E-01	6.418E-05
1.50	4.777E-09	2.100E-01	3.368E-06
1.75	3.428E-10	2.100E-01	9.186E-08
1.90	1.414E-11	2.100E-01	1.171E-09
1.95	2.325E-12	2.100E-01	6.495E-11
2.00	3.693E-13	2.100E-01	3.369E-12

TWOPNT: SUCCESS. PROBLEM SOLVED.

FLDRIV: FINISHED FIXED TEMPERATURE CASE, ADDING THE ENERGY EQUATION.

TWOPNT: DOUBLE PRECISION (TWO POINT BOUNDARY VALUE PROBLEM) SOLVER,
VERSION 3.27 OF FEBRUARY 1997 BY DR. JOSEPH F. GRCAR.

TWOPNT: INITIAL GUESS:

X(cm)	F	V(cm/s)	G	H	T(K)	RHO
0.00	2.634E-03	6.179E+01	0.000E+00	-3.143E+01	3.000E+02	8.525E-05
0.05	2.366E-03	1.205E+02	-1.069E-02	-3.143E+01	7.200E+02	3.929E-05
0.10	1.736E-03	1.150E+02	-1.453E-02	-3.143E+01	1.140E+03	3.018E-05
0.25	-1.174E-03	-6.870E+01	-2.427E-02	-3.143E+01	2.400E+03	3.417E-05
0.50	-9.208E-03	-2.079E+02	-4.001E-02	-3.143E+01	2.400E+03	8.860E-05
0.75	-2.002E-02	-2.942E+02	-4.645E-02	-3.143E+01	2.400E+03	1.361E-04
0.90	-2.675E-02	-3.696E+02	-4.328E-02	-3.143E+01	2.400E+03	1.447E-04

1.00	-3.089E-02	-4.228E+02	-3.958E-02	-3.143E+01	2.400E+03	1.461E-04
1.10	-3.464E-02	-4.732E+02	-3.552E-02	-3.143E+01	2.400E+03	1.464E-04
1.25	-3.953E-02	-5.397E+02	-2.957E-02	-3.143E+01	2.400E+03	1.465E-04
1.50	-4.574E-02	-6.244E+02	-2.013E-02	-3.143E+01	2.400E+03	1.465E-04
1.75	-5.293E-02	-1.806E+02	-3.739E-02	-3.143E+01	6.000E+02	5.860E-04
1.90	-5.739E-02	-1.371E+02	-2.217E-02	-3.143E+01	4.200E+02	8.371E-04
1.95	-5.827E-02	-1.193E+02	-1.300E-02	-3.143E+01	3.600E+02	9.766E-04
2.00	-5.860E-02	-1.000E+02	0.000E+00	-3.143E+01	3.000E+02	1.172E-03

X(cm)	H2	O2	H2O
0.00	9.951E-01	1.382E-09	2.177E-03
0.05	9.836E-01	5.025E-09	7.456E-03
0.10	9.581E-01	2.491E-08	1.793E-02
0.25	7.722E-01	5.211E-07	7.976E-02
0.50	2.841E-01	2.678E-04	2.196E-01
0.75	5.259E-03	1.244E-01	9.994E-02
0.90	2.032E-04	1.960E-01	1.445E-02
1.00	1.257E-05	2.072E-01	2.784E-03
1.10	9.027E-07	2.095E-01	5.326E-04
1.25	6.371E-08	2.099E-01	6.418E-05
1.50	4.777E-09	2.100E-01	3.368E-06
1.75	3.428E-10	2.100E-01	9.186E-08
1.90	1.414E-11	2.100E-01	1.171E-09
1.95	2.325E-12	2.100E-01	6.495E-11
2.00	3.693E-13	2.100E-01	3.369E-12

TWOPNT: SOLVE THE PROBLEM.

TASK	LOG10 NORM F	LOG10 COND J	REMARK
START	2.83		15 GRID POINTS
SEARCH		11.22	GOING OUT OF BOUNDS
EVOLVE	1.46	8.31	200 TIME STEPS, 1.0E-04 LAST STRIDE
SEARCH	-0.98	10.33	11 SEARCH STEPS
REFINE	4.10		1.00 AND 1.00 RATIOS, 23 GRID POINTS
SEARCH		11.22	GOING OUT OF BOUNDS
EVOLVE	1.42	8.39	200 TIME STEPS, 1.0E-04 LAST STRIDE
SEARCH	-1.44	10.74	13 SEARCH STEPS
REFINE	3.58		0.96 AND 1.00 RATIOS, 33 GRID POINTS
SEARCH	-1.15	11.47	23 SEARCH STEPS
REFINE	3.46		0.85 AND 0.94 RATIOS, 39 GRID POINTS
SEARCH	-0.22	11.26	20 SEARCH STEPS
REFINE	2.55		0.53 AND 0.91 RATIOS, 44 GRID POINTS
SEARCH	-0.85	11.42	7 SEARCH STEPS
REFINE	2.14		0.47 AND 0.54 RATIOS, 46 GRID POINTS
SEARCH	-1.43	11.49	5 SEARCH STEPS

REFINE

0.47 AND 0.46 RATIOS

TWOPT: FINAL SOLUTION:

X(cm)	F	V(cm/s)	G	H	T(K)	RHO
0.00	4.093E-03	9.997E+01	0.000E+00	-8.103E+00	3.000E+02	8.189E-05
0.05	3.997E-03	9.767E+01	-3.861E-03	-8.103E+00	3.002E+02	8.184E-05
0.08	3.876E-03	9.482E+01	-5.773E-03	-8.103E+00	3.005E+02	8.176E-05
0.10	3.709E-03	9.092E+01	-7.629E-03	-8.103E+00	3.013E+02	8.158E-05
0.14	3.374E-03	8.339E+01	-1.022E-02	-8.103E+00	3.045E+02	8.093E-05
0.17	2.947E-03	7.417E+01	-1.258E-02	-8.103E+00	3.136E+02	7.947E-05
0.21	2.437E-03	6.302E+01	-1.464E-02	-8.103E+00	3.374E+02	7.732E-05
0.25	1.850E-03	4.820E+01	-1.662E-02	-8.103E+00	3.906E+02	7.678E-05
0.31	6.877E-04	1.590E+01	-2.058E-02	-8.103E+00	5.795E+02	8.651E-05
0.38	-6.800E-04	-1.377E+01	-2.318E-02	-8.103E+00	8.878E+02	9.875E-05
0.44	-2.116E-03	-4.044E+01	-2.277E-02	-8.103E+00	1.259E+03	1.046E-04
0.50	-3.498E-03	-6.473E+01	-2.147E-02	-8.103E+00	1.631E+03	1.081E-04
0.56	-4.791E-03	-8.633E+01	-1.991E-02	-8.103E+00	1.964E+03	1.110E-04
0.62	-5.987E-03	-1.041E+02	-1.837E-02	-8.103E+00	2.221E+03	1.151E-04
0.66	-6.552E-03	-1.101E+02	-1.774E-02	-8.103E+00	2.290E+03	1.190E-04
0.69	-7.101E-03	-1.126E+02	-1.742E-02	-8.103E+00	2.283E+03	1.262E-04
0.70	-7.374E-03	-1.113E+02	-1.753E-02	-8.103E+00	2.233E+03	1.325E-04
0.72	-7.651E-03	-1.082E+02	-1.790E-02	-8.103E+00	2.146E+03	1.414E-04
0.73	-7.936E-03	-1.030E+02	-1.858E-02	-8.103E+00	2.019E+03	1.541E-04
0.75	-8.235E-03	-9.560E+01	-1.972E-02	-8.103E+00	1.850E+03	1.723E-04
0.77	-8.626E-03	-8.395E+01	-2.198E-02	-8.103E+00	1.592E+03	2.055E-04
0.79	-9.075E-03	-6.960E+01	-2.590E-02	-8.103E+00	1.283E+03	2.608E-04
0.80	-9.331E-03	-6.179E+01	-2.884E-02	-8.103E+00	1.118E+03	3.020E-04
0.81	-9.620E-03	-5.388E+01	-3.275E-02	-8.103E+00	9.540E+02	3.571E-04
0.81	-9.779E-03	-5.005E+01	-3.511E-02	-8.103E+00	8.751E+02	3.908E-04
0.82	-9.950E-03	-4.638E+01	-3.777E-02	-8.103E+00	8.000E+02	4.290E-04
0.82	-1.013E-02	-4.296E+01	-4.070E-02	-8.103E+00	7.298E+02	4.718E-04
0.82	-1.033E-02	-3.982E+01	-4.388E-02	-8.103E+00	6.655E+02	5.189E-04
0.83	-1.078E-02	-3.453E+01	-5.077E-02	-8.103E+00	5.561E+02	6.242E-04
0.84	-1.128E-02	-3.060E+01	-5.789E-02	-8.103E+00	4.725E+02	7.375E-04
0.86	-1.248E-02	-2.644E+01	-6.972E-02	-8.103E+00	3.709E+02	9.441E-04
0.88	-1.385E-02	-2.567E+01	-7.624E-02	-8.103E+00	3.254E+02	1.079E-03
0.90	-1.530E-02	-2.686E+01	-7.802E-02	-8.103E+00	3.085E+02	1.139E-03
0.93	-1.724E-02	-2.961E+01	-7.723E-02	-8.103E+00	3.019E+02	1.164E-03
0.95	-1.914E-02	-3.272E+01	-7.539E-02	-8.103E+00	3.004E+02	1.170E-03
0.97	-2.100E-02	-3.585E+01	-7.329E-02	-8.103E+00	3.001E+02	1.172E-03
1.00	-2.281E-02	-3.893E+01	-7.114E-02	-8.103E+00	3.000E+02	1.172E-03
1.05	-2.627E-02	-4.482E+01	-6.715E-02	-8.103E+00	3.000E+02	1.172E-03
1.10	-2.952E-02	-5.038E+01	-6.316E-02	-8.103E+00	3.000E+02	1.172E-03
1.18	-3.405E-02	-5.810E+01	-5.747E-02	-8.103E+00	3.000E+02	1.172E-03
1.25	-3.814E-02	-6.509E+01	-5.171E-02	-8.103E+00	3.000E+02	1.172E-03
1.50	-4.915E-02	-8.387E+01	-3.634E-02	-8.103E+00	3.000E+02	1.172E-03
1.75	-5.613E-02	-9.579E+01	-1.950E-02	-8.103E+00	3.000E+02	1.172E-03
1.90	-5.819E-02	-9.931E+01	-8.051E-03	-8.103E+00	3.000E+02	1.172E-03
1.95	-5.850E-02	-9.983E+01	-4.037E-03	-8.103E+00	3.000E+02	1.172E-03
2.00	-5.860E-02	-1.000E+02	0.000E+00	-8.103E+00	3.000E+02	1.172E-03

X(cm)	H2	O2	H2O
-------	----	----	-----

0.00	1.000E+00	4.284E-15	3.497E-07
0.05	1.000E+00	3.021E-14	2.385E-06
0.08	1.000E+00	1.011E-13	7.737E-06
0.10	9.999E-01	3.770E-13	2.780E-05
0.14	9.997E-01	2.230E-12	1.561E-04
0.17	9.986E-01	1.145E-11	7.332E-04
0.21	9.940E-01	5.582E-11	2.985E-03
0.25	9.788E-01	2.677E-10	1.005E-02
0.31	9.028E-01	2.327E-09	4.123E-02
0.38	7.658E-01	1.786E-08	8.609E-02
0.44	6.062E-01	1.021E-07	1.330E-01
0.50	4.438E-01	9.100E-07	1.805E-01
0.56	2.894E-01	1.505E-05	2.266E-01
0.62	1.484E-01	3.216E-04	2.668E-01
0.66	8.701E-02	2.216E-03	2.781E-01
0.69	4.105E-02	1.321E-02	2.690E-01
0.70	2.646E-02	2.637E-02	2.536E-01
0.72	1.640E-02	4.486E-02	2.326E-01
0.73	9.642E-03	6.737E-02	2.078E-01
0.75	5.259E-03	9.220E-02	1.805E-01
0.77	2.275E-03	1.226E-01	1.451E-01
0.79	1.069E-03	1.510E-01	1.081E-01
0.80	8.310E-04	1.633E-01	8.985E-02
0.81	7.086E-04	1.742E-01	7.238E-02
0.81	6.620E-04	1.790E-01	6.414E-02
0.82	6.206E-04	1.834E-01	5.633E-02
0.82	5.819E-04	1.874E-01	4.901E-02
0.82	5.447E-04	1.909E-01	4.223E-02
0.83	4.732E-04	1.968E-01	3.043E-02
0.84	4.041E-04	2.012E-01	2.106E-02
0.86	2.795E-04	2.065E-01	9.044E-03
0.88	1.811E-04	2.088E-01	3.336E-03
0.90	1.123E-04	2.096E-01	1.141E-03
0.93	5.708E-05	2.099E-01	2.671E-04
0.95	2.793E-05	2.100E-01	5.765E-05
0.97	1.345E-05	2.100E-01	1.197E-05
1.00	6.601E-06	2.100E-01	2.735E-06
1.05	1.745E-06	2.100E-01	2.523E-07
1.10	4.652E-07	2.100E-01	2.420E-08
1.18	7.538E-08	2.100E-01	1.217E-09
1.25	1.478E-08	2.100E-01	8.038E-11
1.50	5.377E-10	2.100E-01	8.567E-13
1.75	1.302E-11	2.100E-01	6.016E-15
1.90	3.659E-13	2.100E-01	4.644E-17
1.95	5.065E-14	2.100E-01	2.018E-18
2.00	7.003E-15	2.100E-01	8.752E-20

TWOPNT: SUCCESS. PROBLEM SOLVED.

POSTOPP

Since graphics routines are not portable to all machines, Oppdif does not contain any graphical output. Instead, we provide the user with a text post-processor called Postopp that reads the raw solution and generates text files for plotting purposes. Postopp can read binary files in either the Save or Recover formats.

Postopp is intended to run interactively, using the same kind of keyword input. The specific keywords available for Postopp are printed as a banner when the program is invoked, and there is a help keyword that provides more information.

Postopp writes text files of data in columnar form. One file contains the species fractions requested by the interactive input. A second file contains other solution variables:

- 1) temperature, T
- 2) density, ρ
- 3) fuel mixture fraction: mass of fuel elements (C and H) per mass of mixture
- 4) velocities: axial, u and radial, v/r
- 5) strain rates: normal $\partial u/\partial x$ and shear $\partial(-v/r)/\partial x$

This file was used to generate the plots for the example solution shown on the next page.

A third file contains reaction rates, if requested, for a specific species of interest. Postopp compares the peak rates for individual reactions to the total rate to filter out unimportant reactions. The printed rate is scaled by $\dot{\omega}_k W_k/\rho$ with units of inverse seconds.

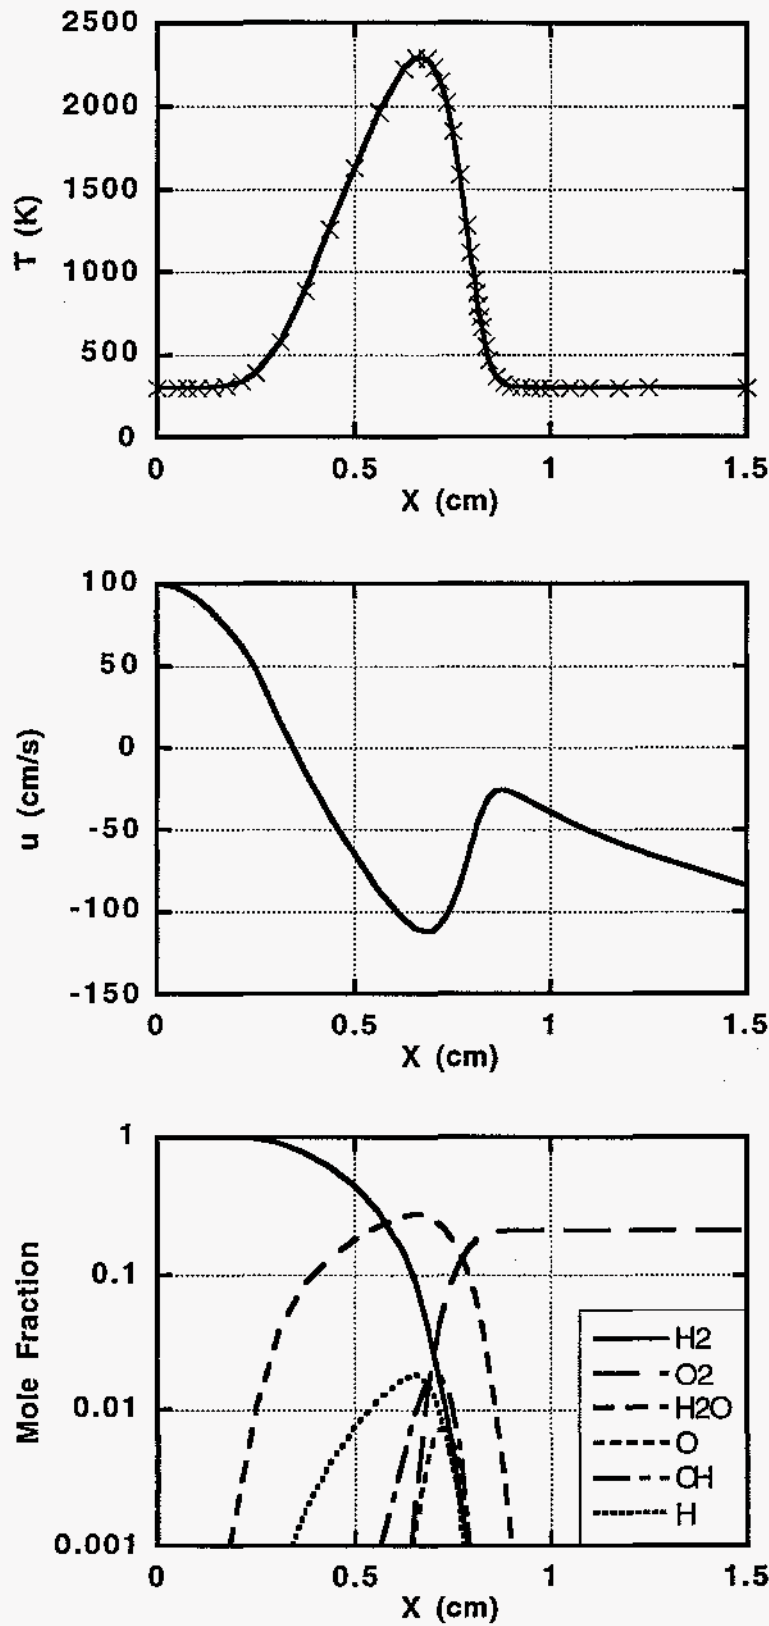


Figure 5. Temperature, velocity, and mole fraction profiles for example H_2 -air flame computation. Symbols on the temperature curve denote gridpoint locations.

NUSTART

Nustart is a post-processing routine that converts the binary solution file into a restart file for a different chemical mechanism than the original solution used. Since the solution file contains a list of the species, any change in the mechanism that adds a new species would require starting a new Oppdif computation from an original job. Original jobs almost always require more computational effort than restart jobs, so there is an advantage in being able to revise the solution file for restart. For example, users with large mechanisms may save computation time by running their first flame with a smaller mechanism, then converting the solution file to the full mechanism and restarting.

To run Nustart:

- 1) Rename the solution file (`save.bin`) to `oldsave.bin`.
- 2) Re-run the Chemkin interpreter to create a new binary linking file (`chem.bin`).
- 3) Execute Nustart, which will create a new solution file: `newsave.bin`.

Nustart allows you to specify species profiles for new species by reading them from unit 5 until it finds an **END**.

- 4) Rename the new solution file for Oppdif to use for restart: `rest.bin`

REFERENCES

1. Kee, R. J., Miller, J. A., and Evans, G. H.: *Twenty-Second Symposium (International) on Combustion*, The Combustion Institute, p. 1479 (1988).
2. Karman, T. von: *NACA Tech. Mem.* 1092 (1921).
3. Schlichting, H.: *Boundary Layer Theory*, McGraw-Hill, p. 91 (1968).
4. Hahn, W. A., Wendt, J. O. L., and Tyson, T. J.: *Comb Sci and Tech* **27**, 1 (1981).
5. Hahn, W. A. and Wendt, J. O. L.: *Eighteenth Symposium (International) on Combustion*, The Combustion Institute, p. 121 (1981).
6. Tsuji, H. and Yamaoka, I.: *Eleventh Symposium (International) on Combustion*, The Combustion Institute, p. 979 (1967).
7. Dixon-Lewis, G., David, T., Gaskell, P. H., Fukatani, S., Jinno, H., Miller, J. A., Kee, R. J., Smooke, M. D., Peters, N., Effelsberg, E., Warnatz, J., and Behrendt, F.: *Twentieth Symposium (International) on Combustion*, The Combustion Institute, p. 1893 (1985).
8. Miller, J. A., Kee, R. J., Smooke, M. D., and Grcar, J. F.: Paper WSS/CI 84-10, Western States Section of the Combustion Institute, Spring Meeting 1984.
9. Chapman, T. W. and Bauer, G. L.: *Appl. Sci. Res.* **31**, 223 (1975).
10. Seshadri, K. and Williams, F. A.: *Int. J. Heat Mass Transfer* **21**, 251 (1978).
11. Evans, G. H. and Greif, R.: *Numerical Heat Transfer* **14**, 373 (1988).
12. Puri, I. K., Seshadri, K., Smooke, M. D., and Keyes, D. E.: *Combust. Sci. and Tech.*, **56**, 1 (1987).
13. Kee, R. J., Miller, J. A., and Jefferson, T. H.: "Chemkin: A General-Purpose, Problem-Independent, Transportable, Fortran Chemical Kinetics Code Package," Sandia National Laboratories Report SAND80-8003, (1980).
14. Kee, R. J., Dixon-Lewis, G., Warnatz, J., Coltrin, M. E., and Miller, J. A.: "A Fortran Computer Code Package for the Evaluation of Gas-Phase Multicomponent Transport Properties," Sandia National Laboratories Report SAND86-8246, (1986).
15. Grcar, J.F.: "The Twopnt Program for Boundary Value Problems," Sandia National Laboratories Report SAND91-8230, April (1992).

INITIAL DISTRIBUTION
UNLIMITED RELEASE

Kee, R. J.
Engineering Division
Colorado School of Mines
Golden, CO 80401-1887

Klipstein, David H.
Reaction Design
11436 Sorrento Valley Road
San Diego, CA 92121

Atreya, Arvind
2158 G. G. Brown Bldg
MEAM Department
University of Michigan
Ann Arbor, MI 48109-2125

Dahm, Werner J.A.
Laboratory for Turbulence & Combustion (LTC)
Department of Aerospace Engineering
The University of Michigan
Ann Arbor, MI 48109-2118

Dibble, Robert
Department of Mechanical Engineering
University of California at Berkeley
Berkeley, CA 94720-1740

Chen, J.-Y.
Department of Mechanical Engineering
University of California at Berkeley
Berkeley, CA 94720-1740

Dandy, David S.
Department of Agricultural and Chemical Engineering
Colorado State University
Fort Collins, CO 80523

Donbar, Jeff
WL/POPT
Bldg 18A
1950 Fifth Street
WPAFB, OH 45433-7251

Fendell, Francis E.
Building R1, Rm 1062
TRW
One Space Park
Redondo Beach, CA 90287

Glarborg, Peter
Department of Chemical Engineering
Bldg 229
Technical Univeristy of Denmark
DK-2800 Lyngby
DENMARK

Kosaly, George
Mechanical Engineering Department
FU-10
University of Washington
Seattle, WA 98195

Gore, Jay
School of Mechanical Engineering
Purdue Univeristy
West Lafayette, IN 47907-1288

Laurendeau, Norm
School of Mechanical Engineering
Purdue Univeristy
West Lafayette, IN 47907-1288

Marinov, Nick M.
L-014
Lawrence Livermore National Laboratories
Livermore, CA 94551

Pitz, William J.
L-014
Lawrence Livermore National Laboratories
Livermore, CA 94551

Westbrook, Charlie
L-014
Lawrence Livermore National Laboratories
Livermore, CA 94551

Pitz, Robert W.
Vanderbilt University
Box 54, Station B
Nashville, Tennessee 37235

Turns, Stephen R.
Propulsion Engineering Research Center
The Pennsylvania State University
Research Building East - Bigler Road
University Park, PA 16802-2319

Peeters , Tim W. J.
Delft Univ. of Technology
Faculty of Applied Physics
P.O Box 5046
1600 GA Delft
The Netherlands

Lai , Ming-Chia
Wayne State Univ.
Mechanical Engineering Dept.
Detroit, Michigan 48202

Dreyer, Christopher B.
Center for Combustion Research
University of Colorado at Boulder
ECME 133, Campus Box 427
Boulder, CO, 80309

Branch, Melvyn C.
Center for Combustion Research
University of Colorado at Boulder
ECME 133, Campus Box 427
Boulder, CO, 80309

Montgomery , Chris
Univ. of Washington
Dept. of Mechanical Engineering
MS FU-10
Seattle, Washington 98195

Pan , Xiaochun
Univ. of Wisconsin
Dept. of Mechanical Engineering
Milwaukee, Wisconsin 53201

Hendron , Thomas
Colorado State Univ.
Chemical Engineering Dept.
4112 Dillon Way
Fort Collins, Colorado 80526-3539

Figueira da Silva , Luis Fernando
Laboratoire D'Energetique et de Detonique
E.N.S.M.A.; U.R.A. 193 au C.N.R.S.
rue Guillaume VII
86034 Poitiers Cedex
FRANCE

Fridman, Alexander
Dept. of Mechanical Engineering
M/C 251
842 W. Taylor
Chicago, IL 60607

Hyde, Simon
School of Mechanical Engineering
Cranfield University
Cranfield
Beds. MK43 0AL.
UNITED KINGDOM

Blevins, Linda G.
National Institute of Standards & Technology
Building & Fire Research Laboratory
Bldg. 224/Rm B360 Gaithersburg, MD 20899-0001

Drummond, Philip J.
NASA Langley Research Center
Mail Stop 197
Hampton, VA 23681-0001

Brooker, John
MS 500-115
NASA-LERC
21000 Brookpark Rd.
Cleveland, OH 44135

Dixon-Lewis, Graham
University of Leeds
Leeds, LS2 9JT
ENGLAND

Ravikrishna, Rayavarapu V
School of Mechanical Engineering
Purdue University
West Lafayette, IN 47907-1288

Tseng, Li-Keng
School of Mechanical Engineering
Purdue University
West Lafayette, IN 47907-1288

Takeo, Tadao
Department of Mechanical Engineering
Nagoya University Chikusa-ku
Nagoya
464-01
JAPAN

Ferreira, Jorge C.
ETH Swiss Federal Institute of Technology
Energy Systems Laboratory
ETH Zentrum LOW C5
CH-8092 Zurich
SWITZERLAND

Turanyi, Tamas
Univeristy of Leeds
Leeds, LS2 9JT
ENGLAND

Mahalingam, Shankar
Department of Mechanical Engineering
University of Colorado at Boulder
Boulder, CO 80309-0427

Fleming , James W.
Code 6185
U.S. Naval Research Lab
Washington, DC 20375-5342

Von Drasek, Bill
American Air Liquide
5230 S. East Ave.
Countryside, IL 60525

Selim M. Senkan (5)
Dept. of Chemical Engineering, UCLA
405 Hilgard Ave
5531 Boelter Hall
Los Angeles, CA 90095

0601 H. K. Moffat, 1126
0601 M. E. Coltrin, 1126

9042 C. M. Hartwig, 8345
9042 G. H. Evans, 8345
9042 J. F. Grear, 8345
9042 S. Griffiths, 8345
9042 W. G. Houf, 8345
9042 R. S. Larson, 8345
9042 A. E. Lutz, 8345 (30)
9042 E. Meeks, 8345
9042 C. D. Moen, 8345
9042 B Nilson, 8345
9042 F. M. Rupley, 8345
9042 P. Spence, 8345
9042 A. Ting, 8345
9042 W. S. Winters, 8345

9052 M. D. Allendorf, 8361
9052 L. L. Baxter, 8361
9054 W. J. McLean, 8300
9055 J. A. Miller, 8353
9057 L. A. Rahn, 8351
9057 W. T. Ashurst, 8351
9057 R. S. Barlow, 8351
9057 P. H. Paul, 8351
9057 J. H. Chen, 8351
9057 H. N. Najm, 8351
9057 R. W. Schefer, 8351
9057 W. Kollmann, 8351

9021 Technical Communications Department, 8815 for OSTI (10)
9021 Technical Communications Department, 8815/Technical Library, MS 0899,4414
8099 Technical Library 4414 (4)
9018 Central Technical Files, 8950-2 (3)