

Optimal Design of Passenger Car Suspension for Ride and Road Holding

Anil Shirahatt

anilmeh@yahoo.com
Vehicles Research and Development
Establishment
Ahamadnagar, Pune, India

P.S.S. Prasad

pssai@yahoo.com

Pravin Panzade

pkpanzade@kanbay.com

M.M. Kulkarni

mmkulkarni_vrde@rediffmail.com
Vehicles Research and Development
Establishment
Ahamadnagar, Pune, India

The primary function of a vehicle suspension system is to isolate the road excitations experienced by the tyres from being transmitted to the passengers. In this paper, a suitable optimizing technique is applied at design stage to obtain the suspension parameters of a passive suspension and active suspension for a passenger car which satisfies the performance as per ISO 2631 standards. A number of objectives such as maximum bouncing acceleration of seat and sprung mass, root mean square (RMS) weighted acceleration of seat and sprung mass as per ISO2631 standards, jerk, suspension travel, road holding and tyre deflection are minimized subjected to a number of constraints. The constraints arise from the practical kinetic and comfortability considerations, such as limits of the maximum vertical acceleration of the passenger seat, tyre displacement and the suspension working space. The genetic algorithm (GA) is used to solve the problem and results were compared to those obtained by simulated annealing (SA) technique and found to yields similar performance measures. Both the passive and active suspension systems are compared in time domain analyses subjected to sinusoidal road input. Results show passenger bounce, passenger acceleration, and tyre displacement are reduced by 74.2%, 88.72% and 28.5% respectively, indicating active suspension system has better potential to improve both comfort and road holding.

Keywords: ride comfort, road holding, LQR control, genetic algorithm, simulated annealing

Introduction

Shock absorption in automobiles is performed by suspension system that carries the weight of the vehicle while attempting to reduce or eliminate vibrations which may be induced by a variety of sources, such as road surface irregularities, aerodynamics forces, vibrations of the engine and driveline, and non-uniformity of the tire/wheel assembly. Usually, road surface irregularities, ranging from potholes to random variations of the surface elevation profile, acts as a major source that excites the vibration of the vehicle body through the tire/wheel assembly and the suspension system (Wong, 1998).

Multi-body dynamics has been used extensively by automotive industry to model and design vehicle suspension. Before modern optimization methods were introduced, design engineers used to follow the iterative approach of testing various input parameters for vehicle suspension performance. The whole analysis will be continued until the predefined performance measures were achieved. Design optimization, parametric studies and sensitivity analyses were difficult, if not impossible to perform. This traditional optimization process usually accompanied by prototype testing, could be difficult and time-consuming for complete complex systems. With the advent of various optimization methods along with developments in computational technology, the design process has been speeded up to reach optimal values and also facilitated the studies on influence of design parameters in order to get the minimum/maximum of an objective function subjected to the constraints. These constraints incorporate the practical considerations into the design process (Baumal et al., 1998).

Zaremba et al. (1997) used constrained optimization procedure for designing a 2DOF car vehicle model optimal control schemes for an active suspension. The control laws obtained minimized the vehicle acceleration subject to constraints on RMS values of the suspension stroke, tyre deformation and actuator force.

Gobbi et al. (2001) used a 2DOF vehicle model and introduced an optimization method, based on Multi-Objective Programming

and Monotonicity analysis and applied for the symbolic derivation of analytical formulae featuring the best compromise among conflicting performance indices pertaining to the vehicle suspension system, i.e. discomfort, road holding and working space.

Alkhatib et al. (2004) used genetic algorithm method to the optimization problem of a linear 1DOF vibration isolator mount and the method is extended to the optimization of a linear 2DOF car suspension model and an optimal relationship between the RMS of the absolute acceleration and the RMS of the relative displacement was found.

Baumal et al. (1998) demonstrated numerical optimization methods to partially automate the design process. GA is used to determine both the active control and passive mechanical parameters of a vehicle suspension system (5DOF) subjected to sinusoidal road profile. The objective is to minimize the extreme acceleration of the passenger's seat, subject to constraints representing the required road-holding ability and suspension working space.

Sun (2002) proposed a methodology on the concept of optimum design of a road-friendly suspension to attenuate the tyre load exerted by vehicles on pavement. A walking-beam suspension system traveling at the speed of 20 m/s was used in a case study.

Gao et al. (2006) proposed a load-dependent controller approach to solve the problem of multiobjective control of quarter car active suspension systems with uncertain parameters. Rettig et al. (2005) focused on optimal control issues arising in semi-active vehicle suspension motivated by the application of continuously controllable ERF-shock absorbers.

Ahmadian et al. (In press) designed an active suspension system and implemented to smooth the amplitude and acceleration received by the passenger within the human health threshold limits. A quarter car model is considered and three control approaches namely optimal control, Fuzzy Control, and Adaptive Optimal Fuzzy Control (AOFC) are applied.

Bourmistrova et al. (2005) applied evolutionary algorithms to the optimization of the control system parameters of quarter car model. The multiobjective fitness function which is a weighted sum of car body rate-of-change of acceleration and suspension travel is minimized.

Mantaras and Luque (2006) used 2DOF model in the analysis of seven different active suspension control strategies: LQR-LQG,

Robust design, Kalman filter, Skyhook damper, Pole-assignment, Neural network and Fuzzy logic. Computer simulations of the different active models and the equivalent passive systems are performed to obtain the vertical acceleration of the sprung mass and the vertical wheel load variation.

Sharkawy (2005) described fuzzy and adaptive fuzzy control (AFC) schemes for the automobile active suspension system (ASS). The design objective was to provide smooth vertical motion so as to achieve the road holding and riding comfort over a wide range of road profiles.

Roumy et. al. (2004) developed LQR and H_∞ controller for quarter car model. The structure's modal parameters are extracted from frequency response data, and are used to obtain a state-space realization. The performance of controller design techniques such as LQR and H_∞ is assessed through simulation.

Georg Rill (2006) shows that the overall vehicle model can be solved very effectively by suitable interfaces and an implicit integration algorithm. This modeling concept is realized with a MATLAB/Simulink interface in the product ve-DYNA which also includes suitable models for the driver.

Analysis of prior research shows that the suspension parameters are optimally designed to attain the best compromise between ride quality and suspension deflections. However, inadequate investigations had been done to apply optimization technique at design stage itself so that suspension parameters satisfies the comfort as specified by international standard ISO 2631-1 for whole-body vibration assessment. The present work aims at developing a suitable optimizing technique to apply at design stage to obtain the suspension parameters of a passive suspension and active suspension for a passenger car which satisfies the performance as per ISO 2631 standards. First, mathematical model has been developed using an 8 DOF full car model for passive and active suspension system. Secondly, for active suspension system LQR controller is designed. A number of objectives such as maximum bouncing acceleration of seat and sprung mass, root mean square (RMS) weighted acceleration of seat and sprung mass as per ISO2631 standards, jerk, suspension travel, road holding and tyre deflection are minimized subjected to a number of constraints. The genetic algorithm (GA) is used to solve the problem and the results are compared with those obtained by simulated annealing method.

Mathematical Model

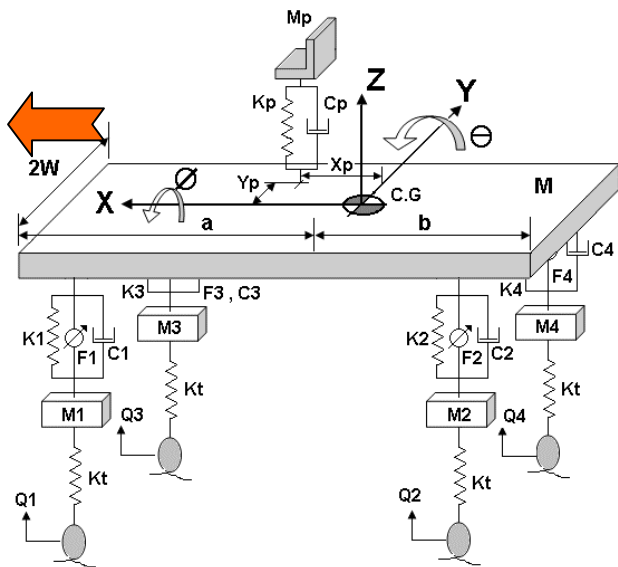


Figure 1. Full car model.

Where,

- M_p : Passenger seat mass (kg)
- M : Sprung mass (kg)
- M_1 & M_3 : Front left and front right side unsprung mass respectively (kg)
- M_2 & M_4 : Rear left and rear right side unsprung mass respectively (kg)
- K_p : Passenger Seat Stiffness (N/m)
- K_1 & K_3 : Front left and front right side spring stiffness respectively (N/m)
- K_2 & K_4 : Rear left and rear right side spring stiffness respectively (N/m)
- K_t : Tyre stiffness (N/m)
- C_p : Passenger seat damping coefficient (Ns/m)
- C_1 & C_3 : Front left and front right side suspension damping co-eff. respectively (Ns/m)
- C_2 & C_4 : Rear left and rear right side suspension damping co-eff. respectively (Ns/m)
- F_1 & F_3 : Front left and front right side actuator force respectively (N)
- F_2 & F_4 : Rear left and rear right side actuator force respectively (N)
- a & b : C.G location from front and rear axle respectively (m)
- $2W$: Wheel track (m)
- X_p & Y_p : Distance of seat position from CG of sprung mass (m)
- I_x : Mass moment of inertia for roll ($kg\cdot m^2$)
- I_y : Mass moment of inertia for roll ($kg\cdot m^2$)
- Q_1 & Q_3 : Road input at front left and front right side respectively.
- Q_2 & Q_4 : Road input at rear left and rear right side respectively.

A full car model with eight degrees of freedom is considered for analysis. Fig 1 shows a full car (8DOF) model consisting of passenger seat and sprung mass referring to the part of the car that is supported on springs and unsprung mass which refers to the mass of wheel assembly. The tire has been replaced with its equivalent stiffness and tire damping is neglected. The suspension, tire, passenger seat are modeled by linear springs in parallel with dampers. In the vehicle model sprung mass is considered to have 3DOF i.e. bounce, pitch and roll while passenger seat and four unsprung mass have 1DOF each.

Using the Newton's second law of motion and free-body diagram concept, the following equations of motion are derived.

$$M_p \ddot{Z}_p + K_p(Z_p - Z - X_p\theta - Y_p\phi) + C_p(\dot{Z}_p - \dot{Z} - \dot{X}_p\dot{\theta} - \dot{Y}_p\dot{\phi}) = 0 \quad (1)$$

$$M \ddot{Z} + K_1(Z - a\theta + W\phi - Z_1) + C_1(\dot{Z} - a\dot{\theta} + W\dot{\phi} - \dot{Z}_1) + K_2(Z + b\theta + W\phi - Z_2) + C_2(\dot{Z} + b\dot{\theta} + W\dot{\phi} - \dot{Z}_2) + K_3(Z - a\theta - W\phi - Z_3) + C_3(\dot{Z} - a\dot{\theta} - W\dot{\phi} - \dot{Z}_3) + K_4(Z + b\theta - W\phi - Z_4) + C_4(\dot{Z} + b\dot{\theta} - W\dot{\phi} - \dot{Z}_4) - K_p(Z_p - Z - X_p\theta - Y_p\phi) - C_p(\dot{Z}_p - \dot{Z} - \dot{X}_p\dot{\theta} - \dot{Y}_p\dot{\phi}) - F_1 - F_2 - F_3 - F_4 = 0 \quad (2)$$

$$I_x \ddot{\phi} + WK_1(Z - a\theta + W\phi - Z_1) - WC_1(\dot{Z} - a\dot{\theta} + W\dot{\phi} - \dot{Z}_1) + WK_2(Z + b\theta + W\phi - Z_2) + WC_2(\dot{Z} + b\dot{\theta} + W\dot{\phi} - \dot{Z}_2) - WK_3(Z - a\theta - W\phi - Z_3) - WC_3(\dot{Z} - a\dot{\theta} - W\dot{\phi} - \dot{Z}_3) - WK_4(Z + b\theta - W\phi - Z_4) - WC_4(\dot{Z} + b\dot{\theta} - W\dot{\phi} - \dot{Z}_4) + Y_p K_p(Z_p - Z - X_p\theta - Y_p\phi) + Y_p C_p(\dot{Z}_p - \dot{Z} - \dot{X}_p\dot{\theta} - \dot{Y}_p\dot{\phi}) - WF_1 - WF_2 + WF_3 + WF_4 = 0 \quad (3)$$

$$\begin{aligned}
 & I_y \ddot{\theta} - aK_1(Z - a\theta + W\phi - Z_1) + aC_1(\dot{Z} - a\dot{\theta} + W\dot{\phi} - \dot{Z}_1) + bK_2(Z + b\theta + W\phi - Z_2) \\
 & + bC_2(\dot{Z} + b\dot{\theta} + W\dot{\phi} - \dot{Z}_2) - aK_3(Z - a\theta - W\phi - Z_3) - aC_3(\dot{Z} - a\dot{\theta} - W\dot{\phi} - \dot{Z}_3) \quad (4) \\
 & + bK_4(Z + b\theta - W\phi - Z_4) + bC_4(\dot{Z} + b\dot{\theta} - W\dot{\phi} - \dot{Z}_4) + X_p K_p(Z_p - Z - X_p\theta - Y_p\phi) \\
 & + X_p C_p(\dot{Z}_p - \dot{Z} - X_p\dot{\theta} - Y_p\dot{\phi}) + aF_1 - bF_2 + aF_3 - bF_4 = 0
 \end{aligned}$$

$$M_1 \ddot{Z}_1 - K_1(Z - a\theta + W\phi - Z_1) - C_1(\dot{Z} - a\dot{\theta} + W\dot{\phi} - \dot{Z}_1) + K_1(Z_1 - Q_1) + F_1 = 0 \quad (5)$$

$$M_2 \ddot{Z}_2 - K_2(Z + b\theta + W\phi - Z_2) - C_2(\dot{Z} + b\dot{\theta} + W\dot{\phi} - \dot{Z}_2) + K_2(Z_2 - Q_2) + F_2 = 0 \quad (6)$$

$$M_3 \ddot{Z}_3 - K_3(Z - a\theta - W\phi - Z_3) - C_3(\dot{Z} - a\dot{\theta} - W\dot{\phi} - \dot{Z}_3) + K_3(Z_3 - Q_3) + F_3 = 0 \quad (7)$$

$$M_4 \ddot{Z}_4 - K_4(Z + b\theta - W\phi - Z_4) - C_4(\dot{Z} + b\dot{\theta} - W\dot{\phi} - \dot{Z}_4) + K_4(Z_4 - Q_4) + F_4 = 0 \quad (8)$$

Using following state space variables,

$$Z_p = X_1 \quad \dot{Z}_p = X_2 \quad Z = X_3 \quad \dot{Z} = X_4 \quad \phi = X_5 \quad \dot{\phi} = X_6$$

$$\theta = X_7 \quad \dot{\theta} = X_8 \quad Z_1 = X_9 \quad \dot{Z}_1 = X_{10} \quad Z_2 = X_{11} \quad \dot{Z}_2 = X_{12}$$

$$Z_3 = X_{13} \quad \dot{Z}_3 = X_{14} \quad Z_4 = X_{15} \quad \dot{Z}_4 = X_{16}$$

Substituting above variables in Eq.(1-8) and writing the equations in state space representation form,

$$\dot{X} = AX + BQ + GF \quad (9)$$

Where,

$$A = [A_1 \ A_2 \ A_3 \ A_4 \ A_5 \ A_6 \ A_7 \ A_8 \ A_9 \ A_{10} \ A_{11} \ A_{12} \ A_{13} \ A_{14} \ A_{15} \ A_{16}]^T$$

$$X = [X_1 \ X_2 \ X_3 \ X_4 \ X_5 \ X_6 \ X_7 \ X_8 \ X_9 \ X_{10} \ X_{11} \ X_{12} \ X_{13} \ X_{14} \ X_{15} \ X_{16}]^T$$

$$B = \begin{bmatrix} B_1 \\ B_2 \\ B_3 \\ B_4 \end{bmatrix}^T \quad Q = \begin{bmatrix} Q_1 \\ Q_2 \\ Q_3 \\ Q_4 \end{bmatrix} \quad G = \begin{bmatrix} G_1 \\ G_2 \\ G_3 \\ G_4 \end{bmatrix}^T \quad F = \begin{bmatrix} F_1 \\ F_2 \\ F_3 \\ F_4 \end{bmatrix}$$

$$B_1 = [0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0]^T$$

$$B_2 = [0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0]^T$$

$$B_3 = [0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0]^T$$

$$B_4 = [0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0]^T$$

$$G_1 = [0 \ 0 \ 0 \ 1/M \ 0 \ W/I_x \ 0 \ -a/I_y \ 0 \ -1/M_1 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0]^T$$

$$G_2 = [0 \ 0 \ 0 \ 1/M \ 0 \ W/I_x \ 0 \ b/I_y \ 0 \ 0 \ 0 \ -1/M_2 \ 0 \ 0 \ 0 \ 0]^T$$

$$G_3 = [0 \ 0 \ 0 \ 1/M \ 0 \ -W/I_x \ 0 \ -a/I_y \ 0 \ 0 \ 0 \ 0 \ 0 \ -1/M_3 \ 0 \ 0]^T$$

$$G_4 = [0 \ 0 \ 0 \ 1/M \ 0 \ -W/I_x \ 0 \ b/I_y \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ -1/M_4]^T$$

$$A_1 = [0 \ 1 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0]$$

$$A_3 = [0 \ 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0]$$

$$A_5 = [0 \ 0 \ 0 \ 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0]$$

$$A_7 = [0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0]$$

$$A_9 = [0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0]$$

$$A_{11} = [0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ 0]$$

$$A_{13} = [0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 1 \ 0 \ 0]$$

$$A_{15} = [0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 1]$$

$$A_2 = \begin{pmatrix} -1 \\ M_p \end{pmatrix} \quad A_4 = \begin{pmatrix} -1 \\ M \end{pmatrix}$$

$$\begin{bmatrix} K_p \\ C_p \\ -K_p \\ -C_p \\ -Y_p K_p \\ -Y_p C_p \\ -X_p K_p \\ -X_p C_p \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}^T \quad \begin{bmatrix} -K_p \\ -C_p \\ (K_1 + K_2 + K_3 + K_4 + K_p) \\ (C_1 + C_2 + C_3 + C_4 + C_p) \\ (W(K_1 + K_2 - K_3 - K_4) + Y_p K_p) \\ (W(C_1 + C_2 - C_3 - C_4) + Y_p C_p) \\ (-aK_1 + bK_2 - aK_3 + bK_4 + X_p K_p) \\ (-aC_1 + bC_2 - aC_3 + bC_4 + X_p C_p) \\ -K_1 \\ -C_1 \\ -K_2 \\ -C_2 \\ -K_3 \\ -C_3 \\ -K_4 \\ -C_4 \end{bmatrix}^T$$

$$A_6 = \begin{pmatrix} -1 \\ I_x \end{pmatrix} \begin{bmatrix} K_p Y \\ C_p Y_p \\ (W(K_1 + K_2 - K_3 - K_4) + Y_p K_p) \\ (W(C_1 + C_2 - C_3 - C_4) + Y_p C_p) \\ (W^2(K_1 + K_2 + K_3 + K_4) - Y_p^2 K_p) \\ (W^2(C_1 + C_2 + C_3 + C_4) - Y_p^2 C_p) \\ (-aK_1 W + bK_2 W + aK_3 W - bWK_4 - X_p Y_p K_p) \\ (-aC_1 W + bC_2 W + aC_3 W - bWC_4 - X_p Y_p C_p) \\ -K_1 W \\ -C_1 W \\ -K_2 W \\ -C_2 W \\ K_3 W \\ C_3 W \\ K_4 W \\ C_4 W \end{bmatrix}^T$$

$$A_8 = \begin{pmatrix} -1 \\ I_y \end{pmatrix} \begin{bmatrix} K_p X_p \\ C_p X_p \\ (-aK_1 + bK_2 - aK_3 + bK_4 - X_p K_p) \\ (-aC_1 + bC_2 - aC_3 + bC_4 - X_p C_p) \\ (-aK_1 W + bK_2 W + aK_3 W - bWK_4 - X_p Y_p K_p) \\ (-aC_1 W + bC_2 W + aC_3 W - bWC_4 - X_p Y_p C_p) \\ (a^2(K_1 + K_2 + K_3 + K_4) - X_p^2 K_p) \\ (a^2(C_1 + C_2 + C_3 + C_4) - X_p^2 C_p) \\ aK_1 \\ aC_1 \\ -bK_2 \\ -bC_2 \\ aK_3 \\ aC_3 \\ -bK_4 \\ -bC_4 \end{bmatrix}^T$$

$$A_{10} = \begin{pmatrix} -1 \\ M_1 \end{pmatrix} \begin{bmatrix} 0 \\ 0 \\ -K_1 \\ -C_1 \\ -K_1 W \\ C_1 W \\ aK_1 \\ aC_1 \\ C_1 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}^T$$

$$A_{12} = \begin{pmatrix} -1 \\ M_2 \end{pmatrix} \begin{bmatrix} 0 \\ 0 \\ -K_2 \\ -C_2 \\ -K_2 W \\ -C_1 W \\ -bK_2 \\ -bC_2 \\ 0 \\ 0 \\ (K_2 + K_t) \\ C_2 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}^T$$

$$A_{14} = \begin{pmatrix} -1 \\ M_3 \end{pmatrix} \begin{bmatrix} 0 \\ 0 \\ -K_3 \\ -C_3 \\ K_3 W \\ C_3 W \\ aK_3 \\ aC_3 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ (K_3 + K_t) \\ C_3 \\ 0 \\ 0 \end{bmatrix}^T$$

$$A_{16} = \begin{pmatrix} -1 \\ M_4 \end{pmatrix} \begin{bmatrix} 0 \\ 0 \\ -K_4 \\ -C_4 \\ K_4 W \\ C_4 W \\ -bK_4 \\ -bC_4 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ (K_4 + K_t) \\ C_4 \end{bmatrix}^T$$

Active Suspension System

The linear time invariant system (LTI) is described by Eq.(9). For controller design it is assumed that all the states are available and also could be measured exactly. First of all let us consider a state variable feedback regulator (Ogata, 1996);

$$F = -KX \tag{10}$$

Where K is the state feedback gain matrix.

The optimization procedure consists of determining the control input F which minimizes the performance index. The performance index J represents the performance characteristic requirement as well as the controller input limitations. In this work LQR control scheme is used to find the control force required, for which one has evaluate the performance index J and hence design the optimal LQR controller. The optimization procedure consists of determining the control input F, which minimizes J, the performance characteristic requirement as well as the controller input limitations.

$$J = \int_0^{\infty} (X^T P X + F^T R F) dt \tag{11}$$

Where

$$X = [X_1 X_2 X_3 X_4 X_5 X_6 X_7 X_8 X_9 X_{10} X_{11} X_{12} X_{13} X_{14} X_{15} X_{16}]^T$$

also $F = \begin{bmatrix} F_1 \\ F_2 \\ F_3 \\ F_4 \end{bmatrix}$ and P and R are positive and are called weighting matrices.

The function inside the integral in Eq.(11) is a quadratic form and the matrices P and R are usually symmetric. It is assumed that R is positive definite and P is positive semi definite. If R is very large relative to P, which implies that the control energy is penalized heavily, the control effort will diminish at the expense of larger values for the state. When P is very large relative to R, which implies that the state is penalized heavily, the control effort rises to reduce the state, resulting in a damped system. P and R represent respective weights on different states and control channels respectively and are assumed accordingly.

Several procedures are available to solve the LQR problem. One approach to find a controller that minimizes the LQR cost function is based on finding the positive-definite solution of the following

Algebraic Riccati Equation. Linear optimal control theory provides the solution of Eq.(11) in terms of Eq.(10).

The gain matrix K is computed from;

$$K = R^{-1}G^T E \tag{12}$$

Where the matrix E is evaluated being the solution of the Algebraic Riccati Equation ;

$$AE + A^T E - EGR^{-1}G^T E + P = 0 \tag{13}$$

And substituting gain matrix K in eqn. 9 we get

$$\dot{X} = (A - GK)X + BQ \tag{14}$$

While designing the LQR controller more weightage is given to ride comfort and an upper limit of 25N is kept to the controlling force depending on the design constraints to reduce cost function. Due to their effectiveness in searching optimal design parameters and obtaining globally optimal solution, the Genetic Algorithms are applied to find the optimal actuator configuration.

Passive Suspension System

For passive suspension system as there is no actuator force i.e. [F] =0 and Eq.(9) becomes

$$\dot{X} = AX + BQ \tag{15}$$

The Eq.(14) and Eq.(15) can be solved for frequency domain or time domain using Matlab [Ogata, 1996].

Optimization and Analysis

Analysis of the suspension system generally implies solving Eq.(1-8) for the time response of the system. The following optimization methods and procedure is adopted for analysis.

Optimization Problem Formulation

The performance characteristics which are of most interest when designing the vehicle suspension are passenger ride comfort, road holding and suspension travel. The passenger ride comfort is related to passenger acceleration, suspension travel is related to relative distance between the unsprung mass and sprung mass and road handling is related to the tyre displacement.

Among the above three characteristics ride comfort is chosen to be the most important characteristic and is expressed in an objective function as

$$\min f(Z) = RMS \left| \ddot{Z}_p(t) \right|$$

As per ISO2631 standards the passenger feels highly comfortable if the weighted RMS acceleration is below 0.315 m/s² (Wong, 1998, Griffin, 2003 and ISO: 2631-1-1997). So, it is considered as constraint.

$$g_1 = f - 0.315m/s^2 \leq 0$$

At least 5 inches of suspension travel must be available in order to absorb a bump acceleration of one-half “g” without hitting the suspension stops and also an upper bound to maximum acceleration

should be kept so that at any time suspension will not hit suspension stops (Baumal et al., 1998 and Gillespie, 2003). Both these are taken as constraints

$$g_2 = |Z - Z1| - 0.127m \leq 0, g_3 = |Z - Z2| - 0.127m \leq 0$$

$$g_4 = |Z - Z3| - 0.127m \leq 0,$$

$$g_5 = |Z - Z4| - 0.127m \leq 0, g_6 = \max \left| \ddot{Z}_p(t) \right| - 4.5m/s^2 \leq 0$$

Dynamic tyre force will increases with increase in tyre deflection so an upper bound to maximum tyre deflection is placed and it is considered as one more constraint (Baumal et al., 1998 and Gillespie, 2003).

$$g_7 = |Z1 - Q1| - 0.0508m \leq 0, g_8 = |Z2 - Q2| - 0.0508m \leq 0$$

$$g_9 = |Z3 - Q3| - 0.0508m \leq 0, g_{10} = |Z4 - Q4| - 0.0508m \leq 0$$

The other performance characteristic viz. road holding is included as constraints and is restricted by (Baumal et al., 1998).

$$g_{11} = |Z1| - 0.07m \leq 0, g_{12} = |Z2| - 0.07m \leq 0$$

$$g_{13} = |Z3| - 0.07m \leq 0, g_{14} = |Z4| - 0.07m \leq 0$$

Human being feel comfortable within a frequency zone of 0.8 Hz and 1.5 Hz and also another criterion for good suspension system often considered is the maximum allowable jerk experienced by the passengers. Both these are added as two more constraints (Griffin, 2003 and Gillespie, 2003).

$$g_{15} = 0.8 \leq Wn \leq 1.5Hz, g_{16} = \max \left| \ddot{\ddot{Z}}_p(t) \right| - 18m/s^3 \leq 0$$

In order to make pitch motion die faster natural frequency of front suspension should be greater than the rear suspension and it is considered as constraint (Gillespie, 2003).

$$g_{17} = Wf > Wr$$

Table 1 (Panzade, 2005) gives the details of fixed parameters used in the analysis and the design variables are also restricted to ranges defined by the bounds as shown in table 2 (Panzade, 2005).

Table 1. Fixed parameters

Parameters	Values	Parameters	Values
Kt	200000 N/m	Iy	4140 kg-m ²
Mp	100 kg	2W	1.450 m
M	2160 kg	a	1.524 m
M1, M3	85 kg	b	1.156 m
M2, M4	60 kg	Xp	0.234 m
Ix	946 kg-m ²	Yp	0.375 m

Table 2. Variable design parameter ranges,

Design Parameters	Lower bound	Upper bound
Kp (N/m)	90000 N/m	120000 N/m
Cp (Ns/m)	400 Ns/m	900 Ns/m
K1, K3 (N/m)	75000 N/m	100000 N/m
C1, C3 (Ns/m)	875 Ns/m	3000 Ns/m
K2, K4 (N/m)	32000 N/m	70000 N/m
C2, C4 (Ns/m)	875 Ns/m	3000 Ns/m

Road Profile

A sinusoidal shape of the road profile as shown in Fig. 2 consisting of two successive depressions of depth $h = 0.05$ m, length $\lambda = 20$ m and vehicle velocity $V = 20$ m/s is used for analysis (Baumal et al., 1998).

As a function of time, the road conditions are given by

$$Q_{1,3}(t) = \begin{cases} \frac{h}{2}(1 - \cos(wt)), & \text{if } 0 \leq t \leq \frac{2\lambda}{V} \quad \text{and} \\ 0 & \text{Otherwise} \end{cases}$$

$$Q_{2,4}(t) = \begin{cases} \frac{h}{2}(1 - \cos(w(t - \tau))), & \text{if } \tau \leq t \leq \left(\tau + \frac{2\lambda}{V}\right) \\ 0 & \text{Otherwise} \end{cases}$$

Where τ and w are the time lag between front and rear wheels and the forcing frequency respectively and are given by

$$\tau = \left(\frac{a+b}{V}\right) \quad \text{and} \quad w = \frac{2\pi V}{\lambda}$$

In this study, the right and left sides have same amplitude road profile but there is a time delay of 0.2 sec and also the rear wheel will follows the same trajectory as the front wheels with a time delay of τ as shown in Fig.2. This road input will help to introduce bounce, pitch and roll motion simultaneously.

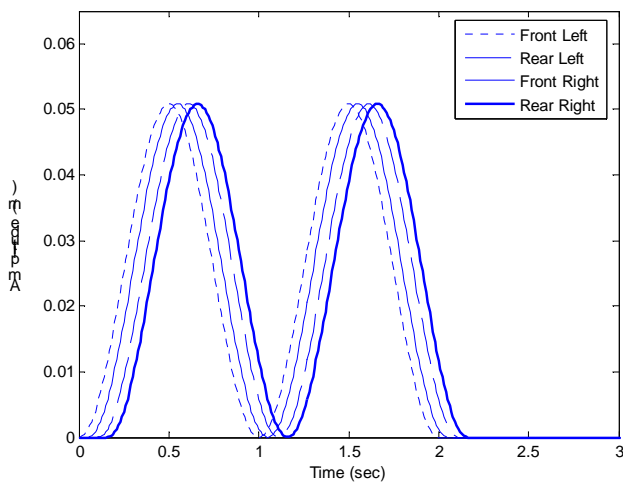


Figure 2. Road profile.

Modified Objective Function

The constrained optimization problem is converted into unconstrained one using penalty approach. The modified objective function is stated as

$$Y = f + G_c \tag{16}$$

Where f is the initial objective function and G_c is a penalty when constraints are violated and is given as

$$G_c = \alpha \times \sum_{i=1}^{17} \max(0, g_i) \tag{17}$$

In Eq.(17), ' α ' is a penalty value which will vary between 8000 and 10000. A GA program is written in MatLAB, which initialize

suspension design variables. Then these values are passed into the 8DOF full car model to solve for the dynamic response of the system. These values are then substituted back into the GA process to calculate the fitness of the suspension design. This procedure is repeated until the stopping criterion is met.

Results and Discussions

This section is divided into two parts. The first gives the best parameters for the present models and comparison the results with simulated annealing method while the second part deals with simulation of present optimally designed suspensions.

The design results from the GA program for passive and active suspension are tabulated in table 3 In order to verify the validity of the results; the GA results were compared to those obtained by simulated annealing technique.

Simulation is performed using vehicle data illustrated in table 1, for road input defined in Fig. 2 and the optimal suspension parameters defined in table 3 using genetic algorithm. In table 3 it can seen the natural frequency of seat for both suspension systems are within the comfortable zone of 0.8-1.5 Hz, while passive suspension system the natural frequency is more compared to active since it use more stiffer suspension at front and rear.

In Fig. 3 it can be observed that the reduction of the driver's vertical displacement peak is approximately 74.2% in case of active suspension as compared with passive suspension and also settling time is reduced from 6 sec to 3.5 sec. Also it is observed that sprung mass vertical displacement is less in case of active suspension compare to passive suspension while pitch and roll displacement is amplified in active suspension and, consequently return to zero is also fast (Fig.4-6). This will occurs since during LQR controller design for active suspension more weightage is given to vertical displacement for comfortable ride.

From Fig. 7-8 it can be observed that seat acceleration and sprung mass vertical acceleration is reduced by 88.72% and 88.17% respectively in case of active suspension as compared with passive suspension and also settling time is reduced from 6.5 sec to 3 sec. Also the vertical weighted RMS acceleration of seat and sprung mass is reduced from 0.3032 m/s² to 0.0534 m/s² and 0.2834 m/s² to 0.0492 m/s² since in case of active LQR controller design more weightage is given ride comfort. It can also be observed sprung mass weighted RMS acceleration is less than seat since seat is located near front right side of tyre while for sprung mass weighted RMS acceleration is calculated at center of gravity of sprung mass.

From Fig. 9 it can be observed that range of the roll acceleration is 65% lower with active suspension than passive suspension. One should be remind here that this rolling motion is excited by time delay between the left and right side bump. Hence, the active suspension has proved to be definitely superior to the passive case.

With regards to pitch acceleration illustrated in Fig. 10, for active suspension the acceleration amplitude range is lower and consequently, returns to zero is very fast. In addition, disturbances of higher amplitude were recorded at about 0.6 sec and 1.6 sec. If we analyze the excitation in Fig. 2 one can observe that these disturbances are likely due to the phase angle of wheel motion slightly ahead of disturbance.

From Fig. 11-14 it can be observed that in case of active suspension system suspension travel increases by 56-60% than passive suspension to provide more ride comfort i.e. less displacement of sprung mass. Also tyre displacement is approximately 28.5% less in case of active suspension than passive suspension system, yielding better road holding (Fig. 15-18). Also it can be concluded since suspension travel and road holding are mutually contradicting parameters, there is increase in suspension travel in case of active suspension than passive suspension.

Also from Fig. 19 and 20 it can be observed that rate of change of acceleration is less in case of active suspension. Hence, jerk experienced by driver seat and sprung mass, for active suspension

jerk is very less compare to passive suspension. Figure 21-24 gives the actuator forces required for active suspension and all are well below the applied limits and practically implementable.

Table 3. Design results of genetic algorithm and simulated annealing method.

Parameters	Genetic Algorithm		Simulated Annealing	
	Passive	Active	Passive	Active
Kp- Seat (N/m)	98935	95161	98946	95168
Cp – Seat (N-s/m)	615	415	596	415
K1- Front Left (N/m)	96861	78158	96830	78098
C1 – Front Left (N-s/m)	2460	2012	2458	2021
K2 – Rear Left (N/m)	52310	41731	52331	41698
C2 - Rear Left (N-s/m)	2281	1848	2281	1863
K3 - Front Right (N/m)	96861	78158	96830	78098
C3 - Front Right (N-s/m)	2460	2012	2458	2021
K4 - Rear Right (N/m)	52310	41731	52331	41698
C4 - Rear Right (N-s/m)	2281	1848	2281	1863
RMS vertical acceleration of seat (m/s ²)	0.3032	0.0534	0.3032	0.0537
RMS vertical acceleration of sprung mass (m/s ²)	0.2834	0.0492	0.2833	0.0495
Max seat acceleration (m/s ²)	2.0849	0.2350	2.0852	0.2357
Max. sprung mass acceleration (m/s ²)	1.9172	0.2268	1.9175	0.2274
Max. seat displacement (m)	0.0725	0.0187	0.0725	0.0187
Max. sprung mass displacement (m)	0.0690	0.0181	0.0690	0.0182
Max. pitch displacement (degrees)	0.0222	0.0025	0.0222	0.0025
Max pitch acceleration (rad/s ²)	1.1700	0.0582	1.1702	0.0583
Max. roll displacement (degrees)	0.0096	0.0029	0.0096	0.0029
Max roll acceleration (rad/s ²)	0.5041	0.0888	0.5041	0.0890
Max. Suspension travel (m) – Front Left side	0.0383	0.0320	0.0383	0.0320
Max. Suspension travel (m) – Front Right side	0.0122	0.0305	0.0122	0.0305
Max. Suspension travel (m) – Rear Left side	0.0290	0.0293	0.0290	0.0292
Max. Suspension travel (m) – Rear Right side	0.0125	0.0288	0.0125	0.0287
Max. Road holding (m) – Front Left side	0.0569	0.0407	0.0569	0.0407
Max. Road holding (m) – Front Right side	0.0573	0.0448	0.0573	0.0448
Max. Road holding (m) – Rear Left side	0.0551	0.0402	0.0551	0.0402
Max. Road holding (m) – Rear Right side	0.0594	0.0448	0.0594	0.0448
Max. seat jerk (m/s ³)	13.9876	1.5729	13.9846	1.5781
Max. sprung mass jerk (m/s ³)	12.4447	1.3415	12.4450	1.3448
Natural frequency seat (Hz)	1.2015	1.0902	1.2017	1.0898
Time (sec)	1790	1650	2050	1890

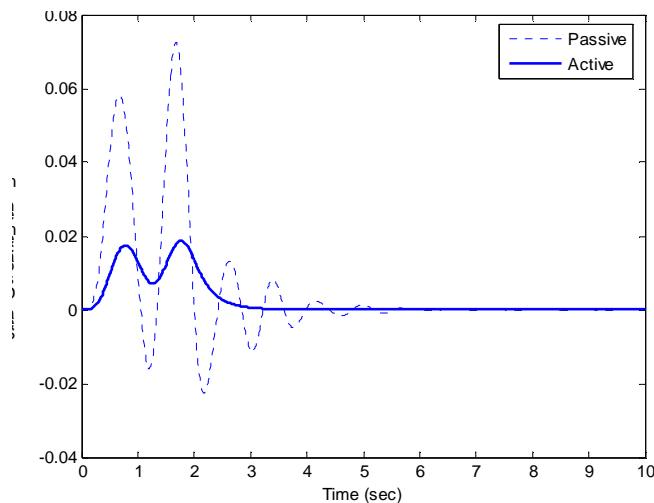


Figure 3. Seat displacement v/s time.

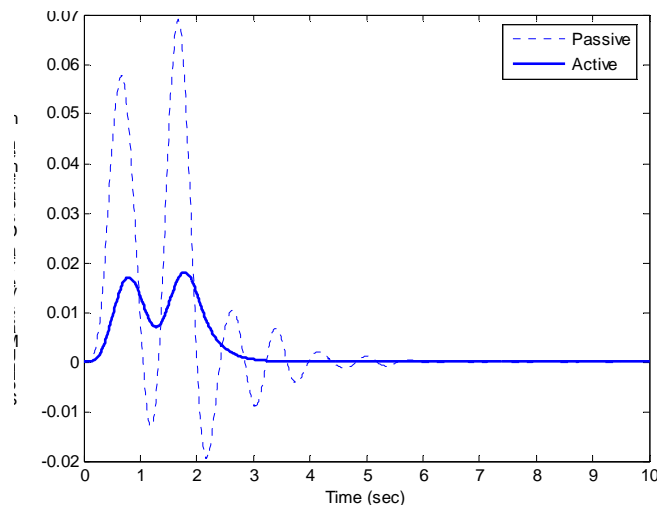


Figure 4. Sprung mass vertical displacement v/s time.

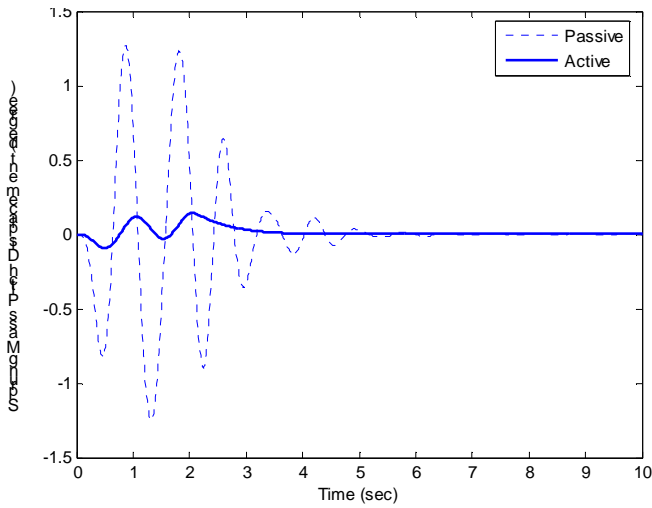


Figure 5. Sprung mass pitch displacement v/s time.

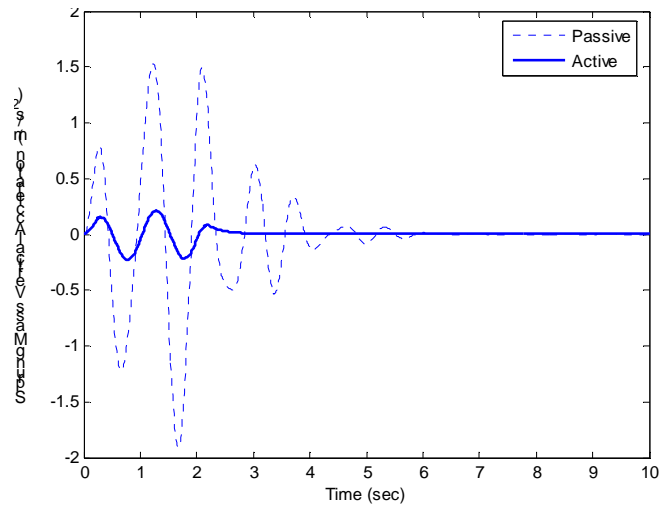


Figure 8. Sprung mass vertical acceleration v/s time.

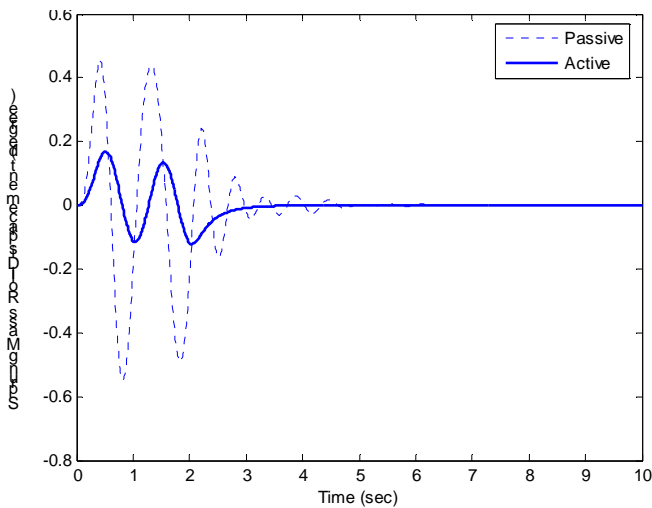


Figure 6. Sprung mass roll displacement v/s time.

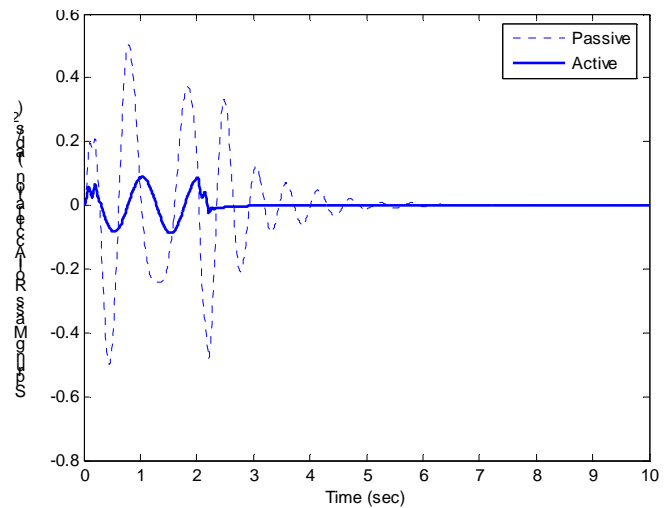


Figure 9. Sprung mass roll acceleration v/s time.

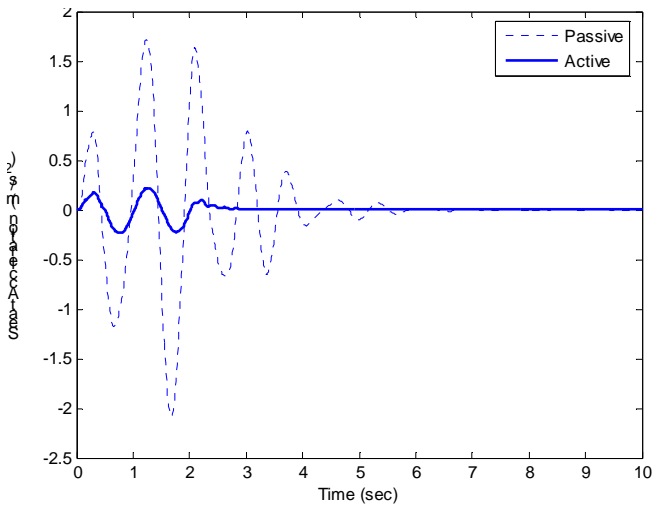


Figure 7. Seat acceleration v/s time.

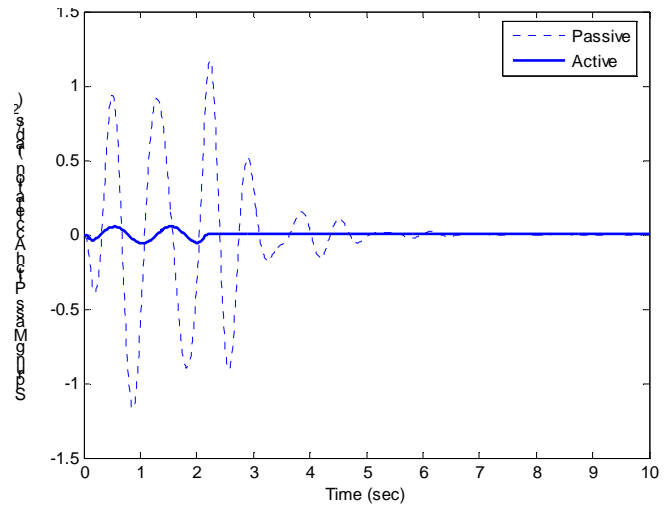


Figure 10 Sprung mass pitch acceleration v/s time.

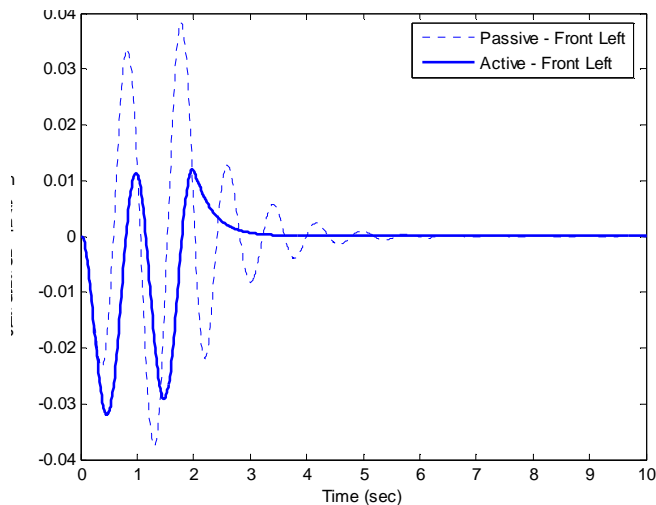


Figure 11. Front left suspension travel v/s time.

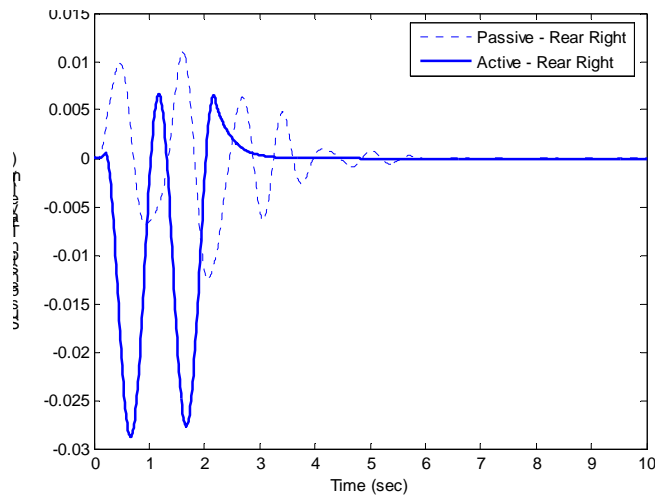


Figure 14. Rear right suspension travel v/s time.

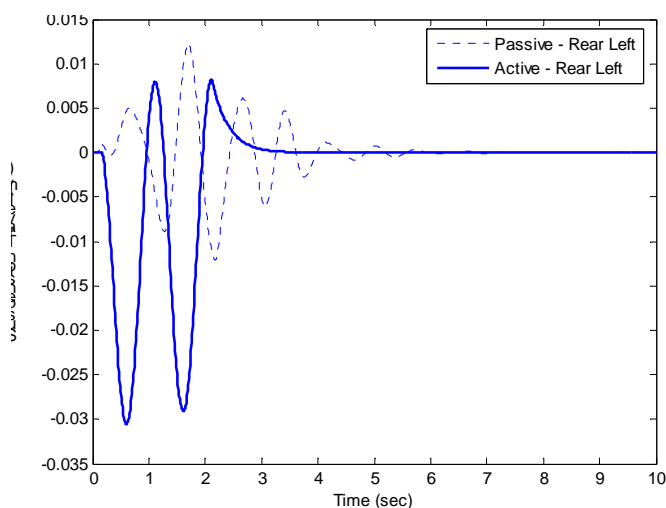


Figure 12. Rear left suspension travel v/s time.

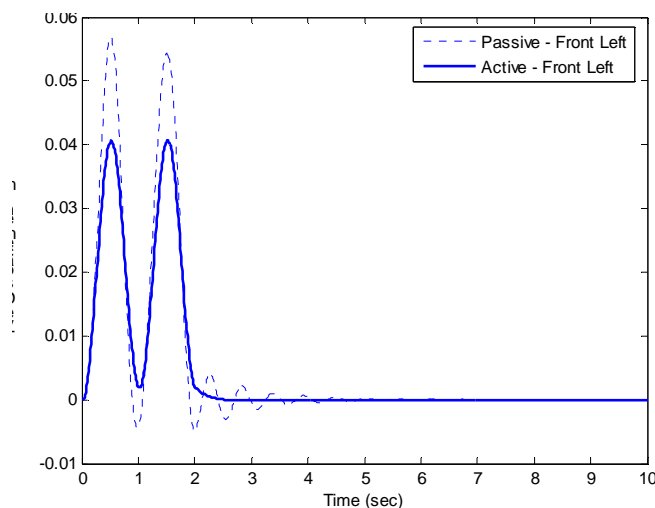


Figure 15. Front left tyre displacement v/s time.

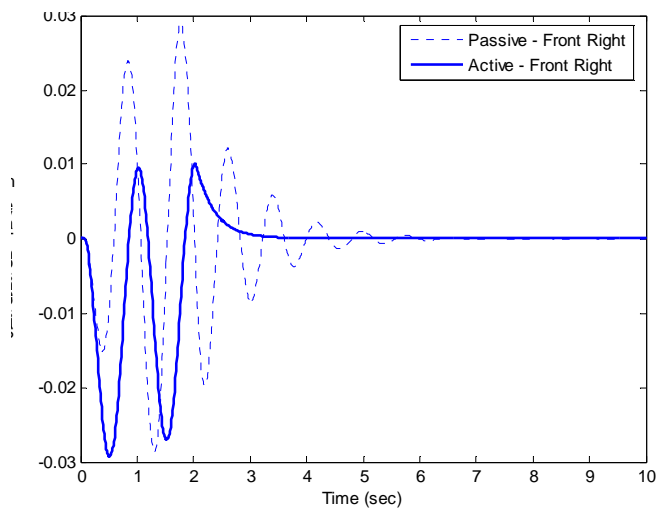


Figure 13. Front right suspension travel v/s time.

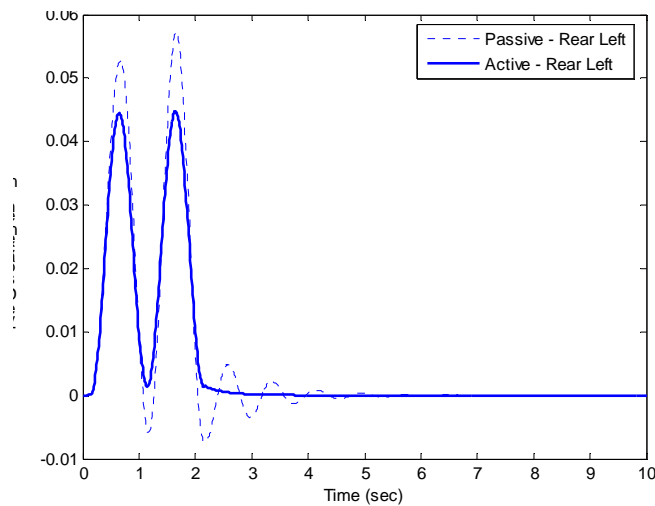


Figure 16. Rear left tyre displacement v/s time.

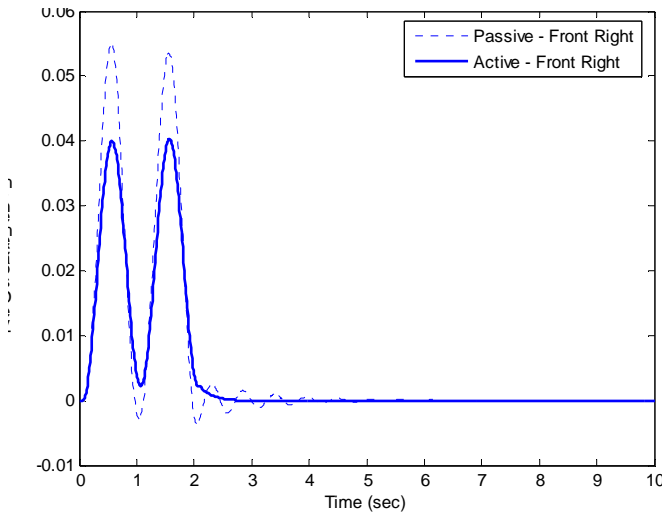


Figure 17. Front right tyre displacement v/s time.

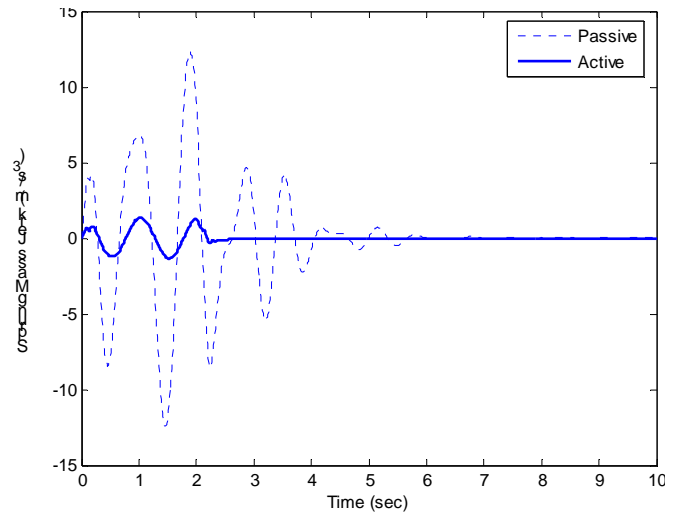


Figure 20. Sprung mass jerk v/s time.

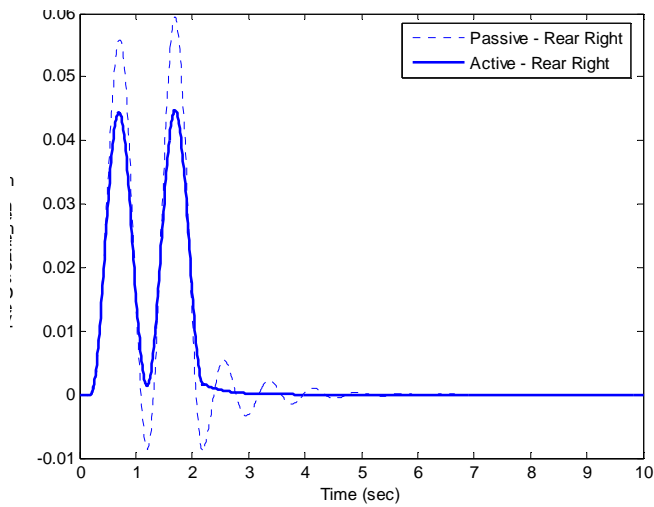


Figure 18. Rear right tyre displacement v/s time.

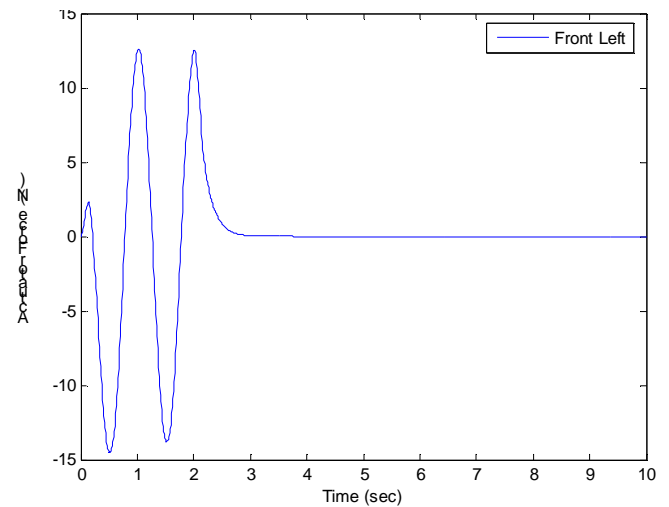


Figure 21. Front left actuator force v/s time.

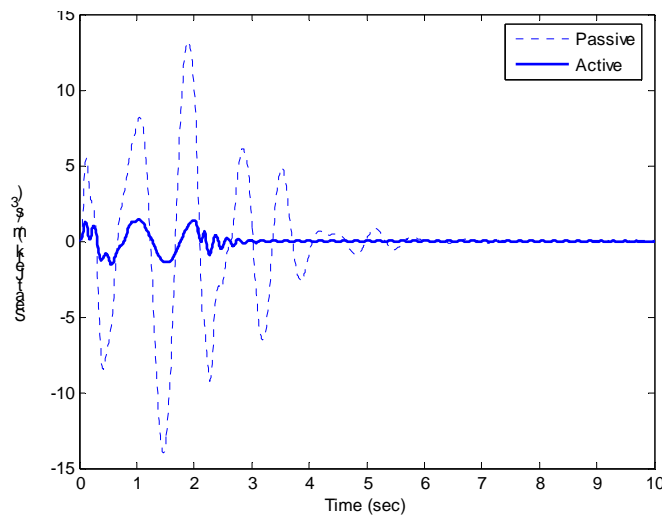


Figure 19. Set jerk v/s time.

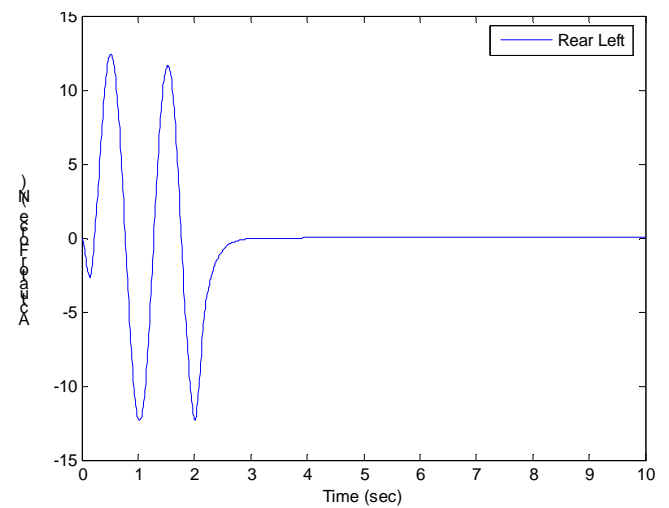


Figure 22. Rear left actuator force v/s time.

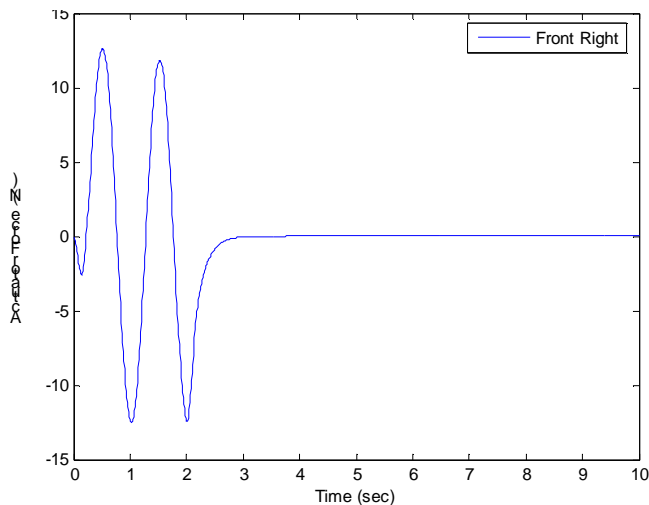


Figure 23. Front right actuator force v/s time.

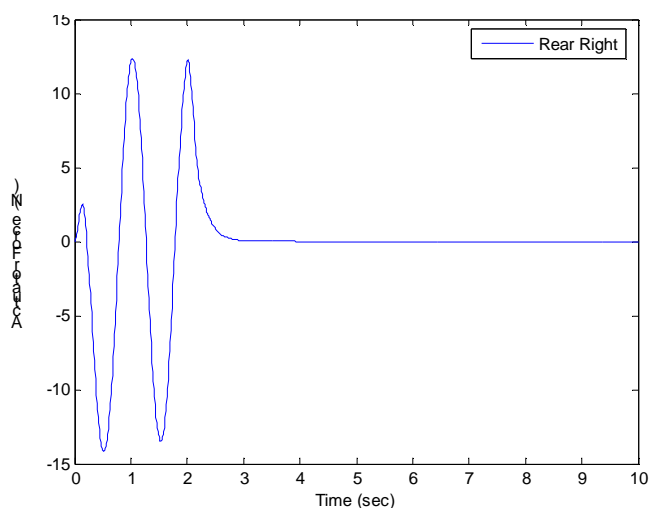


Figure 24. Rear right actuator force v/s time.

Conclusion

Considering the power and capabilities of GA, the present work has attempted to design optimal vehicle suspensions using it. Design objectives such as maximum bouncing acceleration of seat and sprung mass, root mean square (RMS) weighted acceleration of seat and sprung mass as per ISO2631 standards, jerk, suspension travel, road holding and tyre deflection are introduced for accessing comfortability of the suspension. While the searching space of the parameters is very large, the solution space is very tight due to the presence of various constraints. Therefore, the constrained optimization problem is converted into unconstrained one using penalty function approach.

In order to verify the validity of the results, the GA results were compared to those obtained by simulated annealing technique and found to yields similar performance measures. This validates the GA results and also demonstrates that there exists other feasible design, which is able to achieve the same objective.

From the simulation results, it can be observed that the reduction of the driver's vertical displacement peak is approximately 74.2% in case of active suspension as compared with passive suspension and

also settling time is reduced from 6 sec to 3.5 sec. Also the vertical weighted RMS acceleration of seat and sprung mass is reduced from 0.3032 m/s^2 to 0.0534 m/s^2 and 0.2834 m/s^2 to 0.0492 m/s^2 using active LQR controller design since more weightage is given ride comfort. In case of active suspension travel increases by 56-60% than passive suspension to provide more ride comfort i.e. less displacement of sprung mass while tyre displacement is reduced by 28.5% to give better road holding, indicating active suspension system has better potential to improve both comfort and road holding.

References

- Ahmadian, M.T., Sedeh, R.S., and Abdollahpour, R., "Application of Car Active Suspension in Vertical Acceleration Reduction of Vehicle Due to Road Excitation and Its Effect on Human Health", *International Journal of Scientific Research* (In press).
- Alkhatib, R., Jazar, G.N., and Golnaraghi, M.F., 2004, "Optimal Design of Passive Linear Suspension Using Genetic Algorithm", *Journal of Sound and Vibration*, Vol. 275, pp. 665-691.
- Baumal, A.E., McPhee, J.J., and Calamai, P.H., 1998, "Application of Genetic Algorithms to the Design Optimization of an Active Vehicle Suspension System", *Computer Methods in Applied Mechanics and Engineering*, Vol. 163, pp. 87-94.
- Bourmistrova A, Storey I and Subic A, 2005, "Multiobjective Optimisation of Active and Semi-Active Suspension Systems with Application of Evolutionary Algorithm", *International Conference on Modeling and Simulation*, Melbourne, 12-15 December 2005.
- Gao Huijun, Lam James and Wang Changhong, 2006, "Multi-Objective Control of Vehicle Active Suspension Systems via Load-Dependent Controllers", *Journal of Sound and Vibration*, Vol. 290, pp. 654-675.
- Gillespie Thomas D., 2003, "Fundamentals of Vehicle Dynamics", Society of Automotive Engineers, Warrendale.
- Gobbi, M. and Mastinu, G., 2001, "Analytical Description and Optimization of the Dynamic Behaviour of Passively Suspended Road Vehicles", *Journal of Sound and Vibration*, Vol. 245, No. 3, pp. 457-481.
- Griffin, M.J., 2003, "Handbook of human vibration", Academic press, New York.
- Hemiter Marc E., 2001, "Programming in Matlab", Thomson Learning, Singapore.
- ISO: 2631-1, 1997, "Mechanical vibration and shock - Evaluation of human exposure to whole-body vibration".
- Mantaras Daniel A., and Luque Pablo, 2006, "Ride Comfort Performance of Different Active Suspension Systems", *International Journal of Vehicle Design*, Vol. 40, No. 1/2/3, pp. 106-125.
- Ogata, K., 1996, "Modern Control Engineering", Prentice-Hall, New Delhi, 3rd edition.
- Panzade, P.K., 2005, "Modeling and Analysis of full vehicle for ride and handling", M.E. Thesis, PSG College of Technology, Coimbatore.
- Rettig Uwe, and Stryk Oskar von, 2005, "Optimal and Robust Damping Control for Semi-Active Vehicle Suspension", *Proc. ENOC-2005*, Eindhoven, Netherlands, 7-12 August 2005.
- Rill, Georg. 2006, "Vehicle modeling by subsystems", *J. Braz. Soc. Mech. Sci. & Eng.*, Vol.28, no.4, p.430-442.
- Roumy Jean Gabriel, Boulet Benoit, and Dionne Dany, 2004, "Active Control of Vibrations Transmitted Through a Car Suspension", *International Journal of Vehicle Autonomous Systems*, Vol. 2, No.3/4, pp. 236-254.
- Sharkawy, A.B., 2005, "Fuzzy and Adaptive Fuzzy Control for the Automobiles' Active Suspension System", *Vehicle System Dynamics*, Vol. 43, No. 11, pp. 795-806.
- Sun Lu, 2002, "Optimum Design of Road-Friendly Vehicle Suspension Systems Subjected to Rough Pavement Surfaces", *Journal of Applied Mathematical Modelling*, Vol. 26, pp. 635-652.
- Wong, J.Y., 1998, "Theory of Ground Vehicles", John Wiley and Sons Inc., New York.
- Zaremba, A., Hampo, R., and Hrovat D., 1997, "Optimal Active Suspension Design Using Constrained Optimization", *Journal of Sound and Vibration*, Vol. 207, No. 3, pp. 351-364.