

This article was downloaded by: [University of Nottingham]

On: 24 March 2014, At: 11:55

Publisher: Taylor & Francis

Informa Ltd Registered in England and Wales Registered Number: 1072954 Registered office: Mortimer House, 37-41 Mortimer Street, London W1T 3JH, UK



Drying Technology: An International Journal

Publication details, including instructions for authors and subscription information:

<http://www.tandfonline.com/loi/ldrt20>

Optimization of Spray-Drying Process Conditions for the Production of Maximally Viable Microencapsulated *L. acidophilus* NCIMB 701748

Solmaz Behboudi-Jobbehdar^a, Christos Soukoulis^a, Lina Yonekura^a & Ian Fisk^a

^a Division of Food Sciences, School of Biosciences, University of Nottingham, Sutton Bonington Campus, Loughborough, Leicestershire, United Kingdom

Published online: 25 Aug 2013.

To cite this article: Solmaz Behboudi-Jobbehdar, Christos Soukoulis, Lina Yonekura & Ian Fisk (2013) Optimization of Spray-Drying Process Conditions for the Production of Maximally Viable Microencapsulated *L. acidophilus* NCIMB 701748, *Drying Technology: An International Journal*, 31:11, 1274-1283, DOI: [10.1080/07373937.2013.788509](https://doi.org/10.1080/07373937.2013.788509)

To link to this article: <http://dx.doi.org/10.1080/07373937.2013.788509>

PLEASE SCROLL DOWN FOR ARTICLE

Taylor & Francis makes every effort to ensure the accuracy of all the information (the "Content") contained in the publications on our platform. Taylor & Francis, our agents, and our licensors make no representations or warranties whatsoever as to the accuracy, completeness, or suitability for any purpose of the Content. Versions of published Taylor & Francis and Routledge Open articles and Taylor & Francis and Routledge Open Select articles posted to institutional or subject repositories or any other third-party website are without warranty from Taylor & Francis of any kind, either expressed or implied, including, but not limited to, warranties of merchantability, fitness for a particular purpose, or non-infringement. Any opinions and views expressed in this article are the opinions and views of the authors, and are not the views of or endorsed by Taylor & Francis. The accuracy of the Content should not be relied upon and should be independently verified with primary sources of information. Taylor & Francis shall not be liable for any losses, actions, claims, proceedings, demands, costs, expenses, damages, and other liabilities whatsoever or howsoever caused arising directly or indirectly in connection with, in relation to or arising out of the use of the Content.

This article may be used for research, teaching, and private study purposes. Any substantial or systematic reproduction, redistribution, reselling, loan, sub-licensing, systematic supply, or distribution in any form to anyone is expressly forbidden. Terms & Conditions of access and use can be found at <http://www.tandfonline.com/page/terms-and-conditions>

Taylor & Francis and Routledge Open articles are normally published under a Creative Commons Attribution License <http://creativecommons.org/licenses/by/3.0/>. However, authors may opt to publish under a Creative Commons Attribution-Non-Commercial License <http://creativecommons.org/licenses/by-nc/3.0/>. Taylor & Francis and Routledge Open Select articles are currently published under a license to publish, which is based upon the Creative Commons Attribution-Non-Commercial No-Derivatives License, but allows for text and data mining of work. Authors also have the option of publishing an Open Select article under the Creative Commons Attribution License <http://creativecommons.org/licenses/by/3.0/>.

It is essential that you check the license status of any given Open and Open Select article to confirm conditions of access and use.

Optimization of Spray-Drying Process Conditions for the Production of Maximally Viable Microencapsulated *L. acidophilus* NCIMB 701748

Solmaz Behboudi-Jobbehdar, Christos Soukoulis, Lina Yonekura, and Ian Fisk

Division of Food Sciences, School of Biosciences, University of Nottingham, Sutton Bonington Campus, Loughborough, Leicestershire, United Kingdom

In recent years, the use of spray drying for the production of anhydrobiotics has gained the interest of functional food manufacturers, mainly due to cost efficiencies and enhanced product and process flexibility (e.g., enhanced shelf life). In the present work, spray-drying conditions (air inlet temperature and feed flow rate) were optimized for the microencapsulation of the thermo sensitive probiotic lactobacilli strains *Lactobacillus acidophilus* stabilized in a 60:20:20 (w/w) maltodextrin: whey protein concentrate: D-glucose carrier. A 2³ full-factorial experimental design was constructed with air inlet temperature (120, 140, and 160°C) and feed flow rate (6, 7.5, and 9.0 mL/min) as the independent variables and total viable counts (TVC), water activity (*a_w*), and cyclone recovery (CR) defined as the dependent variables. The increase in air inlet temperature from 120 to 160°C induced a significant (*p* < 0.001) reduction in the TVC from 9.02 to 7.20 log cfu/g, which corresponds to a 97.5% loss of the *L. acidophilus* viable counts. On the other hand, the increase in the feed flow rate from 6 to 7.5 mL/min significantly reduced (*p* < 0.001) the heat-induced viability loss. A further increase in the feeding rate did not further modify the achieved thermo protection, and a detrimental impact of cyclone recovery (reduction) and water activity (increase) of the powder was observed. Using pruned quadratic mathematical models, the optimum spray-drying conditions for the production of maximally viable microencapsulated *L. acidophilus* were 133.34°C and 7.14 mL/min. The physicochemical and structural characteristics of the powders produced were acceptable for application with regards to residual water content, particles mean size, and thermo physical properties to ensure appropriate storage stability under room temperature conditions, with a low inactivation rate of *L. acidophilus*. Microcapsules appeared partially collapsed by scanning electron microscope with a spherical shape with surface concavities.

© Solmaz Behboudi-Jobbehdar, Christos Soukoulis, Lina Yonekura, and Ian Fisk

This is an Open Access article distributed under the terms of the Creative Commons Attribution-Non-Commercial License (<http://creativecommons.org/licenses/by-nc/3.0/>), which permits unrestricted non-commercial use, distribution, and reproduction in any medium, provided the original work is properly cited. The moral rights of the named authors have been asserted.

Correspondence: Dr. Ian Fisk, Division of Food Sciences, School of Biosciences, University of Nottingham, Sutton Bonington Campus, Loughborough, Leicestershire, LE12 5RD, UK; E-mail: ian.fisk@nottingham.ac.uk

Keywords Feed rate; Inlet temperature; Microencapsulation; Probiotics; Survival

INTRODUCTION

The term *probiotics* refers to live microorganisms, which when administered at sufficient amounts (usually at 10⁶–10⁷ cfu/g of product), confer health effects that are beneficial to the host.^[1] The incorporation of probiotics in real food systems is challenging for food manufacturers due to their sensitivity to the harsh processing and chemical conditions used in the food process industry. Conditions may induce cellular damage through osmotic and thermal stresses (e.g., thermal processing, high solutes concentration) and through increased redox potential.^[2–4] In addition, if storage conditions are not ideal, physical state changes (glassy to rubbery) may take place, triggering biochemical and enzymatic reactions that detrimentally affect the bacterial survival.^[2–4] Over the last few years, the probiotics industry has experienced a remarkable market share increase, as a broad range of food products containing probiotics have been launched, including classic yogurt-based carriers, ice creams, fruit beverages, non-dairy spreads, breakfast cereals, and health supplements for direct consumption.^[3,5–12]

Dehydration processes such freeze drying, spray drying, freeze–spray drying, vacuum, and fluidized bed drying are among the most common practices for the production of anhydrobiotics for incorporation into food systems while retaining cell viability after processing.^[2] Although freeze drying is considered one of the best practices for reducing thermal damage, spray drying is more advantageous in terms of cost, energy, and throughput.^[13] Despite the wide demand for low-cost probiotics, the use of spray drying as a standard production technique is challenging due its detrimental impact on the cellular integrity of probiotics during drying (if not correctly optimized) and resultant reduction in stability of encapsulated bacteria during product aging.^[2,3,13] It has been demonstrated that heat-induced cellular damage is primarily associated with changes in the physical state of the membranes; for example, crystalline

to gel phase transition, modification of the cytoplasm fluidity, peroxidation of the lipid membrane bilayer, structural modification of macromolecular constructs (e.g., proteins or nucleic acids unfolding), and alteration of other biological processes in the cells.^[2,14] In addition to the carrier–probiotic interaction, the impact of the spray-drying process is associated with process parameters (inlet and outlet air temperature, feed flow rate, residence time at the drying chamber, design parameters of the drying chamber, temperature of the drying medium, etc.), thermodynamic processes (heat and mass transfer rates during droplets dehydration), drying kinetics (impact of steady and falling drying rates), and the biology of the bacteria to be encapsulated (species and strain type, adaptation of the bacteria to heat or osmotic stress conditions, growth state of the culture media).^[3,15–27] Gardiner et al.^[3] reported a strain-dependent decline of viable counts of *Lactobacillus paracasei* NFBC and *Lactobacillus salivarius* UCC as function of increasing outlet temperature, with the latter strains exhibiting the highest sensitivity to NaCl (a marker of thermal damage). The same researchers reported that the viability of the bacteria was optimized when an air outlet temperature of 80–85°C was used. For most thermo sensitive strains such as *L. acidophilus* or *Lactobacillus rhamnosus* GG an outlet air temperature ranging from 70 to 80°C is recommend to minimize spray drying–induced cellular injuries.^[5,17] The use of high feed flow rates can also reduce heat-induced cell damage, but this approach resulted in an increased water activity of the final product and changes to the morphological features of the spray-dried powder.^[22,27]

The effect of carrier wall material on probiotic survival through spray drying has been studied previously.^[5,10,17–21] The total solids concentration of the carrier aliquot as well as the presence of ingredients that can induce a significant depression of the melting temperature of the micro particles has been reported to critically affect the structural integrity of the cytoplasmic membranes and control the osmotic pressure that leads to membranes rupture.^[2] For that reason, materials that ensure good encapsulating capacity and impart acceptable powder functional characteristics (porosity, free-flowing ability, anticaking, and good wetting and dispersing properties) are often chosen as the carrier wall material, in addition to other ingredients that exhibit thermo protective features, such as disaccharides (lactose, sucrose, or trehalose), dextrose, or polyols (mannitol, sorbitol), or act as probiotic growth stimulants (fructo- and galacto-oligosaccharides).^[2,3,17–19,26]

Recently, Ying et al.^[5] demonstrated that the use of complex carbohydrate–protein systems as potential carriers for anhydrobiotics can confer improved performance over storage. In the present study, the impact of the spray-drying conditions (inlet temperature and feeding rate) on the thermo sensitive *L. acidophilus* NCIMB 701748 strain microencapsulated in a ternary carrier system comprised of maltodextrin, whey protein concentrate, and D-glucose

systems was investigated. The optimum spray-drying conditions required for the production of maximally viable dry probiotic formulations with acceptable physico-chemical and structural characteristics were determined.

MATERIALS AND METHODS

Preparation of Probiotics

L. acidophilus NCIMB 701748 obtained from the NCIMB culture collection (NCIMB Ltd., Aberdeen, Scotland) was incubated at 37°C with 5% CO₂ for 24 h. A small amount of the colonies was collected with a sterilized loop and suspended in the cryo-medium of Roti-Store systems (Roti-Store, Carl-Roth GmbH, Karlsruhe, Germany) and the plastic bead cultures were stored in a freezer (New Brunswick Scientific, U57085, Histon, Cambridge, UK) at –80°C.

Five beads of the deep-frozen *L. acidophilus* were placed in 500 mL of MRS broth (Oxoid Ltd., Basingstoke, UK) and incubated for 48 h at 37°C under anaerobic conditions in plastic jars containing Anaero Gen (Oxoid Ltd.). Bacterial cells were harvested by centrifugation (Sigma Laborzentrifugen, SciQuip 2-16, Osterode am Harz, Germany) at 3,000 g for 5 min, and after discarding the supernatant liquid, the recovered pellets were washed once with phosphate buffer saline pH 7.0 (Dulbecco A PBS, Oxoid Ltd.). The cell suspensions were centrifuged at the same conditions and the supernatant PBS was carefully discarded.

Preparation of the Drying Media

Twelve grams of maltodextrin 15 DE (C Dry MD 01910, Cargill Ltd., Manchester, UK), 4 g of whey protein concentrate (Lacprodan DI-8090, Arla A/S, Viby, Denmark), and 4 g of D-glucose (Fisher Chemicals, Loughborough, UK) were blended together and balanced to 100 g with distilled water. The solutions were left to fully hydrate for 1 h at room temperature under magnetic stirring and subsequently they were heat-treated at 90°C for 10 min to destroy pathogens and allow complete protein denaturation. The carbohydrate–protein aliquots were rapidly cooled at room temperature using an ice bath and the *L. acidophilus* pellets were suspended. Non significant differences in the initial viable *L. acidophilus* counts of the carrier aliquots were observed (9.02 ± 0.02 log cfu/g).

Spray Drying and Storage of Probiotic Powders

The inoculated media with *L. acidophilus* were dried using a Buchi B-290 laboratory spray dryer (Buchi, Flawil, Switzerland) and the carrier aliquot was kept under low-speed agitation throughout the spray-drying process using a magnetic stirrer. A 2³ factorial experimental design (Table 1) used to establish the optimum spray-drying conditions (inlet and feeding rate) in terms of maximal strain survival and cyclone recovery and minimum moisture levels. The spray dryer was operated at three different air

TABLE 1
Codification of the independent variables (air inlet temperature and feed flow rate) used for the construction of the response surface design

Independent variables (factors)	Factor levels		
	-1	0	+1
X_1 = Inlet air temperature (°C)	120	140	160
X_2 = Feed flow rate (mL/min)	6.0	7.5	9.0

inlet temperatures (120, 140, and 160°C) and feed flow rates (6, 7.5, and 9) mL min⁻¹, smf the drying air flow rate (35 m³ h⁻¹) and compressor air pressure (0.5 MPa) were kept constant throughout the drying process. The outlet temperature varied proportionally with air inlet temperature and feed flow rate conditions (Table 2). The dry probiotic formulations were collected from the cyclone separator vessel, placed in sealed glass vials, and stored at room temperature in desiccators containing saturated lithium chloride (LiCl, Fisher Scientific) solutions to provide dry conditions ($a_w = 0.11$).

Design of the Experiments

A full-factorial design (n = 32) was used for this course of experiments with air inlet temperature (X_1) and feed flow rate (X_2) as factors and the total viable counts (TVC) after spray drying, the water activity of the spray-dried product (a_w), and the cyclone recovery percentage as the responses. Full-factorial design of experiments (DOE) have previously been successfully applied in a wide range of applications; for example, quality and process optimizations studies in food systems and consumer preference studies.^[28–30] Although full-factorial DOE approaches are generally regarded as time and cost consuming due to the large

number of experiments required, they do offer the best practice approach for process or product optimization where the factor interactions cannot be neglected.^[31]

Analysis of variance (ANOVA) was performed to estimate the significance ($p < 0.05$) of the main effects (linear and quadratic) and their interactions (linear, linear–quadratic, and quadratic–quadratic). The effects of the inlet air temperature and feed flow rate were modeled in a full quadratic mathematical model using response surface methodology as described in Eq. (1):

$$Y = \beta + a_1X_1 + a_2X_1 + a_{11}X_1^2 + a_{22}X_2^2 + bX_1X_2 + c_1X_1^2X_2 + c_2X_1X_2^2 + dX_1^2X_2^2, \quad (1)$$

where Y denotes the response variable, β is the intercept constant, a_1 and a_2 are the main linear effects, a_{11} and a_{22} are the main quadratic effects, and b , c , and d are the linear–linear, linear–quadratic, and quadratic–quadratic interaction coefficients, respectively. The significance of the parameters was tested using t -test. ANOVA was also used to evaluate the performance of the generated models, through the separation of residual variation into lack of fit and pure error linked to the replicate error at the central point. Goodness of fit (R^2) was calculated for each model as an estimation of the upper bound of the predictability of the model. In addition, the goodness of prediction (Q^2) was calculated as a measure of the predictive power of the model as described by Eq. (2):

$$Q^2 = \frac{SS - PRESS}{SS}, \quad (2)$$

where SS and PRESS denote the sum of squares of the response values and the prediction of residual sum of squares, respectively.^[32]

TABLE 2

Effects of the spray-drying conditions (air inlet temperature and feed flow rate) on outlet temperature, water activity, total viable counts of *L. acidophilus* NCIMB 701748, and recovery rate of the powders in the cyclone separator

Treatment	Inlet temperature (°C)	Feed rate mL/min)	Outlet temperature (°C)	Water activity	Viable counts ^a (log cfu/g)	Cyclone recovery (%)
1	120	6	66.5 ± 0.5	0.175 ± 0.003	9.00 ± 0.18	66.6 ± 0.5
2	120	7.5	63.1 ± 0.9	0.199 ± 0.002	8.91 ± 0.12	63.2 ± 0.8
3	120	9	60.0 ± 1.4	0.243 ± 0.011	8.87 ± 0.01	60.1 ± 1.7
4	140	6	82.7 ± 1.7	0.138 ± 0.016	8.65 ± 0.12	70.7 ± 1.5
5	140	7.5	76.9 ± 1.2	0.154 ± 0.002	8.55 ± 0.22	66.8 ± 1.6
6	140	9	72.0 ± 1.9	0.197 ± 0.001	8.41 ± 0.16	62.8 ± 1.9
7	160	6	91.5 ± 0.4	0.112 ± 0.004	7.37 ± 0.11	73.9 ± 0.7
8	160	7.5	88.5 ± 0.2	0.132 ± 0.001	7.81 ± 0.08	70.2 ± 0.0
9	160	9	85.1 ± 1.0	0.159 ± 0.002	8.19 ± 0.20	67.6 ± 0.0

^aStarting cell concentration was 9.02 ± 0.02 log cfu/g.

Enumeration of the Bacteria

The *L. acidophilus* microcapsule powders as well as the drying media aliquots were suspended and diluted in phosphate buffer saline (Dulbecco A PBS, Oxoid Ltd.) under constant shaking for 10 min at room temperature to ensure complete dissolution of the powders. Serial dilutions in PBS were carried out and subsequently pour plated on molten MRS agar and the plates were incubated at 37°C for 72 h under anaerobic conditions. Enumeration of the bacteria was performed in triplicate following the standard plating methodology and the total counts of the viable bacteria were expressed as log colony forming units per gram (log cfu/g).

The viability of the bacteria after the spray-drying process was calculated according to the formula

$$\% \text{ viability} = 100 \times \frac{N}{N_0}, \quad (3)$$

where N_0 , N represent the number of viable bacteria prior and after the spray-drying process.^[17]

Characterization of the Optimized Final Product

Moisture Content and Water Activity

The moisture content was calculated according to American Association of Cereal Chemists (St. Paul, MN, USA) method AA-15A (*Approved Methods of Analysis*, 11th ed.). Two grams of the powder were placed in aluminum pans and dried at 105°C for 24 h. Residual moisture content was calculated according to the formula

$$\% \text{ moisture} = 100 \times \frac{w_f - w_i}{w_i}, \quad (4)$$

where w_i and w_f are the weights of the dry probiotic formulations prior to and after dehydration at 105°C. Water activity was measured using an Aqua Lab water activity meter (Aqua Lab, 3TE, Decagon, Pullman, WA, USA).

DSC Measurements

A standard power-compensated Perkin Elmer DSC-7 (Perkin Elmer Ltd., Beaconsfield, UK) was used for calculation of the glass transition temperature of the optimized formulation. A small portion (15–20 mg) of the powder was weighted in a high-pressure, stainless steel pan and heated from –30 to 150°C at a rate of 10°C/min. A double heating-cooling scanning step was performed, and thermal properties (onset, midpoint, and offset glass transition temperatures and specific heat capacity change, ΔC_p) were calculated using Mettler Toledo Star (Columbus, OH, USA) software from the second heating step thermographs.

Particle Mean Size Analysis

The particle mean size analysis was performed on a laser diffraction particle size analyzer equipped with the

Tornado dry powder system (LS 13320, Beckman Coulter, USA). The Fraunhofer theory was used for the determination of the mean diameters of the microcapsules. The volume distributions of the samples were calculated and the results are presented as mean particle size diameter.

Color Measurement

One gram of powder was put in plastic cuvettes and color measurements were performed using a Hunter lab (Color Quest XE, HunterLab, Reston, VA, USA) colorimeter. The CIE Lab color scale was used to measure the L^* (black to white), a^* (red to green), and b^* (yellow to blue) parameters. The total color difference, ΔE^* , between a white standard tile ($L^* = 92.59$, $a^* = -0.78$, $b^* = 0.67$) and each individual dry probiotic formulation were calculated according to the formula

$$\Delta E^* = [(\Delta L^*)^2 + (\Delta a^*)^2 + (\Delta b^*)^2]^{1/2}, \quad (5)$$

where ΔL^* , Δa^* , Δb^* , are the luminosity, redness, and yellowness intensity difference from the control sample.^[19]

Hygroscopicity

The hygroscopicity of the probiotic powders was determined according to the procedure described by Fritzen-Freire et al.^[19] More specifically, a 1 g sample of the powder was placed in a desiccator equilibrated at 75% relative humidity containing a saturated sodium chloride (NaCl) solution at room temperature. Samples were kept for 7 days and hygroscopicity was calculated gravimetrically according to the formula

$$\begin{aligned} \text{hygroscopicity (g of H}_2\text{O per g of product)} \\ = 100 \times \frac{m_f - m_i}{m_i}, \end{aligned} \quad (6)$$

where m_i and m_f express the moisture of the samples prior to and after storage at 75% relative humidity.

Dissolution

The dissolution capacity of the powders was calculated according to the method of Fritzen-Freire et al.^[19] One gram of powder was added to 50 mL of distilled water and dispersed under magnetic stirring (Ika GmbH, Germany) at 892 rpm using a 2 mm × 7 mm stirring bar. The time required for complete dissolution of the powder was recorded.

Morphological Characterization

For visualization of the morphology of the microcapsules, a small amount of powder was carefully deposited onto carbon tabs (Agar Scientific, Stansted, UK) and coated with carbon (agar turbo carbon coater) to improve conductivity. Scanning electron microscope analysis (SEM)

was performed on an FEI Quanta 3D 200 dual-beam focused ion beam scanning electron microscope (FIB-SEM). The images were acquired using secondary electron imaging at an accelerating voltage of 5–15 kV.

RESULTS AND DISCUSSION

Probiotics Survival throughout the Spray-Drying Process

The impact of the tested spray-drying conditions (inlet air temperature and feed flow rate) on the viability of *L. acidophilus* throughout the process is displayed in Table 2 and the resultant model is graphically illustrated in Fig. 1. As can be seen from Fig. 1, a reduction in the air inlet temperature was in almost all cases linked to an enhancement in *L. acidophilus* viability and at mid and high air inlet temperatures an elevation of the feed flow rate increased *L. acidophilus* viability, although this relationship was reversed at low air inlet temperatures. The most significant change was observed when the outlet temperature was reduced from 91.5 to 60°C; over this temperature range the survival rate of *L. acidophilus* increased from 2.5 to 84%. It is well established that the loss of probiotics viability during convective thermal processing is related to cellular injuries resulting from the combined effect of heat and mechanical stress. Examples include the denaturation of the informational macromolecules (DNA and RNA), damage to ribosomes, dehydration of cytoplasmic membranes, lipid peroxidation, and rupture and collapse of cell membrane due to water removal.^[2,14,16,33,34] Under excessive droplet heat transfer rate conditions (increase of the $T_d - T_g$ driving force), the integrity of the cellular membranes can be lost due to crystalline to rubbery state transitions, which are responsible for the increase the membranes fluidity, leading eventually to the cells' fate.^[2] The changes observed as a result of alterations in the flow rate

are a result of changes in the heat and mass transfer kinetics at the air–solid interface. Generally, the elevation of the feed flow rate causes a reduction in the droplets' surface temperature, which causes changes in both heat and water diffusivity,^[35] consequently reducing the physical damage to the cell membranes. As can be seen in the results of the ANOVA (Table 3), both linear and quadratic coefficients are significant for air inlet temperature and the linear coefficients are significant for feed flow rates ($p < 0.001$).

Effects of Processing Conditions on Water Activity and Cyclone Recovery

The water activity of the spray-dried powder was significantly ($p < 0.001$) affected by air inlet temperature and feed flow rate as displayed in Fig. 2. In general, inlet air temperature was the more impactful factor when compared to feed flow rate for controlling water activity and residual water content (data not shown) of the finished powders; this can be seen in Fig. 2 and is further detailed in Table 3. Products produced with the highest air temperature and lowest feed flow rate resulted in the driest formulations. Low a_w values and residual moisture contents (<4–5% w/w) are prerequisites for the commercial production of spray-dried powders with good handling characteristics such as high flow ability, low stickiness and agglomeration, as well as maximum probiotics viability.^[35] The residual water content ranged from 1.7 to 5.4% w/w (data not shown), which complies with standard acceptable moisture levels for spray-dried powders.^[36] At conditions of low water activity, the matrix moves from the rubbery state toward the glassy state and, thus, water mobility is reduced. This inhibits cell metabolic activity of the bacterial cells, leading to extended shelf life.^[2,5,17]

Both feed rate and inlet temperature significantly impacted cyclone recovery. In both cases this could be described by a linear relationship. In general, spray-drying yield was maximized when the spray dryer was operated at high air inlet temperatures and low feed flow rates (Fig. 3). The amount of the dried product recovered via cyclone separation is influenced by many engineering and product parameters, such as drying air flow and local velocities; the spatial geometry of the separator; and the adhesiveness and cohesiveness of the particles while interacting with the drying chamber.^[36,37] In our work, the air flow was kept constant, and thereby the parameters that affect the surface stickiness of the micro particles such as the hygroscopicity, glass transition temperature, moisture and thermal diffusivity of the carrier material, temperature of the droplets obtained in the drying chamber, etc., probably control the achieved powder recovery at the cyclone separator.^[36] According to the findings of Adhikari et al.,^[36] the presence of ingredients that act as plasticizers; for example, sugars increase the surface stickiness of the dried particles

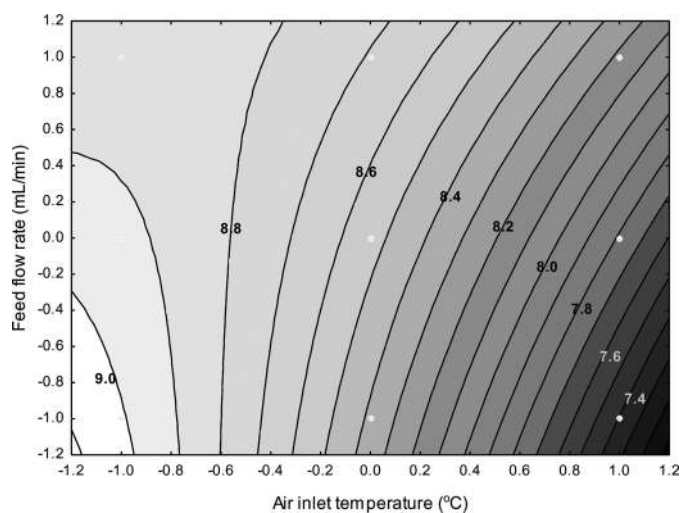


FIG. 1. Effects of air inlet temperature and feed flow rate on the viable counts of *L. acidophilus* NCIMB 701748 after spray drying.

TABLE 3
Regression coefficients and their significance levels for pruned mathematical models used for the prediction of total viable counts of *L. acidophilus* NCIMB 701748, water activity, and powder recovery at the cyclone separator (ns = not significant)

	Total viable counts		a_w		Cyclone recovery	
	Coefficient	<i>p</i> -Value	Coefficient	<i>p</i> -Value	Coefficient	<i>p</i> -Value
Intercept	8.417	<0.001	1.57E-01	<0.001	67.9	<0.001
X_1	-0.569	<0.001	-3.57E-02	<0.001	3.633	<0.001
X_2	0.089	<0.001	7.00E-03	0.018	-3.350	<0.001
X_1^2	0.156	0.008	2.90E-02	<0.001	ns	0.895
X_2^2	ns	0.884	9.00E-03	0.003	ns	0.878
X_1X_2	0.238	<0.001	-5.25E-03	0.013	ns	0.872
$X_1^2X_2$	ns	0.705	ns	0.352	ns	0.711
$X_1X_2^2$	ns	0.478	ns	0.828	ns	0.408
$X_1^2X_2^2$	ns	0.897	ns	0.267	ns	0.802
SS	7.539		0.039147		461.4	
Pure error	0.389		4.62E-04		20.27	
Lack of fit (<i>p</i> -value)	0.0154 (0.946)		0.001216 (0.112)		1.535 (0.962)	
R^2	0.946		0.976		0.952	
R^2_{adj}	0.936		0.971		0.949	
PRESS	4.05E-01		9.37E-04		21.8	
Q^2	0.943		0.973		0.953	

X_1 = Inlet air temperature (°C); X_2 = feed flow rate (mL/min).

due to the increase in the glass transition–surface temperature gradient. Thus, as the $T_d - T_g$ value increases the droplets move toward the rubbery state, sticking on the drying chamber surface and reducing the powder recovery rates. The effect is dependent on both heat and mass diffusion rates, because water acts as a plasticizer for

macromolecules.^[38] In our case, the combination of high air inlet temperature and low feed flow rates led to less particle stickiness probably due to the lower residual contents achieved by the sufficient heat penetration and core-to-droplet surface water diffusion rate.

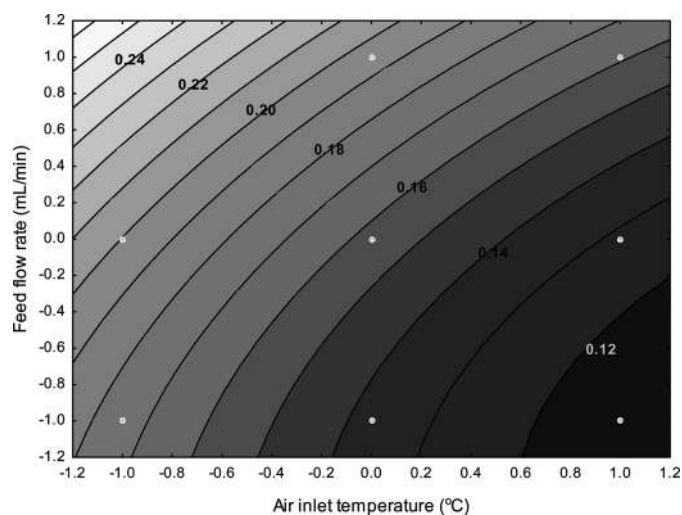


FIG. 2. Effects of air inlet temperature and feed flow rate on the water activity of the spray-dried powders.

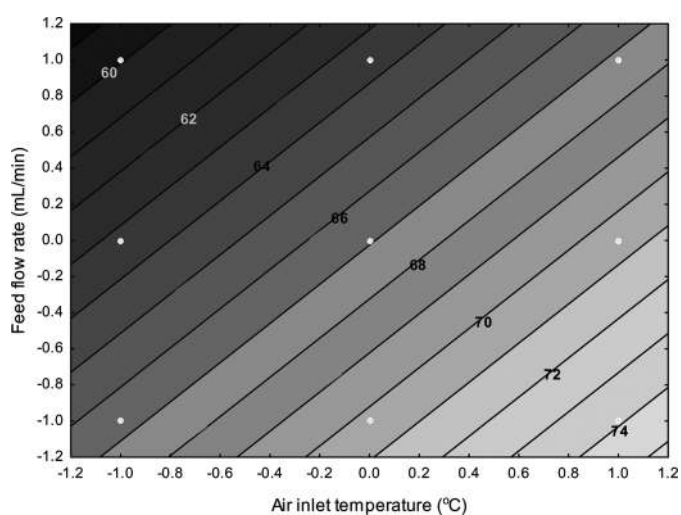


FIG. 3. Effects of air inlet temperature and feed flow rate on the powder recovery at the cyclone separator.

TABLE 4

Optimum spray-drying conditions and validation of the pruned mathematical models constructed for the prediction of total viable counts of *L. acidophilus* NCIMB 701748, water activity, and powder recovery at the cyclone separator

Factor	Optimized conditions		Operating conditions		
Inlet temperature (°C)	133.54		134		
Feeding rate (mL/min)	7.16		7.2		
Outlet temperature (°C)	73.19		73–74		
Responses					
Water activity		Total viable counts (log cfu/g)		Cyclone recovery (%)	
a_w [observed]	a_w [predicted]	TVC[observed]	TVC[predicted]	CR[observed]	CR[predicted]
0.171	0.174	8.59	8.62	68.30	67.47

Optimization of Processing Conditions and Model Verification

It is not possible to simultaneously maximize the viability of *L. acidophilus* while minimizing water activity and maximizing cyclone yield. Therefore, compromises must be made and an optimal compromise must be sought. Optimal operating conditions that produced both viable *L. acidophilus* microencapsulates and a stable dry powder were calculated using a desirability function,^[23] which is further detailed in Eq. (7):

$$\text{Desirability} = (\text{TVC} \cdot a_w \cdot \text{CR})^{1/3}, \quad (7)$$

where TVC is the total viable counts, a_w is the water activity, and CR is the powder recovery in the cyclone separator. The desirability targets were set at 1 (maximum) for TVC and CRA and 0 (minimum) for water activity. As can be seen in Table 4, desirability was maximized when $X_1 = -0.333$ and $X_2 = -0.233$, which corresponds to an air inlet temperature of 133.54°C and a feed flow rate of 7.14 mL/min. In order to validate the constructed mathematical models, a spray-drying experiment using the same carrier system and operating the spray dryer as close as possible to the optimum conditions (134°C and 7.2 mL/min) was carried out. The error between the predicted and observed values was 2.3% for a_w , 0.35% for TVC, and 1.2% for CR, verifying the predictive powder of the constructed models. Statistically, the model was further justified by the lack of fit ($p > 0.05$) and Q^2 values shown in Table 3.

Characterization of the Physicochemical and Structural Characteristics of Optimized Microcapsules

The physicochemical and structural properties of the microcapsules produced under the optimized spray dryer operating conditions are detailed in Table 5. Particle size analysis revealed a bimodal mean size distribution (Fig. 4) that was characteristic of spray-dried powders with high

bulk (tap) density; in general, bimodal distributions pack most efficiently as the smaller particles are included in the voids between the larger microcapsules.^[39] The volume-weighted mean diameter ($d_{v,50}$) of the microcapsules was 10.96 μm , which is comparable to the values (10–20 μm) reported in the case of other spray-dried probiotic formulations.^[17,40] The hygroscopic character of the powders (0.174 g/g of absorbed water) can be explained by the presence of D-glucose and lactose (both of which have hygroscopic properties), although the hygroscopicity values were much lower compared to other probiotic dry formulations.^[19] The glass transition temperature of the powder was 59°C, suggesting that the matrices can be stored under chilling or room temperature conditions while

TABLE 5

Physicochemical characterization and storage stability of the optimized microcapsules containing *L. acidophilus* NCIMB 701748

Physicochemical and microbiological characteristics	
Residual moisture content (g/100 g of powder)	3.76 ± 0.04
Particles mean size $d_{v,50}$ (μm)	10.96 ± 0.63
Hygroscopicity (g of H ₂ O/g of powder)	0.174 ± 0.001
Dissolution time (s)	809 ± 42
Glass transition temperature, T_g (°C)	59.0 ± 1.7
Change of specific heat capacity, ΔC_p (kJ/mol*K)	0.418 ± 0.014
L^*	95.59 ± 0.07
a^*	-0.210 ± 0.006
b^*	2.76 ± 0.07
Total color difference (ΔE^*)	2.87 ± 0.09
Survival after spray drying (%)	69.9 ± 4.3
Viability loss rate at 4°C (days ⁻¹)	0.011
Viability loss rate at 25°C (days ⁻¹)	0.041

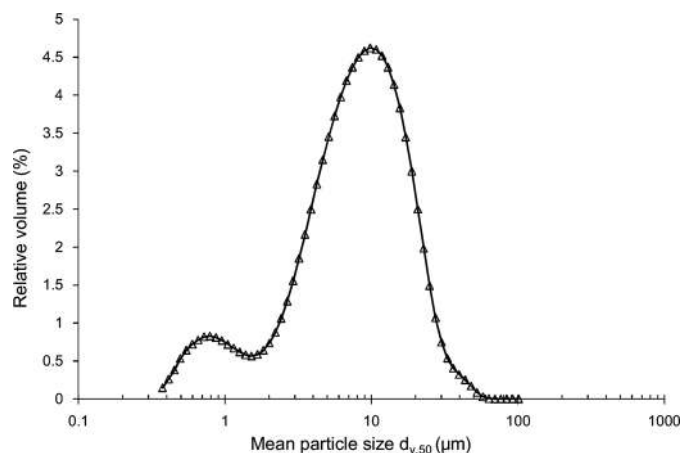


FIG. 4. Particle mean size distribution of the optimized powders containing *L. acidophilus* NCIMB 701748.

retaining their glassy state, irrespective of the plasticizing effect of D-glucose, lactose, and free water in the products.^[38] The spray-dried powders had a lower luminosity (L^*) and higher yellow color intensity compared to other dairy-based spray-dried formulations,^[19] which was probably due to the presence of the milk proteins. Similar results have been also reported by other researchers for the color difference (ΔE^*) for the white standard, which was 2.87; this color threshold is normally quoted for perceivable differences ($\Delta E^* = 3$).^[41]

The morphology of the microcapsules is illustrated in the SEM micrographs shown in Fig. 5. The particulate structure of the product generated under the optimum spray-drying conditions had a partially collapsed structure, which is characteristic of many spray-dried powders analyzed under vacuum, that can be described as a deflated, flat, ball-like, spherical particles. The heat transfer rate and the water diffusion rate from the surface to the core of the droplets as well as the presence of whey protein ingredients critically affected the microstructure of spray-dried matrices, with intermediate heat and mass

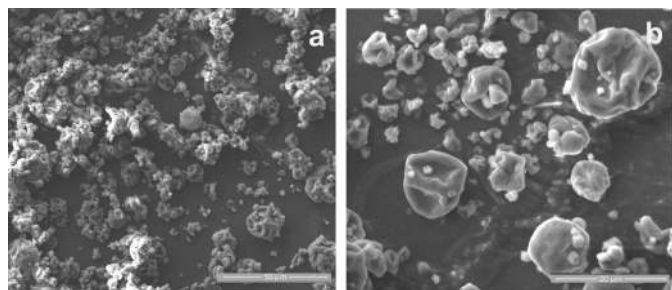


FIG. 5. SEM micrographs of the microcapsules containing *L. acidophilus* NCIMB 701748 produced under the optimized spray-drying conditions: (a) scale bar 50 μm and (b) scale bar 20 μm .

transfer rates (intermediate air inlet temperature and feed flow rate) to induce the highest collapse of the particles.^[42]

The inactivation rates of the powders stored for 30 days at chilled temperatures (4°C) and ambient room storage conditions (25°C) in sealed, airtight vials were calculated by fitting the TVC data to a first-order reaction model, which has successfully been used in previous studies.^[5,17,20,41] The total viable counts of *L. acidophilus* were 8.55 and 7.48 log cfu/g after 30 days of storage at 4 and 25°C, respectively, indicating a good storage stability of the probiotic powders. A fourfold increase in the inactivation rate of *L. acidophilus* was observed at room temperature ($k_{25^\circ\text{C}} = 0.041$) compared to the lower temperature ($k_{4^\circ\text{C}} = 0.011$). Storage temperature impacted the viability of an hydrobiotics through two main mechanisms: firstly, the increase in temperature increased the rate of metabolic activity in the cells (and other chemical or enzymatic reactions that may also occur; e.g., lipid oxidation) and, secondly, will modify the molecular mobility of water, as the environmental temperature approaches T_g (the $T - T_g$ gradient), the matrix will move closer to the rubbery state and water molecular mobility will increase. It should be noted that in the optimized system generated herein, the inactivation rates of *L. acidophilus* at room temperature were considerably lower than those of other spray-dried thermo sensitive lactobacilli strains such as *L. rhamnosus* (0.08–0.19 days⁻¹), *Lactobacillus plantarum* (0.055–0.062), *L. acidophilus* (0.0504), and *Lactobacillus lactis* (0.0574).^[17,20,43]

CONCLUSIONS

In the present work, we showed that optimization of the spray-drying process is essential for the production of dry spray powders containing viable thermo sensitive probiotics. The use of intermediate air inlet temperatures and feed flow rates are required to provide sufficient survivability of *L. acidophilus* through spray drying while retaining good powder recovery rates at the cyclone separator and low residual water activities. In addition, the microcapsules produced at the optimized spray-dried conditions were characterized as having acceptable physicochemical properties (total color, glass transition temperature, hygroscopicity) and low inactivation rates during storage at room and chilling temperature conditions. Although the results are promising and show that through compromises in techno-functional properties, yield, and shelf life, high-quality anhydrobiotics powders can be produced, it is anticipated that the shelf life of powders and the survival rates of *L. acidophilus* can be further improved by continual development of the carrier system and thermal profile of the drying chamber (through chamber geometry optimization and dynamic regulation of exhaust air).

ACKNOWLEDGMENTS

The authors gratefully acknowledge Val Street, Dr. Chris Parmenter, and Dr. Phil Richards for technical assistance and scientific advice with DSC measurements, SEM image analysis, and microbiological testing, respectively. Cargill Ltd. (Manchester, UK) and Arla A/S (Viby, Denmark) are also acknowledged for providing the maltodextrin and whey protein concentrate used in the present work.

REFERENCES

- Food and Agriculture Organization/World Health Organization. *Probiotics in Food. Health and Nutritional Properties and Guidelines for Evaluation*. FAO Food and Nutrition Paper No. 85; FAO: Rome, Italy, 2006.
- Fu, N.; Chen, X.D. Towards a maximal cell survival in convective thermal drying processes. *Food Research International* **2011**, *44*, 1127–1149.
- Gardiner, G.E.; O'Sullivan, E.; Kelly, J.; Auty, M.A.E.; Fitzgerald, G.F.; Collins, J.K.; Ross, R.P.; Stanton, C. Comparative survival rates of human-derived probiotic *Lactobacillus paracasei* and *L. salivarius* strains during heat treatment and spray drying. *Applied and Environmental Microbiology* **2000**, *66*, 2605–2615.
- Dave, R.I.; Shah, N.P. Ingredient supplementation effects on viability of probiotic bacteria in yogurt. *Journal of Dairy Science* **1998**, *81*, 2804–2816.
- Ying, D.Y.; Sun, J.; Sanguansri, L.; Weerakkody, R.; Augustin, M.A. Enhanced survival of spray-dried microencapsulated *Lactobacillus rhamnosus* GG in the presence of glucose. *Journal of Food Engineering* **2012**, *109*, 597–602.
- Saarela, M.; Virkajärvi, I.; Nohynek, L.; Vaari, A.; Mättö, J. Fibres as carriers for *Lactobacillus rhamnosus* during freeze-drying and storage in apple juice and chocolate-coated breakfast cereals. *International Journal of Food Microbiology* **2006**, *112*(2), 171–178.
- Ferraz, J.L.; Cruz, A.G.; Cadena, R.S.; Freitas, M.Q.; Pinto, U.M.; Carvalho, C.C.; Faria, J.A.F.; Bolini, H.M.A. Sensory acceptance and survival of probiotic bacteria in ice cream produced with different overrun levels. *Journal of Food Science* **2012**, *77*(1), S24–S28.
- Cruz, A.G.; Antunes, A.E.C.; Sousa, A.L.O.P.; Faria, J.A.F.; Saad, S.M.I. Ice cream as probiotic food carrier. *Food Research International* **2009**, *42*(9), 1233–1239.
- Ong, L.; Shah, N.P. Probiotic cheddar cheese: Influence of ripening temperatures on proteolysis and sensory characteristics of cheddar cheeses. *Journal of Food Science* **2009**, *74*(5), S182–S191.
- Klu, Y.A.K.; Williams, J.H.; Phillips, R.D.; Chen, J. Survival of *Lactobacillus rhamnosus* GG as influenced by storage conditions and product matrixes. *Journal of Food Science* **2012**, *77*(12), M659–663.
- Lourens-Hattingh, A.; Viljoen, B.C. Yogurt as probiotic carrier food. *International Dairy Journal* **2001**, *11*(1–2), 1–17.
- Rodrigues, D.; Sousa, S.; Gomes, A.M.; Pintado, M.M.; Silva, J.P.; Costa, P.; Amaral, M.H.; Rocha-Santos, T.; Freitas, A.C. Stability of *Lactobacillus paracasei* as free cells or encapsulated in alginate-based microcapsules in low pH fruit juices. *Food and Bioprocess Technology* **2012**, *5*(7), 2748–2757.
- Burgain, J.; Gaiani, C.; Linder, M.; Scher, J. Encapsulation of probiotic living cells: From laboratory scale to industrial applications. *Journal of Food Engineering* **2011**, *104*, 467–483.
- Concoran, B.M.; Stanton, C.; Fitzgerald, G.; Ross, R.P. Life under stress: The probiotic stress response and how it may be manipulated. *Current Pharmaceutical Design* **2008**, *14*, 1382–1399.
- Concoran, B.M.; Ross, R.P.; Fitzgerald, G.F.; Stanton, C. Comparative survival of probiotic lactobacilli spray-dried in the presence of prebiotic substances. *Journal of Applied Microbiology* **2004**, *96*, 1024–1039.
- Teixeira, P.; Castro, H.; Mohacsi-Farkas, C.; Kirby, R. Identification of sites of injury in *Lactobacillus bulgaricus* during heat stress. *Journal of Applied Microbiology* **1997**, *83*(2), 219–226.
- Ananta, E.; Volkert, M.; Knorr, D. Cellular injuries and storage stability of spray dried *Lactobacillus rhamnosus* GG. *International Dairy Journal* **2005**, *15*, 399–409.
- Sunny-Roberts, E.O.; Knorr, D. The protective effect of monosodium glutamate on survival of *Lactobacillus rhamnosus* GG and *Lactobacillus rhamnosus* E-97800 (E800) strains during spray-drying and storage in trehalose-containing powders. *International Dairy Journal* **2009**, *19*, 209–214.
- Fritzen-Freire, C.B.; Prudencio, E.S.; Amboni, R.D.M.C.; Pinto, S.S.; Negrao-Murakami, A.N.; Murakami, F.S. Microencapsulation of bifidobacteria by spray drying in the presence of prebiotics. *Food Research International* **2012**, *45*, 306–312.
- Lapsiri, W.; Bhandari, B.; Wanchaitanawong, P. Viability of *Lactobacillus plantarum* TISTR 2075 in different protectants during spray drying and storage. *Drying Technology* **2012**, *30*, 1407–1412.
- Bustos, P.; Bórquez, R. Influence of osmotic stress and encapsulating materials on the stability of autochthonous *Lactobacillus plantarum* after spray drying. *Drying Technology* **2013**, *31*, 57–66.
- Ahi, M.; Hatamipour, M.S.; Goodarzi, A. Optimization of leaving activity of baker's yeast during the spray-drying process. *Drying Technology* **2010**, *28*(4), 490–494.
- Koc, K.; Yilmazer, M.S.; Balkir, P.; Ertekin, F.K. Spray drying of yogurt: Optimization of process conditions for improving viability and other quality attributes. *Drying Technology* **2010**, *28*(4), 495–507.
- Telang, A.M.; Thorat, B.N. Optimization of process parameters for spray drying of fermented milk soy milk. *Drying Technology* **2010**, *28*(12), 1445–1456.
- Chávez, B.E.; Ledebauer, A.M. Drying of probiotics: Optimization of formulation and process to enhance storage survival. *Drying Technology* **2007**, *25*(7–8), 1193–1201.
- Riveros, B.; Ferrer, J.; Borquez, R. Spray drying of a vaginal probiotic strain of *Lactobacillus acidophilus*. *Drying Technology* **2009**, *27*(1), 123–132.
- Schutyser, A.I.M.; Perdana, J.; Boom, R.M. Single droplet drying for optimal spray drying of enzymes and probiotics. *Trends in Food Science and Technology* **2012**, *27*(2), 73–82.
- Mestry, A.P.; Mujumdar, A.S.; Thorat, B.N. Optimization of spray drying of an innovative functional food: Fermented mixed juice of carrot and watermelon. *Drying Technology* **2011**, *29*(10), 1121–1131.
- Goula, A.M.; Adamopoulos, K.G. A new technique for spray-dried encapsulation of lycopene. *Drying Technology* **2012**, *30*(6), 641–652.
- Myers, R.H.; Montgomery, D.C.; Anderson-Cook, C.M. *Response Surface Methodology*, 3rd Ed.; Wiley: Hoboken, NJ, 2009.
- Cavaliere, C.; Foglia, P.; Marini, F.; Samperi, R.; Antonacci, D.; Laganà, A. The interactive effects of irrigation, nitrogen fertilisation rate, delayed harvest and storage on the polyphenol content in red grape (*Vitis vinifera*) berries: A factorial experimental design. *Food Chemistry* **2010**, *122*, 1176–1184.
- Soukoulis, C.; Tzia, C. Response surface mapping of the sensory characteristics and acceptability of chocolate ice cream containing alternate sweetening agents. *Journal of Sensory Studies* **2010**, *25*(1), 50–75.
- Garre, E.; Raginel, F.; Palacios, A.; Julien, A.; Matallana, E. Oxidative stress responses and lipid peroxidation damage are induced during dehydration in the production of dry active wine yeasts. *International Journal of Food Microbiology* **2011**, *136*, 295–303.
- Santivarangkna, C.; Kulozik, U.; Foerst, P. Inactivation mechanisms of lactic acid starter cultures preserved by drying processes. *Journal of Applied Microbiology* **2008**, *105*, 1–13.

35. Barbosa-Canovas, G.V.; Ortega-Rivas, E.; Juliano, P.; Yan, H. *Food Powders: Physical Properties, Processing and Functionality*; Kluwer Academic: New York, 2005.
36. Adhikari, B.; Howes, T.; Lecomte, D.; Bhandari, B.R. A glass transition temperature approach for the prediction of the surface stickiness of a drying droplet during spraying drying. *Powder Technology* **2005**, *149*, 168–179.
37. Barbosa-Canovas, G.V.; Vega-Mercado, H. *Dehydration of Foods*; Chapman & Hall: New York, 1996.
38. Roos, Y.H. *Phase Transitions in Foods*; Academic Press: New York, 1995.
39. Tonon, R.V.; Brabet, C.; Hubinger, M.D. Influence of process conditions on the physicochemical properties of acai (*Euterpe oleraceae* Mart.) powder produced by spray drying. *Journal of Food Engineering* **2008**, *88*(3), 411–418.
40. Ying, D.Y.; Phoon, M.C.; Sanguansri, L.; Weerakkody, R.; Burgar, I.; Augustin, M.A. Microencapsulated *Lactobacillus rhamnosus* GG powders: Relationship of powder physical properties to probiotic survival during storage. *Journal of Food Science* **2010**, *75*, E588–E595.
41. Martinez-Cervera, S.; Salvador, A.; Muguerza, B.; Moulay, L.; Fizman, S.M. Cocoa fibre and its application as a fat replacer in chocolate muffins. *LWT-Food Science and Technology* **2011**, *44*, 729–736.
42. Reineccius, G.A. Multiple-core encapsulation—The spray drying of food ingredients. In *Microencapsulation of Food Ingredients*; Vilstrup, P., Ed.; Leatherhead Publishing: Surrey, UK, 2001; 151–185.
43. Dianawati, D.; Mishra, V.; Shah, N.P. Stability of microencapsulated *Lactobacillus acidophilus* and *Lactococcus lactis* ssp. *cremoris* during storage at room temperature at low a_w . *Food Research International* **2012**.