


NASA TECHNICAL NOTE



NASA TN D-2975

6.1

NASA TN D-2975

LOAN COPY: R
ANGE: EWL
KIRKLAND AFB

0079943



TECH LIBRARY KAFB, NM

OPTIMIZATION OF TIME-TEMPERATURE
PARAMETERS FOR CREEP AND
STRESS RUPTURE, WITH APPLICATION
TO DATA FROM GERMAN COOPERATIVE
LONG-TIME CREEP PROGRAM

*by Alexander Mendelson, Ernest Roberts, Jr.,
and S. S. Manson*

*Lewis Research Center
Cleveland, Ohio*

TECH LIBRARY KAFB, NM



0079943
NASA TN D-2975

*

OPTIMIZATION OF TIME-TEMPERATURE PARAMETERS FOR CREEP
AND STRESS RUPTURE, WITH APPLICATION TO DATA FROM
GERMAN COOPERATIVE LONG-TIME CREEP PROGRAM

By Alexander Mendelson, Ernest Roberts, Jr. ,
and S. S. Manson

Lewis Research Center
Cleveland, Ohio

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

For sale by the Clearinghouse for Federal Scientific and Technical Information
Springfield, Virginia 22151 - Price \$2.00

OPTIMIZATION OF TIME-TEMPERATURE PARAMETERS FOR CREEP AND STRESS RUPTURE, WITH
APPLICATION TO DATA FROM GERMAN COOPERATIVE LONG-TIME CREEP PROGRAM

by Alexander Mendelson, Ernest Roberts, Jr., and S. S. Manson

Lewis Research Center

SUMMARY

By the use of orthogonal polynomials developed for discrete sets of data, the least-squares equations for determining the optimized stress-rupture parametric constants are obtained in nearly uncoupled form; thus the use of high-degree polynomials is permitted without the loss of significant figures. Optimum values of the constants can thereby be accurately obtained. The method is applied to the data obtained from the German cooperative long-time creep program by using a general parameter of which the Manson-Haferd and Larson-Miller parameters are special cases. Good correlation was obtained. An analysis is also made of creep data obtained for columbium alloy FS-85 with good results. A complete Fortran IV computer program is included to aid those wishing to use the method.

INTRODUCTION

One method of extrapolating short-time creep-rupture data to predict long-time life involves the use of a time-temperature parameter. This concept is based on the assumption that all creep-rupture data for a given material can be correlated to produce a single "master curve" wherein the stress (or log stress) is plotted against a parameter involving a combination of time and temperature. Extrapolation to long times can then be obtained from this master curve, which can presumably be constructed by using only short-time data. Three well-known parametric methods are the Larson-Miller, Manson-Haferd, and Dorn parameters (refs. 1 to 3). These parametric methods have the great advantage, at least in theory, of requiring only a relatively small amount of data to establish the required master curve.

More recently a general creep-rupture parameter was introduced by one of the authors (ref. 4) that includes most of the currently used parameters as special cases. The analysis in the present paper is therefore based on this general parameter.

A significant advance in the practical application of the parametric methods was the development of an objective least-squares method for determining the optimum values of the parametric constants without plotting and cross-plotting the data and without the use of judgment on the part of the analyst (ref. 5). This least-squares method involves, however, several practical difficulties that arise from the fact that in fitting the master curve by a polynomial, the set of linear algebraic equations for the coefficients (the normal equations) are very ill-conditioned. The determinant of these equations can be shown to be related to the Hilbert determinant (ref. 6), which rapidly approaches zero as its order increases. Thus for polynomials above the second degree, it is necessary to use double-precision arithmetic (16 significant digits or more) on the computer, and for the fifth degree and above the results become uncertain even with double-precision arithmetic. This difficulty is inherent in the normal least-squares equations and is not limited only to the stress-rupture problem.

The present report presents a method for avoiding the above difficulty by using orthogonal polynomials in the representation of the master curve (appendix A). The use of orthogonal polynomials for representing discrete sets of unequally spaced data is described in reference 6 and in more detail in reference 7. A further improvement can be obtained by performing a linear transformation on the stresses (or the logs of the stresses) so that all the values of stress (or log stress) lie between 2 and -2, as recommended in reference 7. As a result of these innovations, it became possible to perform all the computations in single-precision arithmetic (eight significant digits) up to 18th degree polynomials without appreciable round-off error.

In addition, this report contains a complete analysis, in which the general parameter was used, of all the data for three steels that were obtained by NASA through the cooperation of Dr. K. Richard of Faberwerke Hoechst in Frankfurt and that were investigated in a long-time cooperative creep program in Germany. Some of the data from the latter investigation are included in this paper.

Finally it is shown by means of a concrete example how the parameter techniques can be applied to creep data to predict long-time creep. For this purpose the data for columbium alloy FS-85, as reported in reference 8, are used.

A complete Fortran IV program, as used on the IBM 7094 computer in making the calculations, is presented in appendix B. This program can be used for the objective analysis of any set of creep-rupture data by the Larson-Miller, Manson-Haferd, or the more general parameter of reference 4.

SYMBOLS

A,B linear transformation coefficients
a,b,c elements of coefficient matrix
D standard deviation

K degree of freedom
 m degree of polynomial
 n number of data points
 $P(\sigma)$ creep-rupture parameter
 Q polynomial
 q stress exponent
 r temperature exponent
 S sum of squares of residuals
 T temperature
 T_a temperature intercept
 t time to rupture
 t_a time intercept
 u coefficient of polynomial function
 X scaled log stress
 x log stress
 y log time
 y_a log time intercept
 α, β constants from recurrence relation
 σ stress
 τ $\sigma^q(T - T_a)^r$

Subscripts:

max maximum
 min minimum

PROCEDURE

General Parameter

The general creep-rupture parameter introduced in reference 4 has the fol-

lowing form

$$P(\sigma) = \frac{\frac{\log t}{\sigma^q} - \log t_a}{(\tau - T_a)^r} \quad (1)$$

where T_a , $\log t_a$, q , and r are material constants to be determined from the available experimental data. The parameter $P(\sigma)$ is a function of the stress and, when plotted against stress, is referred to as a master curve (fig. 1, p. 9). If $q = 0$ and $r = 1$, the Manson-Haferd parameter is obtained. If $q = 0$, $r = -1$, and $T_a = -460^\circ \text{F}$, the Larson-Miller parameter results. If $q = 1$ and $r = 1$, the stress-modified parameter suggested in reference 9 is obtained. Finally, if $q = 0$, equation (1) reduces to the parameter proposed by Manson and Brown (ref. 10).

The object is to find the best values of the constants q , $\log t_a$, T_a , and r so that the master curve best fits the data. To find these values, the method of least squares is used whereby the master curve is represented by a polynomial in the logarithm of the stress, and the best fit is obtained by minimizing the sum of the squares of the deviations (the residuals) of the data from the curve. The calculation procedure will now be described. The details of the derivation are given in appendix A, and a Fortran IV computer program using this method is given in appendix B.

Calculation Procedure

To simplify the notation, the following symbols are introduced:

$$\left. \begin{aligned} \tau &\equiv \sigma^q(\tau - T_a)^r \\ y &\equiv \log t \\ x &\equiv \log \sigma \\ y_a &\equiv \log t_a \end{aligned} \right\} \quad (2)$$

Then from equation (1) it follows that

$$y = \sigma^q y_a + \tau Q(x) \quad (3)$$

where in reference 5, $Q(x)$ was represented by a simple polynomial of the form

$$Q(x) = a_0 + a_1 x + a_2 x^2 + \dots + a_m x^m \quad (4)$$

The least-squares equations obtained sometimes led to difficulties as indicated in the INTRODUCTION. These difficulties can be avoided, however, by rewriting equation (4) in terms of polynomials that are orthogonal over the set of data, as defined in appendix A. Thus assume

$$Q(x) = u_1 Q_1(x) + u_2 Q_2(x) + \dots + u_{m+1} Q_{m+1}(x) = \sum_{j=1}^{m+1} u_j Q_j(x) \quad (5)$$

where u_j is an unknown constant, m is the degree of the highest degree polynomial, and $Q_j(x)$ is a polynomial of degree $j - 1$ that satisfies the orthogonality conditions described in appendix A. The use of orthogonal polynomials permits the solution of the least-squares equations directly in closed form, thus the loss of a large number of significant digits is avoided. The method of calculating Q_j will be discussed in appendix A.

If equation (5) is substituted into equation (3), an equation with $m + 5$ unknown constants results for the case of the general parameter. For the case of the linear parameter there are $m + 3$ constants, and for the Larson-Miller parameter there are $m + 2$. It is necessary that the number of data points n always equals or exceeds the number of unknown constants.

The constants are determined so that equation (3) fits the data best in the least-squares sense. To accomplish this, the sum of the squares of the deviations is minimized; that is,

$$S \equiv \sum_{i=1}^n [y_i - \sigma_i^q y_a - \tau_i Q(x_i)]^2 \quad (6)$$

is made a minimum. Because the equations are nonlinear in some of the unknown constants a trial and error procedure must be used. A set of values is assumed for q , r , and T_a , and the corresponding best values of y_a and u_j are determined. A different set of values for q , r , and T_a is then chosen, and again the best values of y_a and u_j are calculated. Several sets of values of q , r , and T_a are tried, and the values corresponding to the overall best fit are determined. For the case of the linear parameter, only the value of T_a is varied (q is always equal to zero, and r is always equal to 1). For the Larson-Miller parameter, T_a is equal to -460° F, and no trial and error procedure is needed.

As a measure of the fit, the standard deviation D , defined by

$$D = \sqrt{\frac{S}{n - K}} \quad (7)$$

is used, where K equals

$m + 5$	general parameter	}	(8)
$m + 3$	linear parameter		
$m + 2$	Larson-Miller parameter		

The smallest value of D will correspond to the best fit.

To determine the best values of y_a and u_j for a given set of values of T_a , q , and r , the following calculations are made. First, the logarithms of the stresses are scaled so that they lie in the range -2 to 2, as suggested in reference 7. The reason for this is discussed in appendix A. Thus define a variable X by

$$X = Ax + B \quad (9a)$$

$$\left. \begin{aligned} A &= \frac{4}{x_{\max} - x_{\min}} \\ B &= -2 \frac{x_{\max} + x_{\min}}{x_{\max} - x_{\min}} \end{aligned} \right\} \quad (9b)$$

The polynomials $Q_j(X_i)$ are now calculated for each of the data points by using the following formulas:

$$Q_{j+1} = (X - \alpha_j)Q_j - \beta_j Q_{j-1} \quad m \geq j \geq 1 \quad (10)$$

$$\left. \begin{aligned} \alpha_j &= \frac{\sum_{i=1}^n X_i \tau_i^2 Q_j^2(X_i)}{\sum_{i=1}^n \tau_i^2 Q_j^2(X_i)} \quad m \geq j \geq 1 \\ \beta_j &= \frac{\sum_{i=1}^n X_i \tau_i^2 Q_j(X_i) Q_{j-1}(X_i)}{\sum_{i=1}^n \tau_i^2 Q_{j-1}^2(X_i)} \quad m \geq j > 1, Q_1 = 1, \text{ and } \beta_1 = 0 \end{aligned} \right\} \quad (10a)$$

where n is the number of data points, X_i is the scaled value of log for the i^{th} data point, and τ_i is equal to $\sigma_i^q (T_i - T_a)^r$ for the i^{th} data point for the chosen values of T_a , q , and r .

It is to be noted that the degree of the polynomial $Q(x)$ of equation (5) can be increased by merely computing the next polynomial in the series Q_{m+2} without having to recompute any of the previous ones. This is one of the advantages of using orthogonal polynomials.

Once the values of Q_j have been computed for each of the data points, y_a and u_j can be calculated as follows:

Let

$$\left. \begin{aligned}
 a_0 &= \sum_{i=1}^n \sigma_i^{2q} \\
 a_j &= \sum_{i=1}^n \sigma_i^q \tau_i Q_j(X_i) \\
 b_j &= \sum_{i=1}^n \tau_i^2 Q_j^2(X_i) \\
 c_0 &= \sum_{i=1}^n \sigma_i^q y_i \\
 c_j &= \sum_{i=1}^n \tau_i y_i Q_j(X_i)
 \end{aligned} \right\} \quad (11)$$

where $j = 1, 2, \dots, m+1$.

Then

$$\left. \begin{aligned}
 y_a &= \frac{c_0 - \sum_{j=1}^{m+1} \frac{a_j c_j}{b_j}}{a_0 - \sum_{j=1}^{m+1} \frac{a_j^2}{b_j}} \\
 u_j &= \frac{c_j - a_j y_a}{b_j}
 \end{aligned} \right\} \quad (12)$$

Note that if $q = 0$, a_0 equals the number of data points n . Thus by means of equations (9) to (12), the best values of y_a and u_j to fit the data are found for a given choice of T_a , q , and r . The Fortran IV program described in appendix B automatically scans all the desired values of T_a , q , and r and chooses the best set from all the submitted values as determined by the smallest value of the standard deviation D , as defined by equation (7). The method can be illustrated by a simple example: consider a set of theoretical data, which fit the following equation exactly

$$\frac{9.5 - \log t}{T - 600} = 10^{-3}(7.02 + 0.467 x + 0.061 x^2 + 0.00928 x^3) \quad (13)$$

Eight data points satisfying this equation are given in columns 2 to 6 of table I. For this data $T_a = 600^\circ \text{ F}$ and $\log t_a = y_a = 9.5$. Suppose, however, that these eight data points were obtained experimentally and that the values of T_a and $\log t_a$ were not known. The problem then is to find the best values of T_a and $\log t_a$ to fit the data by the linear parameter. These values can readily be found by using the equations of the previous section. First, from column 6 of table I

$$(\log \sigma)_{\max} = 4.75051$$

$$(\log \sigma)_{\min} = 1.81954$$

Therefore from equations (9b)

$$A = 1.36474$$

$$B = -4.48319$$

and by means of equation (9a) the X_1 were computed and are given in column 8.

For illustrative purposes three values of T_a were chosen, 500° , 600° , and 700° F . For each of these values of T_a , values of T_1 , α_j , β_j , and $Q_j(X_1)$ were computed by means of equations (2), (10), and (10a), and the values of a_j , b_j , and c_j were computed by equations (11). The results are tabulated for $T_a = 600^\circ$ in columns 9 to 12 of table I and in table II up to a third degree polynomial.

The values of y_a and u_j were then computed by using equations (12) for each of these three values of T_a by first assuming $m = 2$, then $m = 3$, and finally $m = 4$, corresponding to polynomials of second, third, and fourth degrees, respectively. For each of these cases the standard deviation D was computed from equation (7) with S being given by equation (6) and Q by equation (5). The results are summarized in table III. The least value of D , signifying the best fit, is obtained for $m = 3$ and $T_a = 600^\circ \text{ F}$. The corresponding value of y_a is 9.5. These values, of course, correspond to equation (13), from which the data were generated.

Application to Data from German Cooperative Long-Time Creep Program

As part of the German cooperative long-time creep program, a sufficient amount of material of each of three steels was supplied to NASA to permit the running of short-time tests necessary to predict the results at long times obtained in the German test program. The composition of these steels is shown in table IV.

The results of the NASA tests, which were used in the subsequent analysis,

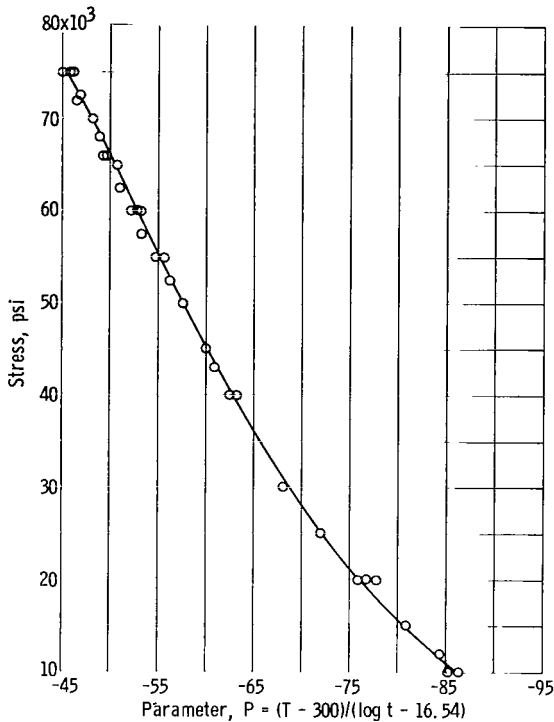


Figure 1. - Master curve for steel K (27b KK), calculated from NASA data between 10 and 3700 hours.

are shown in table V. Table VI shows the results of the long-time German test program. The three steels will be designated briefly as steel K, steel C, and steel P.

With the use of the test data shown in table V a complete analysis was made by the previously described method. The general parameter discussed in the INTRODUCTION was used, and the best values were obtained for the parametric constants for each of the three steels.

All the data obtained for these steels are shown in tables V and VI. Many of the data points were obtained for purposes other than the application to time-temperature parameters, as described in this report. As already discussed in references 4 and 11, a much smaller amount of data is needed when an accelerated program is desired; however, since these data were already available, all the data indicated in tables V and VI were used to obtain the best possible parametric constants.

For all three steels the analysis showed the stress exponent q to be zero, but the temperature exponent r to be different for each of the three materials. For steel K the best value of r was 1, which indicated that the best fit is obtained by the linear parameter. For steel P a value of r of -1 was obtained, which indicated a parameter similar to the Larson-Miller parameter; however, the corresponding value of T_a was 200° F rather than -460° F used in the Larson-Miller parameter. For steel C the value of R was 2.5.

Figure 1 shows the results for steel K. Here the master curve consists of a plot of stress against the optimized parameter $(T - 300)/(\log t - 16.54)$.

Figure 2 shows the isothermals computed by using the optimized parameters, as shown on each of the figures. The range of the NASA data used to obtain these parameters is also shown on each of the figures. The data points shown are the German results obtained to date. The predictions up to 100 000 hours from the NASA data based on the optimized parameters agree well with the German data, if scatter and differences in testing technique between the two organizations are considered.

Figure 3 shows a comparison for each of the three steels between the best linear parameter, the best Larson-Miller parameter, and the best general parameter. Although for some of the steels fair agreement can be obtained with one or the other of these parameters, it is clear that the general parameter is superior when all the materials are considered jointly. If any one of the special cases of this parameter is to be chosen for all materials, the linear

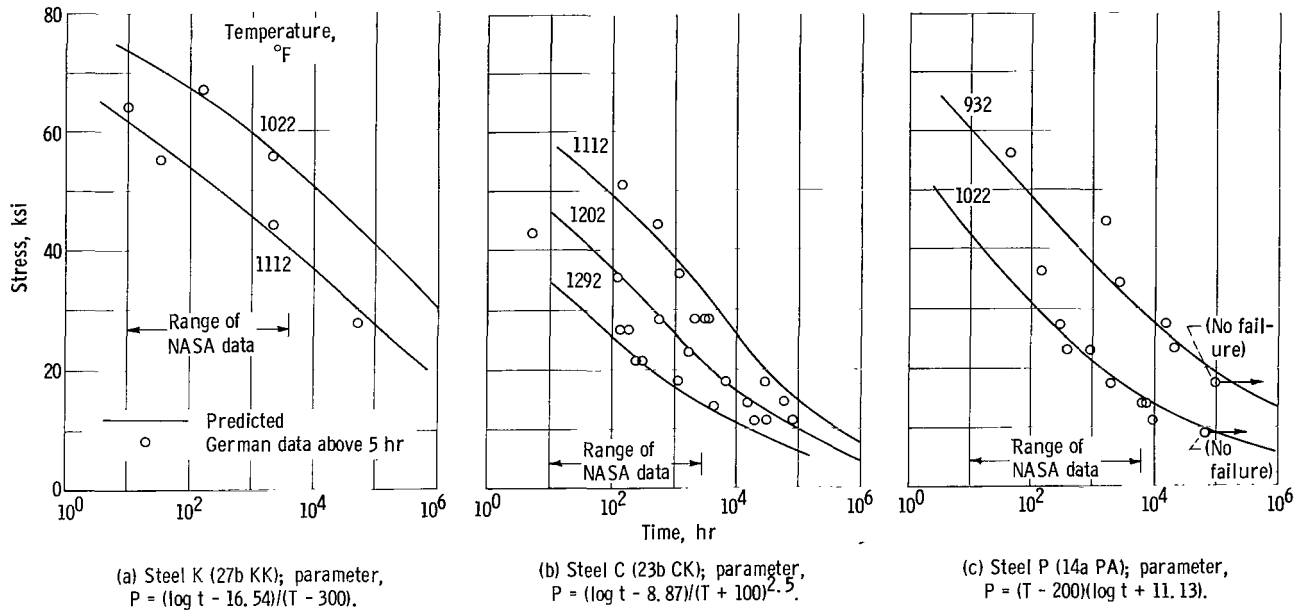


Figure 2. - Analysis of German steel data by generalized parameter with optimum constants (where T is temperature, and t is time to rupture).


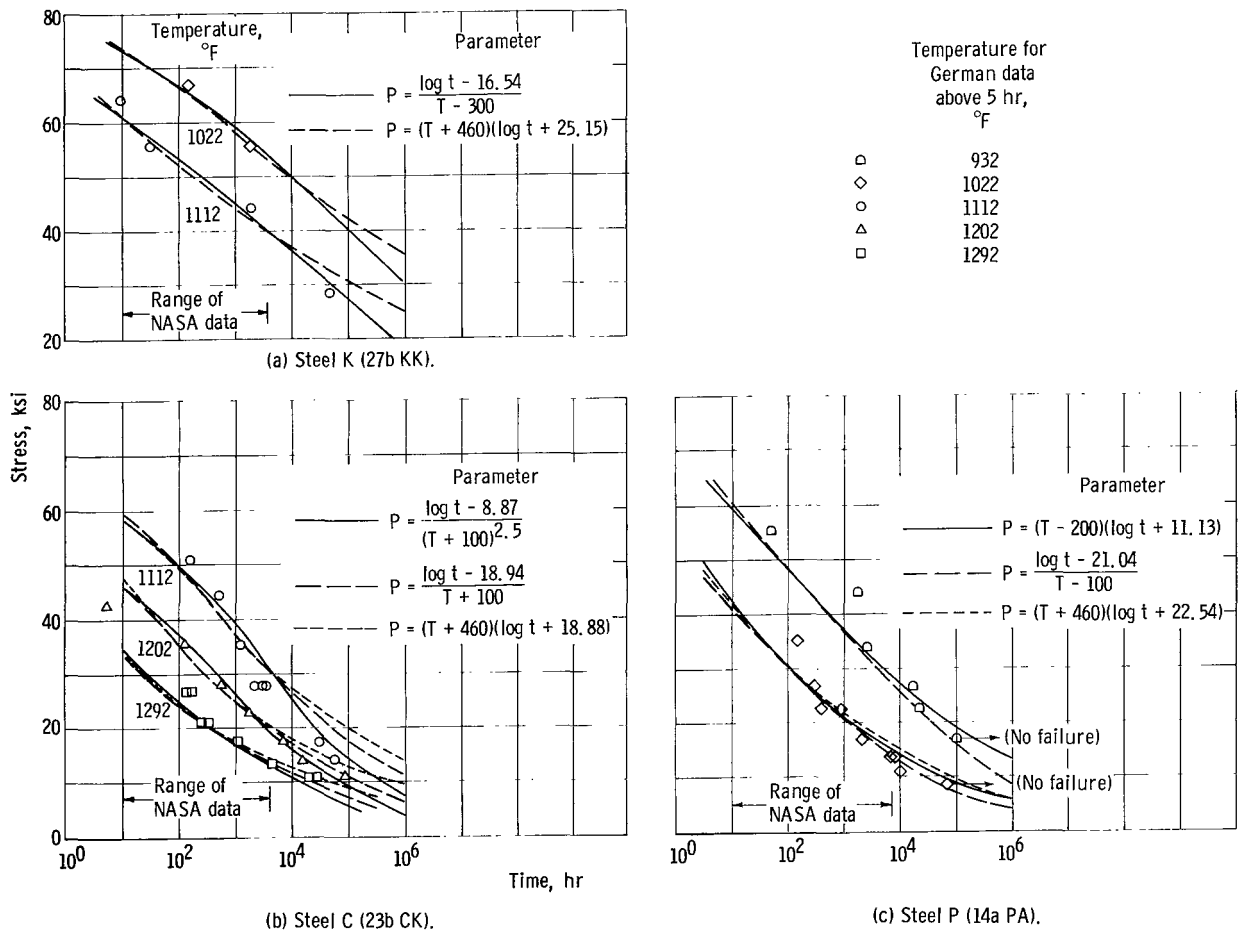


Figure 3. - Analysis of German steel data by several parameters (where T is temperature, and t is time to rupture).

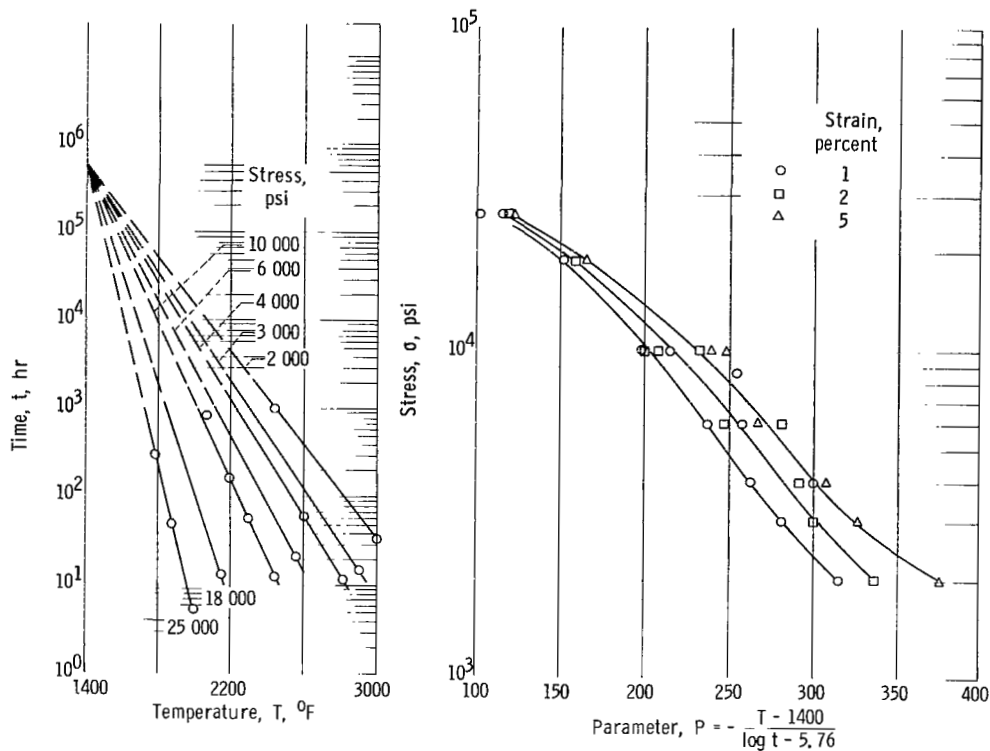

(a) 5-Percent strain.

(b) Master curves obtained for 1-, 2-, and 5-percent strain.

Figure 4. - Analysis of creep data for columbium alloy FS-85 by linear parameter.

parameter would appear to be the best choice.

Application to Creep Data

Although there is no fundamental reason why the same parameter is capable of representing both creep and rupture data, it has nevertheless been found empirically (refs. 1 and 2) that the dual role of the same parameter leads to reasonable results. Experimental data for creep are much more limited, however, than that for rupture, and such data tend to contain more scatter; hence, analysis of creep data by the parametric approach has been limited in the past.

The method of the present report can be applied directly to creep data without any change. All that is necessary is to redefine t as the time to attain a specified amount of creep rather than as the rupture time. Thus, it is assumed that for a given amount of creep, say 1 percent, a plot of $\log \sigma$ against a parameter, such as that given by equation (1), will produce a single master curve. For a different amount of creep, say 5 percent, a different master curve can be obtained, but it is assumed that the parametric constants, such as $\log t_a$ and T_a , remain the same and that they equal the values obtained from rupture data.

Calculations of this type were performed for columbium alloy FS-85. The creep tests were limited to runs of approximately 1000 hours; the data are

given in table VII, as taken from reference 8. Figure 4(a) shows the data for 5-percent creep strain, and figure 4(b) shows the master curves obtained for 1-, 2-, and 5-percent strain as well as the parametric constants obtained by the method of this report. While scatter in the creep data is high, the correlation must be regarded as good. In general, the points agree well with the master curve.

Although these results are encouraging, much more work is necessary before it can be concluded that the parametric approach is completely valid for creep data. If it is eventually concluded that the parametric approach is valid for creep data and in particular that the parametric constants are the same for both the creep and rupture processes, it is obvious that a great saving in test facilities and test program planning will result. It therefore seems very worthwhile in future studies to give more attention to the correlation and extrapolation of creep data by the parametric method.

Lewis Research Center,
National Aeronautics and Space Administration,
Cleveland, Ohio, May 3, 1965.

APPENDIX A

ORTHOGONAL POLYNOMIALS AND LEAST-SQUARES DETERMINATION
OF PARAMETRIC CONSTANTS

A set of polynomials $Q_j(x)$ are said to be orthogonal over an interval with respect to the weighting function $\tau(x)$ if they satisfy the following relation

$$\int_{x=x_1}^{x=x_2} \tau^2(x) Q_j(x) Q_k(x) dx = 0 \quad j \neq k \quad (A1)$$

Similarly a set of polynomials can be defined to be orthogonal over a set of n discrete points x_i by the following relation

$$\sum_{i=1}^n \tau_i^2 Q_j(x_i) Q_k(x_i) = 0 \quad j \neq k \quad (A2)$$

It can be shown (ref. 6), that all orthogonal polynomials satisfy a three-term recurrence relation of the form

$$Q_{k+1} = (x - \alpha_k) Q_k - \beta_k Q_{k-1} \quad k \geq 1 \quad (A3)$$

Thus by starting with $Q_1 = 1$ and $\beta_1 = 0$ an infinite set of orthogonal polynomials can be generated by means of equation (A3) if values for α_k and β_k are known. These can be determined from the orthogonality conditions (eqs. (A1) or (A2)). From the relation (A2) it follows that

$$\sum_{i=1}^n \tau_i^2 Q_k(x_i) Q_{k+1}(x_i) = 0 \quad (A4a)$$

and

$$\sum_{i=1}^n \tau_i^2 Q_{k+1}(x_i) Q_{k-1}(x_i) = 0 \quad (A4b)$$

When the recurrence relation (A3) is used to eliminate Q_{k+1} , there is obtained

$$\sum_{i=1}^n \tau_i^2 Q_k \left[(x_i - \alpha_k) Q_k - \beta_k Q_{k-1} \right] = 0 \quad (A5a)$$

$$\sum_{i=1}^n \tau_i^2 [(x_i - \alpha_k) Q_k - \beta_k Q_{k-1}] Q_{k-1} = 0 \quad (A5b)$$

When the orthogonality condition (A2) is used, equations (A5a) and (A5b) reduce to

$$\sum_{i=1}^n \tau_i^2 (x_i - \alpha_k) Q_k^2 = 0 \quad (A6a)$$

$$\sum_{i=1}^n \tau_i^2 (x_i Q_k Q_{k-1} - \beta_k Q_{k-1}^2) = 0 \quad (A6b)$$

Solving equations (A6) for α_k and β_k gives

$$\alpha_k = \frac{\sum_{i=1}^n x_i \tau_i^2 Q_k^2}{\sum_{i=1}^n \tau_i^2 Q_k^2} \quad (A7a)$$

$$\beta_k = \frac{\sum_{i=1}^n x_i \tau_i^2 Q_k Q_{k-1}}{\sum_{i=1}^n \tau_i^2 Q_{k-1}^2} \quad (A7b)$$

Thus a set of orthogonal polynomials can be generated that are orthogonal over a finite set of discrete values of the variable x . Note that these values need not be equally spaced, a condition that is obviously necessary for stress-rupture data.

Scaling of Polynomial Argument

From the recurrence relation (A3) with $Q_1 = 1$, it follows that the leading term of $Q_{k+1}(x_i)$ is x_i^k . Therefore, depending on the values of x_i , the values of $Q_{k+1}(x_i)$ can become very large or very small. This procedure can lead to a loss of significant figures in performing the calculations. It is shown in reference 7, by comparison with the Chebyshev polynomials, that if x is scaled so that all the values of X_i lie between 2 and -2, the polynomial

values $Q_j(X_i)$ will all be of approximately uniform size. To perform this scaling, let x_{\max} be the maximum value of $\log \sigma$ and x_{\min} be the minimum value of $\log \sigma$; then let

$$X = A \log \sigma + B \quad (\text{A8})$$

$$2 = Ax_{\max} + B \quad (\text{A9a})$$

$$-2 = Ax_{\min} + B \quad (\text{A9b})$$

and solving for A and B results in equations (9b).

It has been found in practice that scaling the values of x as indicated does indeed preserve the significance of the calculations.

Least-Squares Procedure

In terms of the orthogonal polynomials, equation (3) can be written

$$y = \sigma^q y_a + \tau \sum_{j=1}^{m+1} u_j Q_j(X) \quad (\text{A10})$$

To find the best values of y_a and u_j that fit the data, the sum of the squares of the residuals is minimized. Thus let

$$S = \sum_{i=1}^n \left[y_i - \sigma_i^q y_a - \tau_i \sum_{j=1}^n u_j Q_j(X_i) \right]^2 \quad (\text{A11})$$

Then in order to find the values of y_a and u_j that will make S a minimum, S is differentiated in turn with respect to y_a and each u_j , and the resulting equations are set equal to zero. When this is done, the following set of equations is obtained:

$$\left. \begin{aligned} a_0 y_a + a_1 u_1 + a_2 u_2 + \dots + a_{m+1} u_{m+1} &= c_0 \\ a_1 y_a + b_1 u_1 + 0 + \dots + 0 &= c_1 \\ a_2 y_a + 0 + b_2 u_2 + \dots + 0 &= c_2 \\ \vdots & \\ a_{m+1} y_a + 0 + 0 + \dots + b_{m+1} u_{m+1} &= c_{m+1} \end{aligned} \right\} \quad (\text{A12})$$

where

$$\left. \begin{aligned}
a_0 &= \sum_{i=1}^n \sigma_i^{2q} \\
a_j &= \sum_{i=1}^n \sigma_i^q \tau_i Q_j(X_i) \quad j = 1, 2 \dots m+1 \\
b_j &= \sum_{i=1}^n \tau_i^2 Q_j^2(X_i) \quad j = 1, 2 \dots m+1 \\
c_0 &= \sum_{i=1}^n \sigma_i^q y_i \\
c_j &= \sum_{i=1}^n \tau_i y_i Q_j(X_i) \quad j = 1, 2 \dots m+1
\end{aligned} \right\} \quad (A13)$$

It is to be noted that the only nonzero elements in the coefficient matrix of equations (A12) are the diagonal elements and the elements of the first row and first column. All the other elements are zero because of the orthogonality properties of the polynomials used. This is one of the major advantages in using orthogonal polynomials. In the usual case of data fitting, all the elements of the first row and first column, except for the first element, would also be zero; and the equations would be completely uncoupled, each u_j being computed completely independent of the others, without the necessity of solving any sets of equations with the resultant loss of significant figures. In this particular case because of the added constant y_a , the equations are not completely uncoupled, but they are very nearly uncoupled and can readily be solved. Thus for any equation after the first

$$u_j = \frac{c_j - a_j y_a}{b_j} \quad (A14)$$

Substituting into the first equation and solving for y_a give immediately

$$y_a = \frac{c_0 - \sum_{j=1}^{m+1} \frac{a_j c_j}{b_j}}{a_0 - \sum_{j=1}^{m+1} \frac{a_j^2}{b_j}} \quad (A15)$$

APPENDIX B

FORTRAN IV PROGRAM

```

$ID    YAG1202 ERNEST ROBERTS, JR. - 140 M-S - PAX 6132
$LIBSIO    CONTINUE
$IBJOB     SOURCE
$IBFTC PRMTR1 LIST,REF,DECK
C          CREEP/STRESS-RUPTURE PARAMETER PROGRAM                                PRMT 1
C
C          NOMENCLATURE IS AS FOLLOWS                                           PRMT 2
C
C          DD          STANDARD DEVIATION                                         PRMT 3
C          KK          DEGREE OF FREEDOM                                         PRMT 4
C          KM          NUMBER OF VALUES OF M READ                               PRMT 5
C          KW          NUMBER OF VALUES OF W READ                               PRMT 6
C          KR          NUMBER OF VALUES OF R READ                               PRMT 7
C          KTA        NUMBER OF VALUES OF TTA READ                             PRMT 8
C          M          DEGREE POLYNOMIAL                                          PRMT 9
C          N          NUMBER OF DATA POINTS                                     PRMT 10
C          PP          PARAMETER                                                  PRMT 11
C          Q          STRESS EXPONENT                                             PRMT 12
C          QQ         POLYNOMIAL                                                 PRMT 13
C          R          TEMPERATURE EXPONENT                                       PRMT 14
C          RATIO      ABS(Y-YY)/DD                                               PRMT 15
C          SIGMA      STRESS                                                      PRMT 16
C          SIGQ       SIGMA**Q                                                   PRMT 17
C          T          TIME                                                        PRMT 18
C          TA         TIME INTERCEPT                                           PRMT 19
C          TAU        SIGMA**Q*(TT-TTA)**R                                       PRMT 20
C          TAUSQR     TAU**2                                                     PRMT 21
C          TIME       CALCULATED T (10.**YY)                                     PRMT 22
C          TT         TEMPERATURE                                                PRMT 23
C          TTA        TEMPERATURE INTERCEPT                                   PRMT 24
C          X          LOG SIGMA                                                  PRMT 25
C          Y          LOG T                                                       PRMT 26
C          YA         LOG TA                                                      PRMT 27
C          YY         CALCULATED LOG T                                           PRMT 28
C
C          ALL QUANTITIES IN COMMON WITH THIS PROGRAM AND THIS PAPER           PRMT 29
C          ARE REPRESENTED BY THE SAME SYMBOL, WITH REPEATED                   PRMT 30
C          LETTERS INDICATING THE UPPER CASE AND GREEK LETTERS BEING SPELLED    PRMT 31
C          OUT.                                                                    PRMT 32
C
C          PROGRAM EXTRAPOLATES CREEP/STRESS-RUPTURE DATA USING A             PRMT 33
C          GENERALIZED PARAMETER                                                 PRMT 34
C           $PP=(Y/SIGMA**Q-YA)/(TT-TTA)**R,$                                      PRMT 35
C          SELECTS PARAMETER PRODUCING SMALLEST RESIDUAL AND OUTPUTS A         PRMT 36
C          COMPLETE TABLE. RESULTS OF ALL OTHER VALUES ARE SUMMARIZED IN     PRMT 37
C          A SHORTER TABLE.                                                     PRMT 38
C
C          *****INPUT*****                                                  PRMT 39
C
C          TITLE CARD, MODE CARD, AND FIVE (5) SETS OF DATA. AT THE END OF    PRMT 40
C          EACH SET OF DATA MUST BE A CARD WITH THE WORD 'END' IN THE FIRST    PRMT 41
C          THREE COLUMNS. ALL DATA CARDS (EXCEPTING TITLE AND MODE CARDS)   PRMT 42
C          MUST HAVE BLANKS IN THE FIRST THREE COLUMNS. COLUMNS 73-80 ARE     PRMT 43
C          IGNORED.                                                                PRMT 44
C
C          TITLE - ANY ALPHAMERIC INFORMATION--HEADS EACH PAGE OF OUTPUT      PRMT 45
C
C          MODE CARD - ONE OF THREE WORDS IN COLUMNS 1-6, 'LARSON', 'LINEAR',  PRMT 46
C          OR 'GENRAL'. THIS CARD DEFINES 'KK', THE DEGREE OF                   PRMT 47
C          FREEDOM, USED IN CALCULATING GOODNESS OF FIT.                       PRMT 48
C
C          DATA SET 1--VALUES OF TTA TO BE INVESTIGATED--ONE PER CARD         PRMT 49

```

```

C          FORMAT (3X,F10.0)--50 VALUES MAXIMUM          PRMT 59
C          PRMT 60
C DATA SET 2--VALUES OF TEMPERATURE EXPONENT, R, TO BE INVESTIGATED PRMT 61
C          ONE PER CARD--FORMAT (3X,F10.0)--20 VALUES MAXIMUM PRMT 62
C          PRMT 63
C DATA SET 3--VALUES OF STRESS EXPONENT, Q, TO BE INVESTIGATED PRMT 64
C          ONE PER CARD--FORMAT (3X,F10.0)--20 VALUES MAXIMUM PRMT 65
C          PRMT 66
C DATA SET 4--DEGREES OF POLYNOMIAL, M, TO BE INVESTIGATED PRMT 67
C          ONE PER CARD--FORMAT (3X,I2)--MAXIMUM VALUE NOT TO PRMT 68
C          EXCEED 20--ZERO MAY NOT BE USED. PRMT 69
C          PRMT 70
C DATA SET 5--DATA POINTS IN THE ORDER TEMPERATURE, STRESS, AND PRMT 71
C          TIME--ONE SET PER CARD--FORMAT (3X,3F10.0) PRMT 72
C          THE VALUE OF STRESS IS AUTOMATICALLY DIVIDED BY 1000 PRMT 73
C          FOR ALL CALCULATIONS EXCEPT FINDING THE LOG STRESS. PRMT 74
C          200 SETS MAXIMUM. PRMT 75
C          PRMT 76
C          *****REPEAT***** PRMT 77
C          PRMT 78
C          EACH OF THE FIVE SETS OF DATA MUST BE FOLLOWED BY A CARD HAVING PRMT 79
C          THE WORD END IN THE FIRST THREE COLUMNS. PRMT 80
C          ALL DATA CARDS (EXCEPTING TITLE AND MODE CARDS) MUST HAVE THE PRMT 81
C          FIRST THREE COLUMNS BLANK. PRMT 82
C          PRMT 83
C          WITHIN EACH SET, DATA MAY BE IN ANY ORDER. IT WILL BE PROCESSED PRMT 84
C          IN THE ORDER PRESENTED TO THE MACHINE. PRMT 85
C          PRMT 86
C          THE CALCULATIONS ARE PERFORMED IN FOUR (4) LOOPS. PRMT 87
C          GOING FROM INNERMOST TO OUTERMOST, THE QUANTITIES ARE VARIED PRMT 88
C          IN THE FOLLOWING ORDER PRMT 89
C          DEGREE POLYNOMIAL, M PRMT 90
C          VALUE OF TTA PRMT 91
C          TEMPERATURE EXPONENT, R PRMT 92
C          STRESS EXPONENT, Q PRMT 93
C          PRMT 94
C          THE OUTPUT TABLES UTILIZE LESS THAN 120 COLUMNS ON THE PRINTER PRMT 95
C          AND EXPECT NO CARRIAGE CONTROLS OTHER THAN I, O, + AND BLANK. PRMT 96
C          A LINE COUNTER IS INCORPORATED TO LIMIT OUTPUT TO 60 LINES PER PRMT 97
C          PAGE. FOR EACH NEW PAGE THE TITLE AND APPROPRIATE COLUMN HEADINGS PRMT 98
C          ARE PRINTED. PROGRAM ENDS WITH A TRANSFER TO THE INITIAL READ. PRMT 99
C          PRMT 100
C          PAGE COUNTING AND ERROR TRAPS MUST BE PROVIDED BY THE OPERATING PRMT 101
C          SYSTEM. PRMT 102
C          PRMT 103
C          PROGRAM WITH IBSYS AND IOCSM WILL RUN ON A 16K MACHINE PRMT 104
C          PRMT 105
C          PRMT 106
C          LOGICAL TRGGR1,TRGGR2,TRGGR3 PRMT 107
C          PRMT 108
C          DIMENSION TITLE(12),TABLE(5,110),ITBLE(6,110) PRMT 109
C          PRMT 110
C          EQUIVALENCE (TABLE(1,1),ITBLE(1,1)) PRMT 111
C          PRMT 112
C          COMMON /DATA/SIGMA(201),T(201),TT(201) PRMT 113
C          1 /TRYS/M(21),Q(51),R(51),TTA(51) PRMT 114
C          2 /FDATA/SIGQ(200),TAU(200),TAUSQR(200),X(200),XX(200),Y(200) PRMT 115
C          3 /CALC/PP(200),RATIO(200),TIME(200),YY(200) PRMT 116
C          4 /END/LND/N/N/DD/JD/DEGREE/DEGREE PRMT 117
C          5 /PLYNML/OTHER1(4221),YA,OTHER2(63) PRMT 118
C          PRMT 119
C          PRMT 120
C          INPUT PRMT 121
C          PRMT 122
C          1 WRITE (6,9999) PRMT 123
C          READ (5,9001) (TITLE(K),K=1,12) PRMT 124

```

	READ (5,9001) DEGREE	PRMT 125
	K = 0	PRMT 126
10	K = K+1	PRMT 127
	READ (5,9002) CHECK,TTA(K)	PRMT 128
	IF (CHECK.NE.END) GO TO 10	PRMT 129
	KTA = K-1	PRMT 130
	K = 0	PRMT 131
15	K = K+1	PRMT 132
	READ (5,9002) CHECK,R(K)	PRMT 133
	IF (CHECK.NE.END) GO TO 15	PRMT 134
	KR = K-1	PRMT 135
	K = 0	PRMT 136
20	K = K+1	PRMT 137
	READ (5,9002) CHECK,Q(K)	PRMT 138
	IF (CHECK.NE.END) GO TO 20	PRMT 139
	KQ = K-1	PRMT 140
	K = 0	PRMT 141
25	K = K+1	PRMT 142
	READ (5,9003) CHECK,M(K)	PRMT 143
	IF (CHECK.NE.END) GO TO 25	PRMT 144
	KM = K-1	PRMT 145
	K = 0	PRMT 146
30	K = K+1	PRMT 147
	READ (5,9004) CHECK,TT(K),SIGMA(K),T(K)	PRMT 148
	IF (CHECK.NE.END) GO TO 30	PRMT 149
	N=K-1	PRMT 150
C		PRMT 151
C	END OF INPUT	PRMT 152
C		PRMT 153
C	FIND LOG STRESS AND LOG TIME	PRMT 154
C		PRMT 155
	DO 100 K=1,N	PRMT 156
	X(K)=ALOG10(SIGMA(K))+3.	PRMT 157
	Y(K)=ALOG10(T(K))	PRMT 158
100	CONTINUE	PRMT 159
C		PRMT 160
C	INITIALIZE CONSTANTS	PRMT 161
C		PRMT 162
	DD1=1.E5	PRMT 163
	LINES=51	PRMT 164
	TRGR3=.FALSE.	PRMT 165
	NTRY=0	PRMT 166
C		PRMT 167
C	SCALE LOGS OF STRESS	PRMT 168
C		PRMT 169
	CALL SCALE	PRMT 170
C		PRMT 171
C	FIND HIGHEST DEGREE POLYNOMIAL	PRMT 172
C		PRMT 173
	MAX = 0	PRMT 174
	DO 110 K=1,KM	PRMT 175
	MAX = MAX0(MAX,M(K))	PRMT 176
110	CONTINUE	PRMT 177
C		PRMT 178
C	MAJOR LOOP - CALCULATES ALL Y(A)S AND RESIDUALS	PRMT 179
C	WRITES SUMMARY TABLE	PRMT 180
C	FINDS SMALLEST RESIDUAL	PRMT 181
C		PRMT 182
	DO 500 K5=1,KQ	PRMT 183
C		PRMT 184
C	CALCULATE SIGMA**Q	PRMT 185
C		PRMT 186
	DO 112 K=1,N	PRMT 187
	SIGQ(K)=SIGMA(K)**Q(K5)	PRMT 188
112	CONTINUE	PRMT 189
	DO 400 K4=1,KR	PRMT 190

C	DO 300 K3=1,KTA	PRMT 191
C	CALCULATE TAU AND TAU**2	PRMT 192
C		PRMT 193
C	DO 120 K=1,N	PRMT 194
	TDIFF=ABS(TT(K)-TTA(K3))	PRMT 195
	IF (TDIFF) 118,115,118	PRMT 196
115	TAU(K)=0.	PRMT 197
	GO TO 119	PRMT 198
118	TAU(K)=SIGQ(K)*TDIFF**R(K4)	PRMT 199
119	TAUSQR(K) = TAU(K)**2	PRMT 200
120	CONTINUE	PRMT 201
C		PRMT 202
C	EVALUATE POLYNOMIALS	PRMT 203
C		PRMT 204
C	CALL POLY(MAX)	PRMT 205
C		PRMT 206
C	DO 200 K2=1,KM	PRMT 207
C		PRMT 208
C	DETERMINE Y(A)	PRMT 209
C		PRMT 210
C	CALL YSUBA (M(K2))	PRMT 211
C		PRMT 212
C	CALCULATE THEORETICAL LOG TIMES AND TIMES	PRMT 213
C		PRMT 214
C	CALL YTH(M(K2))	PRMT 215
C		PRMT 216
C	COMPUTE RESIDUAL	PRMT 217
C		PRMT 218
C	CALL RESID(M(K2))	PRMT 219
C		PRMT 220
C	MAKE ONE ENTRY IN SUMMARY TABLE	PRMT 221
C		PRMT 222
C	NTRY=NTRY+1	PRMT 223
	TABLE(1,NTRY)=Q(K5)	PRMT 224
	TABLE(2,NTRY)=R(K4)	PRMT 225
	TABLE(3,NTRY)=M(K2)	PRMT 226
	TABLE(4,NTRY)=TTA(K3)	PRMT 227
	TABLE(5,NTRY)=YA	PRMT 228
	TABLE(6,NTRY)=DU	PRMT 229
	TRGGR2=NTRY.EQ.2*LINES	PRMT 230
	IF (TRGGR2) GO TO 170	PRMT 231
	GO TO 190	PRMT 232
C		PRMT 233
C	OUTPUTS ONE PAGE OF SUMMARY TABLE	PRMT 234
C		PRMT 235
C		PRMT 236
C		PRMT 237
C	OUTPUT TITLE AND HEADINGS FOR SUMMARY TABLE	PRMT 238
C		PRMT 239
170	WRITE (6,9005) (TITLE(K),K=1,12),DEGREE	PRMT 240
	IF (LINES.EQ.51) WRITE (6,9006) KTA,KR,KC,KM,N	PRMT 241
	WRITE (6,9007)	PRMT 242
	TRGGR1=NTRY.LE.LINES	PRMT 243
	LIMIT=LINES	PRMT 244
	IF (TRGGR1) LIMIT=NTRY	PRMT 245
	DO 180 K=1,LIMIT	PRMT 246
	WRITE (6,9008) (TABLE(I,K),I=1,2),TABLE(3,K),(TABLE(I,K),I=4,6)	PRMT 247
	IF (TRGGR1) GO TO 180	PRMT 248
	KOL2=K+LINES	PRMT 249
	IF (TRGGR2) GO TO 175	PRMT 250
	IF (KOL2.GT.NTRY) GO TO 180	PRMT 251
175	WRITE (6,9009) (TABLE(I,KOL2),I=1,2),TABLE(3,KOL2),	PRMT 252
1	(TABLE(I,KOL2),I=4,6)	PRMT 253
180	CONTINUE	PRMT 254
	NTRY=0	PRMT 255
	LINES=55	PRMT 256

C	IF (TRGGR3) GO TO 1000	PRMT 257
C	SAVE VALUES PRODUCING SMALLEST RESIDUAL	PRMT 258
C		PRMT 259
190	IF (DD1.LE.00) GO TO 200	PRMT 260
	M1 = M(K2)	PRMT 261
	TTA1=TTA(K3)	PRMT 262
	R1 = R(K4)	PRMT 263
	Q1 = Q(K5)	PRMT 264
	YA1 = YA	PRMT 265
	DD1=DD	PRMT 266
200	CONTINUE	PRMT 267
300	CONTINUE	PRMT 268
400	CONTINUE	PRMT 269
500	CONTINUE	PRMT 270
	TRGGR3=.TRUE.	PRMT 271
	IF (NTRY.NE.0) GO TO 170	PRMT 272
C		PRMT 273
C	END MAJOR LOOP	PRMT 274
C		PRMT 275
C	OUTPUT OPTIMUM VALUES AND HEADING FOR FULL TABLE	PRMT 276
C		PRMT 277
1000	CONTINUE	PRMT 278
1010	WRITE (6,9005) (TITLE(K),K=1,12),DEGREE	PRMT 279
	LINES=3	PRMT 280
1020	WRITE (6,9010) Q1,R1,M1,TTA1,YA1,DD1	PRMT 281
	LINES=LINES+5	PRMT 282
1030	WRITE (6,9011)	PRMT 283
	LINES=LINES+3	PRMT 284
C		PRMT 285
C	CALCULATE THEORETICAL TIMES, RATIOS OF DIFFERENCE,	PRMT 286
C	TO RESIDUAL, AND VALUES OF THE PARAMETER, FOR THE	PRMT 287
C	PARAMETER PRODUCING THE MINIMUM RESIDUAL	PRMT 288
C		PRMT 289
	DO 1035 K=1,N	PRMT 290
	TDIFF=ABS(TT(K)-TTA1)	PRMT 291
	SIGQ(K)=SIGMA(K)**Q1	PRMT 292
	IF (TDIFF) 1032,1031,1032	PRMT 293
1031	TAU(K)=0.	PRMT 294
	GO TO 1034	PRMT 295
1032	TAU(K)=SIGQ(K)*TDIFF**R1	PRMT 296
1034	TAUSQR(K) = TAU(K)**2	PRMT 297
1035	CONTINUE	PRMT 298
	DD=DD1	PRMT 299
	CALL POLY(M1)	PRMT 300
	CALL YSUBA(M1)	PRMT 301
	CALL YTH (M1)	PRMT 302
	CALL RATIO1	PRMT 303
	CALL PARAM	PRMT 304
C		PRMT 305
C	OUTPUT FULL TABLE	PRMT 306
C		PRMT 307
	K = 0	PRMT 308
1040	K = K+1	PRMT 309
	WRITE (6,9012) TT(K),SIGMA(K),X(K),T(K),TIME(K),Y(K),YY(K),	PRMT 310
1	RATIO(K),PP(K)	PRMT 311
	LINES=LINES+1	PRMT 312
	IF (K.EQ.N) GO TO 1	PRMT 313
	IF (LINES.LT.60) GO TO 1040	PRMT 314
	WRITE (6,9005) (TITLE(KKK),KKK=1,12),DEGREE	PRMT 315
	WRITE (6,9011)	PRMT 316
	LINES=6	PRMT 317
	GO TO 1040	PRMT 318
C		PRMT 319
C	END OF PROGRAM	PRMT 320
C		PRMT 321
		PRMT 322

C		PRMT 323
C	FORMAT STATEMENTS FOR PROGRAM	PRMT 324
C		PRMT 325
C	FORMATS FOR INPUT	PRMT 326
C		PRMT 327
	9001 FORMAT (12A6)	PRMT 328
	9002 FORMAT (A3,F10.0)	PRMT 329
	9003 FORMAT (A3,I2)	PRMT 330
	9004 FORMAT (A3,OPF10.0,3PF10.0,OPF10.0)	PRMT 331
C		PRMT 332
C	FORMATS FOR OUTPUT	PRMT 333
C		PRMT 334
C	TITLE (SKIPS TO NEW PAGE)	PRMT 335
C		PRMT 336
	9005 FORMAT(1H1,20X,12A6/1H ,30X,A6,10H PARAMETER/1H)	PRMT 337
C		PRMT 338
C	SUMMARY OF INPUT	PRMT 339
C		PRMT 340
	9006 FORMAT (1H ,10X,45HCREEP/RUPTURE PARAMETERS ARE INVESTIGATED FOR/ 11H ,I2,18H VALUE(S) OF T(A),,I3,25H TEMPERATURE EXPONENT(S),,I3, 224H STRESS EXPONENT(S), AND,I3,14H POLYNOMIAL(S)/1H ,10X,5HUSING, 314,12H DATA POINTS/1H)	PRMT 341
		PRMT 342
		PRMT 343
		PRMT 344
C		PRMT 345
C	HEADINGS FOR SUMMARY TABLE, ONE LINE OF SUMMARY TABLE	PRMT 346
C		PRMT 347
	9007 FORMAT (1H ,2(2X,1HQ,7X,1HR,6X,1HM,5X,4HT(A),5X,4HY(A),4X, 1 8HSTD.DEV.,10X)/1H)	PRMT 348
	9008 FORMAT (1H ,OPF5.2,F8.2,15,F9.0,F10.2,1PE11.2)	PRMT 349
	9009 FORMAT (1H+,58X,OPF5.2,F8.2,15,F9.0,F10.2,1PE11.2)	PRMT 350
C		PRMT 351
C	OPTIMUM VALUES	PRMT 352
C		PRMT 353
	9010 FORMAT(1H 10X44HVALUES PRODUCING SMALLEST STANDARD DEVIATION/3HQ=PRMT 1F5.2,4H, R=F5.2,4H, M=I2,7H, T(A)=F6.0,7H, Y(A)=F9.3,11H, STD.DEV.PRM 2=1PE9.2/1H0)	PRMT 354
		PRMT 355
C		PRMT 356
C	HEADINGS FOR FULL TABLE, ONE LINE OF FULL TABLE	PRMT 357
C		PRMT 358
	9011 FORMAT (5H TEMP,4X,6HSTRESS,3X,3HLOG,6X,4HTIME,5X,6HCALC1D,5X, 13HLOG,3X,8HCALC LOG,2X6HDEV/SD,3X,9HPARAMETER/1H ,5X,6H(*E-3),2X, 26HSTRESS,14X,4HTIME,5X,4HTIME,4X,4HTIME/1H)	PRMT 359
	9012 FORMAT (1H ,OPF5.0,F8.1,F8.3,2F10.1,3F9.3,1PF12.3)	PRMT 360
C		PRMT 361
	9999 FORMAT (1H1)	PRMT 362
C		PRMT 363
		PRMT 364
		PRMT 365
C		PRMT 366
		PRMT 367
C	END	PRMT 368


```

$IBFIC PRMBLK LIST,REF,DECK
C   SETS FIRST POLYNOMIAL TO UNITY AT ALL STATIONS AND STORES      PRMB  1
C   ALPHAMERIC CODE WORDS                                          PRMB  2
C                                                                      PRMB  3
C   BLOCK DATA                                                      PRMB  4
COMMON /PLYNML/QQ(21,200),OTHERS(85)/END/END/NAMES/NAMES(2)      PRMB  5
DATA (QQ(1,K),K=1,200)/200*1./,END/3HEND/,                       PRMB  6
1   (NAMES(K),K=1,2)/12HLARSONLINEAR/                             PRMB  7
END                                                                    PRMB  8

```

```

$IBFIC PARAM LIST,REF,DECK
C   SUBROUTINE FOR EVALUATING THE PARAMETER AT EACH POINT          PARM  1
C                                                                      PARM  2
C   SUBROUTINE PARAM                                                PARM  3
C                                                                      PARM  4
COMMON /FDATA/SIGQ(200),TAU(200),OTHERS(600),Y(200)             PARM  5
1   /CALC/PP(200),OTHER1(600)/N/N                                  PARM  6
2   /PLYNML/OTHER2(4221),YA,OTHER3(63)                            PARM  7
C                                                                      PARM  8
C   DO 10 K=1,N                                                      PARM  9
PP(K) = (Y(K)-SIGQ(K)*YA)/TAU(K)                                  PARM 10
10  CONTINUE                                                         PARM 11
    RETURN                                                            PARM 12
    END                                                                PARM 13

```

```

$IBFIC YTH LIST,REF,DECK
C   SUBROUTINE FOR CALCULATING TIMES AND LOG TIMES FROM THE PARAMETER YTH  1
C                                                                      YTH  2
C   SUBROUTINE YTH(M)                                               YTH  3
C                                                                      YTH  4
COMMON /CALC/OTHERS(400),TIME(200),YY(200)                       YTH  5
1   /FDATA/SIGQ(200),TAU(200),OTHER1(800)                         YTH  6
2   /PLYNML/QQ(21,200),U(21),YA,OTHER2(63)                       YTH  7
3   /N/N                                                            YTH  8
C                                                                      YTH  9
C   DO 10 K=1,N                                                      YTH 10
YY(K) = 0.                                                         YTH 11
10  CONTINUE                                                         YTH 12
    M1 = M+1                                                         YTH 13
        DO 30 K=1,N                                                  YTH 14
            DO 20 J=1,M1                                             YTH 15
YY(K) = YY(K)+QQ(J,K)*U(J)                                         YTH 16
20  CONTINUE                                                         YTH 17
    YY(K) = TAU(K)*YY(K)+SIGQ(K)*YA                                 YTH 18
    TIME(K) = 10.**YY(K)                                             YTH 19
30  CONTINUE                                                         YTH 20
    RETURN                                                            YTH 21
    END                                                                YTH 22

```

```

$IBFTC RATIO1 LIST,REF,DECK
C SUBROUTINE FOR CALCULATING RATIOS RATO 1
C OF INDIVIDUAL RESIDUALS TO ROOT-MEAN-SQUARE RESIDUAL RATO 2
C RATO 3
C SUBROUTINE RATIO1 RATO 4
C RATO 5
COMMON /FDATA/OTHERS(1000),Y(200) RATO 6
1 /CALC/OTHER1(200),RATIO(200),OTHER2(200),YY(200) RATO 7
2 /N/N/DD/DD RATO 8
C RATO 9
DO 10 K=1,N RATO 10
RATIO(K) = ABS(Y(K)-YY(K))/DD RATO 11
10 CONTINUE RATO 12
RETURN RATO 13
END RATO 14

```

```

$IBFTC RESID LIST,REF,DECK
C SUBROUTINE FOR CALCULATING RESIDUAL RESD 1
C RESD 2
C THE RESIDUAL IS BASED ON THE LOG OF THE TIME. RESD 3
C IT IS DEFINED AS THE SQUARE ROOT OF THE SUM OF THE SQUARES OF RESD 4
C THE INDIVIDUAL RESIDUALS DIVIDED BY THE DIFFERENCE BETWEEN THE NUMRESD 5
C BER OF DATA POINTS AND THE DEGREES OF FREEDOM. THE DEGREES OF RESD 6
C FREEDOM, KK, DEPENDS ON THE PARAMETER (SEE MAIN BODY OF REPORT). RESD 7
C KK=2 FOR LARSON-MILLER PARAMETER RESD 8
C KK=3 FOR LINEAR PARAMETER RESD 9
C KK=5 FOR GENERAL PARAMETER RESD 10
C RESD 11
C DD = SQRT((Y-YY)**2/(N-M-KK)) RESD 12
C RESD 13
C SUBROUTINE RESID(M) RESD 14
C RESD 15
COMMON /FDATA/OTHERS(1000),Y(200) RESD 16
1 /CALC/OTHER1(600),YY(200) RESD 17
2 /DD/DO/N/N/DEGREE/DEGREE/NAMES/FAMES(2) RESD 18
C RESD 19
IF (DEGREE.EQ.FAMES(2)) GO TO 20 RESD 20
IF (DEGREE.EQ.FAMES(1)) GO TO 10 RESD 21
KK = 5 RESD 22
GO TO 30 RESD 23
10 KK = 2 RESD 24
GO TO 30 RESD 25
20 KK = 3 RESD 26
30 D = N-M-KK RESD 27
DD = 0. RESD 28
DO 40 K=1,N RESD 29
DD = DD+(Y(K)-YY(K))**2 RESD 30
40 CONTINUE RESD 31
DD = SQRT(DD/D) RESD 32
RETURN RESD 33
END RESD 34

```

\$IBFTC	YSUBA	LIST,REF,DECK		
C		SUBROUTINE FOR EVALUATING Y(A)	YSUB	1
C			YSUB	2
C		THIS SUBROUTINE ALSO EVALUATES THE QUANTITIES, U, NECESSARY	YSUB	3
C		FOR DETERMINING THE THEORETICAL LOG TIMES.	YSUB	4
C			YSUB	5
C		SUBROUTINE YSUBA(M)	YSUB	6
C			YSUB	7
	COMMON	/PLYNML/QQ(21,200),U(21),YA,A(21),B(21),C(21)	YSUB	8
1		/FDATA/SIGQ(200),TAU(200),TAUSQR(200),OTHERS(400),	YSUB	9
2		Y(200)/N/N	YSUB	10
C			YSUB	11
	A0	= 0.	YSUB	12
	C0	= 0.	YSUB	13
		DO 10 K=1,N	YSUB	14
	A0	= A0+SIGQ(K)**2	YSUB	15
	C0	= C0+SIGQ(K)*Y(K)	YSUB	16
10		CONTINUE	YSUB	17
	M1	= M+1	YSUB	18
		DO 20 J=1,M1	YSUB	19
	A(J)	= 0.	YSUB	20
	B(J)	= 0.	YSUB	21
	C(J)	= 0.	YSUB	22
20		CONTINUE	YSUB	23
		DO 40 J=1,M1	YSUB	24
		DO 30 K=1,N	YSUB	25
	A(J)	= A(J)+SIGQ(K)*TAU(K)*QQ(J,K)	YSUB	26
	B(J)	= B(J)+TAUSQR(K)*QQ(J,K)**2	YSUB	27
	C(J)	= C(J) + TAU(K)*Y(K)*QQ(J,K)	YSUB	28
30		CONTINUE	YSUB	29
40		CONTINUE	YSUB	30
	SUM1	= 0.	YSUB	31
	SUM2	= 0.	YSUB	32
		DO 50 J=1,M1	YSUB	33
	A0B	= A(J)/B(J)	YSUB	34
	SUM1	= SUM1+A0B*C(J)	YSUB	35
	SUM2	= SUM2+A0B*A(J)	YSUB	36
50		CONTINUE	YSUB	37
	YA	=(C0-SUM1)/(A0-SUM2)	YSUB	38
		DO 60 J=1,M1	YSUB	39
60	U(J)	=(C(J)-A(J)*YA)/B(J)	YSUB	40
		CONTINUE	YSUB	41
		RETURN	YSUB	42
		END	YSUB	43

\$IBFTC	POLY	LIST,REF,DECK	
C		SUBROUTINE FOR EVALUATING ORTHOGONAL POLYNOMIALS	POLY 1
C			POLY 2
C		ALL POLYNOMIALS UP TO MAXIMUM DESIRED DEGREE ARE EVALUATED	POLY 3
C		AT EACH DATA POINT	POLY 4
C			POLY 5
C		THE FIRST POLYNOMIAL IS IDENTICALLY EQUAL TO UNITY	POLY 6
C		THESE VALUES ARE STORED BY A BLOCK DATA SUBROUTINE	POLY 7
C			POLY 8
C		SUBROUTINE POLY(M)	POLY 9
C			POLY 10
	COMMON	/FDATA/OTHER1(400),TAUSQR(200),OTHER2(200),XX(200),	POLY 11
1		OTHER3(200)	POLY 12
2		/PLYNML/QQ(21,200),OTHERS(45),ALPHA(20),BETA(20)	POLY 13
3		/N/N	POLY 14
C			POLY 15
		S1 = 0.	POLY 16
		S2 = 0.	POLY 17
		DO 10 K=1,N	POLY 18
		S1 = S1+XX(K)*TAUSQR(K)	POLY 19
		S2 = S2+TAUSQR(K)	POLY 20
10		CONTINUE	POLY 21
		ALPHA(1) = S1/S2	POLY 22
		DO 20 K=1,N	POLY 23
		QQ(2,K) = XX(K)-ALPHA(1)	POLY 24
20		CONTINUE	POLY 25
		IF (M.LE.1) RETURN	POLY 26
		DO 50 K=2,M	POLY 27
		S1 = 0.	POLY 28
		S2 = 0.	POLY 29
		S3 = 0.	POLY 30
		S4 = 0.	POLY 31
		DO 30 J=1,N	POLY 32
		D1 = TAUSQR(J)*QQ(K,J)	POLY 33
		D2 = D1*QQ(K,J)	POLY 34
		S1 = S1+XX(J)*D2	POLY 35
		S2 = S2+D2	POLY 36
		S3 = S3+XX(J)*D1*QQ(K-1,J)	POLY 37
		S4 = S4+TAUSQR(J)*QQ(K-1,J)**2	POLY 38
30		CONTINUE	POLY 39
		ALPHA(K) = S1/S2	POLY 40
		BETA(K) = S3/S4	POLY 41
		DO 40 J=1,N	POLY 42
		QQ(K+1,J) = (XX(J)-ALPHA(K))*QQ(K,J)-BETA(K)*QQ(K-1,J)	POLY 43
40		CONTINUE	POLY 44
50		CONTINUE	POLY 45
		RETURN	POLY 46
		END	POLY 47

\$IBFTC	SCALE	LIST,REF,DECK		
C		SUBROUTINE FOR SCALING LOGS OF STRESS	SCAL	1
C			SCAL	2
C		THE SCALED VALUES LIE IN THE REGION -2 TO 2	SCAL	3
C			SCAL	4
C		SUBROUTINE SCALE	SCAL	5
C			SCAL	6
C		COMMON /FDATA/OTHER1(600),X(200),XX(200),OTHER2(200)/N/N	SCAL	7
C			SCAL	8
		BIG = 0.	SCAL	9
		SMALL = 1.E5	SCAL	10
		DO 10 K=1,N	SCAL	11
		BIG = AMAX1(BIG,X(K))	SCAL	12
		SMALL = AMIN1(SMALL,X(K))	SCAL	13
10		CONTINUE	SCAL	14
		A = 4./(BIG-SMALL)	SCAL	15
		B=2.*(BIG+SMALL)/(BIG-SMALL)	SCAL	16
		DO 20 K=1,N	SCAL	17
		XX(K) = A*X(K)-B	SCAL	18
20		CONTINUE	SCAL	19
		RETURN	SCAL	20
		END	SCAL	21

REFERENCES

1. Larson, F. R.; and Miller, James: A Time-Temperature Relationship for Rupture and Creep Stress. Trans. ASME, vol. 74, no. 5, July 1952, pp. 765-771; Discussion, pp. 171-175.
2. Manson, S. S.; and Haferd, Angela M.: A Linear Time-Temperature Relation for Extrapolation of Creep and Stress-Rupture Data. NACA TN 2890, 1953.
3. Orr, Ramond L.; Sherby, Oleg D.; and Dorn, John E.: Correlations of Rupture Data for Metals at Elevated Temperatures. Trans. ASM, vol. 46, 1954, pp. 113-128.
4. Manson, S. S.: Design Considerations for Long Life at Elevated Temperatures. NASA TP 1-63, 1963.
5. Manson, S. S.; and Mendelson, A.: Optimization of Parametric Constants for Creep-Rupture Data by Means of Least Squares. NASA MEMO 3-10-59E, 1959.
6. Hamming, R. W.: Numerical Methods for Scientists and Engineers. McGraw-Hill Book Co., Inc., 1962, pp. 223-246.
7. Forsythe, G. E.: Generation and Use of Orthogonal Polynomials for Data-Fitting with a Digital Computer. J. Soc. Indust. Appl. Math., vol. 5, no. 2, June 1957, pp. 74-88.
8. Titran, Robert H.; and Hall, Robert W.: High-Temperature Creep Behavior of a Columbium Alloy, FS-85, NASA TN D-2885, 1965.
9. Murry, G.: Extrapolation of the Results of Creep Tests by Means of Parametric Formulae. Vol. 1 of Proc. Joint Int. Conf. on Creep, Inst. Mech. Eng., 1963, pp. 6-87 - 6-100.
10. Manson, S. S.; and Brown, W. F., Jr.: Time-Temperature-Stress Relations for the Correlation of Extrapolation of Stress-Rupture Data. Proc. ASTM, vol. 53, 1953, pp. 693-719.
11. Manson, S. S.; Succop, G.; and Brown, W. F., Jr.: The Application of Time-Temperature Parameters to Accelerated Creep-Rupture Testing. Trans. ASM, vol. 51, 1959, pp. 911-934.

TABLE I. - CALCULATION OF POLYNOMIALS FOR THEORETICAL DATA FOR THIRD DEGREE POLYNOMIAL

[Temperature intercept, T_a , 600° F.]

1	2	3	4	5	6	7	8	9	10	11	12
Index, i	Tempera- ture, T , $^{\circ}F$	Time, t , hr	Stress, σ , psi	log t	log σ	$\sigma^q(T-T_a)^r$	Scaled log σ , X	Polynomial			
								Q_1	Q_2	Q_3	Q_4
1	1100	4954.68	56 300	3.69501	4.75051	500	2.0	1	1.3619	-0.19594	-0.50845
2	1100	11365.9	19 800	4.05560	4.29666	500	1.3806	1	.30341	-1.6875	-.57205
3	1200	625.342	30 300	2.79612	4.48144	600	1.6328	1	.85576	-1.4583	1.7195
4	1200	2908.	5 080	3.46359	3.70586	600	.57433	1	-.80869	1.5741	-1.2980
5	1300	117.371	12 900	2.06956	4.11059	700	1.1267	1	.18925	2.5067	-1.0745
6	1300	1340.	778	3.12710	2.89098	700	-.53777	1	-2.2709	-.90880	.92564
7	1400	34.4856	4 190	1.53764	3.62221	800	.46017	1	2.8030	.015445	-.77354
8	1400	995.25	66	2.99793	1.81954	800	-2.0	1	.51879	-.78251	-.98133

TABLE II. - INTERMEDIATE CALCULATIONS FOR THEORETICAL

DATA FOR THIRD DEGREE POLYNOMIAL

[Temperature intercept, T_a , 600° F.]

1	2	3	4	5	6	7
Index, j	α	β	a	b	c	u
0	-----	-----	8.0	-----	23.743	-----
1	0.27092	0.	5200.	3.48×10^6	14897.	-9.9146×10^{-3}
2	-.57813	1.6548	786.18	5.7589	2616.	-8.4266×10^{-4}
3	.28432	1.3315	465.68	7.6678	3796.9	-8.1771×10^{-5}
4	.41260	.80618	286.01	6.1816	2694.6	-3.6513×10^{-6}

TABLE III. - FIT FOR SEVERAL VALUES OF LINEAR
PARAMETER FOR THEORETICAL DATA

Degree of polynomial	Temperature, T_a	Variable, Y_a	Deviation
2	500	10.54	0.008049
3	500	10.54	.009786
4	500	10.55	.010660
2	600	9.49	.004859
3	600	9.50	.000002
4	600	9.50	.000003
2	700	8.44	.015412
3	700	8.46	.013937
4	700	8.45	.014469

TABLE IV. - COMPOSITION OF STEELS RECEIVED
FROM GERMAN COOPERATIVE LONG-
TIME CREEP PROGRAM

[As-received, 20-mm-diam. bar stock.]

Element	Composition, percent		
	Steel		
	C (23b CK)	P (14a PA)	K (27b KK)
Carbon	0.065	0.270	0.068
Silicon	.47	.26	.45
Manganese	.60	.60	.73
Chromium	17.24	2.62	16.14
Molybdenum	2.08	.27	2.10
Columbium and tantalum	.02	Trace	.44
Nickel	11.90	.14	13.12
Titanium	.39	Trace	Trace
Vanadium	.10	.26	.05
Tungsten	Less than 0.005	Trace	Trace

TABLE V. - NASA RUPTURE DATA

(a) Steel K (27b KK)

Temperature, T, OF	Stress, σ, psi	Time, t, hr	Temperature, T, OF	Stress, σ, psi	Time, t, hr	Temperature, T, OF	Stress, σ, psi	Time, t, hr
1022.00	77 000.000	1.500	1600.00	20 000.000	0.400	a _{1112.00}	60 000.000	12.900
a _{1022.00}	72 500.000	13.800	1560.00	20 000.000	1.900	a _{1110.00}	60 000.000	34.
a _{1022.00}	72 000.000	10.	1520.00	20 000.000	4.450	a _{1080.00}	60 000.000	52.200
a _{1022.00}	70 000.000	36.700	a _{1480.00}	20 000.000	23.700	a _{1080.00}	60 000.000	37.400
a _{1022.00}	68 000.000	60.400	a _{1460.00}	20 000.000	25.500	a _{1050.00}	60 000.000	239.
a _{1022.00}	66 000.000	73.300	a _{1440.00}	20 000.000	38.	a _{1030.00}	60 000.000	445.
a _{1022.00}	66 000.000	107.600	a _{1400.00}	20 000.000	136.800	a _{1022.00}	60 000.000	989.900
a _{1022.00}	65 000.000	201.300	a _{1360.00}	20 000.000	394.800	a _{1020.00}	60 000.000	817.500
a _{1022.00}	62 500.000	250.400	a _{1340.00}	20 000.000	704.600	1040.00	75 000.000	.330
a _{1022.00}	60 000.000	990.	a _{1320.00}	20 000.000	1212.	1022.00	75 000.000	5.850
a _{1022.00}	60 000.000	817.500	1320.00	40 000.000	2.700	a _{1000.00}	75 000.000	15.600
a _{1022.00}	55 000.000	3 680.	1290.00	40 000.000	7.500	a _{980.00}	75 000.000	46.500
1112.00	68 000.000	.750	a _{1260.00}	40 000.000	15.200	a _{960.00}	75 000.000	138.
1112.00	65 000.000	2.250	a _{1230.00}	40 000.000	44.400	a _{940.00}	75 000.000	542.
1112.00	62 500.000	4.300	a _{1170.00}	40 000.000	377.	a _{920.00}	75 000.000	579.600
a _{1112.00}	60 000.000	13.900	a _{1140.00}	40 000.000	1417.	a _{1120.00}	50 000.000	186.100
a _{1112.00}	57 500.000	22.700	a _{1125.00}	40 000.000	2110.	a _{1200.00}	40 000.000	130.200
a _{1112.00}	55 000.000	51.500	a _{1112.00}	40 000.000	5367.	a _{1280.00}	30 000.000	132.700
a _{1112.00}	52 500.000	147.500	1200.00	60 000.000	.610	a _{1340.00}	25 000.000	125.800
a _{1112.00}	50 000.000	283.	1170.00	60 000.000	1.250	a _{1500.00}	15 000.000	51.300
a _{1112.00}	45 000.000	1 020.	1150.00	60 000.000	4.400	a _{1560.00}	12 000.000	41.700
a _{1112.00}	43 000.000	1 579.	1140.00	60 000.000	4.500	a _{1580.00}	10 000.000	32.400
1112.00	37 000.000	13 140.	a _{1120.00}	60 000.000	10.700	a _{1540.00}	10 000.000	148.200

(b) Steel C (23b CK)

Temperature, T, OF	Stress, σ, psi	Time, t, hr	Temperature, T, OF	Stress, σ, psi	Time, t, hr	Temperature, T, OF	Stress, σ, psi	Time, t, hr
a _{1600.00}	5 000.000	570.200	a _{1230.00}	30 000.000	175.700	a _{1202.00}	36 000.000	68.600
a _{1620.00}	5 000.000	186.600	a _{1250.00}	30 000.000	103.500	a _{1202.00}	38 000.000	59.300
a _{1660.00}	5 000.000	156.800	a _{1280.00}	30 000.000	58.100	a _{1202.00}	42 000.000	24.400
a _{1680.00}	5 000.000	91.600	1292.00	30 000.000	21 300.	a _{1202.00}	44 000.000	14.500
a _{1700.00}	5 000.000	62.700	a _{1310.00}	30 000.000	22.500	a _{1202.00}	45 000.000	22.900
a _{1740.00}	5 000.000	40.500	a _{1112.00}	40 000.000	667.900	1202.00	46 000.000	7.
a _{1780.00}	5 000.000	10.600	a _{1120.00}	40 000.000	785.400	1202.00	48 000.000	2.850
a _{1425.00}	10 000.000	1690.	a _{1150.00}	40 000.000	266.700	1202.00	49 000.000	2.550
a _{1450.00}	10 000.000	550.300	a _{1170.00}	40 000.000	127.800	1202.00	50 000.000	1.470
a _{1480.00}	10 000.000	270.	a _{1202.00}	40 000.000	44.100	a _{1202.00}	18 000.000	153.700
a _{1500.00}	10 000.000	170.	a _{1202.00}	40 000.000	74.	a _{1202.00}	23 000.000	194.600
a _{1520.00}	10 000.000	128.500	a _{1210.00}	40 000.000	40.500	a _{1202.00}	25 000.000	75.
a _{1560.00}	10 000.000	40.	a _{1220.00}	40 000.000	37.800	a _{1202.00}	28 000.000	34.600
a _{1570.00}	10 000.000	31.500	a _{1240.00}	40 000.000	17.200	a _{1202.00}	29 000.000	31.
a _{1600.00}	10 000.000	15.800	1270.00	40 000.000	4.500	a _{1202.00}	32 000.000	13.300
1650.00	10 000.000	5.250	1280.00	40 000.000	1.200	a _{1292.00}	33 000.000	19.800
1700.00	10 000.000	1.750	1292.00	40 000.000	1.300	a _{1292.00}	34 000.000	10.400
a _{1202.00}	20 000.000	3307.	1300.00	40 000.000	.800	1292.00	36 000.000	2.750
a _{1260.00}	20 000.000	667.400	a _{1112.00}	34 000.000	2 274.	1292.00	37 000.000	7.600
a _{1290.00}	20 000.000	255.	a _{1112.00}	43 000.000	363.100	1292.00	38 000.000	1.650
a _{1292.00}	20 000.000	347.100	a _{1112.00}	46 000.000	233.900	a _{1060.00}	60 000.000	42.500
a _{1292.00}	20 000.000	363.	a _{1112.00}	46 000.000	261.400	a _{1300.00}	25 000.000	89.600
a _{1320.00}	20 000.000	180.400	a _{1112.00}	48 000.000	183.100	a _{1360.00}	19 000.000	35.
a _{1360.00}	20 000.000	82.	a _{1112.00}	50 000.000	84.500	a _{1430.00}	15 000.000	71.400
a _{1400.00}	20 000.000	28.900	a _{1112.00}	52 000.000	65.600	a _{1480.00}	12 000.000	147.900
1440.00	20 000.000	9.	a _{1112.00}	54 000.000	39.300	a _{1570.00}	8 000.000	104.
1480.00	20 000.000	2.500	a _{1112.00}	57 000.000	23.300	a _{1630.00}	6 000.000	140.800
a _{1112.00}	30 000.000	4258.	a _{1202.00}	25 000.000	1 074.	a _{1140.00}	34 000.000	1077.
a _{1160.00}	30 000.000	1110.	a _{1202.00}	34 000.000	199.400	a _{1320.00}	15 000.000	1505.
a _{1180.00}	30 000.000	696.300	a _{1202.00}	35 000.000	124.300	a _{1480.00}	8 000.000	2237.
a _{1202.00}	30 000.000	350.				a _{1540.00}	6 000.000	1258.

^aData point used in parametric analysis.

TABLE V. - Concluded. NASA RUPTURE DATA

(c) Steel P (14a PA)

Temperature, T, O _F	Stress, σ, psi	Time, t, hr	Temperature, T, O _F	Stress, σ, psi	Time, t, hr	Temperature, T, O _F	Stress, σ, psi	Time, t, hr
932.00	65 000.000	3.800	^a 1250.00	10 000.000	19.200	^a 740.00	90 000.000	57.100
^a 932.00	60 000.000	14.150	^a 1220.00	10 000.000	42.	^a 785.00	80 000.000	84.
^a 932.00	60 000.000	14.400	^a 1180.00	10 000.000	167.	^a 820.00	70 000.000	195.800
^a 932.00	57 500.000	10.	^a 1170.00	10 000.000	203.400	^a 880.00	60 000.000	120.
^a 932.00	55 000.000	18.900	^a 1140.00	10 000.000	608.	^a 932.00	50 000.000	103.500
^a 932.00	52 500.000	51.	^a 1090.00	10 000.000	2639.	^a 1022.00	30 000.000	186.700
^a 932.00	40 000.000	623.	1100.00	40 000.000	1.300	^a 1050.00	25 000.000	123.500
^a 932.00	30 000.000	7 592.	1080.00	40 000.000	2.200	^a 1090.00	20 000.000	79.500
932.00	27 000.000	11 410.	1060.00	40 000.000	4.300	^a 1090.00	20 000.000	112.400
1022.00	58 000.000	.580	1050.00	40 000.000	6.800	^a 1120.00	16 000.000	183.500
1022.00	55 000.000	.717	1040.00	40 000.000	7.400	^a 1160.00	13 000.000	100.300
1022.00	50 000.000	1.280	^a 1020.00	40 000.000	22.500	^a 1230.00	8 000.000	97.900
1022.00	47 000.000	2.450	^a 1010.00	40 000.000	20.100	^a 1290.00	5 000.000	139.700
1022.00	47 000.000	6.200	^a 1000.00	40 000.000	63.300	^a 740.00	80 000.000	996.600
1022.00	45 000.000	3.500	^a 990.00	40 000.000	51.200	^a 780.00	70 000.000	1122.
1022.00	42 500.000	6.300	^a 980.00	40 000.000	80.600	^a 830.00	60 000.000	948.800
^a 1022.00	40 000.000	22.500	^a 960.00	40 000.000	192.100	^a 880.00	50 000.000	599.
^a 1022.00	37 500.000	12.	^a 940.00	40 000.000	427.900	^a 932.00	35 000.000	1902.
^a 1022.00	25 000.000	362.200	^a 930.00	40 000.000	623.	^a 980.00	30 000.000	754.800
1415.00	10 000.000	.170	^a 900.00	40 000.000	2572.	^a 1000.00	25 000.000	970.700
1340.00	10 000.000	1.500	932.00	70 000.000	1.400	^a 1030.00	20 000.000	1084.
1315.00	10 000.000	3.700	897.00	70 000.000	5.800	^a 1070.00	16 000.000	804.800
1290.00	10 000.000	6.100	^a 860.00	70 000.000	31.200	^a 1150.00	9 000.000	948.500
						^a 1220.00	5 000.000	960.

^aData point used in parametric analysis.

TABLE VI. - GERMAN RUPTURE DATA

Temperature, T, °F	Stress, σ, psi	Time, t, hr	Temperature, T, °F	Stress, σ, psi	Time, t, hr
Steel K (27b KK)			Steel C (23b CK)		
1022.00	76 899.999	0.100	1292.00	17 800.000	1 100.
1022.00	66 899.999	160.	1292.00	21 400.000	300.
1022.00	55 500.000	2 000.	1292.00	21 400.000	250.
1112.00	72 500.000	.100	1292.00	27 000.000	180.
1112.00	64 000.000	10.	1292.00	27 000.000	140.
1112.00	55 500.000	35.	1292.00	47 000.000	.100
1112.00	44 100.000	2 100.	Steel P (14a PA)		
1112.00	28 400.000	52 000.	932.00	84 000.000	0.100
Steel C (23b CK)			932.00	75 500.000	.100
1112.00	14 200.000	60 000.	932.00	78 399.999	2.
1112.00	17 800.000	30 000.	932.00	55 500.000	150.
1112.00	28 400.000	3 500.	932.00	44 100.000	1 700.
1112.00	28 400.000	3 000.	Steel P (14a PA)		
1112.00	28 400.000	2 200.	932.00	34 200.000	2 600.
1112.00	35 600.000	1 200.	932.00	27 000.000	16 000.
1112.00	44 100.000	520.	932.00	22 800.000	22 000.
1112.00	51 200.000	150.	932.00	17 100.000	100 000.
1112.00	59 800.000	.100	1022.00	72 599.999	.100
1202.00	11 400.000	82 790.	1022.00	69 699.999	.100
1202.00	14 200.000	15 000.	1022.00	65 500.000	1.200
1202.00	17 800.000	6 500.	1022.00	59 800.000	1.500
1202.00	22 800.000	1 800.	1022.00	35 600.000	150.
1202.00	28 400.000	550.	1022.00	27 000.000	300.
1202.00	35 600.000	124.	Steel P (14a PA)		
1202.00	42 700.000	5.	1022.00	22 800.000	400.
1202.00	52 600.000	.100	1022.00	22 800.000	900.
1292.00	11 400.000	30 000.	1022.00	17 100.000	2 100.
1292.00	11 400.000	20 000.	1022.00	13 900.000	6 500.
1292.00	13 900.000	4 500.	1022.00	13 900.000	8 000.
			1022.00	11 100.000	10 000.
			1022.00	8 830.000	68 000.

TABLE VII. - CREEP DATA FOR COLUMBIUM ALLOY FS-85

Temperature, T, °F	Stress, σ , psi	Time, t, hr		
		1-Percent creep	2-Percent creep	5-Percent creep
2005	25 000	0.6	3.0	6.1
1900	25 000	26.	33.	45.
1790	25 000	210.	257.	332.
2175	18 000	4.9	7.8	13.
2400	10 000	3.4	5.7	10.8
2300	10 000	25.4	41.	68.
2200	10 000	54.	84.	133.
2100	10 000	355.	500.	765.
2100	10 000	380	570.	875.
2000	10 000	775.	1325.	2175.
2000	10 000	900.	1420.	-----
2000	8 500	2480.	-----	-----
2575	6 000	5.6	10.	22.2
2200	6 000	425.	710.	1370.
2800	4 000	3.4	6.4	13.5
2620	4 000	14.4	26.	56.
2200	4 000	1140.	-----	-----
2900	3 000	2.6	5.4	13.8
3000	2 000	4.6	9.5	33.2
2450	2 000	-----	-----	950.

3/18/85
oo

"The aeronautical and space activities of the United States shall be conducted so as to contribute . . . to the expansion of human knowledge of phenomena in the atmosphere and space. The Administration shall provide for the widest practicable and appropriate dissemination of information concerning its activities and the results thereof."

—NATIONAL AERONAUTICS AND SPACE ACT OF 1958

NASA SCIENTIFIC AND TECHNICAL PUBLICATIONS

TECHNICAL REPORTS: Scientific and technical information considered important, complete, and a lasting contribution to existing knowledge.

TECHNICAL NOTES: Information less broad in scope but nevertheless of importance as a contribution to existing knowledge.

TECHNICAL MEMORANDUMS: Information receiving limited distribution because of preliminary data, security classification, or other reasons.

CONTRACTOR REPORTS: Technical information generated in connection with a NASA contract or grant and released under NASA auspices.

TECHNICAL TRANSLATIONS: Information published in a foreign language considered to merit NASA distribution in English.

TECHNICAL REPRINTS: Information derived from NASA activities and initially published in the form of journal articles.

SPECIAL PUBLICATIONS: Information derived from or of value to NASA activities but not necessarily reporting the results of individual NASA-programmed scientific efforts. Publications include conference proceedings, monographs, data compilations, handbooks, sourcebooks, and special bibliographies.

Details on the availability of these publications may be obtained from:

SCIENTIFIC AND TECHNICAL INFORMATION DIVISION
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
Washington, D.C. 20546