



# Options for Staging Orbits in Cislunar Space

Ryan Whitley  
Roland Martinez

NASA

IEEE Aerospace Conference  
March 2016



## Need for Staging Orbit

*NASA's Building Blocks to Mars*

Expanding exploration capabilities by visiting an asteroid that has been redirected to high lunar orbit.



Exploring Mars and other deep space destinations.

Getting affordable access to low Earth orbit from U.S. companies.



Learning fundamentals of living and working in space aboard ISS.

Traveling beyond low Earth orbit with the Space Launch System and Orion spacecraft.



**Earth Reliant**

Missions: 6 to 12 months

**Proving Ground**


Missions: 1 month up to 12 months

**Earth Independent**

Missions: 2 to 3 years<sup>2</sup> / 14


## Hub for International Exploration

## ISECG Mission Scenario

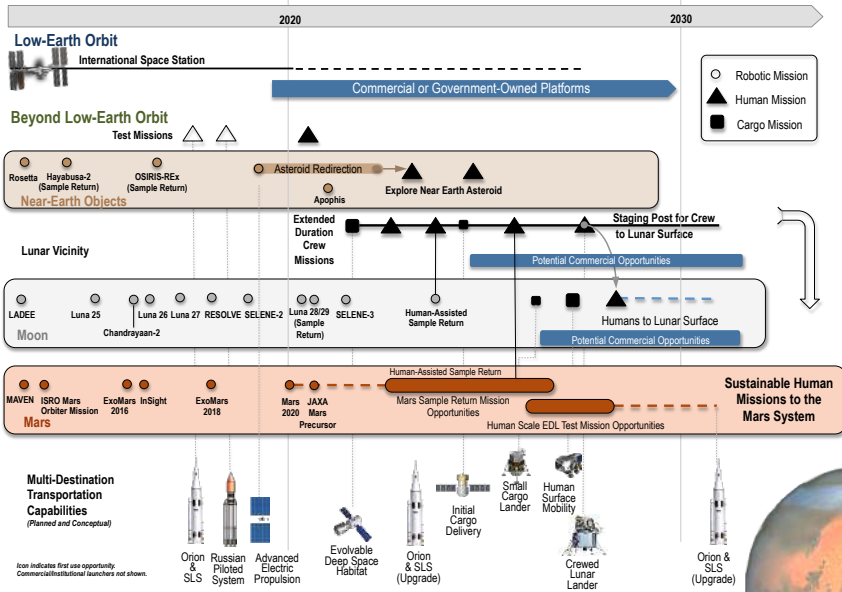

# All Cislunar Orbits Considered

Orbit Type	Orbit Period	Amplitude Range	E-M Orientation
Low Lunar Orbit (LLO)	~2 hrs	100 km	Any inclination
Prograde Circular (PCO)	11 hrs	3,000 to 5,000 km	~ 75° inclination
Frozen Lunar Orbit	~13 hrs	880 to 8,800 km	40° inclination
Elliptical Lunar Orbit (ELO)	~14 hrs	100 to 10,000 km	Equatorial
Near Rectilinear Orbit (NRO)	6-8 days	2,000 to 75,000 km	Roughly polar
Earth-Moon L2 Halo	8-14 days	0 to 60,000 km (L2)	Dependent on size
Distant Retrograde Orbit (DRO)	~14 days	70,000 km	Equatorial


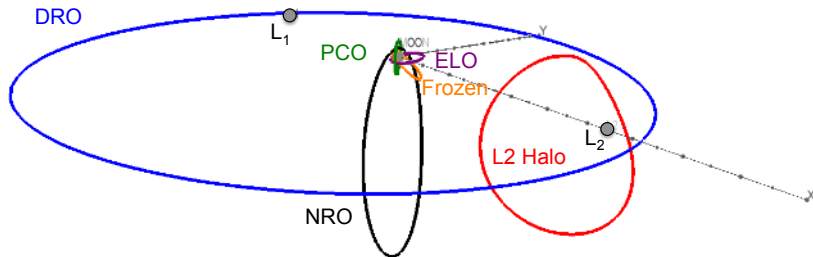


In total, 7 types of orbits were considered, relying on both previous studies from literature and new analysis, primarily for the NRO. While the analysis presented is not comprehensive for all orbits, trends and characteristics are computed to permit generalized conclusions.

# Orion Transfers from Earth to NRO

## 21 Day Mission

Transfers to and from NRO are around 5 days each way

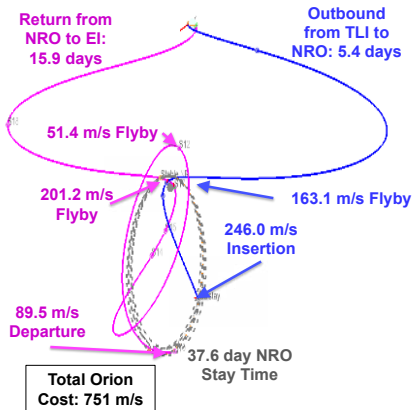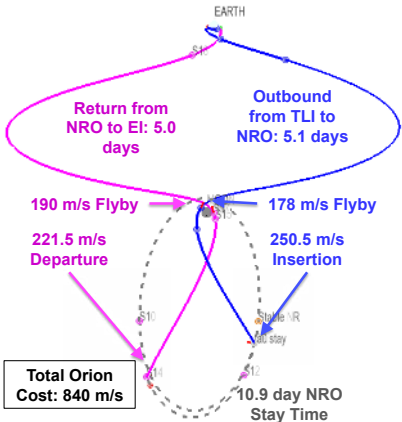

## 60 Day Mission

Dwell time enabled by NRO habitat permits reduction in total  $\Delta V$

## Transfer Costs from Earth TLI Condition

- An important metric for orbit viability is accessibility from Earth using existing or planned transportation elements.
- The combined performance of NASA's SLS and Orion vehicles were evaluated:
  - [SLS] SLS completes ascent to Low Earth Orbit and than the SLS Exploration Upper Stage places Orion on trans-lunar trajectory
  - [Orion] The MPCV is ~25 t, with ~8 t of usable propellant, leaving a  $\Delta V$  budget of around 1250 m/s with a total lifetime constraint of 21 days for 4 crew members
- Smaller Cislunar Orbits

Orbit	Total $\Delta V$	$C_3$ (Moon)
LLO	1800+ m/s	-2.67 $km^2/s^2$
PCO	Unknown	-.85 $km^2/s^2$
Frozen	Unknown	-.75 $km^2/s^2$
ELO	940 to 1270 m/s <sup>a</sup>	-.72 $km^2/s^2$

<sup>a</sup> Optimal values from 20 year epoch scan.

- Larger Cislunar Orbits

Orbit	Total $\Delta V$	Stay Time	Total $\Delta V$	Stay Time
NRO	21 Day Mission		60 Day Mission	
	840 m/s	10.9 d	751 m/s	37.6 d
L2 Halo <sup>b</sup>	18 Day Mission		31 Day Mission	
	811 m/s	5 d	637 m/s	10 d
DRO <sup>c</sup>	21 Day Mission		26 Day Mission	
	957 m/s	6 d	841 m/s	6 d


<sup>b</sup> From AIAA 2013-5478

<sup>c</sup> From AIAA 2014-1696

Orion	Feasible	Marginal	Infeasible
-------	----------	----------	------------


# Accessing the Lunar Surface from NRO

## Example Transfer from NRO to Polar LLO

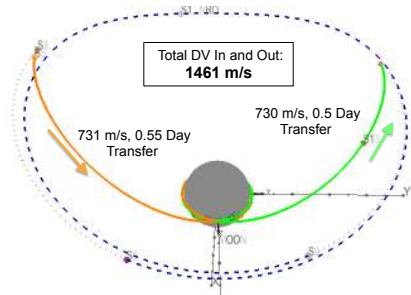

Low cost transfers from NRO to LLO are possible with short transfer times of around 1/2 day for global surface landing sites. However, the cost at the poles is significantly cheaper than the faces with one way cost of 730 m/s compared to 898 m/s respectively.

Transfer Time Each way = .5 days

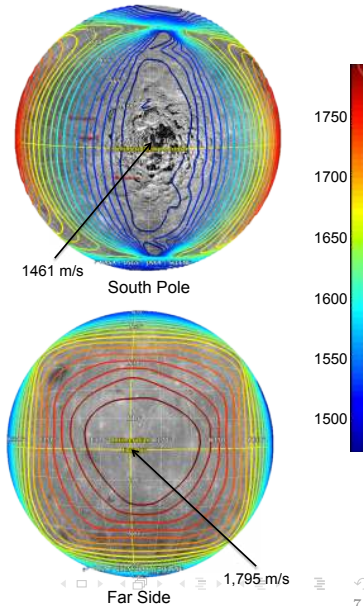


## All Orbits: Lunar Surface Access

Orbit	To or From LLO		Plane Change	Total
	$\Delta V$	$\Delta T$	$\Delta V$	$\Delta V$
LLO (0° PC)	0 m/s	< 1hr	0 m/s <sup>b</sup>	0 m/s
LLO (30° PC)	0 m/s	< 1hr	846 m/s <sup>b</sup>	846 m/s
PCO (Pol.)	700 m/s	5 hrs	–	700 m/s
Frozen (Pol.)	556 m/s <sup>a</sup>	6 hrs	252 m/s <sup>b</sup>	808 m/s
Frozen (Eq.)	556 m/s <sup>a</sup>	6 hrs	408 m/s <sup>b</sup>	964 m/s
ELO (0° PC)	515 m/s <sup>a</sup>	7 hrs	0 m/s <sup>b</sup>	515 m/s
ELO (90° PC)	515 m/s <sup>a</sup>	7 hrs	478 m/s <sup>b</sup>	993 m/s
NRO (Pol.)	730 m/s	0.5 days	–	730 m/s
NRO (Eq.)	898 m/s	0.5 days	–	898 m/s
EM-L2 (Pol.)	800 m/s	3 days	–	800 m/s
EM-L2 (Eq.)	750 m/s	3 days	–	750 m/s
DRO (Pol.)	830 m/s	4 days	–	830 m/s

Legend
Favorable
Marginal
Unfavorable

<sup>a</sup> Calculations assume impulsive hohmann transfer <sup>b</sup> Eqn:  $\Delta V_{pc} = 2v \sin \left[ \frac{\Delta i}{2} \right]$

Total Lander Cost (Includes, ascent, descent and staging orbit insertion  $\Delta V$ s)

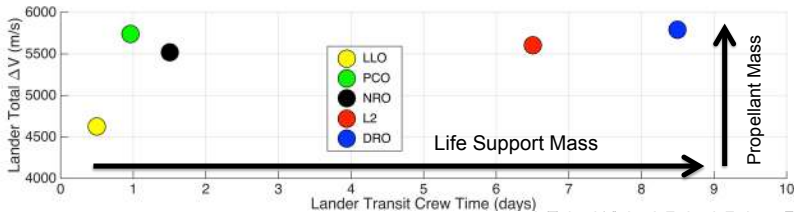



## Anytime Surface to Cislunar Orbit Abort Assessment

- For **LLO**, orbit precession around the moon is key.
  - Analysis performed in the mid 2000's for Constellation suggest that some amount of plane change may be required to get back to an orbiting asset.
  - If Orion is in a polar orbit and landing site is also polar that plane change cost should be minimal. The plane change cost increases as the landing site moves away from the poles.
- If the staging orbit is in a fixed plane, such as the **Frozen** orbit, the **PCO**, or the **ELO** selected for analysis, the plane change cost could be substantial.
  - As the PCO is around 75 degrees this cost may not be too large, while the Frozen orbit with 40 degree inclination may have a substantial plane change.
  - The equatorial ELO is a particular challenge for global aborts as only equatorial landing sites would be favored.
- An assessment of the **NRO** anytime aborts was assessed from a both a polar surface landing site as well as an equatorial landing site.

Orbit	Anytime Abort Requirement			
	From Pole		From Equator	
	$\Delta V$	$\Delta T$	$\Delta V$	$\Delta T$
NRO	750 m/s	3.5 d	900 m/s	2.5 d
L2 Halo <sup>a</sup>	900 m/s	3.5 d	850 m/s	2.5 d
L2 Lissajous <sup>a</sup>	850 m/s	3.5 d	800 m/s	2.5 d

<sup>a</sup> See "Mission Analysis for Exploration Missions Utilizing Near-Earth Libration Points." Ph.D. Thesis by Florian Renk for detailed analysis.


- As the table demonstrates, for the larger orbits, **NRO** is substantially more favorable for polar landing sites, while the **L2 Halo** and Lissajous orbits are more favorable for equatorial landing sites with Lissajous generally out performing the L2 Halo.

# Stationkeeping Costs

## All Orbits Stationkeeping

Orbit Type	Stationkeeping
LLO	50 m/s + per year
PCO	0 m/s for 3 years
Frozen	0 m/s
ELO	>300 m/s per year
NRO	<10 m/s per year
EM L2H	<10 m/s per year
DRO	0 m/s

## NRO Stationkeeping

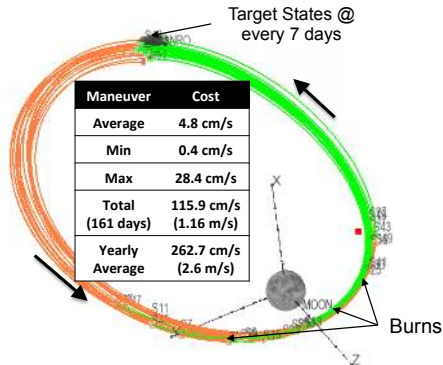

Legend	Favorable	Marginal	Unfavorable
--------	-----------	----------	-------------

For the NRO, small corrections each orbit can maintain stability at an average cost of 2.6 m/s per year (0.22 m/s per month). Two of NASA's ARTEMIS spacecraft successfully flew a similar Earth-Moon  $L_1$  and  $L_2$  Halo libration orbit stationkeeping strategy at 0.31 and 0.41 m/s per month cost.


# Communication (Line of sight to Earth and Moon)

## All Orbits Line of Sight Communications to Earth

Orbit Type	Communication
LLO	50% Occulted
Frozen	Frequent Occultation
ELO	Frequent Occultation
NRO	No Occultation
EM L2H	No Occultation
DRO	Infrequent Occultation

Legend
Favorable
Marginal
Unfavorable

## NRO Line of Sight Communications to Lunar Surface

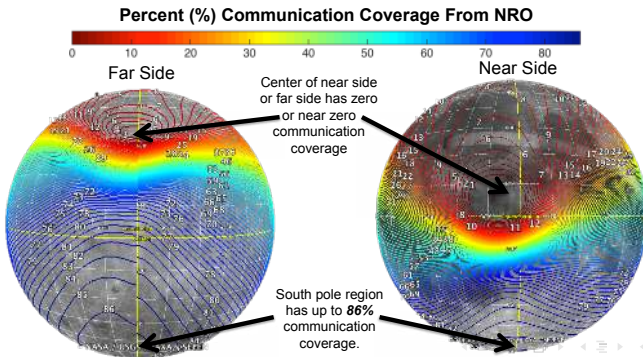

# Thermal Comparison

## Heat Flux & Radiator Sizing Comparison

Orbit / Location	Maximum Heat Flux ( $W/m^2$ )			Radiator Sizing <sup>a,b</sup>
	Radiative	Reflective	Total	
LLO	1545	231	1776	N/A
NRO	54	8	62	21.4 $m^2$
DRO	–	–	0.6	18.0 $m^2$
Deep Space	–	–	0.0	17.9 $m^2$

<sup>a</sup>Radiator Sizing Based on 5000 W  $Q_{craft}$

<sup>b</sup>Eqn :  $Q_{net} = Q_r - \alpha(Q_s + Q_a) - \epsilon Q_{IR}$ ,  $\alpha = .2$ ,  $\epsilon = .8$ ,  $T_{rad} = 280K$

## All Orbits Thermal

Orbit Type	Thermal
LLO	Radiators Insufficient
NRO	Radiators Sufficient
EM L2H	Radiators Sufficient
DRO	Radiators Sufficient

Legend
Favorable
Marginal
Unfavorable

For LLO, the radiator sizing is undefined; a radiator cannot be sized large enough to handle the flux in LLO. No increase in radiator sizing is necessary for the vehicle in NRO, E-M L2 or DRO orbits as the radiator has margin already as designed to the benign deep space environment.

## Staging Orbit Summary Comparison

Orbit Type	Earth Access (Orion)	Lunar Access (to Polar LLO)	Crewed Spacecraft		
			SK	Communication	Thermal
Low Lunar Orbit (LLO)	Infeasible	$\Delta V = 0$ m/s $\Delta T = 0$	50 m/s + per year	50% Occulted	Radiators Insufficient
Prograde Circular Orbit (PCO)	Marginally Feasible	$\Delta V < 700$ m/s $\Delta T < 1$ day	0 m/s for 3 years	Unknown	Unknown
Frozen Lunar Orbit	Marginally Feasible	$\Delta V = 808$ m/s $\Delta T < 1$ day	0 m/s	Frequent Occultation	Unknown
Elliptical Lunar Orbit (ELO)	Marginally Feasible	$\Delta V = 953$ m/s $\Delta T < 1$ day	>300 m/s per year	Frequent Occultation	Unknown
Near Rectilinear Orbit (NRO)	Feasible	$\Delta V = 730$ m/s $\Delta T = .5$ day	<10 m/s per year	No Occultation	Radiators Sufficient
Earth-Moon L2 Halo	Feasible	$\Delta V = 800$ m/s $\Delta T = 3$ days	<10 m/s per year	No Occultation	Radiators Sufficient
Distant Retrograde Orbit (DRO)	Feasible	$\Delta V = 830$ m/s $\Delta T = 4$ days	0 m/s	Infrequent Occultation	Radiators Sufficient

Legend	Favorable	Marginal	Unfavorable
--------	-----------	----------	-------------

Establishing a viable staging orbit in cislunar space is a key step in the human exploration journey. Maximizing flexibility in terms of access from Earth, access to other destinations, and spacecraft design impacts are all important. Accordingly, **the Near Rectilinear Orbit (NRO) appears to be the most favorable orbit** to meet multiple, sometimes competing, constraints and requirements.

