

This is a repository copy of *Overview of recent progress in US fast ignition research*.

White Rose Research Online URL for this paper:
<https://eprints.whiterose.ac.uk/65654/>

Version: Published Version

Article:

Freeman, R. R., Akli, K., Beg, F. et al. (31 more authors) (2006) Overview of recent progress in US fast ignition research. *Journal de physique iv*. pp. 95-100. ISSN 1155-4339

<https://doi.org/10.1051/jp4:2006133018>

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.

Overview of recent progress in US fast ignition research^{*,**}

R.R. Freeman^{1,3}, K. Akli¹, F. Beg², R. Betti⁵, S. Chen², D.J. Clark³, P.M. Gu¹, G. Gregori⁴, S.P. Hatchett⁴, D. Hey¹, K. Highbarger³, J.M. Hill³, N. Izumi⁴, M. Key⁴, J.A. King¹, J.A. Koch⁴, B. Lasinski⁴, B. Langdon⁴, A.J. MacKinnon⁴, D. Meyerhofer⁶, N. Patel³, P. Patel⁴, J. Pasley², H.S. Park⁴, C. Ren⁵, R.A. Snavely⁴, R.B. Stephens⁷, C. Stoeckl⁶, M. Tabak⁴, R. Town⁴, L. Van Woerkom³, R. Weber³, S.C. Wilks⁴ and B.B. Zhang¹

¹ *The University of California-Davis, Davis CA, USA*

² *The University of California-San Diego, San Diego, USA*

³ *The Ohio State University, Columbus OH, USA*

⁴ *The University of California-Lawrence Livermore National Lab, Livermore, USA*

⁵ *The University of Rochester, Rochester, USA*

⁶ *The University of Rochester-Laboratory for Laser Energetics, Rochester, USA*

⁷ *General Atomics Corporation, San Diego, USA*

Abstract. The Fast Ignition Program in the United States has enjoyed increased funding in various forms from the Office of Fusion Energy Sciences of the Department of Energy. The program encompasses experiments on large laser facilities at various world-wide locations, and benefits enormously from collaborations with many international scientists. The program includes exploratory work in cone-target design and implosion dynamics, high electron current transport measurements in normal density materials, development of diagnostics for heating measurements, generation of protons from shaped targets, theoretical work on high gain target designs, and extensive modeling development using PIC and hybrid codes.

1. INTRODUCTION

The fast ignition concept is attractive to the Inertial Fusion Community for a simple but fundamental reason: it in principle requires less total energy input to achieve ignition [1].

Current US programs and projects are developing new capabilities for Short Pulse HED Science and Fast Ignition: There are currently 3 funded projects from the Office of Fusion Energy Sciences in the US Department of Energy: (1) FI Concept Exploration (LLNL, GA, UCD, OSU); (2) Fusion Science Center for Extreme States of Matter and FI (LLE, OSU, UCSD, UR, UT, MIT, LLNL); and (3) FI Advanced Concept Exploration (LLNL, GA, LLE, OSU, UCSD, UR). There are, in addition, substantial resources derived from LLNL's Short Pulse S&T Initiative. The major US facilities to support FI research that currently are in use, or will be on line within the next 5 years, are LLNL's Jupiter facility, Sandia's Z and ZPW, Rochester's Omega and Omega EP, and ultimately LLNL's NIF.

This presentation was in the last Plenary Session of IFSA-2005, and served largely as a summary of oral and poster presentations from many US scientists at IFSA-2005. This paper makes reference to those presentations to guide the reader to the papers where the technical work is presented in detail. There are 6

* This work was sponsored by resources from the Office of Fusion Energy-Department of Energy; Internal R&D resources from LLNL, GA and OSU; and facility time at, and collaborations with, colleagues at RAL, ILE and EPT. Special thanks to: D. Batani, S. Baton, M. Koenig, R. Kodama, K. Lancaster, P. Norreys, and K. Tanaka.

** A portion of this work was performed under the auspices of the U.S. Department of Energy by University of California Lawrence Livermore National Laboratory under contract No. W-7405-Eng-48.

sections: (1) Concept; (2) Relativistic electron transport and isochoric heating; (3) Modeling; (4) Proton isochoric heating and possible role in FI; (5) Fuel Compression-hydro design and experiments; and (6) Future Prospects.

2. TECHNICAL WORK

2.1 Concept

Figure 1 shows the three essential elements of fast ignition [2].

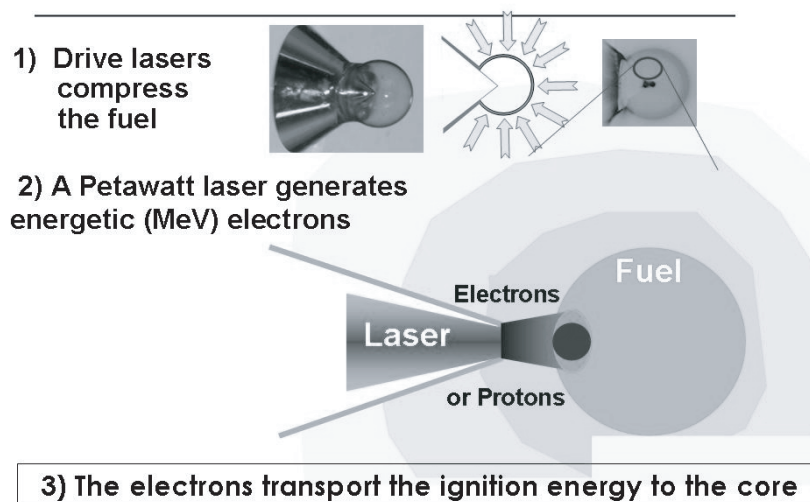


Figure 1. Three essential elements of Fast Ignition.

The targets are imploded to an isochoric density as much as several hundred times normal density, a high energy, short pulse laser is guided near to the core of the imploded shell where the energy is converted into high energy electrons, and these electrons must traverse an extreme density gradient through the plasma surrounding the core, and then deposit their energy in the core. The targets will likely require a cone insert to enable the laser to get close enough to the core before converting its energy into fast electrons such that there can be a reasonable chance that fast electrons will remain collimated enough.

The scale of the currents involved and the complex path the fast electrons must travel are indicated on Figure 2 [2].

2.2 Relativistic Electron Transport and Isochoric Heating

Initial studies have investigated large current flows in normal density materials induced by high energy, short pulse lasers. Diagnostics have been developed to record 2-D image K_α radiation from Cu and XUV radiation at 68 eV and 270 eV; and single-hit CCD spectrometers have been used to record the spectra of the K_α radiation as well as determine the absolute intensities. Observations have been made of electron transport through slabs of normal density metals and through wires and cones. In general, we find (a) that the fast electrons generated by the laser spread in slabs with an opening angle of nearly 40 degrees, independent of the intensity of the laser; (b) that the electrons appear to have a stopping length determined

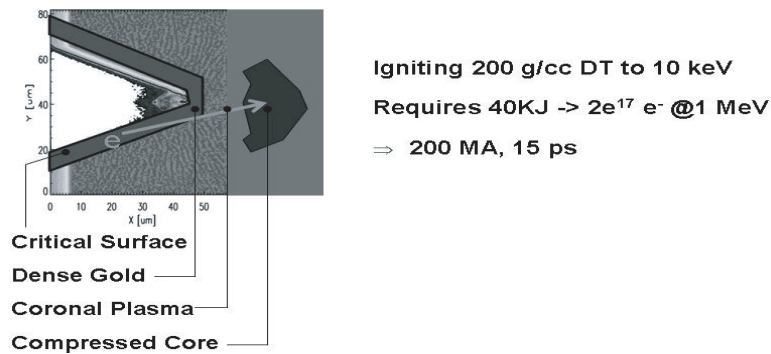


Figure 2. Ignition conditions and fast electron path in an FI target.

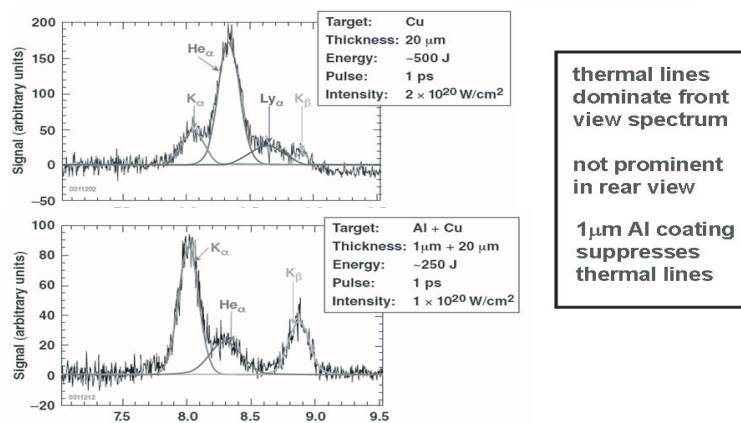


Figure 3. Extreme heating observed in initial layer of slab targets.

largely by potentials due to resistance experienced by the return current; (c) that there is a thin ($\sim 1 \mu\text{m}$) layer on the front of the targets that reaches considerably higher temperatures than the bulk material; (d) that many of the presumably lower energy electrons spread rapidly on the surface of the target; and finally (e) there is no indication in any of these experiments of magnetic collimation, or self-pinching of the fast electrons.

The anomalous thin layer heating on the front surface is suppressed by application of a $\sim 1 \mu\text{m}$ over coating of another material, as shown in Figure 3 [2].

The origin of this anomalous heating layer is not completely understood, but may be related to Weibel-like instabilities: this phenomenon is a subject of current investigation.

2.3 Modeling

Modeling is at three main levels [3]:

1. 2D and 3D Radiation/hydrodynamic modeling to define the initial conditions for the short pulse interaction and also the post short pulse hydrodynamics
2. 2D and 3D explicit particle in cell modeling at densities $< 50 N_C$ to model the laser plasma interaction and the electron beam generation
3. 2D and 3D hybrid PIC modeling of the electron transport in dense plasma and the isochoric heating

Integration of these three modeling modes is under development in order to develop a full ab initio code for a design of a full Proof-of-Principle FI experiment. As part of the thrust to develop reliable predictive codes, we have begun to benchmark a well known hybrid-PIC code, LSP, against our experiments.

2.4 Proton Isochoric Heating and Possible Role in FI [4]

Since the discovery of protons accelerated from the back surface of a relatively thin target struck by an ultra-intense laser pulse by Snavely et al. in 2000 [PRL, **85**, 2954], there has been an ever increasing interest in this phenomenon, and IFSA-2005 had many papers representing investigations into its uses. We have studied the generation of protons from shaped targets in an attempt to focus the proton beam, and to efficiently heat targets with these focused protons. This experimental effort has met with some real success, with clear indications of improved isochoric heating using protons compared to electrons. Further, it appears possible to focus the protons with considerable accuracy. Figure 4 shows some results of these types of measurements, and there have been theoretical analyses that suggest that the electron to proton conversion efficiency may be increased dramatically by correctly preparing the back surface of the laser target. This work has led to serious suggestions of making targets for FI which actually use the fast electrons, which appear to be difficult to spatially control, to generate focused proton beams to carry the laser energy through the surrounding plasma into the core [11].

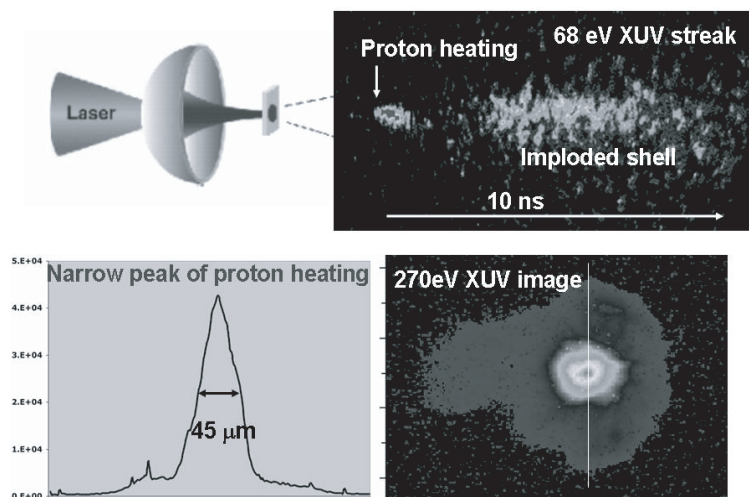


Figure 4. Focusing of protons accelerated from a shaped surface and the resulting heating.

2.5 Fuel Compression-Hydro Design and Experiments [2, 5, 12]

The design requirements for a FI target are complex [2, 5] We are experimentally validating our compression design codes with experiments on Omega, with gratifying results as shown in Figure 5 [10].

The significance of these results is that direct drive at Omega gives well simulated results with no significant ablated/entrained Au near tip of cone, suggesting that these re-entrant cone designs are useable. Another topic of research is the design of high gain targets for FI: it is possible to design thick wetted-foam, low adiabat, low velocity targets with high ρ , high ρR and small hot spot. Such targets concepts are essential for any proposed Proof-of-Principle (PoP) experimental demonstration of FI fusion [5].

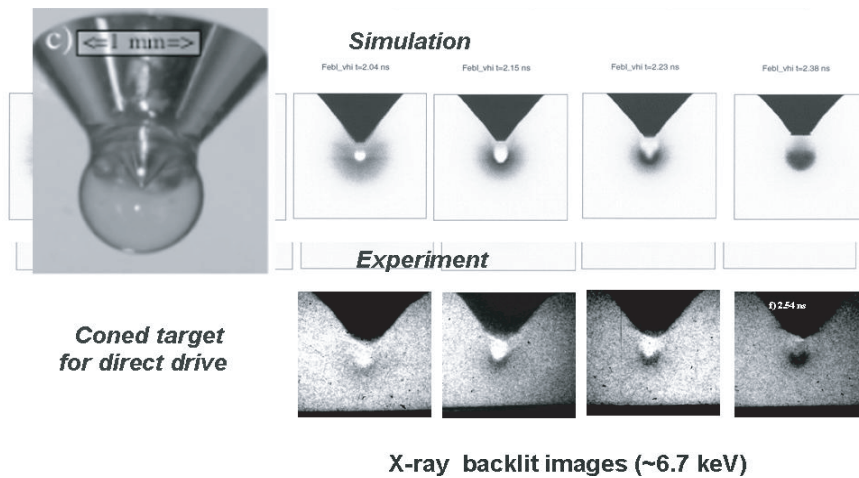


Figure 5. Simulation and experimental results of compression of FI target.

3. FUTURE PROSPECTS

The future research in FI in the US is dependent upon the completion of facilities capable of compression of targets to high enough density, with energetic enough short pulse lasers. The current plan calls for sub-PoP experiments to be carried out on the Omega EP facility, now under construction at LLE, and due for completion in 2007. Assuming that there is success with the sub-PoP experiments, the proposed plan calls for a full demonstration on the NIF sometime after the 2010-12 time frame, with a possible alternative being the Z-pinch facility at Sandia. In the medium term, the program will work concentrate on “Integrated Experiments”; that is, combining as many of the aspects of the FI concept together in one experiment, and to continue to advance our modeling capabilities with a goal towards a full ab-initio FI code. Figure 6 shows the main components of planned integrated experiments, all aimed at the sub-PoP demonstration on Omega EP. In the shorter term, the program continues to work on an ever increasing complex set of diagnostics in anticipation of the more aggressive experimental program [1, 8].

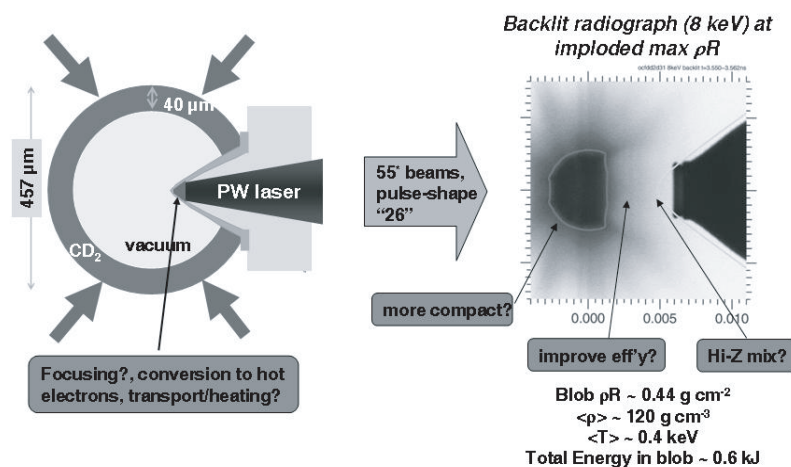


Figure 6. The physical concepts to be examined in preparation for the sub-PoP experiments.

4. SUMMARY

The US Fast Ignition program is composed of a collection of University efforts, combined with support from NNSA facilities in LLE, LLNL, and Sandia. Its mission is to understand the fundamental physics issues confronting FI, and to develop the codes and diagnostics necessary to field a sub-PoP FI integrated experiment on Omega EP in the 2007-2008 time-frame. Assuming success at Omega EP, the program plan calls for a full PoP experiment on the NIF [7] or perhaps Z-R [9] in the 2010-2012 time frame.

References

- [1] See the link <http://fsc.lle.rochester.edu/>
- [2] See R. Stephens et al., "High energy electron transport in solids", this volume #M01.1
- [3] See H. Ruhl, "Collisional transport of fast electrons through solid density materials" #Tu011.4; T. Melhorn "Simulation of heating – compressed fast-ignition cores by petawatt laser generated electrons" #F027.2; S. Wilks et al., "On the use of reduce mass targets to obtain high temperature solid density materials using petawatt lasers for astrophysical applications" #Tu06.3, all this volume.
- [4] See M. Key et al., "Study of electron and proton isochoric heating for fast ignition", this volume #M01.4
- [5] See R. Betti, "Low-adiabat implosions for hot-spot and fast-ignition direct-drive inertial confinement fusion", this volume #M01.5
- [6] See R. Mccrory, "Progress in direct-drive inertial confinement fusion research at the Laboratory for Laser Energetics", this volume #WP3.3
- [7] See E. Moses, "The National Ignition Facility: Path to Ignition in the Laboratory", this volume #Wp3.2
- [8] D. Meyerhofer, LLE, Rochester, NY., Personal Communication
- [9] See J. Porter et al., "Understanding and control of time-integrated P2 and P4 radiation asymmetry in double z-pinch driven hohlraums", this volume #F023.2
- [10] See K. Akli et al., "Modeling of the electro heating of an imploded core in an integrated fast ignition experiment", this volume #MPo1.1
- [11] See D. Hey et al., "A Monte Carlo Code for Modeling Proton Heating in Fast Ignition Targets", this volume #MPo1.9
- [12] See Max Tabak, "Capsule optimization techniques for Fast Ignition", this volume #MPo1.19