

# OXIDATION OF METHANE IN BIOTRICKLING FILTERS INOCULATED WITH METHANOTROPHIC BACTERIA

Manuel Cáceres\*<sup>1</sup>, Antonio D. Dorado<sup>1,2</sup>, Juan C. Gentina<sup>1</sup>, Germán Aroca<sup>1</sup>

<sup>1</sup>School of Biochemical Engineering, Pontificia Universidad Católica de Valparaíso, Av. Brasil 2085, Valparaíso, Chile.

<sup>2</sup>Manresa School of Engineering, Universitat Politècnica de Catalunya, Av. Bases de Manresa 61-73, 08242 Manresa, España

## Abstract

The oxidation of methane (CH<sub>4</sub>) using biofilters has been proposed as an alternative to mitigate anthropogenic greenhouse gas emissions with low concentration of CH<sub>4</sub> that cannot be used as a source of energy. However conventional biofilters utilize organic packing materials that have a short lifetime, clogging problems and are commonly inoculated with non-specific microorganisms leading to unpredictable CH<sub>4</sub> elimination capacities (EC) and removal efficiencies (RE). The main objective of this work was to characterize the oxidation of CH<sub>4</sub> in two biotrickling filters (BTFs) packed with polyethylene rings and inoculated with two methanotrophic bacteria *Methylomicrobium album* and *Methylocystis* sp. in order to determine the CH<sub>4</sub> elimination capacity (EC) and CO<sub>2</sub> production (pCO<sub>2</sub>) when using a specific inoculum. The repeatability of the results in both BTF was determined when operated at the same inlet load of CH<sub>4</sub>. A dynamic mathematical model that describes the CH<sub>4</sub> abatement in the BTFs was developed and validated using mass transfer and kinetic parameters estimated independently. Results showed that EC and pCO<sub>2</sub> of the BTFs are not identical but very similar at all the conditions tested. The use of specific inoculum has shown a faster start-up and higher EC per unit area (0.019 g<sub>CH<sub>4</sub></sub>·m<sup>-2</sup>·h<sup>-1</sup>) in comparison to most of previous studies at the same CH<sub>4</sub> load rate (23.2 g<sub>CH<sub>4</sub></sub>·m<sup>-3</sup>·h<sup>-1</sup>). Global mass balance shown that the maximum reduction of CO<sub>2</sub> equivalents was 98.5 g<sub>CO<sub>2</sub>eq</sub>·m<sup>-3</sup>·h<sup>-1</sup>. Model developed described satisfactorily CH<sub>4</sub> abatement in BTFs in a wide range of conditions.

**Key words:** biofiltration, biotrickling filters, greenhouse gases, global warming, methane oxidation, methanotrophs.

\* Corresponding Author: e-mail: [manuel.caceres.s@mail.pucv.cl](mailto:manuel.caceres.s@mail.pucv.cl), tel.: 56-32-2273641, fax: 56-32-2273803.

## INTRODUCTION

Methane ( $\text{CH}_4$ ) is considered the second largest contributor to the greenhouse effect with a global warming potential (GWP) of about 23 times greater than carbon dioxide ( $\text{CO}_2$ ). For this reason there is a growing interest in reducing anthropogenic emissions of this gas when its use as source of energy is not feasible due to its low concentration. There are many anthropogenic sources of gaseous emissions with such characteristic that are emitted to the atmosphere, such as those emitted from abandoned landfills, livestock facilities, animal husbandry and some sections of wastewater treatment plants. In all these cases, the microbial oxidation of  $\text{CH}_4$  could be a low cost solution compared with physical/chemical technologies (Lopez et al. 2013). This biotechnology takes advantage of the ability of methane-oxidizing bacteria (MOB), also called methanotrophs, which utilize  $\text{CH}_4$  as a source of carbon and energy (Sohngen, 1906). In MOBs the incorporation of  $\text{CH}_4$  into the metabolism is mediated by the enzyme methane monooxygenase (MMO) that oxidase  $\text{CH}_4$  to methanol. In a second reaction, methanol is converted to formaldehyde by a methanol dehydrogenase. Then, the carbon from  $\text{CH}_4$  follows its catabolism by the RuMP or serine pathway depending on the type of microorganism, giving rise to the classification of methanotrophs type I and II respectively, being assimilated to biomass or released as carbon dioxide ( $\text{CO}_2$ ) (Hanson and Hanson 1996).

The bio-oxidation of  $\text{CH}_4$  has been applied in landfills using covers of compost bio-augmented with MOBs, achieving good  $\text{CH}_4$  reductions but without control of the operational conditions (Scheutz et al. 2009; Sadasivam and Reddy 2014). Different configurations of closed bioreactors, like traditional biofilters and biotrickling filters (BTFs), have been tested looking for an improved configuration that allows a better control of the factors that determine the rate of  $\text{CH}_4$  bio-oxidation (Nikiema et al. 2009; Rocha-Ríos et al. 2009; Pfluger et al. 2011; Veillete et al. 2011). Traditional biofilters generally utilize organic materials, like soil or compost, as support of the microbial communities established in biofilms over the surfaces of the particles that at the same time can be source of nutrients for the microorganisms. In the bio-oxidation of  $\text{CH}_4$  these organic materials have shown to have a short lifetime (<6 months) and problems associated with channeling, clogging and pressure drop in long-term operations (Veillete et al. 2012). In BTFs a biofilm develops on an inorganic material and nutrients are provided by a recirculating solution. Inorganic packing materials have several advantages like good mechanical resistance, low-pressure drop and a more stable behavior in long-term operation. BTFs have been used to study the effect of nutrients concentrations, pH and

temperature on the bio-oxidation of CH<sub>4</sub> because it allows a better control of the operation conditions. Until now there have been reported the use of non-specific microbial communities like active sludge or natural inoculation for the bio-oxidation of CH<sub>4</sub> in biofiltration systems. Table 1 shows a summary of the values reported by different authors using inorganic and organic materials as a support for non-specific microbial communities. There are no reports of bio-oxidation of CH<sub>4</sub> using BTFs inoculated with pure cultures of methanotrophic bacteria.

**Table 1** Bio-oxidation of CH<sub>4</sub> in different reactors with different inoculum and packing materials

The use of non-specific microbial communities can lead to long startup periods and different communities can evolve obtaining different performances. Although biofiltration studies generally do not have duplicate systems to evaluate the repeatability in biofilters (Jimenez et al. 2016) the complexity of the mechanisms involved leads to accept that repeatability is not ensured. In this sense the use of specific methanotrophic bacteria as inoculum of a BTF can be an effective way to get more reproducible CH<sub>4</sub> results that can be predicted through a dynamic model that considers the kinetic parameters of these microorganisms and mass transport processes of the system. There are few reports on the modeling and simulation of the biofiltration of CH<sub>4</sub> probably due to the scarce experimental data to build and validate reliable models. Mrazovac et al. 2012 focused on the preliminary stage of the biological degradation of CH<sub>4</sub>; the diffusion of CH<sub>4</sub> in water by irreversible absorption and desorption. Ordaz et al. (2014) characterized the impact of a non-aqueous phase on the kinetics of CH<sub>4</sub> bio-oxidation using respirometry techniques. Only one empirical model has been reported and was developed for a compost-based biofilter (Plessis 2003). Nikiema et al. (2009b) proposed a model for the biofiltration of CH<sub>4</sub> taking into account the variables concentration, velocity and temperature. This model simulates the biofiltration of CH<sub>4</sub> at steady conditions in a range of concentrations between 1500 and 9500 ppm and considering a constant biomass concentration. Other studies determining kinetic parameters of methanotrophs have set different kinetic parameters for different concentrations ranges (Delhom nie et al. 2008; M nard et al. 2014; Rodrigues et al. 2009; Boiesen et al. 1993; Ordaz et al. 2014).

The main objective of this work was to characterize the oxidation of CH<sub>4</sub> in biotrickling filters (BTFs) inoculated with *Methylobacterium album* and *Methylocystis* sp., type I and type II methanotrophic bacteria respectively, assessing the CH<sub>4</sub> bio-oxidation repeatability through a statistical comparison of two identical BTFs. A

comprehensive dynamic model of the bio-oxidation of CH<sub>4</sub> using BTFs was also developed and validated using the experimental set of data.

## MATERIALS AND METHODS

### *Biotrickling filters set up*

Two identical biotrickling filters (BTFs) were set up using transparent tubes of polyvinyl chloride (PVC) of 0.153 m internal diameter (ID) and 1.20 m of height with gas sampling ports located every 30 cm from inlet to outlet. Polyethylene rings (OD =15 mm, ID = 13 mm, H=10 mm, density 1.02 kg·L<sup>-1</sup>, external specific area 316 m<sup>-1</sup> and 77% void fraction) were used as a support for the biofilm. The total packing volume (*V*) was 20 L. Both BTFs were inoculated with active cultures of methanotrophic bacteria type I and II, *Methylomicrobium album* (ATCC 33003) and *Methylocystis* sp. (ATCC 49242), grown using CH<sub>4</sub> as sole carbon and energy source in a nitrate mineral salts liquid medium (NMS, ATCC 1306). The composition of *NMS medium* was: 1.0 g·L<sup>-1</sup> MgSO<sub>4</sub>·7H<sub>2</sub>O, 0.2 g·L<sup>-1</sup> CaCl<sub>2</sub>·6H<sub>2</sub>O, 1.0 g·L<sup>-1</sup> KNO<sub>3</sub>, 0.272 g·L<sup>-1</sup> KH<sub>2</sub>PO<sub>4</sub>, 0.717 g·L<sup>-1</sup> Na<sub>2</sub>HPO<sub>4</sub>·12H<sub>2</sub>O. 2.0 ml of a chelated iron solution and 0.5 ml of a trace elements solution was also added to 1 L of the NMS solution. *Chelated Iron Solution*: Ferric (III): 1.0 g·L<sup>-1</sup> ammonium citrate, 2.0 g·L<sup>-1</sup> EDTA sodium salt, 0.3 ml of HCl (concentrated), 100 ml of distilled deionized water. *Trace Element Solution*: 0.5 g·L<sup>-1</sup> EDTA, 0.2 g·L<sup>-1</sup> FeSO<sub>4</sub>·7H<sub>2</sub>O, 0.01 g·L<sup>-1</sup> ZnSO<sub>4</sub>·7H<sub>2</sub>O, 0.003 g·L<sup>-1</sup> MnCl<sub>2</sub>·4H<sub>2</sub>O, 0.03 g·L<sup>-1</sup> H<sub>3</sub>BO<sub>3</sub>, 0.02 g·L<sup>-1</sup> CoCl<sub>2</sub>·6H<sub>2</sub>O, 0.001 g·L<sup>-1</sup> CaCl<sub>2</sub>·2H<sub>2</sub>O, 0.002 g·L<sup>-1</sup> NiCl<sub>2</sub>·6H<sub>2</sub>O, 0.003 g·L<sup>-1</sup> Na<sub>2</sub>MoO<sub>4</sub>·2H<sub>2</sub>O.

The BTFs were continuously fed with a mixture of pre-humidified air and pure CH<sub>4</sub> (99.8% v/v). Different CH<sub>4</sub> concentrations were obtained by mixing air and CH<sub>4</sub> using two mass flow controllers (AFC-37, Aalborg, USA). Inlet concentrations ([CH<sub>4</sub>]<sub>in</sub>) between 0.5% - 3.9% (v/v) of CH<sub>4</sub> were fed initially at different gas flow rates to determine the best condition for kinetic tests. The gas flow rate (*F*) used were between 0.2 - 1.0 L·min<sup>-1</sup>. CH<sub>4</sub> and CO<sub>2</sub> were measured on line using an IR detector and O<sub>2</sub> using an electrochemical sensor with a multigas analyzer (Xam 5600, Dräger, Germany). Fresh NMS medium (0.5 L) was supplied every day by spraying it to the top of the columns at rate of 0.5 L·min<sup>-1</sup>. Figure 1 shows a diagram of the experimental setup used for the oxidation of CH<sub>4</sub> in BTFs.

**Fig. 1** Diagram of the experimental system for the oxidation of CH<sub>4</sub> in biotrickling filters.

The BTFs operation was characterized by measuring the CH<sub>4</sub> removal efficiency (*RE*) in %, and the CH<sub>4</sub> elimination capacity (*EC*) in gCH<sub>4</sub>·m<sup>-3</sup>·h<sup>-1</sup> at different CH<sub>4</sub> loads (*L*) in gCH<sub>4</sub>·m<sup>-3</sup>·h<sup>-1</sup> after reaching steady state. Production of CO<sub>2</sub> (*pCO*<sub>2</sub>) in gCO<sub>2</sub>·m<sup>-3</sup>·h<sup>-1</sup> and consumption of O<sub>2</sub> (*cO*<sub>2</sub>) in gO<sub>2</sub>·m<sup>-3</sup>·h<sup>-1</sup> were also measured. A steady state was considered to be reached when *RE* have a variation less than 5% in consecutive days. These parameters were determined according to the following equations:

$$RE = \frac{[CH_4]_{in} - [CH_4]_{out}}{[CH_4]_{in}} \cdot 100 \quad (1)$$

$$EC = ([CH_4]_{in} - [CH_4]_{out}) \cdot \frac{F}{V} \quad (2)$$

$$L = [CH_4]_{in} \cdot \frac{F}{V} \quad (3)$$

$$pCO_2 = ([CO_2]_{out} - [CO_2]_{in}) \cdot \frac{F}{V} \quad (4)$$

$$cO_2 = ([O_2]_{out} - [O_2]_{in}) \cdot \frac{F}{V} \quad (5)$$

#### *Repeatability assessment*

The repeatability of CH<sub>4</sub> bio-oxidation in the BTFs was evaluated with two indicators: EC and pCO<sub>2</sub>; using the paired samples Student's t-test according to the methodology proposed by Jimenez et al. (2016). A two-tailed hypothesis testing was used considering that the mean of the differences is equal to zero, i.e. no significant differences exist between BTFs, at a 95% confidence level. Repeatability between BTFs is established qualitatively when the calculated *t* value is under a specific tabulated *T<sub>critical</sub>* value, based on the degrees of freedom of the data set (n-1). Similarly, no significant difference exists between biofilters for a p-value > 0.05.

### *Model of the bio-oxidation of CH<sub>4</sub> in a biotrickling filter*

The model developed here considers the most relevant phenomena occurring during the biofiltration process for the bio-oxidation of CH<sub>4</sub> in a biotrickling filter like advection, absorption and diffusion. The assumptions underlying this model are based on a consolidated model reported previously ( Dorado et al. 2012):

- (1) Gas phase circulation regime is modelled as plug flow pattern. Thus, axial dispersion is not considered.
- (2) Gas-biofilm interface equilibrium is described by Henry's law.
- (3) Planar geometry and perpendicular diffusion in biofilm are used to derive model equations considering that the solid support size is significantly higher than the biofilm thickness. Diffusion in the biofilm is described by Fick's law.
- (4) Biofilm is formed on the external surface of the packing material. Thus, biomass does not grow in the pores of the packing material and reactions only take place in the biofilm phase.
- (5) Physical properties of the species in the biofilm are assumed to be the same as in water since this is the main component.
- (6) There is no accumulation of biomass in the filter bed in each period and biomass properties (thickness, specific surface area and kinetic coefficients) are uniform along the bed.
- (7) Adsorption of pollutant onto the support is neglected due to the low pollutant concentration and the low adsorption capacity of the packing material. Moreover, under steady-state conditions, the adsorption process is in equilibrium.

Dynamic mass balances in the gas phase and within the biofilm serve to describe changes in the biodegradation capacity of the biofilter during operation, overcoming the limitations of previous biofiltration models. The resulting equations are summarized as following:

$$\frac{\partial[CH_4]}{\partial t} = -v_z \cdot \frac{\partial[CH_4]}{\partial z} - \frac{a}{\varepsilon} k_g \left( [CH_4] - \frac{[CH_4]}{H} \right) \quad (6)$$

$$\frac{\partial [CH_4]_b}{\partial t} = D_B \cdot \frac{\partial^2 [CH_4]_b}{\partial x^2} - \frac{1}{Y_{X/S}} \cdot \mu_{max} \cdot \frac{[CH_4]}{K_S + \frac{[CH_4]}{H}} \cdot X \quad (7)$$

Where  $v_z$  is the gas velocity in  $m \cdot h^{-1}$ ;  $z$  is the height position from the inlet in  $m$ ;  $a$  is the specific surface area in  $m^{-1}$ ;  $\varepsilon$  is the porosity;  $k_g$  is the mass transfer coefficient in  $m \cdot h^{-1}$ ;  $H$  is the adimensional partition coefficient;  $[CH_4]_b$  is the concentration in the biofilm in  $g \cdot m^{-3}$ ;  $D_B$  is the diffusion coefficient for  $CH_4$  in the biofilm in  $m \cdot h^{-1}$ ;  $Y_{X/S}$  is the yield coefficient biomass/methane;  $\mu_{max}$  is the maximum specific growth rate in  $h^{-1}$ ;  $K_S$  is the half saturation constant in  $g \cdot m^{-3}$ ; and  $X$  is the biomass concentration in  $g \cdot m^{-3}$ .

With the following initial and boundary conditions:

$$\text{At } t = 0 \quad [CH_4] = 0 \text{ and } [CH_4]_b = 0;$$

$$z = 0 \quad [CH_4] = [CH_4]_{in}$$

$$x = 0 \quad [CH_4]_b = \frac{[CH_4]}{H}$$

$$x = \delta \quad \frac{\partial [CH_4]_b}{\partial x} = 0$$

The resulting set of ordinary differential equations was solved using MATLAB. A variable order method was used for solving stiff differential equations based on the numerical differentiation formulas (NDFs). The parameter estimation was performed using a MATLAB algorithm based on a multidimensional unconstrained nonlinear minimization (Nelder–Mead) algorithm.

#### *Biofilter model parameters estimation*

The measuring of  $CH_4$  concentration in the gaseous phase of flasks containing an active culture of methanotrophs were used to characterize separately the kinetic of  $CH_4$  bio-oxidation by methanotrophs type I and II for initial concentrations between 1.0 and 6.8  $g \cdot m^{-3}$  of  $CH_4$ . Maximum specific growth rate ( $\mu_{max}$ ) and half saturation constant ( $K_S$ ) were determined by using a dynamic model of the batch culture of the microorganisms using methane as a sole source of carbon and energy. In this model the specific growth rate ( $\mu$ ) is replaced by Monod expression (equations 8

and 9). A non-linearization process minimizing the norm of the differences between experimental CH<sub>4</sub> concentration and the model predictions was used for determining the parameters.

$$\frac{d[CH_4]}{dt} = -\frac{1}{Y_{X/S}} \cdot \mu_{max} \cdot \frac{[CH_4]}{K_S + \frac{[CH_4]}{H}} \cdot X \quad (8)$$

$$\frac{dX}{dt} = \frac{\mu_{max}}{H} \cdot \frac{[CH_4]}{K_S + \frac{[CH_4]}{H}} \cdot X \quad (9)$$

## RESULTS AND DISCUSSION

### *Elimination capacity*

Figure 2 shows the CH<sub>4</sub> elimination capacity (EC) of the BTFs operated both in parallel at the same CH<sub>4</sub> inlet load. The maximum CH<sub>4</sub> elimination capacity (EC<sub>max</sub>) reached was in average 6.2 gCH<sub>4</sub>·m<sup>-3</sup>·h<sup>-1</sup> at an inlet load of 23.2 gCH<sub>4</sub>·m<sup>-3</sup>·h<sup>-1</sup> given by an inlet CH<sub>4</sub> concentration of 3.9% (v/v). Compared with other studies using similar reactor volumes (Table 1) the EC<sub>max</sub> was low, probably due to the low specific area of the polyethylene rings used as packing material for biofilm formation in the BTFs. However, the maximum specific elimination capacity (EC<sub>sp</sub>) was 0.019 gCH<sub>4</sub>·m<sup>-2</sup>·h<sup>-1</sup> being greater than the values reported by Nikiema et al. (2009a) at the same inlet load of CH<sub>4</sub> using packing materials with similar and higher specific area, indicating that the high biological CH<sub>4</sub> oxidation activity observed in this work could be related to the use of massive specific methanotrophic inoculum. Likewise, Rocha-Ríos et al. (2009) reported a EC<sub>sp</sub> of 0.037 gCH<sub>4</sub>·m<sup>-2</sup>·h<sup>-1</sup> in a BTF using polyurethane foam as support with specific area of 600 m<sup>-1</sup> and inoculated with a methanotrophic consortium. Figure 3 shows photographs taken with scanning electron microscopy (SEM, Jeol/Jem 1200 EX II, camera Gatan ES500W Model 782, USA) of the biofilm formed on the surface of the rings used as support in the lower section of the BTFs. It is possible to observe that the methanotrophic bacteria were properly immobilized on packing material forming a robust biofilm with a similar degree of colonization in both BTFs.

**Fig. 2** Elimination capacity (EC) of CH<sub>4</sub> in BTF1 (○) and BTF2 (●) as function of the inlet load of CH<sub>4</sub> (L).



**Fig. 3** SEM pictures (5000x) of the biofilm formed in the external side of rings extracted from the lower section of BTF1 (a) and BTF2 (b).

Figure 4 shows that the average production of CO<sub>2</sub> and the consumption of O<sub>2</sub> in BTFs were almost equivalent to the stoichiometric amount of CH<sub>4</sub> oxidized. The proposed stoichiometry for the complete oxidation of CH<sub>4</sub> indicates that 1 mol of CH<sub>4</sub> requires 2 mol of oxygen (O<sub>2</sub>) to generate 1 mol of CO<sub>2</sub> (Havran et al. 2011). The difference between the production of CO<sub>2</sub> in the BTFs and the theoretical value obtained for the complete oxidation of CH<sub>4</sub> can be explained by its use as carbon source for microbial growth. The low difference indicates that a high degree of mineralization was achieved in BTFs at inlet loads of CH<sub>4</sub> lower than 10 g<sub>CH<sub>4</sub></sub>·m<sup>-3</sup>·h<sup>-1</sup>.

**Fig. 4** O<sub>2</sub> consumed (◆) and CO<sub>2</sub> produced (▲) as a function of CH<sub>4</sub> elimination capacity.

A carbon mass balance was made considering the carbon from CH<sub>4</sub> ( $C_{CH_4}$ ) and CO<sub>2</sub> ( $C_{CO_2}$ ) in gC·m<sup>-3</sup>·h<sup>-1</sup> at the inlet and the outlet of the BTFs to estimate the amount of carbon accumulated ( $C_{ac}$ ) as biomass into the BTFs, Equations 8, 9 and 10. Figure 5 shows the  $C_{ac}$  (in gC·m<sup>-3</sup>·h<sup>-1</sup>) as function of the CH<sub>4</sub> load. An estimation of the reduction of the global warming potential (GWP) in the gaseous stream was made considering that the GWP of CH<sub>4</sub> is 23 related to the CO<sub>2</sub> (Equation 11).

$$C_{in} = (C_{CH_4})_{in} + (C_{CO_2})_{in} \quad (8)$$

$$C_{out} = (C_{CH_4})_{out} + (C_{CO_2})_{out} \quad (9)$$

$$C_{ac} = (C_{in} - C_{out}) \quad (10)$$

$$\text{Red GWP} = (GWP_{CH_4}) \cdot EC_{CH_4} - pCO_2 \quad (11)$$

For inlet loads of CH<sub>4</sub> below 10 g<sub>CH<sub>4</sub></sub>m<sup>-3</sup>h<sup>-1</sup> the amount of accumulated carbon in the BTFs ( $C_{ac}$ ) was around 0.1gCm<sup>-3</sup>h<sup>-1</sup> but when the load of CH<sub>4</sub> was increased over 10 g<sub>CH<sub>4</sub></sub>m<sup>-3</sup>h<sup>-1</sup> it was observed a proportional increase of accumulated carbon in the BTFs. This could be due to the higher availability of CH<sub>4</sub> stimulate the growth of

biomass. In addition methanotrophic bacteria are known for their ability to produce exopolysaccharides (EPS) at high methane flux rates (Huq et al. 1978). According to Equation 11 the maximum reduction of CO<sub>2</sub> equivalents (Red GWP) was 98.5 gCO<sub>2</sub>m<sup>-3</sup>h<sup>-1</sup> at load of 23.2 gCH<sub>4</sub>·m<sup>-3</sup>·h<sup>-1</sup>.

**Fig. 5** Accumulated carbon (C<sub>ac</sub>) in the BTF1 (□) and BTF2 (■)

Figure 6 shows the concentrations of CH<sub>4</sub> along the BTF1 at different empty bed residence times (EBRT), and the effect of different inlet concentration of CH<sub>4</sub>. The higher variation in the CH<sub>4</sub> concentration along the column was observed in the first section of the BTF1. This effect was accentuated at inlet CH<sub>4</sub> concentrations over 1.0% v/v. The higher variation on CH<sub>4</sub> concentration along the BTF1 was observed at the lower gas velocity tested (1.1 h of EBRT). A similar behavior was observed in the BTF2. This behavior is consistent with the decrease of CH<sub>4</sub> and O<sub>2</sub> concentration from the gas phase to the biofilm as the gas moves through the column of the BTFs and CH<sub>4</sub> is oxidized, decreasing CH<sub>4</sub> and O<sub>2</sub> concentration. Due the high free volume given by polyethylene rings, clogging episodes or even increases of pressure drop after one year of continuous operation were not detected.

**Fig. 6** Profiles of CH<sub>4</sub> concentration along the height (H) of the BTF1 at different inlet CH<sub>4</sub> concentration and different empty bed residence time: ♦ 67, ▲ 50, ■ 40, x 30 minutes.

#### *Operation repeatability*

Statistical analysis (Student's t test) of the data considering as hypothesis that the BTFs have identical EC and pCO<sub>2</sub> (difference between the means is equal to zero) and 80 degrees of freedom indicated that significant differences between the BTFs were established since the calculated *t* value was higher than the specific tabulated *T<sub>critical</sub>* value for both indicators. However, if is used a more flexible comparison criteria (like a reasonable difference between the means), the values measured for EC and pCO<sub>2</sub> are quite similar between the BTFs to consider that the two systems of bio-oxidation of CH<sub>4</sub> have similar behavior. Moreover when the statistical analysis was made by periods of operation, the results indicated an identical behavior (*t* < *T<sub>critical</sub>*) to the first 45 days of operation, after which their performance began to distancing probably due to the sum of small differences in the operation like channeling of the gas flow, temperature or pH. In Table 2 are summarized the results for statistical analyses.

**Table 2** Results for statistical analyses for BTFs

*Estimation of the kinetic parameters of the model*

Figures 7 show the experimental data and the model simulation for the bio-oxidation of CH<sub>4</sub> by *Methylobacterium album* and *Methylocystis* sp. respectively, at different initial concentration of CH<sub>4</sub>.

**Fig. 7** Experimental data (dots) and model estimation (lines) for the bio-oxidation of CH<sub>4</sub> by (a) *Methylobacterium album* and (b) *Methylocystis* sp. at different initial concentration of CH<sub>4</sub>.

The estimated kinetic parameters are presented in Table 3 for *Methylobacterium album* and *Methylocystis* sp., respectively.

**Table 3** Kinetics parameters for *Methylobacterium album* and *Methylocystis* sp.

*Simulation of the bio-oxidation of CH<sub>4</sub> in BTFs*

Figure 8 shows the effect of flow rate (i.e. contact time) on the RE measured experimentally and predicted for the model developed. In this figure the RE is normalized with respect to RE achieved at the most favorable condition of contact time (100 min) to evaluate the influence of the flow rate on the loss of efficiency at 3 different concentrations (0.5, 1 and 2% of CH<sub>4</sub>). RE at contact times of 100 min were respectively 28, 39 and 70% in ascending order of concentration in the case of BTF1 and 31, 40 and 78% in the case of BTF2. Data analysis shows that, independently of methane inlet concentration, the effect of contact time is equivalent in both BTFs: from 0.2 to 0.6 l min<sup>-1</sup> the loss of efficiency is maximum (50%), considerably inferior (25%) between 0.6 and 1.0 l min<sup>-1</sup>, and being practically constant from then on (5%). Thus, the critical effect of mass limitation due the low solubility of CH<sub>4</sub> is highly sensitive between 30 and 100 min.

The degree of agreement between experimental RE and model predictions is significantly high according to Figure 8, demonstrating that the model proposed based on mass balances, transport phenomena and biological characterization

can predict the observed behavior by means of a low set of parameters (Table 4). Mainly, it is noteworthy that the model proposed is able to describe satisfactorily 36 different situations where flow rate (from 0.2 to 2.0 l min<sup>-1</sup>); inlet concentration (0.5, 1.0 and 2.0%) and bio-system (BTF1 and BTF2) were varied in each case. In this table is also possible to compare the parameters values with previous works reported in the field of methane biodegradation. Although in the present work the range of concentrations is wider than those previously studied, a unique set of parameters was able to describe all scenarios monitored, not differing significantly than those reported for other studies.

**Table 4** Physical and kinetics parameters values for the bio-oxidation of CH<sub>4</sub>.

**Fig. 8** Removal efficiency (RE) of CH<sub>4</sub> in the BTFs as function of the gas flow rate at inlet CH<sub>4</sub> concentrations of 0.5% v/v (x), 1.0% v/v (o) and 2.0% v/v (\*) for model predictions (continuous lines) and experimental monitoring (discontinuous signs) in the case of BTF1 (a) and BTF2 (b).

## CONCLUSIONS

The high degree of feasibility and reproducibility of CH<sub>4</sub> bio-oxidation has been demonstrated in a long-term operation of 1 year for two identical biotrickling filters inoculated with methanotrophic bacteria type I and II, *Methylobacterium album* and *Methylocystis* sp. The maximum CH<sub>4</sub> elimination capacity reached was in average 6.2 gCH<sub>4</sub>·m<sup>-3</sup>·h<sup>-1</sup>. The use of specific inoculum has shown a faster start-up and higher EC per unit area (0.019 gCH<sub>4</sub>·m<sup>-2</sup>·h<sup>-1</sup>) in comparison to most of previous studies. Plant monitoring let to develop a more comprehensive mathematical model to describe CH<sub>4</sub> biofiltration by means of kinetic and mass transport characterization that predicts the wide range of conditions tested with high agreement with the experimental observations.

## ACKNOWLEDGEMENTS

This research was financed by the National Fund for Science and Technology (FONDECYT), Project 1110919, and the Pontificia Universidad Católica de Valparaíso. We thank Biofilm and Environmental Microbiology Laboratory of the Universidad de Concepción who helped us to get SEM pictures.

## REFERENCES

- Avalos Ramírez A, García Aguilar B, Jones P, Heitz M (2012) Improvement of methane biofiltration by the addition of non-ionic surfactants to biofilters packed with inert materials. *Process Biochemistry* 47: 76-82
- Boiesen A, Arvin E, Broholm K (1993) Effect of mineral nutrients on the kinetics of methane utilization by methanotrophs. *Biodegradation* 4(3): 163–170
- Delhoménie MC, Nikiema J, Bibeau L, Heitz M (2008) A new method to determine the microbial kinetic parameters in biological air filters. *Chemical Engineering Science* 63(16): 4126–4134
- Dorado AD, Baeza JA, Lafuente J, Gabriel D, Gamisans X (2012) Biomass accumulation in a biofilter treating toluene at high loads – Part 2: Model development, calibration and validation. *Chemical Engineering Journal* 209: 670–676
- Estrada JM, Lebrero R, Quijano G, Pérez R, Figueroa-González I, García-Encina PA, Muñoz R (2014) Methane abatement in a gas-recycling biotrickling filter: Evaluating innovative operational strategies to overcome mass transfer limitations. *Chemical Engineering Journal* 253: 385–393
- Girard M, Avalos Ramirez A, Buelna G, Heitz M (2011) Biofiltration of methane at low concentrations representative of the piggery industry—influence of the methane and nitrogen concentrations. *Chem Eng J* 168:151–158
- Hanson R, Hanson T (1996) Methanotrophic Bacteria. *Microbiological Reviews* 60 (2): 439-471.
- Havran V, Dudukovic M, Lo C (2011) Conversion of Methane and Carbon Dioxide to Higher Value Products. *Ind. Eng. Chem. Res.* 50:7089-7100
- Huq MN, Ralph BJ, Rickard PAD (1978) The extracellular polysaccharide of a methylotrophic culture. *Australian Journal of Biological Science* 31: 311–316
- Jimenez L, Arriega S, Aizpuru A (2016) Assessing biofiltration repeatability: statistical comparison of two identical toluene removal systems. *Environmental Technology* 37(6). doi: 10.1080/09593330.2015.1077894
- López JC, Quijano G, Souza TS, Estrada JM, Lebrero R, Muñoz R (2013) Biotechnologies for greenhouse gases (CH<sub>4</sub>, N<sub>2</sub>O and CO<sub>2</sub>) abatement: state of the art and challenges. *Appl Microbiol Biotechnol* 97: 2277-2303
- Ménard C, Ramirez AA Heitz M (2014) Kinetics of simultaneous methane and toluene biofiltration in an inert packed bed. *Journal of Chemical Technology & Biotechnology* 89(4): 597–602
- Mrazovac SM, Milan PR, Vojinovic-Miloradov MB, Tomic BS (2012) Dynamic model of methane–water diffusion. *Applied Mathematical Modelling* 36(9): 3985–3991
- Nikiema J, Girard M, Brzezinski R, Heitz M (2009a) Biofiltration of methane using an inorganic filter bed: Influence of inlet load and nitrogen concentration. *Canadian Journal of Civil Engineering* 36(12): 1903-1910
- Nikiema J, Payre G, Heitz M (2009b). A mathematical steady state model for methane bioelimination in a closed biofilter. *Chemical Engineering Journal* 150(2-3):418–425
- Nikiema J, Heitz M (2010) The use of inorganic packing materials during methane biofiltration. *International Journal of Chemical Engineering*, Volume 2010. Article ID 573149, 8 pages.
- Ordaz A, López JC, Figueroa-González I, Muñoz R, Quijano G (2014) Assessment of methane biodegradation kinetics in two-phase partitioning bioreactors by pulse respirometry. *Water Research* 67: 46–54

Perdikis K, Mehrotra AK, Hettiaratchi JP (2008) Study of thin biocovers (TBC) for oxidizing uncaptured methane emissions in bioreactor landfills. *Waste Manag* 28:1364-1274

Pfluger A, Wu WM, Pieja AJ, Wan J, Rostkowski K, Criddle C (2011) Selection of Type I and Type II methanotrophic proteobacteria in a fluidized bed reactor under non-sterile conditions. *Bioresource Technology* 102: 9919-9926

Plessis C (2003) Empirical model for methane oxidation using a composted pine bark biofilter. *Fuel* 82(11): 1359-1365

Rocha Ríos J, Bordel S, Hernández S, Revah S (2009) Methane degradation in two-phase partition bioreactors. *Chemical Engineering Journal* 152: 289-292

Rodrigues A, Valdman B, Salgado AM (2009) Analysis of methane biodegradation by *Methylosinus trichosporium* OB3b. *Brazilian Journal of Microbiology* 40(2): 301-307

Sadasivam BY, Reddy KR (2014) Landfill methane oxidation in soil and bio-based cover systems: a review. *Rev Environ Sci Biotechnol* 13:79-107

Scheutz C, Bogner J, De Visscher A, Gebert J, Hilger H, Huber-Humer M, Kjeldsen P, Spokas K (2009) Microbial methane oxidation processes and technologies for mitigation of landfill gas emissions. *Waste Manag Res* 27: 409-455. doi: 10.1177/0734242X09339325

Sohngen NL (1906) Über bakterien welche methan ab kohlenstoffnahrung und energiequelle gebrauchen (On bacteria which use methane as a carbon and energy source). *Z. Bakteriologie. Parasitenkunde. (Infektionster)* 15: 513-517

Veillette M, Viens P, Avalos Ramirez A, Brzezinski R, Heitz M (2011) Effect of ammonium concentration on microbial population and performance of a biofilter treating air polluted with methane. *Chemical Engineering Journal* 171:1114-1123

Veillette M, Girard M, Viens P, Brzezinski R, Heitz M (2012) Function and limits of biofilters for the removal of methane in exhaust gases from the pig industry. *Appl Microbiol Biotechnol*. 94 (3): 601-6011

## Table captions

**Table 1** Bio-oxidation of CH<sub>4</sub> in different reactors with different inoculum and packing materials

**Table 2** Statistical analysis of experimental results in Biotrickling filters

**Table 3** Kinetics parameters for the bio-oxidation of CH<sub>4</sub> by *Methylobacterium album* and *Methylocystis* sp.

**Table 4** Physical and kinetics parameters values for the bio-oxidation of CH<sub>4</sub>.

## Figures captions

**Fig. 1** Diagram of experimental system for the oxidation of CH<sub>4</sub> in biotrickling filters.

**Fig. 2** Elimination capacity (EC) of CH<sub>4</sub> in BTF1 (○) and BTF2 (●) as function of the inlet load of CH<sub>4</sub> (L).

**Fig. 3** SEM pictures (5000x) of the biofilm formed in the external side of rings extracted from the lower section of BTF1 (a) and BTF2 (b).

**Fig. 4** Moles of O<sub>2</sub> consumed (□) and CO<sub>2</sub> produced (▲) as function of CH<sub>4</sub> elimination capacity.

**Fig. 5** Accumulated carbon (C<sub>ac</sub>) in the BTF1 (□) and BTF2 (■)

**Fig. 6** Profiles of CH<sub>4</sub> concentration along the height (H) of the BTF1 at different inlet CH<sub>4</sub> concentration and different empty bed residence time: ◆ 67, ▲ 50, ■ 40, x 30 minutes.

**Fig. 7** Experimental data (dots) and model estimation (lines) for the bio-oxidation of CH<sub>4</sub> by (a) *Methylomicrobium album* and (b) *Methylocystis* sp. at different initial concentration of CH<sub>4</sub>.

**Fig. 8** Removal efficiency (RE) of CH<sub>4</sub> in the BTFs as function of the gas flow rate at inlet CH<sub>4</sub> concentrations of 0.5% v/v (x), 1.0% v/v (○) and 2.0% v/v (\*) for model predictions (continuous lines) and experimental monitoring (discontinuous signs) in the case of BTF1 (a) and BTF2 (b).

Figure 1 was created using Microsoft Office.

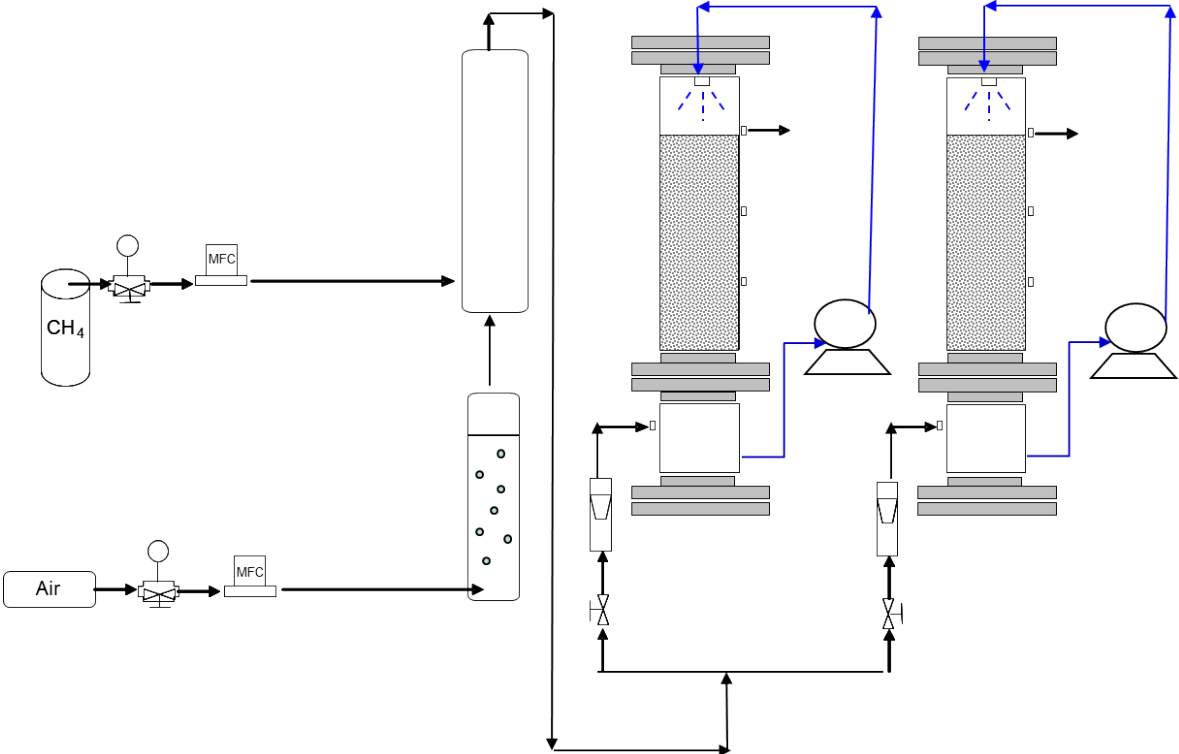




Figure 2 was created using Microsoft Office.

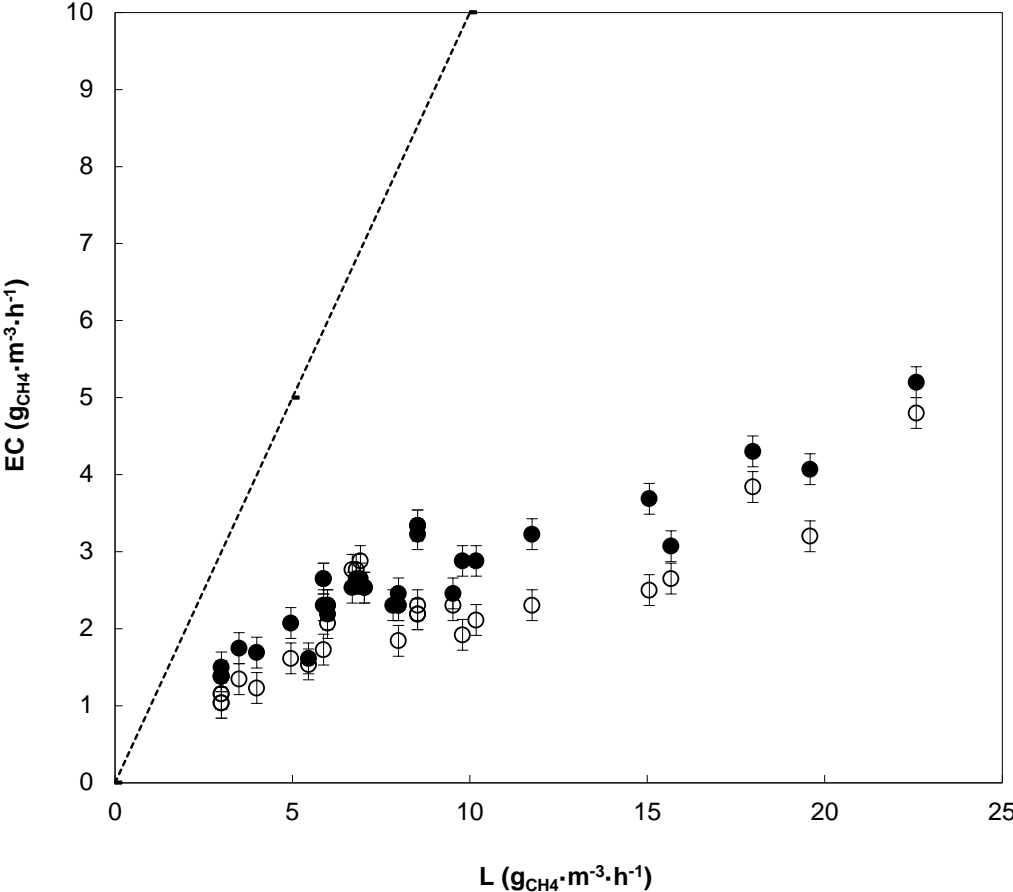


Figure 3. SEM pictures were taken using DigitalMicrograph (DM).

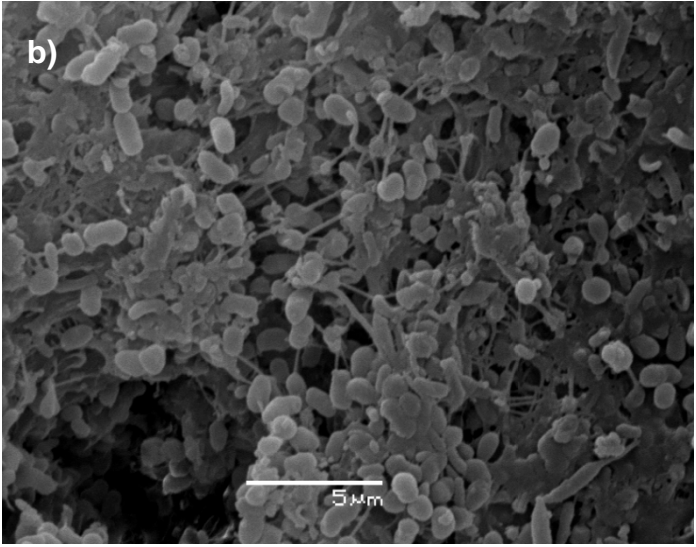
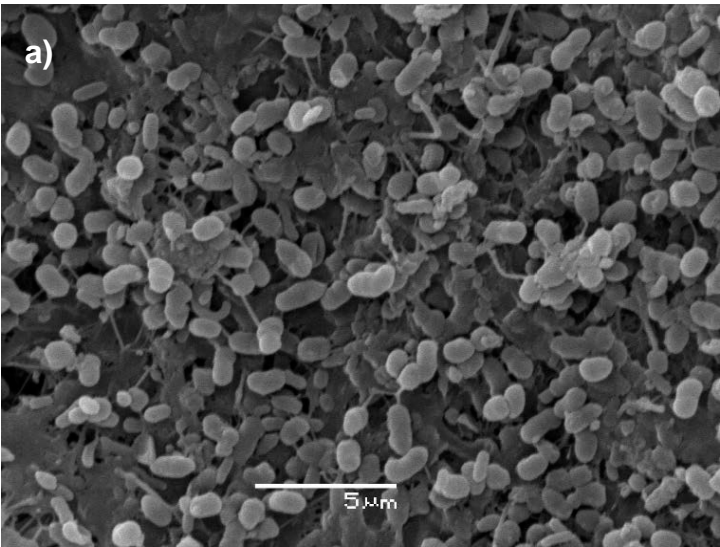


Figure 4 was created using Microsoft Office.

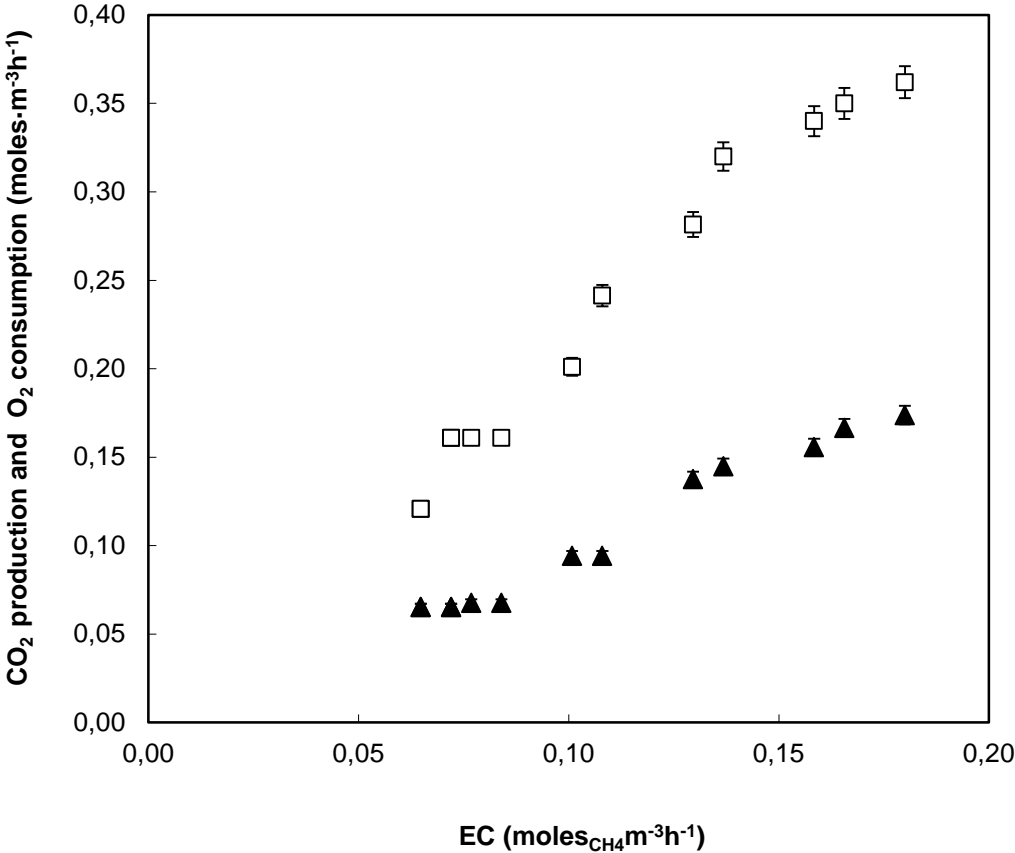


Figure 5 was created using Microsoft Office.

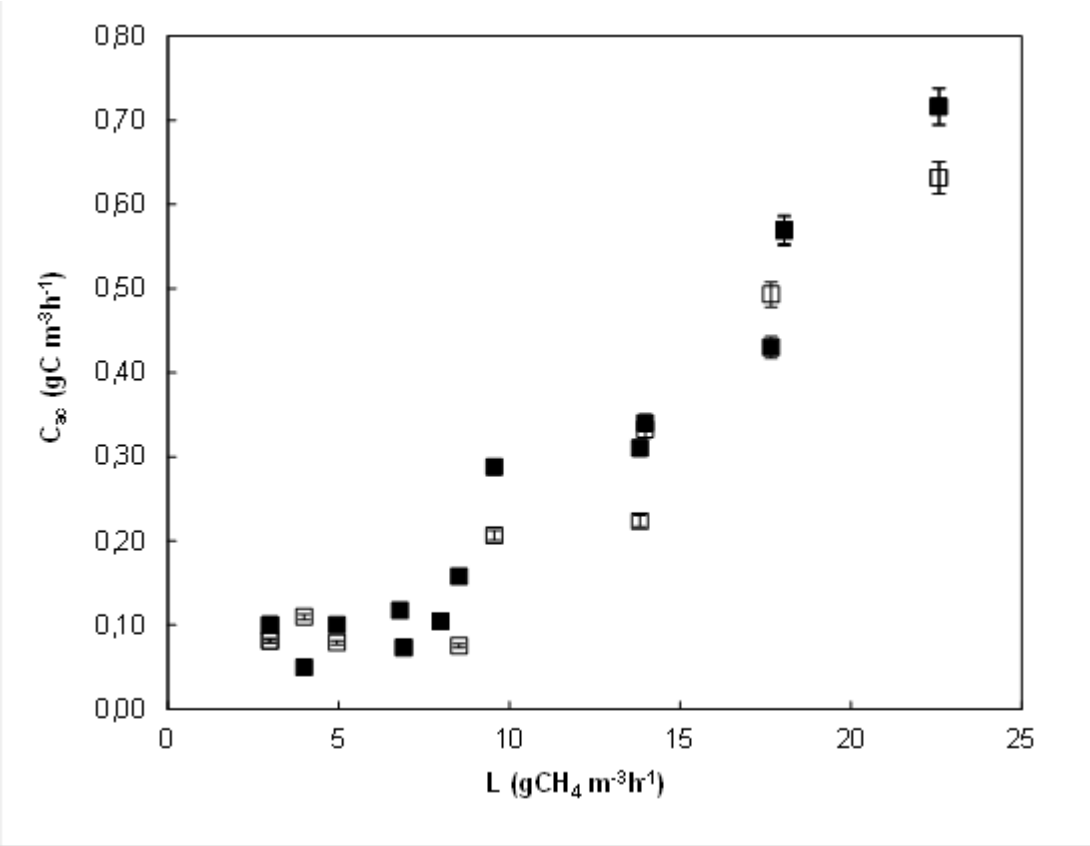


Figure 6 was created with Microsoft Office.


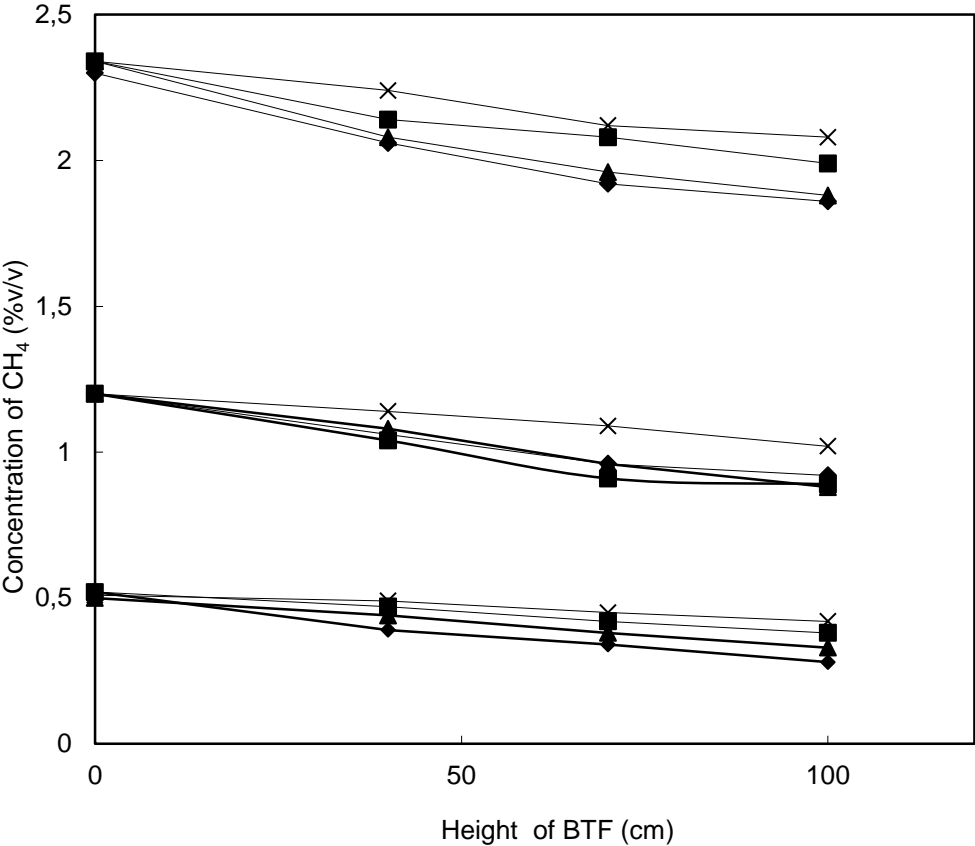


Figure 7 was created with MatLab.

a)

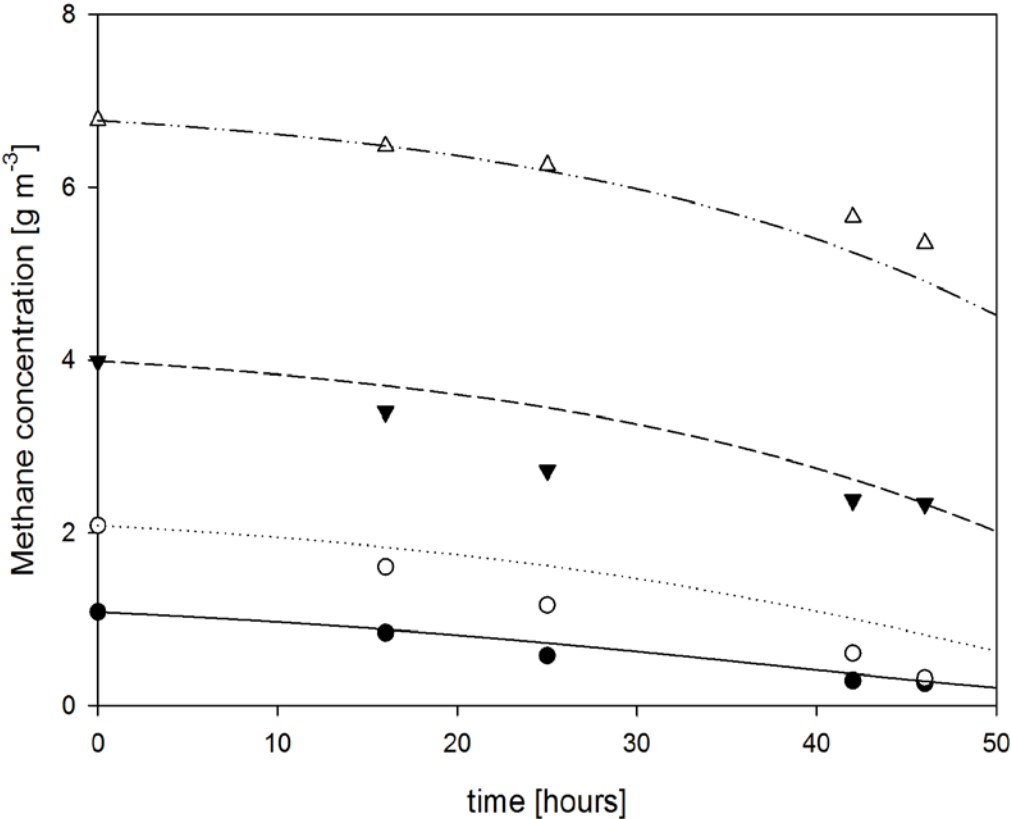

b)


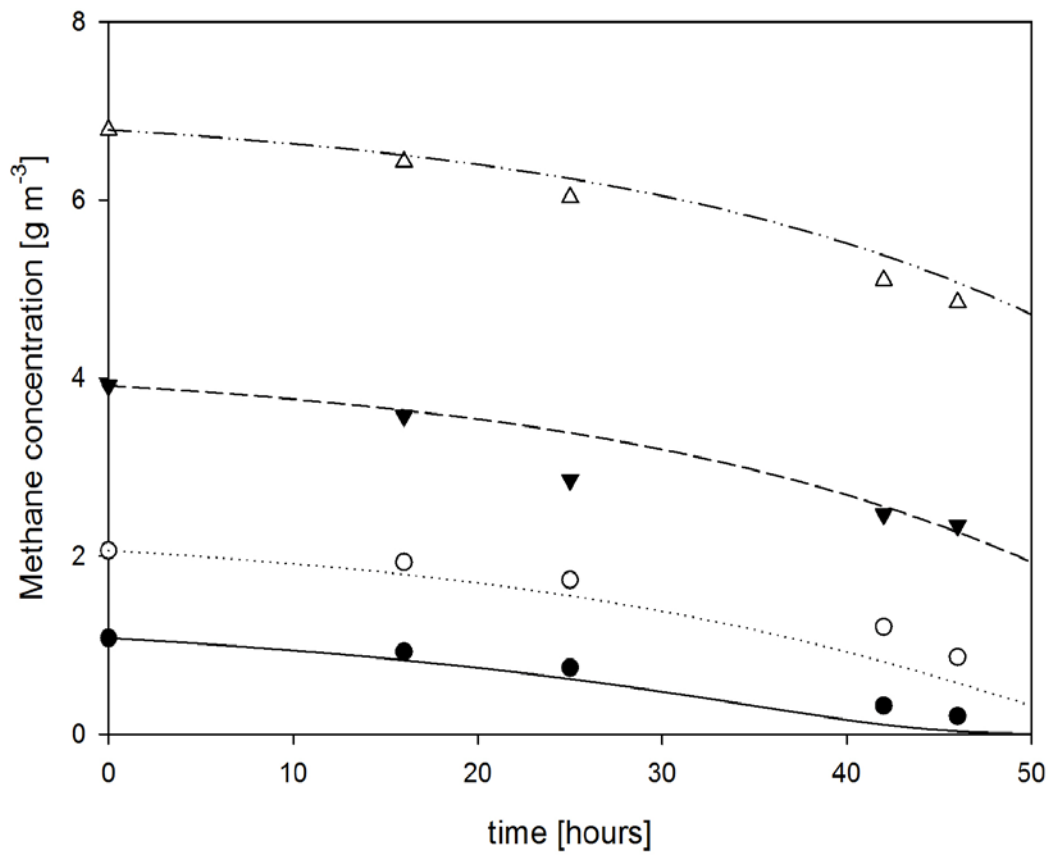



Figure 8 was created with MatLab.

a)



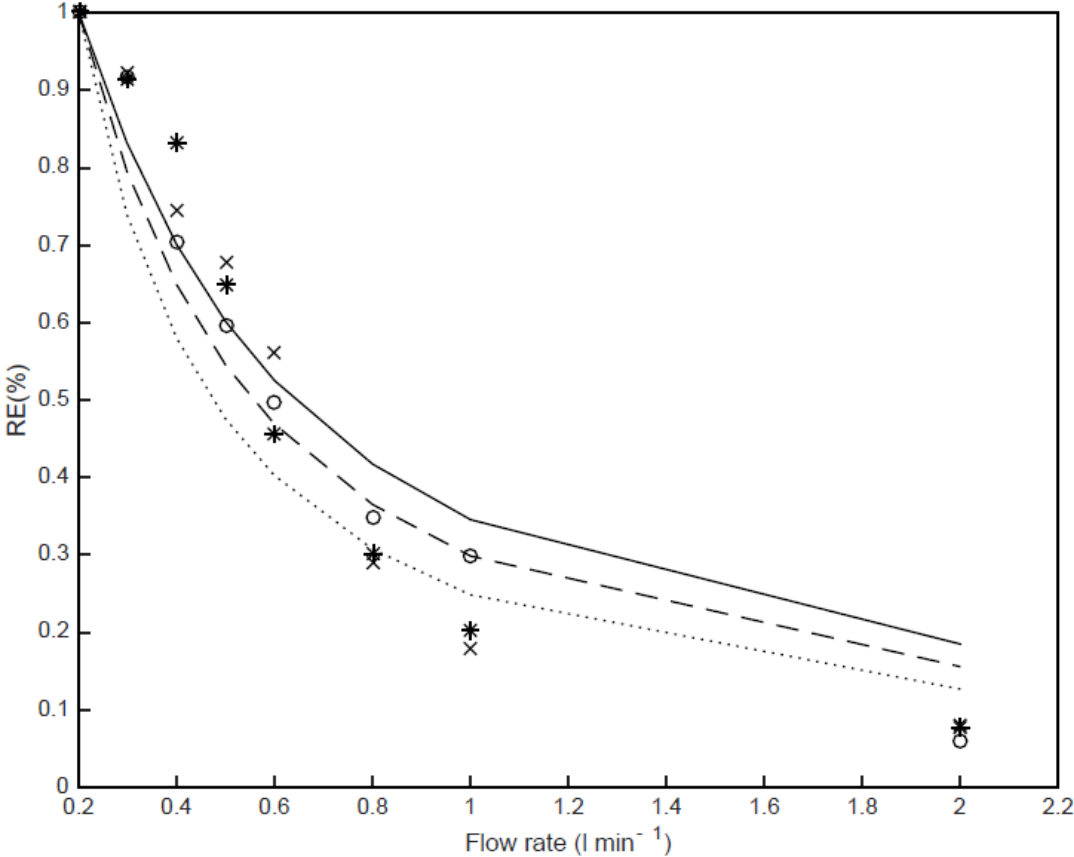

b)

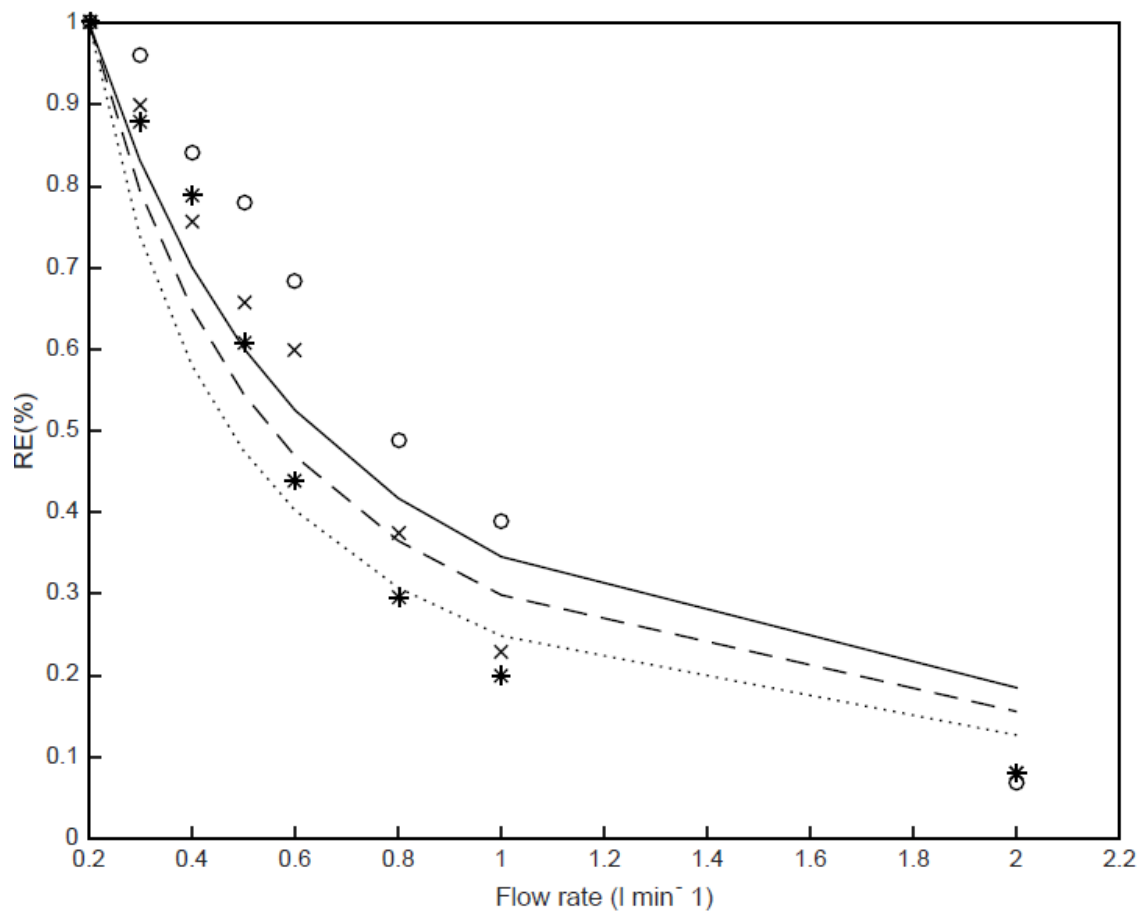

**Table 1** Bio-oxidation of CH<sub>4</sub> in different reactors with different inoculum and packing materials

Reactor	Inoculum	Packing	L <sub>CH<sub>4</sub></sub> (g·m <sup>-3</sup> ·h <sup>-1</sup> )	EC <sub>max</sub> (g·m <sup>-3</sup> ·h <sup>-1</sup> )	Void fraction	Specific area (m <sup>-1</sup> )	EC <sub>sp</sub> (g·m <sup>-2</sup> ·h <sup>-1</sup> )	Reference
Biotrickling filter (Multiphase)	Methanotrophic consortium isolated from WWTP	Polyurethane foam	157	22	0.97	600	0.037	Rocha-Ríos et al. 2009
		With 10% (v/v) of silicon oil as nonaqueous phase	131	51	0.97	600	0.085	
Biofilter	Leachate from methanotrophic biofilter	Expanded clay	23	5.0	0.55	470	0.010	Nikiema et al. 2010
		Rock-5mm		10.5	0.40	1250	0.008	
		Rock-2mm		17.3	0.37	1360	0.013	
Biofilter	Not specified	Gravel ( 4-8 mm)	25	14.5	0.40	8500	0.002	Girard et al. 2011
Biofilter	Indigenous microorganisms from the packing material	Compost	29	27.5	Not specified	Not specified	Not specified	Haubrichs and Widmann 2006
Biocover	Not specified	Manure compost/saw dust (9:1)	9	5	0.41	Not specified	Not specified	Perdikea et al. 2008
Biotrickling filter	Lixivate from biofilter treating CH <sub>4</sub>	Clay spheres	62	10	0.40	310	0.032	Avalos et al. 2012
		Polypropylene spheres		8	0.90	280	0.029	
		Stones		21	0.44	470	0.047	
Biotrickling filter with recirculation of gas	Methanotrophic consortium isolated from WWTP	Polyurethane foam in cubes of 1cm <sup>3</sup>	230	30	Not specified	1000	0.030	Estrada et al. 2014
Biotrickling filter	Methanotrophs type I ( <i>Methylomicrobium album</i> ) and type II ( <i>Methylocystis</i> sp.)	Polyethylene rings (1cm id, 1.2 cm od, 1 cm height)	23	6.2	0.77	316	0.019	This work

**Table 2** Statistical analysis of experimental results in Biotrickling filters

Parameter	EC	pCO <sub>2</sub>	EC	pCO <sub>2</sub>
(Units)	(gCH <sub>4</sub> m <sup>-3</sup> h <sup>-1</sup> )	(gCO <sub>2</sub> m <sup>-3</sup> h <sup>-1</sup> )	(gCH <sub>4</sub> m <sup>-3</sup> h <sup>-1</sup> )	(gCO <sub>2</sub> m <sup>-3</sup> h <sup>-1</sup> )
Degrees of freedom		80		45
T <sub>critical</sub>	1.97	2.14	1.74	1.86
Student <i>t</i> value	7.03	7.51	2.05	2.07

**Table 3** Kinetic parameters for the bio-oxidation of CH<sub>4</sub> by *Methylomicrobium album* and *Methylocystis sp.*

Parameter	Symbol	<i>Methylomicrobium a.</i>	<i>Methylocystis sp.</i>	(Units)	Reference
Maximum specific growth rate	μ <sub>max</sub>	1.16	1.10	(d <sup>-1</sup> )	Fitted
Semi-saturation constant	K <sub>S</sub>	0.29	0.43	(g m <sup>-3</sup> )	Fitted
Biomass-substrate yield	Y <sub>X/S</sub>	0.28	0.28	(g g <sup>-1</sup> )	Experimental
Partition coefficient	H	29.4	29.4	-	Literature

**Table 4** Physical and kinetics parameters values for the bio-oxidation of CH<sub>4</sub>.

Parameter	[CH <sub>4</sub> ]	μ <sub>max</sub>	K <sub>S</sub>	Y <sub>X/S</sub>	k <sub>g</sub>	D <sub>b</sub>
(Units)	(g m <sup>-3</sup> )	(d <sup>-1</sup> )	(g m <sup>-3</sup> )	(g g <sup>-1</sup> )	(m h <sup>-1</sup> )	(m h <sup>-1</sup> )
Delhoménie et al. 2008	<10.4	0.43	5.37	0.36-0.8	-	-
Delhoménie et al. 2008	10.4-19.3	1.09	7.59	0.36-0.8	-	-
Menard et al. 2004	1.3-5.9	0.79	6.13	-	-	-
Santos-Rodrigues et al. 2009	0.03	0.77	-	0.68	-	-
Boiesen et al. 1993	-	0.43-1.30	0.05-0.19	0.27-0.89	-	-
Ordaz et al. 2014	1-20	2.23	0.11	0.69	-	-
This work	35-226	1.10-1.16	0.29-0.43	0.14-0.40	0.9	1.87·10 <sup>-5</sup>