

# Perception & evaluation of audio quality in music production

Wilson, AD and Fazenda, BM

Title	Perception & evaluation of audio quality in music production				
Authors	Wilson, AD and Fazenda, BM				
Publication title	Proceedings of the 16th International Conference on Digital Audio Effects (DAFx-13)				
Publisher	Digital Audio Effects (DAFx)				
Туре	Conference or Workshop Item				
USIR URL	This version is available at: http://usir.salford.ac.uk/id/eprint/30255/				
Published Date	2013				

USIR is a digital collection of the research output of the University of Salford. Where copyright permits, full text material held in the repository is made freely available online and can be read, downloaded and copied for non-commercial private study or research purposes. Please check the manuscript for any further copyright restrictions.

For more information, including our policy and submission procedure, please contact the Repository Team at: <u>library-research@salford.ac.uk</u>.

## PERCEPTION & EVALUATION OF AUDIO QUALITY IN MUSIC PRODUCTION

Alex Wilson and Bruno Fazenda

Acoustics Research Centre School of Computing, Science and Engineering University of Salford Salford, UK alex.wilson199@gmail.com

## ABSTRACT

A dataset of audio clips was prepared and audio quality assessed by subjective testing. Encoded as digital signals, a large amount of feature-extraction was possible. A new objective metric is proposed, describing the Gaussian nature of a signal's amplitude distribution. Correlations between objective measurements of the music signals and the subjective perception of their quality were found. Existing metrics were adjusted to match quality perception. A number of timbral, spatial, rhythmic and amplitude measures, in addition to predictions of emotional response, were found to be related to the perception of quality. The emotional features were found to have most importance, indicating a connection between quality and a unified set of subjective and objective parameters.

## 1. INTRODUCTION

A single, consistent definition for quality has not yet been offered, however, for certain restricted circumstances, 'quality' has an understood meaning when applied to audio. Measurement techniques exist for the assessment of audio quality, such as [1] and [2], however such standards typically apply to the measurement of quality with reference to a golden sample; what is in fact being ascertained is the reduction in perceived quality due to destructive processes, such as the effects of compression codecs, in which the audio being evaluated is a compressed version of the reference and the deterioration in quality is measured [3].

Such descriptions would not strictly apply to the evaluation of quality in musical recordings. This study is concerned with the audio quality of 'produced' commercial music where there is no fixed reference and quality is evaluated by comparison with all other samples heard. This judgement is based on both subjective and objective considerations.

In systems where objective measurement is possible, there is still disagreement regarding which parameters contribute to quality and the manner of their contribution. The work of Toole indicates that, with loudspeakers, even a measure as trivial as the on-axis amplitude response does not have a simple relationship to quality [4]. Toole suggests evidence of many secondary factors influencing listener preference, even based on geography. For example, [5] describes a specific studio monitor as having a 'European' tone, citing a consistent, subjective evaluation leading to this description.

With music being described by Gurney as the '*peculiar delight* which is at once perfectly distinct and perfectly indescribable'[6], this use of language is typical in audio and does present some problems. Lacking a solid definition for audio quality, each listener can apply their own criteria, making it highly subjective.

[7] describes a series of subjective parameters (including spatial impression and tonality) and suggests applicable measurement methodologies. The concept of the existence of an ideal amount of a given signal parameter to yield maximal subjective quality ratings for a given piece of music is one that will be explored.

If quality is highly subjective the aspects of the subject which are of influence can be investigated. [8] found that an expert group of music professionals was able to distinguish various recording media from one another, based on their subjective audio quality ratings of classical music recordings. While a CD and cassette displayed a distinct difference in quality, formats of higher fidelity than CD were not rated significantly higher than the CD. The expertise of the listener is therefore thought to be a factor in qualityperception, due to ability to detect technical flaws.

In summary, audio quality, as applied to music recordings, is predicted to be based on both subjective and objective measures. This paper will investigate both aspects using independent methodologies, and subsequently attempt to determine what correlations exist and how the subjective and objective evaluations can be linked, to lead towards a quality-prediction model.

#### 2. METHODOLOGY

The hypotheses under test are as follows:

- 1. There are noticeable differences in quality between samples
- 2. Listener training has an influence on perception of quality
- 3. Familiarity with a sample is related to how much it is liked
- 4. Quality is related to one or more objective signal parameters

#### 2.1. Subjective Testing

To obtain subjective measures of the audio signals a listening test was designed in which subjects listened to a series of audio clips and answered simple questions on their experience.

Basic information about the subject was gathered so that results could be analysed based on demographics. The age and sex of each subject was recorded. In addition, subjects were asked to identify themselves as either 'audio expert', 'musician' or 'none of the above'. This last category is used as a control group herein referred to as the naïve group. Subjects in this category would ideally not possess professional knowledge of acoustics or audio engineering and lack any above-average musical ability. Subjects were given a short briefing in order to ensure the questions were understood. For each audition the subject was asked the questions in Table 1, designed to investigate the hypotheses under test.

Table 1: Questions in subjective tes	: Questions in subje	ective test	
--------------------------------------	----------------------	-------------	--

Question	Answers		
How familiar are you with this			
song?	Very familiar $1 \rightarrow 5$ star scale		
Please rate this Song	$1 \rightarrow 5$ star scale		
Please rate the Sound Quality of	$1 \rightarrow 5$ star scale		
this sample			

#### 2.1.1. Audio Selection

All audio samples were 16-bit, 44.1kHz stereo PCM files. 55 samples were used, each a 20 second segment of the song centered around the second chorus (where possible) with a one second fadein and fade-out. This forecast the test duration at 20-25 minutes. Based on the guidelines described in [9], listener fatigue was considered negligible. The audio selection process was influenced by the test hypotheses. As familiarity was investigated, there needed to be a number that were unfamiliar to all and some familiar to all. To achieve this, six songs by unsigned Irish artists were used. The bulk of samples used were from 1972 to 2012, with two 1960s samples, and was predominately pop and rock styles.

#### 2.1.2. Test Delivery

The listening test was delivered using a MATLAB script, which displays text, plays audio and receives user input. Controlled tests took place in the listening room at University Of Salford. The room has been designed for subjective testing and meets the requirements of ITU-R BS. 1116-1, with a background noise level of 5.7dBA [10]. While the test ran on a laptop computer subjects were seated at a displaced monitor and keyboard, minimising distractions as well as reducing fan noise from the computer. Audio was delivered using Sennheiser HD800 headphones and the order of playback was randomised for each subject.

Unlike methods described in Section 1, this experiment contains no reference for what constitutes highest or lowest quality. In this case, what is being tested is that which the subject does naturally, listening to music. In more rigorously-controlled testing with modified stimuli, there is a risk of gathering unnatural responses to unnatural stimuli. In order to test normal listening experiences, each audition was unique and the audio had not been treated in any way, other than loudness equalisation to mimic modern broadcast standards or programs such as Spotify. Loudness levels were calculated using the model described in [11]. These predictions agreed well with *in-situ* measurements performed using a Brüel & Kjær Head And Torso Simulator (HATS) and sound level meter. For testing, samples were auditioned at an average listening level of 84dBA, measured using the HATS and sound level meter.

Additional subjects were tested in less controlled circumstances, outside of the listening room, using Sennheiser HD 25-1 II headphones. A small number of subjects were tested in both controlled and uncontrolled circumstances and displayed a high level of consistency, permitting further uncontrolled tests, most of which took place in quiet locations at NUI Maynooth and Trinity College Dublin.

## 2.2. Objective Measures

In order to characterise the audio signals the features in Table 2 were extracted from each sample. Feature-extraction was aided by the use of the MIRtoolbox [12].

Table 2: Features used in objective analysis.

Feature	Description
Crest factor	Ratio of peak amplitude to rms amplitude
	(in dB)
Width	1 - (cross-correlation between left and right
	channels of the stereo signal, at a time offset
	of zero samples)
Rolloff	Frequency at which 85% of spectral energy
	lies below[13]
Harsh energy	Fraction of total spectral energy contained
	within 2k-5kHz band
LF energy	Fraction of total spectral energy contained
	within 20-80Hz band
Tempo	Measured in beats per minute
Gauss	See Section 2.2.1
Нарру	Prediction of emotional response[14]
Anger	Prediction of emotional response[14]

Happy and Anger were chosen from a set of five classes, including Sadness, Fear and Tenderness. The latter three were rejected due to weak correlation with quality ratings obtained.

Rolloff describes the extent of the high frequencies and the overall bandwidth, especially when combined with LF energy, representing the band reproduced by a typical studio subwoofer, although this could extend to 100 or 120Hz in some units. Various ranges were compared to quality ratings and the 20-80Hz range was found to be most highly correlated.

Harsh energy was based on author experience and the accounts of mix engineers, where this range was said to imbue a 'cheap', 'harsh', 'luxurious' or 'smooth' character. Again, various bands were compared to quality ratings and 2k-5kHz was found to be most highly correlated.

#### 2.2.1. Gauss - A Measure of Audible Distortion

The classic model of the amplitude distribution of digital audio is a modified Gaussian probability mass function (PMF) with zeromean. Note: 'histogram', 'probability density function' and 'PMF' are often used interchangeably but the unique distinctions are used here. Most commercially-released music prior to the mid-1990s adheres to this model, particularly when there is sufficient dynamic range and the mix consists of many individual elements.

Hard-limiting becomes a feature of the PMF with the onset of the 'loudness war' [15], where the extreme amplitude levels assume higher probabilities, sometimes exceeding the zero-amplitude probability to become the most probable levels.

A more recent phenomenon has been the presence of wider peaks in the interim values, as seen in Figure 1b, to avoid clipping as described above. This can be caused by a number of issues, such as the mastering of mixes already limited and the limiting of individual elements in the mix, such as the drums. Reports suggest it is not uncommon in modern audio productions to use multiple stages of limiting in the mix process to prepare for the limiting it will receive during the mastering process [16].

The PMF of each audio signal was analysed to provide features associated with audible distortion. Hard-limiting and dynamic range compression have been studied in relation to listener preference [17]. Since these parameters are encompassed by the PMF, this study attempts to gather them into a higher-level fea-

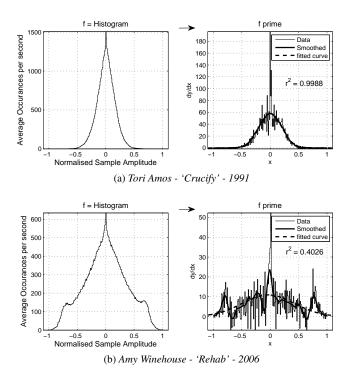


Figure 1: Depiction of Gauss feature

ture. The histogram was evaluated using 201 bins, providing a good trade-off between runtime, accuracy and clarity of visualisation. In order to evaluate the shape of the distribution, particularly the slope and the presence of any localised peaks, the first derivate was determined. For the ideal distribution this had a Gaussian form (see Figure 1a) so the  $r^2$  of a Gaussian fit was calculated for each sample. This was used as a feature describing loudness, dynamic range and related audible distortions, referred to as 'Gauss'.

#### 3. RESULTS

The total number of subjects tested was 24; 9 female and 15 male. Expertise was 12 expert, 5 musician and 7 neither. The mean age was 27 years. With 55 audio samples and 24 subjects, 1320 auditions were gathered and analysis was performed on this dataset.

int. leve	el Source	d.f.	Qua	ılity	Like	
ını. tevet	Source		F	p	F	p
1	Sample	54	7.78	0.00	7.74	0.00
1	Expertise	2	4.50	0.01	3.95	0.02
1	Familiar	2	17.62	0.00	204.47	0.00
2	S*E	108	0.94	0.65	0.85	0.87
2	S*F	94	1.08	0.29	1.30	0.03
2	E*F	4	3.16	0.01	3.20	0.01

Table 3: Results of 3-way ANOVA

The results of a 3-way ANOVA, shown in Table 3, show that each main effect is significant (p < 0.05), for quality and like, in addition to a significant second-level interaction between expertise and familiarity for quality and two second-level interactions

1.06


0.34 0.95

0.61

106

3

S\*E\*F



(a) 1-way ANOVA: Mean Quality, (b) 1-way ANOVA: Time Taken, grouped by subject group grouped by subject group

Figure 2: Results of subjective test

for like (Sample/Familiar and Expertise/Familiar). To investigate further, one-way ANOVA tests were performed with post-hoc multiple comparison and Bonferroni adjustment applied.

The mean quality ratings for the audio samples ranged from 2.12 to 4.29. The result in Table 3 supports test hypothesis #1, that certain samples are perceived as higher-quality than others.

Mean quality scores were significantly lower for the expert group than the naïve group (F(1,2) = 3.42, p = 0.03), see Figure 2a). This provides support for test hypothesis #2, that a listener's training has an influence on quality-perception. Comparing the expert and musician groups shows that the groups agree on quality. The expert group were more critical of quality than the naïve group indicating that factors such as distortion and dynamic range compression were more easily identified. The mean time taken to evaluate each 20-second sample varied according to expertise, with the naïve group responding significantly quicker than the other two groups (F(1,2) = 12.16, p = 0.00), shown in Figure 2b. As their quality ratings were also higher, this indicates that the naïve group was less aware of what to listen for or simply less engaged in the experiment, further supporting hypothesis #2.




Figure 3: 1-way ANOVA: Mean Like, grouped by familiarity

Figure 3 shows that samples which were more familiar were liked more (F(1,2) = 283.62, p = 0.00). This is the evidence to support test hypothesis #3 and reflects the idea that one is unlikely to become familiar with a song one does not enjoy listening to. Previous work has suggested that in using commercially successful music there was an automatic assumption of high-quality by listeners [18]. This study supports this view, indicating that, on first listen, one's perception of quality is low and repeated listens allow quality to be better appreciated and a more realistic appraisal be made.

#### 3.1. Historical Study of Features

The scattered data in Figure 4 is smoothed by local regression using weighted linear least squares and a second-degree polynomial model method, with rejection of outliers.

Figure 4a shows Gauss plotted against release year. It should be noted that the compact disc format was released in late 1983. Songs from earlier time periods are represented by remastered releases and their Gauss values should be considered estimates.

The values in the years immediately following the release of the CD show a 'hi-fi' period, with corresponding high quality ratings (see Figure 4c). This begins to subside in 1990, when the amplitude limits of the CD are reached and signals begin to be subjected to hard-limiting. What follows is a period of increasing loudness and distortion, until a practical limit is reached in 1997. Figure 4b shows anger values regularly exceed the expected range at the same time as the loudness war. The data then indicates a return to more Gaussian-like amplitude distributions in recent years.

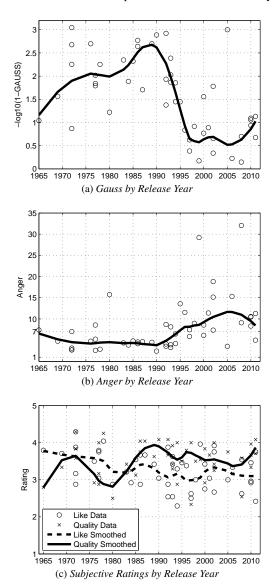


Figure 4: *History of features* 

## 3.2. Correlation Between Features

The correlation between variables is shown in Figure 5. This illustrates that the emotional predictions are comprised of other features, for example, anger is correlated with loudness measures (crest factor and gauss), spectral measures (harsh energy) and the other emotional prediction feature, happy. Also evident is the similarity between crest factor and gauss. Harsh energy and LF energy are related by definition, as both are proportions of the total spectral energy. The correlation not immediately obvious is between harsh energy and tempo, with slower tempo samples having less energy in the 2kHz to 5kHz band.

	1.000	0.585	0.461	0.162	0.156	0.022	0.000	0.052	0.001
ANGER	0.000	0.000	0.000	0.002	0.003	0.278	0.914	0.095	0.786
CF	0.585	1.000	0.714	0.131	0.013	0.023	0.000	0.020	0.000
CF	0.000	0.000	0.000	0.007	0.414	0.271	0.963	0.303	0.991
GAUSS	0.461	0.714	1.000	0.077	0.001	0.006	0.004	0.037	0.012
	0.000	0.000	0.000	0.040	0.783	0.568	0.650	0.159	0.425
HAPPY	0.162	0.131	0.077	1.000	0.085	0.004	0.049	0.000	0.001
HAPPY	0.002	0.007	0.040	0.000	0.030	0.640	0.103	0.889	0.806
HARSH	0.156	0.013	0.001	0.085	1.000	0.102	0.020	0.188	0.007
HARSH	0.003	0.414	0.783	0.030	0.000	0.017	0.304	0.001	0.553
LF	0.022	0.023	0.006	0.004	0.102	1.000	0.005	0.007	0.001
LF	0.278	0.271	0.568	0.640	0.017	0.000	0.602	0.538	0.813
ROLLOFF	0.000	0.000	0.004	0.049	0.020	0.005	1.000	0.013	0.003
ROLLOFF	0.914	0.963	0.650	0.103	0.304	0.602	0.000	0.413	0.698
TEMPO	0.052	0.020	0.037	0.000	0.188	0.007	0.013	1.000	0.017
TEMPO	0.095	0.303	0.159	0.889	0.001	0.538	0.413	0.000	0.345
WIDTH	0.001	0.000	0.012	0.001	0.007	0.001	0.003	0.017	1.000
WDTH	0.786	0.991	0.425	0.806	0.553	0.813	0.698	0.345	0.000
	ANGER	CF	GAUSS	HAPPY	HARSH	LF	ROLLOFF	TEMPO	WIDTH

Figure 5: Correlation matrix, showing  $r^2$  of linear fit between variables. P values are in italics and determine cell-shading.

### 3.3. Objective Measures Compared to Quality

The expected output of the *miremotion* function is in the range 1 to 7, extending to a likely 0 to 8 [14]. While happy scores ranged from 1.7 to 7.2, anger scores ranged from 2 to 32. Due to this range, the analysis is performed on a logarithmic scale. The Gauss feature values have a range of 0 to 1 but most lie between 0.9000 and 0.9999. To better approximate a linear plot, the data plotted is equal to  $-\log_{10}(1 - \text{Gauss})$ , which magnifies this upper range.

Little correlation was found between objective parameters and the like variable. However, individual features were significantly correlated with subjective quality ratings. This is shown in Figure 6, where each point is the mean quality value for each sample over all subjects, and the trend lines shown are best fit lines ascertained using linear regression.  $r^2$  values range from 0.0831 to 0.3532 and all correlations were found to be significant, with p < 0.05 (apart from the sample subset with above-optimal width, see Section 4.5). By these significant correlations, test hypothesis #4 is supported.

## 4. DISCUSSION

The most significant correlations are found for emotional features and spectral features. This allows aesthetic considerations to be made for quality. The emotional intent of the artist and the timbre of the instrumentation are important considerations, as well as the choice of tempo. Additionally, these three considerations are influenced by musical genre.

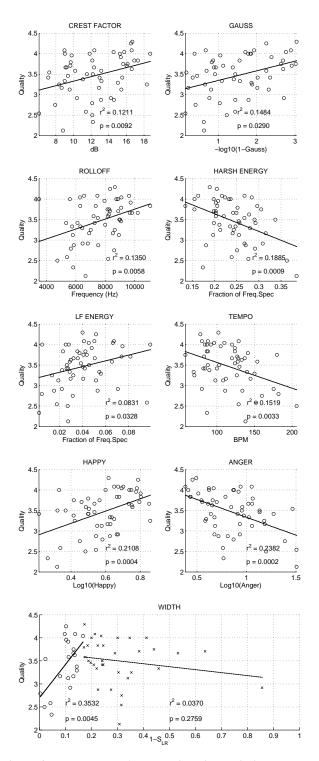


Figure 6: Comparison of perceived quality and objective measures, showing linear regression and associated  $r^2$  and p values

## 4.1. Emotional Response Predictions

The *miremotion* features used (happy and anger) were highly correlated with quality, yielding some of the highest  $r^2$  values of the features in Figure 6. This suggests that the perception of quality

is linked to the 'emotion class' in which the sample belongs and the listener's emotional reaction to the sample; high quality rating were awarded in instances of high happy coefficient and low quality ratings for high anger coefficient. Moreover, this result indicates a connection between quality and a unified set of subjective and objective parameters, as the *miremotion* features are objective measures designed to predict subjective responses.

It should be noted that the algorithm used for prediction was originally trained by audio entirely from film soundtracks [14]. It is likely that these samples were classical and electronic styles and recorded with ample dynamic range. The samples used here yield a range of values suggesting a weakness in the assumptions of the original methodology - the predictions may not be reliable for commercial music from a wide timespan. For example, 'Sober' by Tool (1993) scores 3.9 for anger, compared to 'Teenage Dream' by Katy Perry (2010) scoring 10.5. Additionally, 'Raining Blood' by Slayer (1986) scores similarly to 'With Or Without You' by U2 (1987), rated 4.5 and 4.6 respectively - the similar release time ruling out extreme production differences in the previous example.

Supported by Figure 4b, it is suggested that anger shows good correlation with quality due to the features which make up the prediction, although in this case it may not be a good prediction of the actual emotional response of the listener, due to differences in pop/rock music to the original training set of film scores.

#### 4.2. Spectral Features

Quality ratings were higher in cases of high rolloff and high LF energy, relating to wider bandwidth. LF energy also relates to production trends and advancements in technology as the ability to capture and reproduce these low frequencies has improved over time due to a number of factors, including the use of synthesisers and developments in loudspeaker technology, such as the use of stronger magnet materials allowing smaller cabinet volumes, which are more easily installed in the home.

That high harsh energy is related to low quality shows the sensitivity of the ear at these frequencies, and this measure displays one of the highest correlations.

#### 4.3. Amplitude Features

The relationship between crest factor (as a measure of dynamic range) and quality suggests that listeners can identify reduced dynamic range as a determinant of reduced quality. Despite a different methodology this supports recent studies which refute that hypercompressed audio is preferred or achieves greater sales [17].

The newly derived Gauss metric worked well as a means of classifying the most distorted tracks from those less so, by encoding fine structure in the signal's PMF. With issues relating to loudness and dynamic range compression receiving much attention in the community this new feature can be used to gain insight into the perceptual effects of loudness-maximisation.

#### 4.4. Rhythmic Features

Slower tempo is associated with higher quality, possibly due to higher production values that can be applied to slower music, such as the addition of string orchestra or layers of backing vocals that can be found in ballads. Also, with a lower event density, there is more space between notes to hear detail in the instruments and better evaluate spaciousness. The correlation between tempo and harsh energy should be noted.

## 4.5. Spatial Features

While one linear model was not appropriate for width, an optimal value is found close to 0.17, where quality ratings reach a peak. This precise value was likely influenced by headphone playback, where sensitivity to width is enhanced. Due to this relationship, the width plot in Figure 6 shows two linear fits, with the dataset divided into values above and below 0.17.

The data indicates that there is an increase in perceived quality in going from monaural presentation to an ideal stereo width. However, wider-still samples saw no significant change in quality. For the reference of the reader, the samples used that measured closest to this optimal width are 'Sledgehammer' by Peter Gabriel (1986), 'Superstition' by Stevie Wonder (1972) and 'Firestarter' by Prodigy (1996).

The optimal width was narrower than the mean width (0.25). This may be due to recent attempts in popular music production to produce wider mixes, where this modern width may be presenting as lower-quality due to coincidence with modern dynamic range reduction.

## 5. CONCLUSIONS AND FURTHER WORK

Correlations between objective measures of digital audio signals and subjective measures of audio quality have been found for the open-ended case of commercial music productions. Dynamics, distortions, tempo, spectral features and emotional predictions have shown correlation with perceived audio quality.

A new objective signal parameter is proposed to unify crest factor, clipping and other features of the audio PMF. This feature works better than crest factor alone for identifying quality, and an analysis of how the feature varies with release year provides an insight into production trends and the evolution of the muchdiscussed loudness war. Some further work is needed to improve performance, identify a more robust feature or to test the use of the histogram itself as a feature vector.

Due to the correlations between objective measures and qualityperception it is anticipated that quality scores can be predicted by means of the extracted signal parameters. A number of possible implementations are being explored at the time of writing.

With only a relatively small test panel, the results are indicative rather than conclusive. Additional subjective testing would be required to increase confidence in the findings. While concepts have been proven a greater number of audio samples and subjects would be needed for future development. Such a listening test would be well-suited to a mass-participation experiment, conducted on-line. The robustness of feature based quality predictions would benefit from this larger dataset, towards the goal of automatic quality-evaluation and subsequent enhancement.

## 6. REFERENCES

- ITU-R BS.1534-1, "Method for the subjective assessment of intermediate quality levels of coding systems," Tech. Rep., International Telecommunication Union, Geneva, Switzerland, Jan. 2003.
- [2] ITU-T P.800, "Methods for objective and subjective assessment of quality," Tech. Rep., International Telecommunications Union, 1996.

- [3] Amandine Pras, Rachel Zimmerman, Daniel Levitin, and Catherine Guastavino, "Subjective evaluation of mp3 compression for different musical genres," in *Audio Engineering Society Convention 127*, 10 2009.
- [4] Floyd E. Toole, "Loudspeaker measurements and their relationship to listener preferences: Part 1," *J. Audio Eng. Soc*, vol. 34, no. 4, pp. 227–235, 1986.
- [5] Lorenz Rychner, "Featured review: Neumann KH 120 A Active Studio Monitor," http://www.recordingmag.com/productreviews/2012/12/59.html, Accessed feb 1, 2013, 2012.
- [6] Edmund Gurney, *The Power of Sound*, Cambridge University Press, 2011, originally 1880.
- [7] W. Hoeg, L. Christensen, and R. Walker, "Subjective assessment of audio quality - the means and methods within the ebu," *EBU Technical Review*, pp. 40–50, Winter 1997.
- [8] Richard Repp, "Recording quality ratings by music professionals," in *Proc. Intl. Computer Music Conf.*, New Orleans, USA, Nov. 6-11, 2006, pp. 468–474.
- [9] Raimund Schatz, Sebastian Egger, and Kathrin Masuch, "The impact of test duration on user fatigue and reliability of subjective quality ratings," *J. Audio Eng. Soc*, vol. 60, no. 1/2, pp. 63–73, 2012.
- [10] ITU-R BS.1116-1, "Methods for the subjective assessment of small impairments in audio systems including multichannel sound systems," Tech. Rep., International Telecommunications Union, Vol. 1, pp. 1–11, 1997.
- [11] Brian R. Glasberg and Brian C. J. Moore, "A model of loudness applicable to time-varying sounds," *J. Audio Eng. Soc*, vol. 50, no. 5, pp. 331–342, 2002.
- [12] Olivier Lartillot and Petri Toiviainen, "A matlab toolbox for musical feature extraction from audio," in *Proc. Digital Audio Effects (DAFx-07)*, Bordeaux, France, Sept. 10-15, 2007, pp. 237–244.
- [13] George Tzanetakis and Perry R. Cook, "Musical genre classification of audio signals," *IEEE Transactions on Speech* and Audio Processing, vol. 10, no. 5, pp. 293–302, 2002.
- [14] Tuomas Eerola, Olivier Lartillot, and Petri Toiviainen, "Prediction of multidimensional emotional ratings in music from audio using multivariate regression models," in *International Conference on Music Information Retrieval*, Kobe, Japan, Oct. 26-30, 2009, pp. 621–626.
- [15] Earl Vickers, "The loudness war: Background, speculation, and recommendations," in *Audio Engineering Society Convention 129*, 11 2010.
- [16] David Pensado, "Into The Lair #47 Creating Loud Tracks with EQ and Compression," http://www.pensadosplace.tv/2012/09/18/into-the-lair-47-creating-loud-tracks-w-eq-and-compression/, accessed April 4, 2013, September 2012.
- [17] N.B.H. Croghan, K.H. Arehart, and J.M. Kates, "Quality and loudness judgments for music subjected to compression limiting.," *J Acoust Soc Am*, vol. 132, no. 2, pp. 1177–88, 2012.
- [18] Steven Fenton, Bruno Fazenda, and Jonathan Wakefield, "Objective measurement of music quality using inter-band relationship analysis," in *Audio Engineering Society Con*vention 130, 5 2011.