
PETROLEUM PRODUCTION SYSTEMS

SECOND EDITION

This page intentionally left blank

PETROLEUM PRODUCTION SYSTEMS

SECOND EDITION

Michael J. Economides
A. Daniel Hill
Christine Ehlig-Economides
Ding Zhu

Upper Saddle River, NJ • Boston • Indianapolis • San Francisco
New York • Toronto • Montreal • London • Munich • Paris • Madrid
Capetown • Sydney • Tokyo • Singapore • Mexico City

Many of the designations used by manufacturers and sellers to distinguish their products are claimed as trademarks. Where those designations appear in this book, and the publisher was aware of a trademark claim, the designations have been printed with initial capital letters or in all capitals.

The authors and publisher have taken care in the preparation of this book, but make no expressed or implied warranty of any kind and assume no responsibility for errors or omissions. No liability is assumed for incidental or consequential damages in connection with or arising out of the use of the information or programs contained herein.

For information about buying this title in bulk quantities, or for special sales opportunities (which may include electronic versions; custom cover designs; and content particular to your business, training goals, marketing focus, or branding interests), please contact our corporate sales department at corpsales@pearsoned.com or (800) 382-3419.

For government sales inquiries, please contact governmentsales@pearsoned.com.

For questions about sales outside the U.S., please contact international@pearsoned.com.

Visit us on the Web: informit.com

Library of Congress Cataloging-in-Publication Data

Petroleum production systems / Michael J. Economides. — 2nd ed.
p. cm.

Includes bibliographical references and index.

ISBN 0-13-703158-0 (hardcover : alk. paper)

1. Oil fields—Production methods. 2. Petroleum engineering.

I. Economides, Michael J.

TN870.E29 2013

622'.338—dc23

2012022357

Copyright © 2013 Pearson Education, Inc.

All rights reserved. Printed in the United States of America. This publication is protected by copyright, and permission must be obtained from the publisher prior to any prohibited reproduction, storage in a retrieval system, or transmission in any form or by any means, electronic, mechanical, photocopying, recording, or likewise. To obtain permission to use material from this work, please submit a written request to Pearson Education, Inc., Permissions Department, One Lake Street, Upper Saddle River, New Jersey 07458, or you may fax your request to (201) 236-3290.

ISBN-13: 978-0-13-703158-0

ISBN-10: 0-13-703158-0

Text printed in the United States on recycled paper at Courier in Westford, Massachusetts.

Third printing, January, 2014

Executive Editor:

Bernard Goodwin

Managing Editor:

John Fuller

Project Editor:

Elizabeth Ryan

Packager:

Laserwords

Copy Editor:

Laura Patchkofsky

Indexer:

Constance Angelo

Proofreader:

Susan Gall

Developmental Editor:

Michael Thurston

Cover Designer:

Chuti Prasertsith

Compositor:

Laserwords

Contents

Foreword	xv
Preface	xvii
About the Authors	xix
Chapter 1 The Role of Petroleum Production Engineering	1
1.1 Introduction	1
1.2 Components of the Petroleum Production System	2
1.2.1 Volume and Phase of Reservoir Hydrocarbons	2
1.2.2 Permeability	8
1.2.3 The Zone near the Well, the Sandface, and the Well Completion	9
1.2.4 The Well	10
1.2.5 The Surface Equipment	11
1.3 Well Productivity and Production Engineering	11
1.3.1 The Objectives of Production Engineering	11
1.3.2 Organization of the Book	14
1.4 Units and Conversions	15
References	18
Chapter 2 Production from Undersaturated Oil Reservoirs	19
2.1 Introduction	19
2.2 Steady-State Well Performance	19
2.3 Transient Flow of Undersaturated Oil	24
2.4 Pseudosteady-State Flow	26
2.4.1 Transition to Pseudosteady State from Infinite Acting Behavior	29
2.5 Wells Draining Irregular Patterns	30
2.6 Inflow Performance Relationship	34
2.7 Effects of Water Production, Relative Permeability	37
2.8 Summary of Single-Phase Oil Inflow Performance Relationships	39
References	39
Problems	39

Chapter 3	Production from Two-Phase Reservoirs	41
3.1	Introduction	41
3.2	Properties of Saturated Oil	42
3.2.1	General Properties of Saturated Oil	42
3.2.2	Property Correlations for Two-Phase Systems	47
3.3	Two-Phase Flow in a Reservoir	53
3.4	Oil Inflow Performance for a Two-Phase Reservoir	55
3.5	Generalized Vogel Inflow Performance	56
3.6	Fetkovich's Approximation	57
	References	58
	Problems	58
Chapter 4	Production from Natural Gas Reservoirs	61
4.1	Introduction	61
4.1.1	Gas Gravity	61
4.1.2	Real Gas Law	63
4.2	Correlations and Useful Calculations for Natural Gases	66
4.2.1	Pseudocritical Properties from Gas Gravity	66
4.2.2	Presence of Nonhydrocarbon Gases	68
4.2.3	Gas Compressibility Factor Correction for Nonhydrocarbon Gases	68
4.2.4	Gas Viscosity	71
4.2.5	Gas Formation Volume Factor	74
4.2.6	Gas Isothermal Compressibility	75
4.3	Approximation of Gas Well Deliverability	76
4.4	Gas Well Deliverability for Non-Darcy Flow	79
4.5	Transient Flow of a Gas Well	84
	References	91
	Problems	93
Chapter 5	Production from Horizontal Wells	95
5.1	Introduction	95
5.2	Steady-State Well Performance	97
5.2.1	The Joshi Model	97
5.2.2	The Furui Model	100
5.3	Pseudosteady-State Flow	103

5.3.1	The Babu and Odeh Model	103
5.3.2	The Economides et al. Model	109
5.4	Inflow Performance Relationship for Horizontal Gas Wells	114
5.5	Two-Phase Correlations for Horizontal Well Inflow	115
5.6	Multilateral Well Technology	116
	References	117
	Problems	119

Chapter 6 The Near-Wellbore Condition and Damage Characterization; Skin Effects 121

6.1	Introduction	121
6.2	Hawkins' Formula	122
6.3	Skin Components for Vertical and Inclined Wells	126
6.4	Skin from Partial Completion and Well Deviation	128
6.5	Horizontal Well Damage Skin Effect	134
6.6	Well Completion Skin Factors	138
6.6.1	Cased, Perforated Completions	138
6.6.2	Slotted or Perforated Liner Completions	146
6.6.3	Gravel Pack Completions	148
6.7	Formation Damage Mechanisms	151
6.7.1	Particle Plugging of Pore Spaces	151
6.7.2	Mechanisms for Fines Migration	154
6.7.3	Chemical Precipitation	154
6.7.4	Fluid Damage: Emulsions, Relative Permeability, and Wettability Changes	155
6.7.5	Mechanical Damage	156
6.7.6	Biological Damage	157
6.8	Sources of Formation Damage During Well Operations	157
6.8.1	Drilling Damage	157
6.8.2	Completion Damage	159
6.8.3	Production Damage	161
6.8.4	Injection Damage	162
	References	163
	Problems	165

Chapter 7 Wellbore Flow Performance	167
7.1 Introduction	167
7.2 Single-Phase Flow of an Incompressible, Newtonian Fluid	168
7.2.1 Laminar or Turbulent Flow	168
7.2.2 Velocity Profiles	169
7.2.3 Pressure-Drop Calculations	172
7.2.4 Annular Flow	179
7.3 Single-Phase Flow of a Compressible, Newtonian Fluid	179
7.4 Multiphase Flow in Wells	184
7.4.1 Holdup Behavior	185
7.4.2 Two-Phase Flow Regimes	187
7.4.3 Two-Phase Pressure Gradient Models	191
7.4.4 Pressure Traverse Calculations	210
References	214
Problems	215
Chapter 8 Flow in Horizontal Wellbores, Wellheads, and Gathering Systems	217
8.1 Introduction	217
8.2 Flow in Horizontal Pipes	217
8.2.1 Single-Phase Flow: Liquid	217
8.2.2 Single-Phase Flow: Gas	218
8.2.3 Two-Phase Flow	220
8.2.4 Pressure Drop through Pipe Fittings	236
8.3 Flow through Chokes	236
8.3.1 Single-Phase Liquid Flow	240
8.3.2 Single-Phase Gas Flow	241
8.3.3 Gas–Liquid Flow	243
8.4 Surface Gathering Systems	247
8.5 Flow in Horizontal Wellbores	250
8.5.1 Importance of Wellbore Pressure Drop	250
8.5.2 Wellbore Pressure Drop for Single-Phase Flow	252
8.5.3 Wellbore Pressure Drop for Two-Phase Flow	252
References	256
Problems	258

Chapter 9	Well Deliverability	261
9.1	Introduction	261
9.2	Combination of Inflow Performance Relationship (IPR) and Vertical Flow Performance (VFP)	262
9.3	IPR and VFP of Two-Phase Reservoirs	268
9.4	IPR and VFP in Gas Reservoirs	270
	Problems	274
Chapter 10	Forecast of Well Production	275
10.1	Introduction	275
10.2	Transient Production Rate Forecast	275
10.3	Material Balance for an Undersaturated Reservoir and Production Forecast Under Pseudosteady-State Conditions	277
10.4	The General Material Balance for Oil Reservoirs	281
10.4.1	The Generalized Expression	281
10.4.2	Calculation of Important Reservoir Variables	282
10.5	Production Forecast from a Two-Phase Reservoir: Solution Gas Drive	286
10.6	Gas Material Balance and Forecast of Gas Well Performance	294
	References	296
	Problems	297
Chapter 11	Gas Lift	299
11.1	Introduction	299
11.2	Well Construction for Gas Lift	299
11.3	Continuous Gas-Lift Design	303
11.3.1	Natural versus Artificial Flowing Gradient	303
11.3.2	Pressure of Injected Gas	304
11.3.3	Point of Gas Injection	305
11.3.4	Power Requirements for Gas Compressors	309
11.4	Unloading Wells with Multiple Gas-Lift Valves	310
11.5	Optimization of Gas-Lift Design	312
11.5.1	Impact of Increase of Gas Injection Rate, Sustaining of Oil Rate with Reservoir Pressure Decline	312
11.5.2	Maximum Production Rate with Gas Lift	314

11.6	Gas-Lift Performance Curve	316
11.7	Gas-Lift Requirements versus Time	328
	References	332
	Problems	333
Chapter 12 Pump-Assisted Lift		335
12.1	Introduction	335
12.2	Positive-Displacement Pumps	338
12.2.1	Sucker Rod Pumping	338
12.2.2	Progressing Cavity Pumps	352
12.3	Dynamic Displacement Pumps	354
12.3.1	Electrical Submersible Pumps	354
12.4	Lifting Liquids in Gas Wells; Plunger Lift	359
	References	362
	Problems	362
Chapter 13 Well Performance Evaluation		365
13.1	Introduction	365
13.2	Open-Hole Formation Evaluation	366
13.3	Cased Hole Logs	368
13.3.1	Cement Evaluation	368
13.3.2	Cased Hole Formation Evaluation	369
13.3.3	Production Log Evaluation	370
13.4	Transient Well Analysis	387
13.4.1	Rate Transient Analysis	387
13.4.2	Wireline Formation Testing and Formation Fluid Sampling	390
13.4.3	Well Rate and Pressure Transient Analysis	393
13.4.4	Flow Regime Analysis	400
	References	438
	Problems	439
Chapter 14 Matrix Acidizing: Acid/Rock Interactions		443
14.1	Introduction	443
14.2	Acid–Mineral Reaction Stoichiometry	446
14.3	Acid–Mineral Reaction Kinetics	453
14.3.1	Laboratory Measurement of Reaction Kinetics	454
14.3.2	Reactions of HCl and Weak Acids with Carbonates	454

14.3.3	Reaction of HF with Sandstone Minerals	455
14.3.4	Reactions of Fluosilicic Acid with Sandstone Minerals	460
14.4	Acid Transport to the Mineral Surface	460
14.5	Precipitation of Acid Reaction Products	461
	References	464
	Problems	466
Chapter 15	Sandstone Acidizing Design	469
15.1	Introduction	469
15.2	Acid Selection	470
15.3	Acid Volume and Injection Rate	472
15.3.1	Competing Factors Influencing Treatment Design	472
15.3.2	Sandstone Acidizing Models	472
15.3.3	Monitoring the Acidizing Process, the Optimal Rate Schedule	486
15.4	Fluid Placement and Diversion	496
15.4.1	Mechanical Acid Placement	496
15.4.2	Ball Sealers	497
15.4.3	Particulate Diverting Agents	497
15.4.4	Viscous Diversion	508
15.5	Preflush and Postflush Design	509
15.5.1	The HCl Preflush	509
15.5.2	The Postflush	511
15.6	Acid Additives	512
15.7	Acidizing Treatment Operations	512
	References	513
	Problems	516
Chapter 16	Carbonate Acidizing Design	519
16.1	Introduction	519
16.2	Wormhole Formation and Growth	522
16.3	Wormhole Propagation Models	525
16.3.1	The Volumetric Model	526
16.3.2	The Buijse-Glasbergen Model	529
16.3.3	The Furuï et al. Model	531
16.4	Matrix Acidizing Design for Carbonates	535
16.4.1	Acid Type and Concentration	535

16.4.2	Acid Volume and Injection Rate	536
16.4.3	Monitoring the Acidizing Process	538
16.4.4	Fluid Diversion in Carbonates	540
16.5	Acid Fracturing	541
16.5.1	Acid Penetration in Fractures	542
16.5.2	Acid Fracture Conductivity	545
16.5.3	Productivity of an Acid-Fractured Well	552
16.5.4	Comparison of Propped and Acid Fracture Performance	553
16.6	Acidizing of Horizontal Wells	554
	References	555
	Problems	558
Chapter 17 Hydraulic Fracturing for Well Stimulation		559
17.1	Introduction	559
17.2	Length, Conductivity, and Equivalent Skin Effect	562
17.3	Optimal Fracture Geometry for Maximizing the Fractured Well Productivity	566
17.3.1	Unified Fracture Design	567
17.4	Fractured Well Behavior in Conventional Low-Permeability Reservoirs	574
17.4.1	Infinite Fracture Conductivity Performance	574
17.4.2	Finite Fracture Conductivity Performance	578
17.5	The Effect of Non-Darcy Flow on Fractured Well Performance	579
17.6	Fractured Well Performance for Unconventional Tight Sand or Shale Reservoirs	585
17.6.1	Tight Gas Sands	586
17.6.2	Shale	586
17.7	Choke Effect for Transverse Hydraulic Fractures	592
	References	594
	Problems	597
Chapter 18 The Design and Execution of Hydraulic Fracturing Treatments		601
18.1	Introduction	601
18.2	The Fracturing of Reservoir Rock	602
18.2.1	<i>In-Situ</i> Stresses	602
18.2.2	Breakdown Pressure	604
18.2.3	Fracture Direction	606

18.3	Fracture Geometry	609
18.3.1	Hydraulic Fracture Width with the PKN Model	610
18.3.2	Fracture Width with a Non-Newtonian Fluid	613
18.3.3	Fracture Width with the KGD Model	614
18.3.4	Fracture Width with the Radial Model	615
18.3.5	Tip Screenout (TSO) Treatments	615
18.3.6	Creating Complex Fracture Geometries	615
18.4	The Created Fracture Geometry and Net Pressure	616
18.4.1	Net Fracturing Pressure	616
18.4.2	Height Migration	621
18.4.3	Fluid Volume Requirements	624
18.4.4	Proppant Schedule	629
18.4.5	Propped Fracture Width	631
18.5	Fracturing Fluids	635
18.5.1	Rheological Properties	636
18.5.2	Frictional Pressure Drop during Pumping	641
18.6	Proppants and Fracture Conductivity	642
18.6.1	Propped Fracture Conductivity	643
18.6.2	Proppant Transport	645
18.7	Fracture Diagnostics	646
18.7.1	Fracturing Pressure Analysis	646
18.7.2	Fracture Geometry Measurement	647
18.8	Fracturing Horizontal Wells	651
18.8.1	Fracture Orientation in Horizontal Well Fracturing	651
18.8.2	Well Completions for Multiple Fracturing	652
	References	655
	Problems	657

Chapter 19 Sand Management 661

19.1	Introduction	661
19.2	Sand Flow Modeling	662
19.2.1	Factors Affecting Formation Sand Production	662
19.2.2	Sand Flow in the Wellbore	672
19.3	Sand Management	676
19.3.1	Sand Production Prevention	676
19.3.2	Cavity Completion	677

19.4	Sand Exclusion	677
19.4.1	Gravel Pack Completion	678
19.4.2	Frac-Pack Completion	688
19.4.3	High-Performance Fracturing	693
19.4.4	High-Performance Fractures in Deviated Production Wells	694
19.4.5	Perforating Strategy for High-Performance Fractures	697
19.5	Completion Failure Avoidance	698
	References	699
	Problems	702
Appendix A		703
Appendix B		705
Appendix C		709
Index		711

Foreword

I have waited on this book for the last 10 years. It is a modernized version of the classic first edition, thousands of copies of which have been distributed to my former trainees, engineers, and associates. The authors of the book have worked with me in a number of capacities for 25 years and we have become kindred spirits both in how we think about oil and gas production enhancement and, especially, in knowing how bad production management can be, even in the most unexpected places and companies.

It is a comprehensive book that describes the “production system,” or what I refer to as “nodal analysis,” artificial lift, well diagnosis, matrix stimulation, hydraulic fracturing, and sand control.

There are some important points that are made in this book, which I have made repeatedly in the past:

1. To increase field production, well improvement can be more effective than infill drilling, especially when the new wells are just as suboptimum as existing wells. We demonstrated this while I was managing Yukos E&P in Russia. During that time appropriate production enhancement actions improved field production by more than 15% even after stopping all drilling for as long as a year.
2. In conventional reservoirs, optimized well completions do not sacrifice ultimate field recovery as long as they are achieved with adequate reservoir pressure support from either natural gas cap or water drive mechanisms or through injection wells.
3. Many, if not most, operators fail to address well performance, and few wells are produced at their maximum flow potential. This book takes great steps to show that proper production optimization is far more important to success than just simply executing blindly well completions and even stimulation practices. In particular, I consider the Unified Fracture Design (UFD) approach, the brainchild of the lead author, to be the only coherent approach to hydraulic fracture design. I have been using it exclusively and successfully in all my hydraulic fracture design work.

This book provides not only best practices but also the rationale for new activities. The strategies shown in this book explain why unconventional oil and gas reservoirs are successfully produced today.

The book fills a vacuum in the industry and has come not a moment too soon.

—*Joe Mach*
Inventor, Nodal Analysis
Former Executive VP, Yukos
Former VP, Schlumberger

Preface

Since the first edition of this book appeared in 1994, many advances in the practice of petroleum production engineering have occurred. The objective of this book is the same as for the first edition: to provide a comprehensive and relatively advanced textbook in petroleum production engineering, that suffices as a terminal exposure to senior undergraduates or an introduction to graduate students. This book is also intended to be used in industrial training to enable nonpetroleum engineers to understand the essential elements of petroleum production. Numerous technical advances in the years since the first edition have led to the extensive revisions that readers will notice in this second edition. In particular, widespread use of horizontal wells and much broader application of hydraulic fracturing have changed the face of production practices and justified critical updating of the text. The authors have benefited from wide experience in both university and industrial settings. Our areas of interest are complementary and ideally suited for this book, spanning classical production engineering, well testing, production logging, artificial lift, and matrix and hydraulic fracture stimulation. We have been contributors in these areas for many years. Among the four of us, we have taught petroleum production engineering to literally thousands of students and practicing engineers using the first edition of this book, both in university classes and in industry short courses, and this experience has been one of the key guiding factors in the creation of the second edition.

This book offers a structured approach toward the goal defined above. Chapters 2–4 present the inflow performance for oil, two-phase, and gas reservoirs. Chapter 5 deals with complex well architecture such as horizontal and multilateral wells, reflecting the enormous growth of this area of production engineering since the first edition of the book. Chapter 6 deals with the condition of the near-wellbore zone, such as damage, perforations, and gravel packing. Chapter 7 covers the flow of fluids to the surface. Chapter 8 describes the surface flow system, flow in horizontal pipes, and flow in horizontal wells. Combination of inflow performance and well performance versus time, taking into account single-well transient flow and material balance, is shown in Chapters 9 and 10. Therefore, Chapters 1–10 describe the workings of the reservoir and well systems.

Gas lift is outlined in Chapter 11, and mechanical lift in Chapter 12. For an appropriate production engineering remedy it is essential that well and reservoir diagnosis be done. Chapter 13 presents the state-of-the-art in modern diagnosis that includes well testing, production logging, and well monitoring with permanent downhole instruments.

From the well diagnosis it can be concluded whether the well is in need of matrix stimulation, hydraulic fracturing, artificial lift, combinations of the above, or none. Matrix stimulation for all major types of reservoirs is presented in Chapters 14, 15, and 16, while hydraulic fracturing is treated in Chapters 17 and 18. Chapter 19 is a new chapter dealing with advances in sand management.

To simplify the presentation of realistic examples, data for three characteristic reservoir types—an undersaturated oil reservoir, a saturated oil reservoir, and a gas reservoir—are presented in the Appendixes. These data sets are used throughout the book.

Revising this textbook to include the primary production engineering of the past 20 years has been a considerable task, requiring a long and concerted (and only occasionally contentious!) effort from the authors. We have also benefited from the efforts of many of our graduate students and support staff. Discussions with many of our colleagues in industry and academia have also been a key to the completion of the book. We would like to thank in particular the contributions of Dr. Paul Bommer, who provided some very useful material on artificial lift; Dr. Chen Yang, who assisted with some of the new material on carbonate acidizing; Dr. Tom Blasingame and Mr. Chih Chen, who shared well data used as pressure buildup and production data examples; Mr. Tony Rose, who created the graphics; and Ms. Katherine Brady and Mr. Imran Ali for their assistance in the production of this second edition.

As we did for the first edition, we acknowledge the many colleagues, students, and our own professors who contributed to our efforts. In particular, feedback from all of our students in petroleum production engineering courses has guided our revision of the first edition of this text, and we thank them for their suggestions, comments, and contributions.

We would like to gratefully acknowledge the following organizations and persons for permitting us to reprint some of the figures and tables in this text: for Figs. 3-2, 3-3, 5-2, 5-4, 5-7, 6-15, 6-16, 6-18, 6-19, 6-20, 6-21, 6-22, 6-24, 6-26, 6-27, 6-28, 6-29, 7-1, 7-9, 7-12, 7-13, 7-13, 7-14, 8-1, 8-4, 8-6, 8-7, 8-17, 13-13, 13-19, 14-3, 15-1, 15-2, 15-4, 15-7, 15-10, 15-12, 16-1, 16-2, 16-4, 16-5, 16-6, 16-7, 16-8, 16-14, 16-16, 16-17, 16-20, 17-2, 17-3, 17-6, 17-11, 17-12, 17-13, 17-14, 17-15, 17-16, 17-17, 17-18, 17-19, 18-20, 18-21, 18-22, 18-23, 18-25, 18-26, 19-1, 19-6, 19-7, 19-8, 19-9, 19-10, 19-17, 19-18, 19-19, 19-20, 19-21a, 19-21b, and 19-22, the Society of Petroleum Engineers; for Figs. 6-13, 6-14, 13-2, 13-18, 18-13, 18-14, 18-19, 19-2, and 19-3, Schlumberger; for Figs. 6-23, 12-5, 12-6, 15-3, 15-6, 16-17, and 16-19, Prentice Hall; for Figs. 8-3, 8-14, 12-15, 12-16, and 16-13, Elsevier Science Publishers; for Figs. 4-3, 19-12, 19-13, 19-14, and 19-15, Gulf Publishing Co., Houston, TX; for Figs. 13-5, 13-6, 13-8, 13-9, 13-11, and 13-12, Hart Energy, Houston, TX; for Figs. 7-11 and 8-5, the American Institute of Chemical Engineers; for Figs. 7-6 and 7-7, the American Society of Mechanical Engineers; for Figs. 8-11 and Table 8-1, Crane Co., Stamford, CT; for Figs. 12-8, 12-9, and 12-10, Editions Technip, Paris, France; for Fig. 2-3, the American Institute of Mining, Metallurgical & Petroleum Engineers; for Fig. 3-4, McGraw-Hill; for Fig. 7-10, World Petroleum Council; for Fig. 12-11, Baker Hughes; for Fig. 13-1, PennWell Publishing Co., Tulsa, OK; for Fig. 13-3, the Society of Petrophysicists and Well Log Analysts; for Fig. 18-16, Carbo Ceramics, Inc.; for Figs. 12-1, 12-2, and 12-7, Dr. Michael Golan and Dr. Curtis Whitson; for Fig. 6-17, Dr. Kenji Furui; for Fig. 8-8, Dr. James P. Brill; for Fig. 15-8, Dr. Eduardo Ponce da Motta; for Figs. 18-11 and 18-15, Dr. Harold Brannon. Used with permission, all rights reserved.

About the Authors



MICHAEL J. ECONOMIDES

A chemical and petroleum engineer and an expert on energy geopolitics, Dr. Michael J. Economides is a professor at the University of Houston and managing partner of Economides Consultants, Inc., with a wide range of industrial consulting, including major retainers by Fortune 500 companies and national oil companies. He has written 15 textbooks and almost 300 journal papers and articles.



A. DANIEL HILL

Dr. A. Daniel Hill is professor and holder of the Noble Chair in Petroleum Engineering at Texas A&M University. The author of 150 papers, three books, and five patents, he teaches and conducts research in the areas of production engineering, well completions, well stimulation, production logging, and complex well performance.



CHRISTINE EHLIG-ECONOMIDES

Dr. Christine Ehlig-Economides holds the Albert B. Stevens Endowed Chair and is professor of petroleum engineering at Texas A&M University and Senior Partner of Economides Consultants, Inc. Dr. Ehlig-Economides provides industry consulting and training and supervises student research in well production and reservoir analysis. She has authored more than 70 papers and journal articles and is a member of the U. S. National Academy of Engineering.



DING ZHU

Dr. Ding Zhu is associate professor and holder of the W. D. Von Gonten Faculty Fellowship in Petroleum Engineering at Texas A&M University. Dr. Zhu's main research areas include general production engineering, well stimulation, and complex well performance. Dr. Zhu is a coauthor of more than 100 technical papers and one book.

The Role of Petroleum Production Engineering

1.1 Introduction

Petroleum production involves two distinct but intimately connected general systems: the reservoir, which is a porous medium with unique storage and flow characteristics; and the artificial structures, which include the well, bottomhole, and wellhead assemblies, as well as the surface gathering, separation, and storage facilities.

Production engineering is that part of petroleum engineering that attempts to maximize production (or injection) in a cost-effective manner. In the 15 years that separated the first and second editions of this textbook worldwide production enhancement, headed by hydraulic fracturing, has increased tenfold in constant dollars, becoming the second largest budget item of the industry, right behind drilling. Complex well architecture, far more elaborate than vertical or single horizontal wells, has also evolved considerably since the first edition and has emerged as a critical tool in reservoir exploitation.

In practice one or more wells may be involved, but in distinguishing production engineering from, for example, reservoir engineering, the focus is often on specific wells and with a short-time intention, emphasizing production or injection optimization. In contrast, reservoir engineering takes a much longer view and is concerned primarily with recovery. As such, there may be occasional conflict in the industry, especially when international petroleum companies, whose focus is accelerating and maximizing production, have to work with national oil companies, whose main concerns are to manage reserves and long-term exploitation strategies.

Production engineering technologies and methods of application are related directly and interdependently with other major areas of petroleum engineering, such as formation evaluation, drilling, and reservoir engineering. Some of the most important connections are summarized below.

Modern formation evaluation provides a composite reservoir description through three-dimensional (3-D) seismic, interwell log correlation and well testing. Such description leads to the identification of geological flow units, each with specific characteristics. Connected flow units form a reservoir.

Drilling creates the all-important well, and with the advent of directional drilling technology it is possible to envision many controllable well configurations, including very long horizontal sections and multilateral, multilevel, and multibranch wells, targeting individual flow units. The drilling of these wells is never left to chance but, instead, is guided by very sophisticated measurements while drilling (MWD) and logging while drilling (LWD). Control of drilling-induced, near-wellbore damage is critical, especially in long horizontal wells.

Reservoir engineering in its widest sense overlaps production engineering to a degree. The distinction is frequently blurred both in the context of study (single well versus multiple well) and in the time duration of interest (long term versus short term). Single-well performance, undeniably the object of production engineering, may serve as a boundary condition in a fieldwide, long-term reservoir engineering study. Conversely, findings from the material balance calculations or reservoir simulation further define and refine the forecasts of well performance and allow for more appropriate production engineering decisions.

In developing a petroleum production engineering thinking process, it is first necessary to understand important parameters that control the performance and the character of the system. Below, several definitions are presented.

1.2 Components of the Petroleum Production System

1.2.1 Volume and Phase of Reservoir Hydrocarbons

1.2.1.1 Reservoir

The reservoir consists of one or several interconnected geological flow units. While the shape of a well and converging flow have created in the past the notion of radial flow configuration, modern techniques such as 3-D seismic and new logging and well testing measurements allow for a more precise description of the shape of a geological flow unit and the ensuing production character of the well. This is particularly true in identifying lateral and vertical boundaries and the inherent heterogeneities.

Appropriate reservoir description, including the extent of heterogeneities, discontinuities, and anisotropies, while always important, has become compelling after the emergence of horizontal wells and complex well architecture with total lengths of reservoir exposure of many thousands of feet.

Figure 1-1 is a schematic showing two wells, one vertical and the other horizontal, contained within a reservoir with potential lateral heterogeneities or discontinuities (sealing faults), vertical boundaries (shale lenses), and anisotropies (stress or permeability).

While appropriate reservoir description and identification of boundaries, heterogeneities, and anisotropies is important, it is somewhat forgiving in the presence of only vertical wells. These issues become critical when horizontal and complex wells are drilled.

The encountering of lateral discontinuities (including heterogeneous pressure depletion caused by existing wells) has a major impact on the expected complex well production. The well branch trajectories vis à vis the azimuth of directional properties also has a great effect on well production. Ordinarily, there would be only one set of optimum directions.

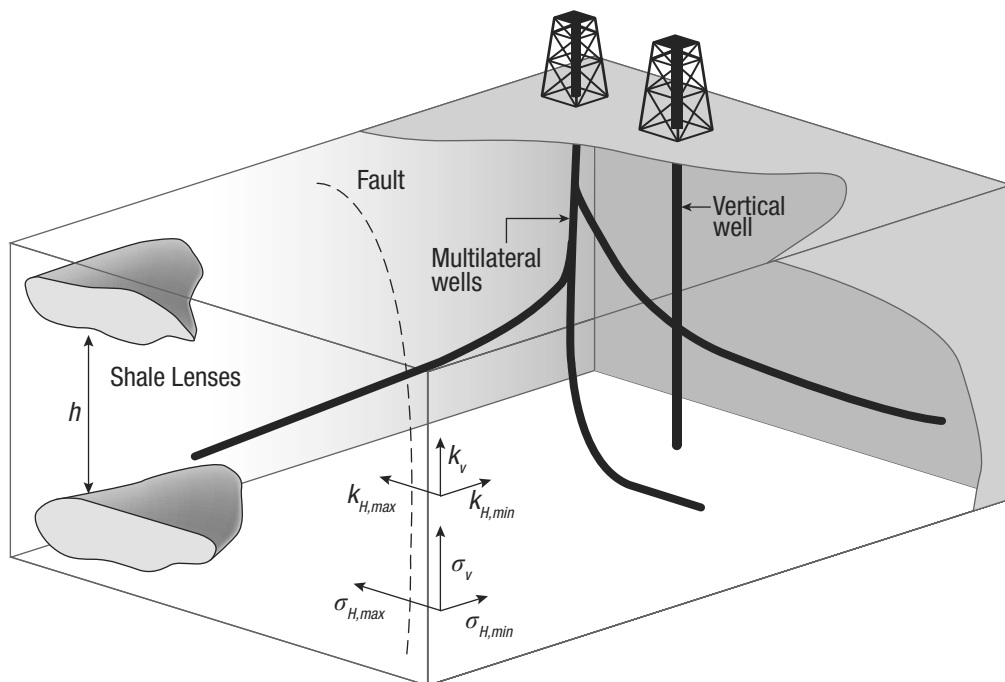


Figure 1-1 Common reservoir heterogeneities, anisotropies, discontinuities, and boundaries affecting the performance of vertical, horizontal, and complex-architecture wells.

Understanding the geological history that preceded the present hydrocarbon accumulation is essential. There is little doubt that the best petroleum engineers are those who understand the geological processes of deposition, fluid migration, and accumulation. Whether a reservoir is an anticline, a fault block, or a channel sand not only dictates the amount of hydrocarbon present but also greatly controls well performance.

1.2.1.2 Porosity

All of petroleum engineering deals with the exploitation of fluids residing within porous media. Porosity, simply defined as the ratio of the pore volume, V_p , to the bulk volume, V_b ,

$$\phi = \frac{V_p}{V_b} \quad (1-1)$$

is an indicator of the amount of fluid in place. Porosity values vary from over 0.3 to less than 0.1. The porosity of the reservoir can be measured based on laboratory techniques using reservoir cores or with field measurements including logs and well tests. Porosity is one of the very first measurements obtained in any exploration scheme, and a desirable value is essential for the

continuation of any further activities toward the potential exploitation of a reservoir. In the absence of substantial porosity there is no need to proceed with an attempt to exploit a reservoir.

1.2.1.3 Reservoir Height

Often known as “reservoir thickness” or “pay thickness,” the reservoir height describes the thickness of a porous medium in hydraulic communication contained between two layers. These layers are usually considered impermeable. At times the thickness of the hydrocarbon-bearing formation is distinguished from an underlying water-bearing formation, or aquifer. Often the term “gross height” is employed in a multilayered, but co-mingled during production, formation. In such cases the term “net height” may be used to account for only the permeable layers in a geologic sequence.

Well logging techniques have been developed to identify likely reservoirs and quantify their vertical extent. For example, measuring the spontaneous potential (SP) and knowing that sandstones have a distinctly different response than shales (a likely lithology to contain a layer), one can estimate the thickness of a formation. Figure 1-2 is a well log showing clearly the deflection of the spontaneous potential of a sandstone reservoir and the clearly different response of the adjoining shale layers. This deflection corresponds to the thickness of a *potentially* hydrocarbon-bearing, porous medium.

The presence of satisfactory net reservoir height is an additional imperative in any exploration activity.

1.2.1.4 Fluid Saturations

Oil and/or gas are never alone in “saturating” the available pore space. Water is always present. Certain rocks are “oil-wet,” implying that oil molecules cling to the rock surface. More frequently, rocks are “water-wet.” Electrostatic forces and surface tension act to create these wettabilities, which may change, usually with detrimental consequences, as a result of injection of fluids, drilling, stimulation, or other activity, and in the presence of surface-acting chemicals. If the water is present but does not flow, the corresponding water saturation is known as “connate” or “interstitial.” Saturations larger than this value would result in free flow of water along with hydrocarbons.

Petroleum hydrocarbons, which are mixtures of many compounds, are divided into oil and gas. Any mixture depending on its composition and the conditions of pressure and temperature may appear as liquid (oil) or gas or a mixture of the two.

Frequently the use of the terms *oil* and *gas* is blurred. Produced oil and gas refer to those parts of the total mixture that would be in liquid and gaseous states, respectively, after surface separation. Usually the corresponding pressure and temperature are “standard conditions,” that is, usually (but not always) 14.7 psi and 60° F.

Flowing oil and gas in the reservoir imply, of course, that either the initial reservoir pressure or the induced flowing bottomhole pressures are such as to allow the concurrent presence of two phases. Temperature, except in the case of high-rate gas wells, is for all practical purposes constant.

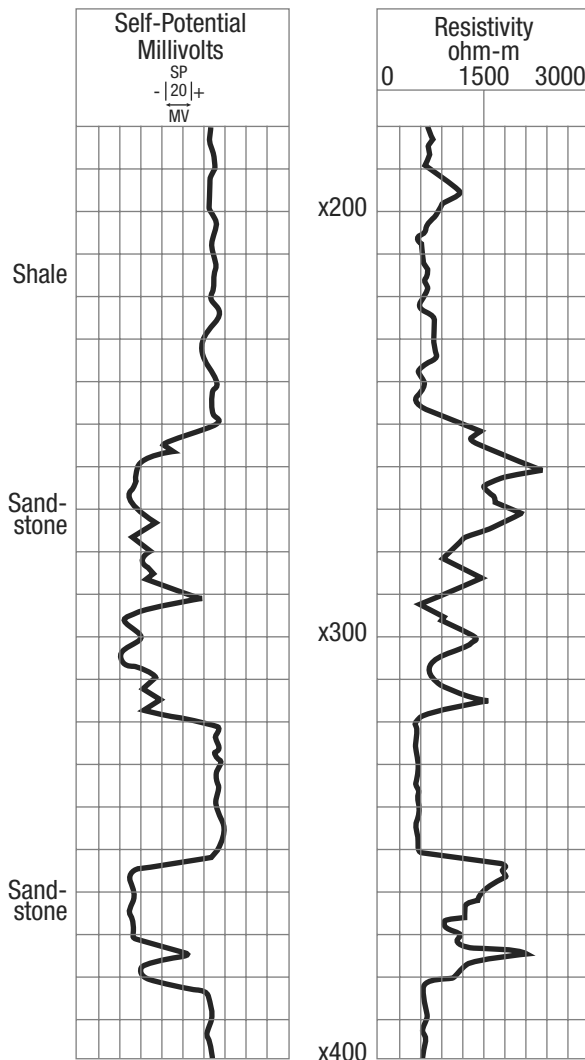


Figure 1-2 Spontaneous potential and electrical resistivity logs identifying sandstones versus shales, and water-bearing versus hydrocarbon-bearing formations.

An attractive hydrocarbon saturation is the third critical variable (along with porosity and reservoir height) to be determined before a well is tested or completed. A classic method, currently performed in a variety of ways, is the measurement of the formation electrical resistivity. Knowing that formation brines are good conductors of electricity (i.e., they have poor resistivity) and hydrocarbons are the opposite, a measurement of this electrical property in a porous formation of sufficient height can detect the presence of hydrocarbons. With proper calibration, not

just the presence but also the hydrocarbon saturation (i.e., fraction of the pore space occupied by hydrocarbons) can be estimated.

Figure 1-2 also contains a resistivity log. The previously described SP log along with the resistivity log, showing a high resistivity within the same zone, are good indicators that the identified porous medium is likely saturated with hydrocarbons.

The combination of porosity, reservoir net thickness, and saturations is essential in deciding whether a prospect is attractive or not. These variables can allow the estimation of hydrocarbons near the well.

1.2.1.5 Classification of Reservoirs

All hydrocarbon mixtures can be described by a phase diagram such as the one shown in Figure 1-3. Plotted are temperature (x axis) and pressure (y axis). A specific point is the *critical point*, where the properties of liquid and gas converge. For each temperature less than the critical-point temperature (to the left of T_c in Figure 1-3) there exists a pressure called the “bubble-point” pressure, above which only liquid (oil) is present and below which gas and liquid coexist. For lower pressures (at constant temperature), more gas is liberated. Reservoirs above the bubble-point pressure are called “undersaturated.”

If the initial reservoir pressure is less than or equal to the bubble-point pressure, or if the flowing bottomhole pressure is allowed to be at such a value (even if the initial reservoir pressure is above the bubble point), then free gas will at least form and will likely flow in the reservoir. This type of a reservoir is known as “two-phase” or “saturated.”

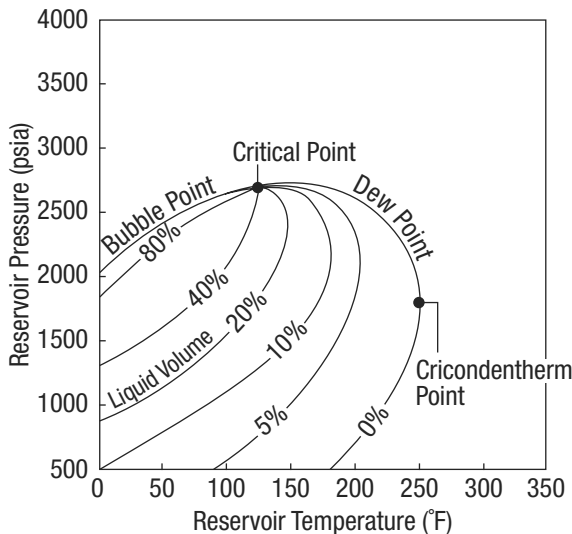


Figure 1-3 Oilfield hydrocarbon phase diagram showing bubble-point and dew-point curves, lines of constant-phase distribution, region of retrograde condensation, and the critical and cricondenthem points.

For temperatures larger than the critical point (to the right of T_c in Figure 1-3), the curve enclosing the two-phase envelop is known as the “dew-point” curve. Outside, the fluid is gas, and reservoirs with these conditions are “lean” gas reservoirs.

The maximum temperature of a two-phase envelop is known as the “cricondentherm.” Between these two points there exists a region where, because of the shape of the gas saturation curves, as the pressure decreases, liquid or “condensate” is formed. This happens until a limited value of the pressure, after which further pressure reduction results in reevaporation. The region in which this phenomenon takes place is known as the “retrograde condensation” region, and reservoirs with this type of behavior are known as “retrograde condensate reservoirs.”

Each hydrocarbon reservoir has a characteristic phase diagram and resulting physical and thermodynamic properties. These are usually measured in the laboratory with tests performed on fluid samples obtained from the well in a highly specialized manner. Petroleum thermodynamic properties are known collectively as *PVT* (*pressure–volume–temperature*) properties.

1.2.1.6 Areal Extent

Favorable conclusions on the porosity, reservoir height, fluid saturations, and pressure (and implied phase distribution) of a petroleum reservoir, based on single well measurements, are insufficient for both the decision to develop the reservoir and for the establishment of an appropriate exploitation scheme.

Advances in 3-D and wellbore seismic techniques, in combination with well testing, can increase greatly the region where knowledge of the reservoir extent (with height, porosity, and saturations) is possible. Discontinuities and their locations can be detected. As more wells are drilled, additional information can enhance further the knowledge of the reservoir’s peculiarities and limits.

The areal extent is essential in the estimation of the “original-oil (or gas)-in-place.” The hydrocarbon volume, V_{HC} , in reservoir cubic ft is

$$V_{HC} = Ah\phi(1 - S_w) \quad (1-2)$$

where A is the areal extent in ft^2 , h is the reservoir thickness in ft, ϕ is the porosity, and S_w is the water saturation. (Thus, $1 - S_w$ is the hydrocarbon saturation.) The porosity, height, and saturation can of course vary within the areal extent of the reservoir.

Equation (1-2) can lead to the estimation of the oil or gas volume under standard conditions after dividing by the oil formation volume factor, B_o , or the gas formation volume factor, B_g . This factor is simply a ratio of the volume of liquid or gas under reservoir conditions to the corresponding volumes under standard conditions. Thus, for oil,

$$N = \frac{7758Ah\phi(1 - S_w)}{B_o} \quad (1-3)$$

where N is in stock tank barrels (STB). In Equation (1-3) the area is in acres. For gas,

$$G = \frac{Ah\phi(1 - S_w)}{B_g} \quad (1-4)$$

where G is in standard cubic ft (SCF) and A is in ft^2 .

The gas formation volume factor (traditionally, $\text{res ft}^3/\text{SCF}$), B_g , simply implies a volumetric relationship and can be calculated readily with an application of the real gas law. The gas formation volume factor is much smaller than 1.

The oil formation volume factor ($\text{res bbl}/\text{STB}$), B_o , is not a simple physical property. Instead, it is an empirical thermodynamic relationship allowing for the reintroduction into the liquid (at the elevated reservoir pressure) of all of the gas that would be liberated at standard conditions. Thus the oil formation volume factor is invariably larger than 1, reflecting the swelling of the oil volume because of the gas dissolution.

The reader is referred to the classic textbooks by Muskat (1949), Craft and Hawkins (revised by Terry, 1991), and Amyx, Bass, and Whiting (1960), and the newer book by Dake (1978) for further information. The present textbook assumes basic reservoir engineering knowledge as a prerequisite.

1.2.2 Permeability

The presence of a substantial porosity usually (but not always) implies that pores will be interconnected. Therefore the porous medium is also “permeable.” The property that describes the ability of fluids to flow in the porous medium is permeability. In certain lithologies (e.g., sandstones), a larger porosity is associated with a larger permeability. In other lithologies (e.g., chinks), very large porosities, at times over 0.4, are not necessarily associated with proportionately large permeabilities.

Correlations of porosity versus permeability should be used with a considerable degree of caution, especially when going from one lithology to another. For production engineering calculations these correlations are rarely useful, except when considering matrix stimulation. In this instance, correlations of the *altered* permeability with the *altered* porosity after stimulation are useful.

The concept of permeability was introduced by Darcy (1856) in a classic experimental work from which both petroleum engineering and groundwater hydrology have benefited greatly.

Figure 1-4 is a schematic of Darcy’s experiment. The flow rate (or fluid velocity) can be measured against pressure (head) for different porous media.

Darcy observed that the flow rate (or velocity) of a fluid through a specific porous medium is linearly proportional to the head or pressure difference between the inlet and the outlet and a characteristic property of the medium. Thus,

$$u \propto k\Delta p \quad (1-5)$$

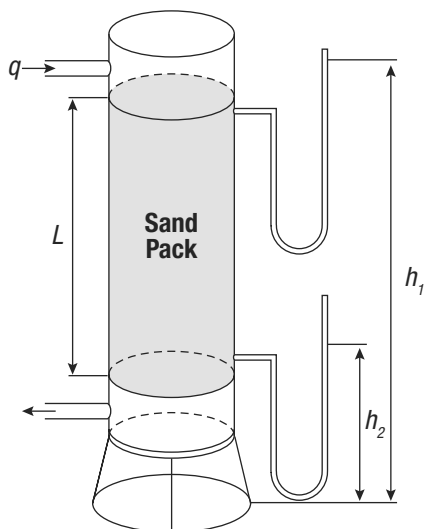


Figure 1-4 Darcy's experiment. Water flows through a sand pack and the pressure difference (head) is recorded.

where k is the permeability and is a characteristic property of the porous medium. Darcy's experiments were done with water. If fluids of other viscosities flow, the permeability must be divided by the viscosity and the ratio k/μ is known as the "mobility."

1.2.3 The Zone near the Well, the Sandface, and the Well Completion

The zone surrounding a well is important. First, even without any man-made disturbance, converging, radial flow results in a considerable pressure drop around the wellbore and, as will be demonstrated later in this book, the pressure drop away from the well varies logarithmically with the distance. This means that the pressure drop in the first foot away from the well is naturally equal to that 10 feet away and equal to that 100 feet away, and so on. Second, all intrusive activities such as drilling, cementing, and well completion are certain to alter the condition of the reservoir near the well. This is usually detrimental and it is not inconceivable that in some cases 90% of the total pressure drop in the reservoir may be consumed in a zone just a few feet away from the well.

Matrix stimulation is intended to recover or even improve the near-wellbore permeability. (There is damage associated even with stimulation. It is the net effect that is expected to be beneficial.) Hydraulic fracturing, today one of the most widely practiced well-completion techniques, alters the manner by which fluids flow to the well; one of the most profound effects is that near-well radial flow and the damage associated with it are eliminated.

Many wells are cemented and cased. One of the purposes of cementing is to support the casing, but at formation depths the most important reason is to provide zonal isolation. Contamination of the produced fluid from the other formations or the loss of fluid *into* other formations

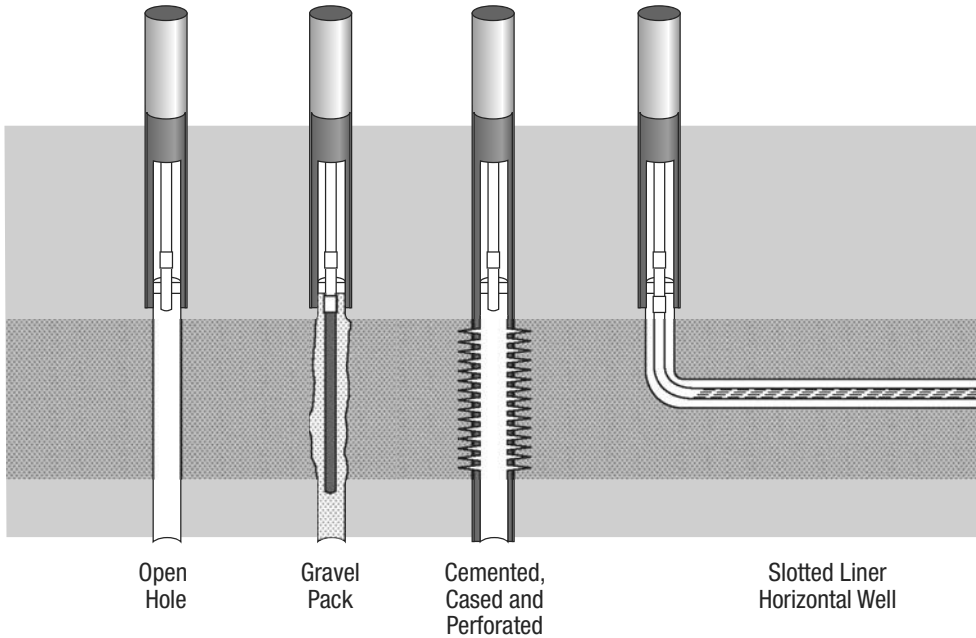


Figure 1-5 Options for well completions.

can be envisioned readily in an open-hole completion. If no zonal isolation or wellbore stability problems are present, the well can be open hole. A cemented and cased well must be perforated in order to reestablish communication with the reservoir. Slotted liners can be used if a cemented and cased well is not deemed necessary and are particularly common in horizontal wells where cementing is more difficult.

Finally, to combat the problems of sand or other fines production, screens can be placed between the well and the formation. Gravel packing can be used as an additional safeguard and as a means to keep permeability-reducing fines away from the well.

The various well completions and the resulting near-wellbore zones are shown in Figure 1-5.

The ability to direct the drilling of a well allows the creation of highly deviated, horizontal, and complex wells. In these cases, a longer to far longer exposure of the well with the reservoir is accomplished than would be the case for vertical wells.

1.2.4 The Well

Entrance of fluids into the well, following their flow through the porous medium, the near-well zone, and the completion assembly, requires that they are lifted through the well up to the surface.

There is a required flowing pressure gradient between the bottomhole and the well head. The pressure gradient consists of the potential energy difference (hydrostatic pressure) and the

frictional pressure drop. The former depends on the reservoir depth and the latter depends on the well length.

If the bottomhole pressure is sufficient to lift the fluids to the top, then the well is “naturally flowing.” Otherwise, artificial lift is indicated. Mechanical lift can be supplied by a pump. Another technique is to reduce the density of the fluid in the well and thus to reduce the hydrostatic pressure. This is accomplished by the injection of lean gas in a designated spot along the well. This is known as “gas lift.”

1.2.5 The Surface Equipment

After the fluid reaches the top, it is likely to be directed toward a manifold connecting a number of wells. The reservoir fluid consists of oil, gas (even if the flowing bottomhole pressure is larger than the bubble-point pressure, gas is likely to come out of solution along the well), and water.

Traditionally, the oil, gas, and water are not transported long distances as a mixed stream, but instead are separated at a surface processing facility located in close proximity to the wells. An exception that is becoming more common is in some offshore fields, where production from subsea wells, or sometimes the commingled production from several wells, may be transported long distances before any phase separation takes place.

Finally, the separated fluids are transported or stored. In the case of formation water it is usually disposed in the ground through a reinjection well.

The reservoir, well, and surface facilities are sketched in Figure 1-6. The flow systems from the reservoir to the entrance to the separation facility are the production engineering systems that are the subjects of study in this book.

1.3 Well Productivity and Production Engineering

1.3.1 The Objectives of Production Engineering

Many of the components of the petroleum production system can be considered together by graphing the inflow performance relationship (IPR) and the vertical flow performance (VFP). Both the IPR and the VFP relate the wellbore flowing pressure to the surface production rate. The IPR represents what the reservoir can deliver, and the VFP represents what the well can deliver. Combined, as in Figure 1-7, the intersection of the IPR with the VFP yields the well deliverability, an expression of what a well will actually produce for a given operating condition. The role of a petroleum production engineer is to maximize the well deliverability in a cost-effective manner. Understanding and measuring the variables that control these relationships (well diagnosis) becomes imperative.

While these concepts will be dealt with extensively in subsequent chapters, it is useful here to present the productivity index, J , of an oil well (analogous expressions can be written for gas and two-phase wells):

$$J = \frac{q}{p - p_{wf}} = \frac{kh}{\alpha_r B \mu} J_D. \quad (1-6)$$

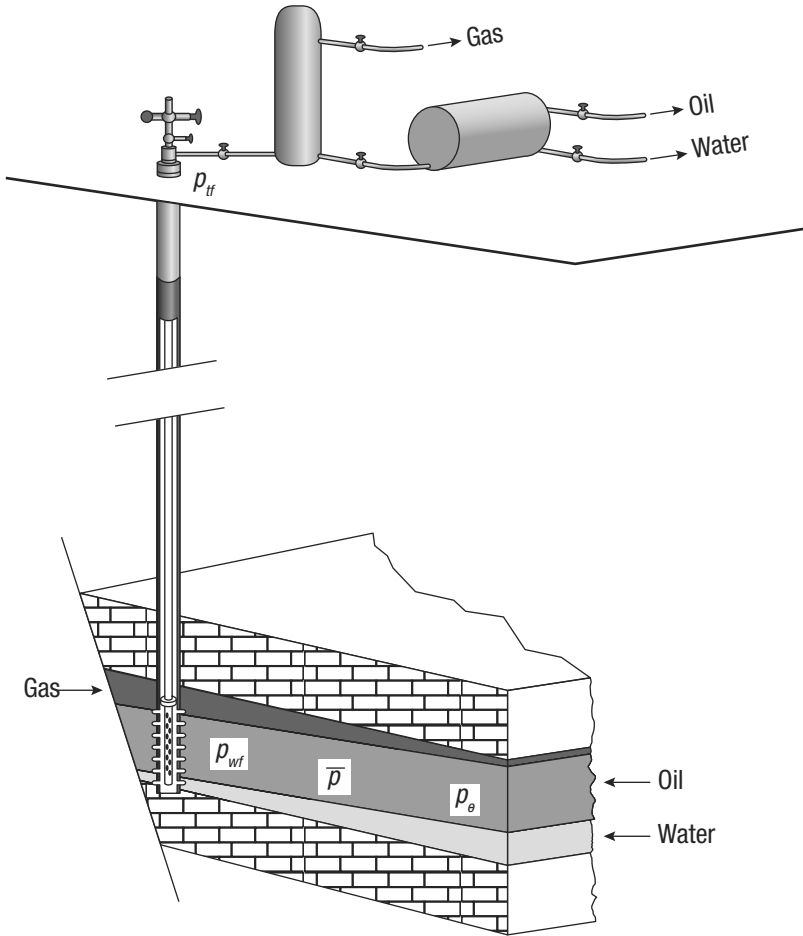


Figure 1-6 The petroleum production system, including the reservoir, underground well completion, the well, wellhead assembly, and surface facilities.

Equation (1-6) succinctly describes what is possible for a petroleum production engineer. First, the dimensioned productivity index with units of flow rate divided by pressure is proportional to the dimensionless (normalized) productivity index J_D . The latter, in turn, has very well-known representations. For steady-state flow to a vertical well,

$$J_D = \frac{1}{\ln\left(\frac{r_e}{r_w}\right) + s} \quad (1-7)$$

For pseudosteady state flow,

$$J_D = \frac{1}{\ln\left(\frac{r_e}{r_w}\right) - 0.75 + s}, \quad (1-8)$$

and for transient flow,

$$J_D = \frac{1}{p_D + s} \quad (1-9)$$

where p_D is the dimensionless pressure. The terms steady state, pseudosteady state, and transient will be explained in Chapter 2. The concept of the dimensionless productivity index combines flow geometry and skin effects, and can be calculated for any well by measuring flow rate and pressure (reservoir and flowing bottomhole) and some other basic but important reservoir and fluid data.

For a specific reservoir with permeability k , thickness h , and with fluid formation volume factor B and viscosity μ , the only variable on the right-hand side of Equation (1-6) that can be engineered is the dimensionless productivity index. For example, the skin effect can be reduced or eliminated through matrix stimulation if it is caused by damage or can be otherwise remedied if it is caused by mechanical means. A negative skin effect can be imposed if a successful hydraulic fracture is created. Thus, stimulation can improve the productivity index. Finally, more favorable well geometry such as horizontal or complex wells can result in much higher values of J_D .

In reservoirs with pressure drawdown-related problems (fines production, water or gas coning), increasing the productivity can allow lower drawdown with economically attractive production rates, as can be easily surmised by Equation (1-6).

Increasing the drawdown ($p - p_{wf}$) by lowering p_{wf} is the other option available to the production engineer to increase well deliverability. While the IPR remains the same, reduction of the flowing bottomhole pressure would increase the pressure gradient ($p - p_{wf}$) and the flow rate, q , must increase accordingly. The VFP change in Figure 1-7 shows that the flowing bottomhole pressure may be lowered by minimizing the pressure losses between the bottomhole and the separation facility (by, for example, removing unnecessary restrictions, optimizing tubing size, etc.), or by implementing or improving artificial lift procedures. Improving well deliverability by optimizing the flow system from the bottomhole location to the surface production facility is a major role of the production engineer.

In summary, well performance *evaluation* and *enhancement* are the primary charges of the production engineer. The production engineer has three major tools for well performance evaluation: (1) the measurement of (or sometimes, simply the understanding of) the

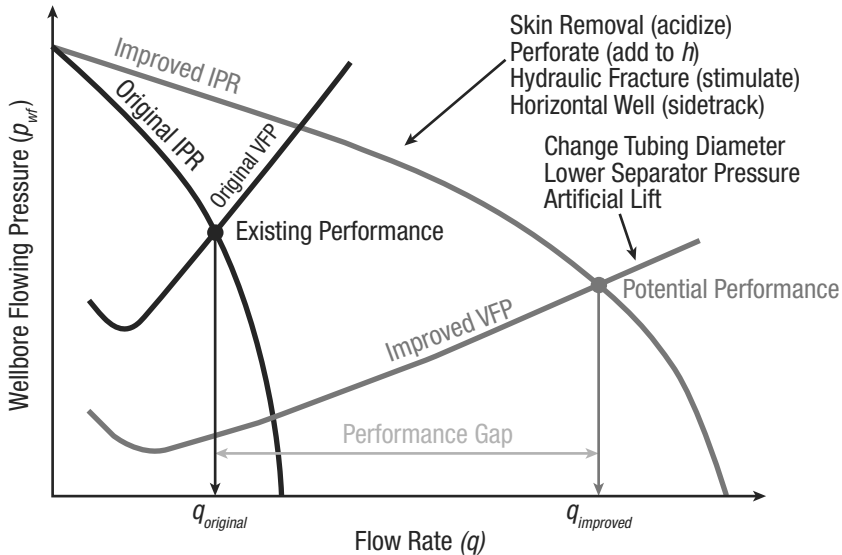


Figure 1-7 Well deliverability gap between the original well performance and optimized well performance.

rate-versus-pressure drop relationships for the flow paths from the reservoir to the separator; (2) well testing, which evaluates the reservoir potential for flow and, through measurement of the skin effect, provides information about flow restrictions in the near-wellbore environment; and (3) production logging measurements or measurements of pressure, temperature, or other properties by permanently installed downhole instruments, which can describe the distribution of flow into the wellbore, as well as diagnose other completion-related problems.

With diagnostic information in hand, the production engineer can then focus on the part or parts of the flow system that may be optimized to enhance productivity. Remedial steps can range from well stimulation procedures such as hydraulic fracturing that enhance flow in the reservoir to the resizing of surface flow lines to increase productivity. This textbook is aimed at providing the information a production engineer needs to perform these tasks of well performance evaluation and enhancement.

1.3.2 Organization of the Book

This textbook offers a structured approach toward the goal defined above. Chapters 2–4 present the inflow performance for oil, two-phase, and gas reservoirs. Chapter 5 deals with complex well architecture such as horizontal and multilateral wells, reflecting the enormous growth of this area of production engineering since the first edition of the book. Chapter 6 deals with the

condition of the near-wellbore zone, such as damage, perforations, and gravel packing. Chapter 7 covers the flow of fluids to the surface. Chapter 8 describes the surface flow system, flow in horizontal pipes, and flow in horizontal wells. Combination of inflow performance and well performance versus time, taking into account single-well transient flow and material balance, is shown in Chapters 9 and 10. Therefore, Chapters 1–10 describe the workings of the reservoir and well systems.

Gas lift is outlined in Chapter 11, and mechanical lift in Chapter 12.

For an appropriate product engineering remedy, it is essential that well and reservoir diagnosis be done.

Chapter 13 presents the state-of-the-art in modern diagnosis that includes well testing, production logging, and well monitoring with permanent downhole instruments.

From the well diagnosis it can be concluded whether the well is in need of matrix stimulation, hydraulic fracturing, artificial lift, combinations of the above, or none.

Matrix stimulation for all major types of reservoirs is presented in Chapters 14, 15, and 16. Hydraulic fracturing is discussed in Chapters 17 and 18.

Chapter 19 is a new chapter dealing with advances in sand management.

This textbook is designed for a two-semester, three-contact-hour-per-week sequence of petroleum engineering courses, or a similar training exposure.

To simplify the presentation of realistic examples, data for three characteristic reservoir types—an undersaturated oil reservoir, a saturated oil reservoir, and a gas reservoir—are presented in Appendixes. These data sets are used throughout the book. Examples and homework follow a more modern format than those used in the first edition. Less emphasis is given to hand-done calculations, although we still think it is essential for the reader to understand the salient fundamentals. Instead, exercises require application of modern software such as Excel spreadsheets and the PPS software included with this book, and trends of solutions and parametric studies are preferred in addition to single calculations with a given set of variables.

1.4 Units and Conversions

We have used “oilfield” units throughout the text, even though this system of units is inherently inconsistent. We chose this system because more petroleum engineers “think” in bbl/day and psi than in terms of m^3/s and Pa. All equations presented include the constant or constants needed with oilfield units. To employ these equations with SI units, it will be easiest to first convert the SI units to oilfield units, calculate the desired results in oilfield units, then convert the results to SI units. However, if an equation is to be used repeatedly with the input known in SI units, it will be more convenient to convert the constant or constants in the equation of interest. Conversion factors between oilfield and SI units are given in Table 1-1.

Table 1-1 Typical Units for Reservoir and Production Engineering Calculations

Variable	Oilfield Unit	SI Unit	Conversion (Multiply SI Unit)
Area	acre	m ²	2.475×10^{-4}
Compressibility	psi ⁻¹	Pa ⁻¹	6897
Length	ft	m	3.28
Permeability	md	m ²	1.01×10^{15}
Pressure	psi	Pa	1.45×10^{-4}
Rate (oil)	STB/d	m ³ /s	5.434×10^5
Rate (gas)	MSCF/d	m ³ /s	3049
Viscosity	cp	Pa-s	1000

Example 1-1 Conversion from Oilfield to SI Units

The steady-state, radial flow form of Darcy's law in oilfield units is given in Chapter 2 as

$$p_e - p_{wf} = \frac{141.2qB\mu}{kh} \left(\ln \frac{r_e}{r_w} + s \right) \quad (1-10)$$

for p in psi, q in STB/d, B in res bbl/STB, μ in cp, k in md, h in ft, and r_e and r_w in ft (s is dimensionless). Calculate the pressure drawdown ($p_e - p_{wf}$) in Pa for the following SI data, first by converting units to oilfield units and converting the result to SI units, then by deriving the constant in this equation for SI units.

Data

$q = 0.001 \text{ m}^3/\text{s}$, $B = 1.1 \text{ res m}^3/\text{ST m}^3$, $\mu = 2 \times 10^{-3} \text{ Pa-s}$, $k = 10^{-14} \text{ m}^2$, $h = 10 \text{ m}$,
 $r_e = 575 \text{ m}$, $r_w = 0.1 \text{ m}$, and $s = 0$.

Solution

Using the first approach, we first convert all data to oilfield units. Using the conversion factors in Table 1-1,

$$q = \left(0.001 \frac{\text{m}^3}{\text{s}}\right)(5.434 \times 10^5) = 543.4 \text{ STB/d} \quad (1-11)$$

$$B = 1.1 \text{ res bbl/STB} \quad (1-12)$$

$$\mu = (2 \times 10^{-3} \text{ Pa-s})(10^3) = 2 \text{ cp} \quad (1-13)$$

$$k = (10^{-14} \text{ m}^2)(1.01 \times 10^{15}) = 10.1 \text{ md} \quad (1-14)$$

$$h = (10 \text{ m})(3.28) = 32.8 \text{ ft.} \quad (1-15)$$

Since r_e is divided by r_w , the units for these radii do not have to be converted. Now, from Equation (1-10),

$$p_e - p_{wf} = \frac{(141.2)(543.4)(1.1)(2)}{(10.1)(32.8)} \left[\ln\left(\frac{575}{0.1}\right) + 0 \right] = 4411 \text{ psi} \quad (1-16)$$

and converting this results to Pascals,

$$p_e - p_{wf} = (4411 \text{ psi})(6.9 \times 10^3) = 3.043 \times 10^7 \text{ Pa} \quad (1-17)$$

Alternatively, we can convert the constant 141.2 to the appropriate constant for SI units, as follows (including only-to-be-converted variables):

$$p_e - p_{wf}(\text{Pa}) = \frac{(141.2)[q(\text{m}^3/\text{s})(5.43 \times 10^5)][\mu(\text{Pa} - \text{s})(10^3)]}{[k(\text{m}^2)(1.01 \times 10^{15})][h(\text{m})(3.28)]} (6.9 \times 10^3) \quad (1-18)$$

or

$$p_e - p_{wf} = \frac{0.159qB\mu}{kh} \left(\ln \frac{r_e}{r_w} + s \right) = \frac{qB\mu}{2\pi kh} \left(\ln \frac{r_e}{r_w} + s \right). \quad (1-19)$$

The constant derived, 0.159, is $1/2\pi$, as it should be for this consistent set of units. Substituting the parameters in SI units directly into Equation (1-19), we again calculate that $p_e - p_{wf} = 3.043 \times 10^7 \text{ Pa}$.

Often, in regions where metric units are customary, a mix of SI and non-SI units is sometimes employed. For example, in using Darcy's law, the units for flow rate may be m^3/d ; for viscosity, cp; for permeability, md; and so on. In this instance, units can be converted to oilfield units in the same manner demonstrated here for consistent SI units.

References

1. Amyx, J.W., Bass, D.M., Jr., and Whiting, R.L., *Petroleum Reservoir Engineering*, McGraw-Hill, New York, 1960.
2. Craft, B.C., and Hawkins, M. (revised by Terry, R.E.), *Applied Petroleum Engineering*, 2nd ed., Prentice Hall, Englewood Cliffs, NJ, 1991.
3. Dake, L.P., *Fundamentals of Reservoir Engineering*, Elsevier, Amsterdam, 1978.
4. Darcy, H., *Les Fontaines Publiques de la Ville de Dijon*, Victor Dalmont, Paris, 1856.
5. Earlougher, R.C., Jr., *Advances in Well Test Analysis*, SPE Monograph, Vol. 5, SPE, Richardson, TX, 1977.
6. Muskat, M., *Physical Principles of Oil Production*, McGraw-Hill, New York, 1949.

This page intentionally left blank

Index

Note: Page numbers with “f” indicate figures; those with “t” indicate tables.

A

ACA (after-closure analysis), 430, 433, 434–35

Acid

acid/rock interactions (*See* Matrix acidizing)

additives, in sandstone acidizing

design, 512

concentration profiles, 475f

gas, 68

injection into gas reservoir, 494–96

placement, mechanical, 496–97

reaction products, precipitation of, 461–64

response curves, 471f

selection, in sandstone acidizing design,

470–71, 471t

transport to mineral surface, 460–61

Acid capacity number

fast-reacting minerals, 474, 477

HCl, 510

slow-reacting minerals, 474

Acid fracture conductivity, 545–52

average, 551, 552t

effective, 548–49t

fracture width profile along a fracture, 546f

Acid fracturing, 541–54

acid diffusion coefficients, 544f

acid fracture conductivity, 545–52

acid-fractured well, productivity of, 552–53, 553f

acid penetration distance, 544–45

acid penetration in fractures, 542–45, 543f

vs. matrix acidizing, 443

propped fracture vs. acid fracture performance, 553–54

well productivity, 552–53, 553f

Acidizing process, optimal rate schedule for

monitoring, 486–96

acid injection into gas reservoir, 494–96

acid treatment data, 492t

design chart for monitoring acidizing,

Pacaloni's, 489–90, 490f

injection rate and pressure, maximum, 487–89, 488f

maximum Δp , maximum rate procedure,

Pacaloni's, 489–90, 490f

skin factor evolution during acidizing, 486f,

490–93, 493t, 494f

Acidizing treatment. *See also* Matrix acidizing

in sandstone acidizing design, 512–13

Acid-mineral reaction kinetics, 453–60

constants in HCl-mineral reaction kinetics

models, 455t

constants in HF-mineral reaction kinetics

models, 456t

dissolution rate of rotating disk of feldspar,

457–58

fluosilicic acid with sandstone minerals, 460

HCl and weak acids with carbonates, 454–55

HF with sandstone minerals, 455–60

measurement of, 454

relative reaction rates of sandstone minerals,

459

Acid-mineral reaction stoichiometry, 446–52

chemical reactions, primary, 448t

dissolving power of acids, 450t, 451t

HCl preflush volume, calculating, 452

spending of acid components, 451t

Acid penetration

distance, 544–45

in fractures, 542–45, 543f

Acid volume, 472–96

acidizing process, optimal rate schedule for monitoring, 486–96

design, 478–80

injection rate and, 472–96

to remove drilling mud damage, 480–81, 481f

sandstone acidizing models, 472–85

treatment design, competing factors

influencing, 472

After-closure analysis (ACA), 430, 433, 434–35

Agarwal-Gardner type curves, 578–79, 578f

Altered permeability, 8

Altered porosity, 8
 Anisotropy, 2, 3f, 401
 dependence of deviated well skin factor on
 reservoir, 134
 horizontal, 113
 ratio, 98, 104
 vertical-to-horizontal, 95, 97–98, 112
 Annular flow, 179, 188, 220, 221, 221f, 222,
 223f, 224f, 226
 Annular mist flow, 222, 223f, 224f, 226
 Areal extent, 7–8
 Arps decline curve analysis, 388, 388t, 390
 Artificial lift, 11, 13

B

Babu-Odeh model, 103–9
 schematic of, 103f
 well performance with, 106–8
 Backflow, 392
 Baker flow regime map, 222f, 225–26
 Ball sealers, 497
 Barnett shale formation, 586
 Beam loads, sucker rod and, 345–47
 Beam pumping units, 345
 Bean (choke diameter), 241
 Before-closure behavior, 430, 432, 433, 435–37
 Beggs-Brill correlation, 201–6, 223, 226–28
 Beggs-Brill flow regime map, 224f, 225, 226
B factor correlations, 693t
 Bilinear flow, 416, 416f, 418–20
 Biological damage, 157
 Biwing fracture, events with, 648f
 Borate-crosslinked fluid, properties of, 638–39f,
 638–40
 Bottomhole flowing pressure, 1, 4, 6, 10–11, 13
 in gas well, calculating, 182–84
 in gas well, flow rate vs., 78–79, 78t, 79f
 with GLR values of 300 and 800 SCF/STB,
 264–65
 injected gas, 313
 injection rate increase, impact of, 312–13
 modified Hagedorn-Brown correlation, 266,
 266t
 production rates, 266, 266t
 reduction in, VFP curve and, 268
 well deliverability, 261
 wellhead pressure, 262
 Bottomwater, excessive, 380–81
 Boundaries, 2, 3f

Boundary dominated flow, 577
 Breakdown pressure, 602, 604, 605, 605f, 606f
 Brill-Mukherjee model, 192
 Bubble flow, 188, 210
 dispersed, 222, 222f, 223f, 224f, 226
 elongated, 222, 222f, 223f, 224f
 Griffith correlation, 198–201
 Bubble-point pressure, 6
 introduction, 41–42
 PVT properties below, 43, 45f
 saturated oil characterized by, 42–43
 Buijse-Glasbergen model, 529–31, 531f
 Buildup analysis. *See also* Log-log diagnostic plot
 limited-entry vertical well, 413–14, 414f
 for limited-entry well, 413–14, 414f
 model match for, 409f, 414f

C

Cake resistance, effect on acid placement, 506–8
 injection rate history, total, 508f
 injection rate into high-permeability layer,
 507f
 injection rate into low-permeability layer, 507f
 Carbonate acidizing design, 519–55
 acid fracturing, 541–54
 HCl acid and weak acid reactions with,
 454–55
 horizontal wells, acidizing of, 554–55, 554f
 introduction, 519–22
 matrix acidizing design for carbonates, 535–41
 skin evolution during, 539–40, 540f
 wormhole formation and growth, 522–25
 wormhole propagation models, 525–35
 Cased hole logs, 368–87. *See also* Production log
 evaluation
 Cased well, 9–10, 10f
 completion skin factors, 138–46
 Cavity completion, 677
 Cemented well, 9–10, 10f
 Cement evaluation, 368–69, 369f
 Cement squeeze, 370, 374–75
 Channeling, 374–375f, 374–76, 376f
 Chemical precipitation, 154–55
 Chen equation, 177–78, 197, 206
 Choke, 236–47
 critical flow, 242, 246, 247
 diameter (bean), 241
 flow coefficient, 240f
 flow rate, 237

- gas-liquid flow, 243–47
 - horizontal well flow profile, 255f
 - kinetic energy pressure drop through, 240
 - performance curves, 246–47, 247f
 - schematic of, 237f
 - single-phase gas flow, 241–43
 - single-phase liquid flow, 240–41
 - size, 242, 243f, 244–46, 255f
 - transverse hydraulic fractures, 592–94
 - Churn flow, 188, 191
 - Closure stress, 430–37
 - after-closure analysis, 430, 433, 434–35
 - before-closure behavior, 430, 432, 433, 435–37
 - vs. proppant conductivity, 643, 644f
 - Colebrook-White equation, 176–77
 - Completion damage, 159–61
 - Completion failure avoidance, 698–99
 - Complex fracture geometry, creating, 615–16
 - Complex fracturing, defined, 610, 615
 - Compressible, single-phase flow of, 179–84
 - calculation of bottomhole flowing pressure in gas well, 182–84
 - equation for pressure drop, 179–82
 - Condensate, 7
 - Conductive fracture length, 562–66, 565f
 - Conductivity performance
 - finite fracture, 578–79
 - infinite fracture, 574–78
 - Conical wormhole forms, 523
 - Connate water saturation, 4
 - Continuous gas-lift design, 303–10
 - gas compressors, power requirements for, 309–10
 - GLR and gas-lift rate, calculating, 303–4
 - natural vs. artificial flowing gradient, 303–4
 - point of injected gas, 305–8
 - pressure of injected gas, 304–5
 - tubing performance curve, 306, 308f
 - Continuous gas-lift system, 300–301, 301f
 - Correlations
 - Beggs-Brill, 201–6, 223, 226–28
 - β factor, 693t
 - Dukler, 231–34
 - Eaton, 228–31
 - empirical constants in two-phase critical flow, 243–44, 244t
 - flow in formation in non-Darcy coefficient, 81–82t
 - Gilbert, 243, 244–46, 244t
 - Gray, 206–10
 - Griffith, 198–201
 - Hagedorn-Brown, 192–98, 228
 - Omana, 244, 245, 246
 - porosity vs. permeability, 8
 - pressure gradient, 226, 230, 231, 232
 - property, for two-phase systems, 47–52
 - Ros, 243, 244–46, 244t
 - two-phase, for horizontal well inflow, 115–16
 - Cricodentherm, 7
 - Critical depth for horizontal fracture, 607–8, 608f
 - Critical flow
 - vs. critical point of fluid, 237
 - empirical correlations for, in gas-liquid flow, 243–44, 244t
 - through choke, 242, 246, 247
 - Critical point, 6
 - Crossover method of gravel pack placement, 680, 681f
 - Cylindrical flow, 401, 418
- ## D
- Damkohler number, 474–75
 - Darcy. *See also* Non-Darcy flow
 - experiment, 8–9, 9f
 - law in radial coordinates, 19
 - Data farcs, 303
 - Decline curve analysis, 387–90, 590, 591f
 - Δ in kinetic energy pressure drop, meaning of, 234
 - Δp_F , frictional pressure drop, 176–79
 - Δp_{KE} , pressure drop due to kinetic energy change, 174–76
 - Δp_{PE} , pressure drop due to potential energy change, 173–74
 - Depth
 - critical, for horizontal fracture, 607–8, 608f
 - stresses vs., 604
 - Design fracture treatment to achieve optimal dimensions, 634–35
 - Deterministic models, 192
 - Deviated production wells in HPF, 694–97, 698f
 - Dew-point curve, 7
 - Diagnostic fracture injection test (DFIT). *See* Fracture calibration injection falloff
 - Differential depletion, 392, 393
 - Dimensionless effective wellbore radius, 563, 564, 564f

Dimensionless groups in sandstone acidizing
 model, 476t

Dimensionless productivity index, 13

Discontinuities, 2, 3f

Dispersed bubble flow, 222, 222f, 223f, 224f, 226

Distributed flow, 220–26
 bubble, 221f, 222, 222f, 223f, 224f, 226
 mist, 221f, 222, 222f

Downhole instruments, 14

Downhole properties, estimating, 51–52

Draining patterns, irregular, 30–34
 production rate and, 30, 32
 reservoir pressure in adjoining drainage areas,
 determining, 32–34, 32f
 shape factor for closed, single-well drainage
 areas, 31f

Drawdown, 13, 16, 22

Drawdown failure condition, 666–67, 671f

Drilling damage
 mud, acid volume needed to remove, 480–81,
 481f
 sources of, 157–59

Dual-porosity approach, 592

Dukler correlation, 231–34, 233f

Duns-Ros flow regime map, 188, 190f

Dynamic displacement pumps, 335, 354–59
 electrical submersible, 354–59

Dynamic value, 610

Dynamometer card
 for elastic rods, 348f
 from properly working rod pump, 348f
 rod pump performance analyzed from, 347–50
 shapes, 348–50, 349f

E

Eaton correlation, 228–31
 friction factor, 228, 229f
 holdup, 228, 229f

Economides et al. model, 109–13
 parallelepiped model with appropriate
 coordinates, 110f
 results summary, 113t
 shape factors, approximate, 111t
 well performance with, 112–13

Effective drainage radius, 80, 390, 418

Effective wellbore radius, 21–22

Electrical resistivity, 5–6, 5f

Electrical submersible pump (ESP), 335, 354–59
 completion, 353f, 354, 355f

design, 357, 358–59
 pump characteristic chart, 354, 356f, 358f
 selecting, 356–57

Ellipsoidal flow around perforation, 476f

Elongated bubble flow, 222, 222f, 223f, 224f

Empirical models, 192

Emulsions, fluid damage and, 155–56

Equations
 Chen, 177–78, 197, 206
 Colebrook-White, 176–77
 flow regimes, 402–3t
 Hagen-Poiseuille, 171, 172
 mechanical energy balance, 172, 179, 192,
 193–94, 335
 pressure drawdown, 25
 pressure drop, 179–82

ESP. *See* Electrical submersible pump (ESP)

EUR (expected ultimate recovery), 388–90, 389f

Expected ultimate recovery (EUR), 388–90, 389f

Exponential decline, 577

F

Fanning friction factor, 176, 197, 210

Feldspar, dissolution rate of rotating disk of,
 457–58

Fetkovich's approximation, 57–58

F-function constants, 573, 573t

Fine migration, mechanisms for, 154

Fines, 151

Finite fracture conductivity performance, 578–79

Fittings, equivalent lengths of, 238–39t

Flow, 217–56
 capacity of low-pressure gas line, 219–20
 horizontal pipes, 217–36
 horizontal wellbores, 250–56
 introduction, 217
 surface gathering systems, 247–50
 through chokes, 236–47

Flow geometries. *See* Flow regimes

Flow profile used to evaluate damaged well, 372

Flow regime analysis, 400–437
 flow regime equations, 402–3t
 fracture calibration injection falloff, 429–37,
 430, 431f
 horizontal well, 429, 429f
 limited-entry vertical well, 410–16, 410f
 permeability, determining, 401
 pressure buildup analysis, 406–7, 410f
 radial flow geometries for vertical wells, 405

- reservoir pressure, estimating, 405–6
- skin factor, estimating, 405
- transient well analysis, 400–437
- unit conversion factors, 404t
- vertically fractured vertical well, 416–28
- wellbore storage, 407–10
- Flow regime maps, 188, 190–91
 - Baker, 222f, 225–26
 - Beggs-Brill, 224f, 225, 226
 - Duns-Ros, 188, 190f
 - Mandhane, 223, 223f, 225, 226
 - Taitel-Dukler, 190–91, 190f, 223, 224f
- Flow regimes. *See also* Single-phase flow regimes; Two-phase flow regimes
 - defined, 400–401
 - distributed, 220, 221f, 222, 223, 224f
 - equations, 402–3t
 - intermittent, 220, 221f, 222, 223, 224f, 226, 227
 - limited-entry vertical well, 410–11, 410f
 - maps of (*See* Flow regime maps)
 - pressure buildup analysis, 406–7, 410f
 - segregated, 220–21, 221f, 223, 224f
 - vertically fractured vertical well, 416–19, 416f
- Fluid damage, 155–56
- Fluid diversion in carbonates, 540–41
- Fluid efficiency in fracture calibration injection
 - falloff, 430, 432, 433t, 435
- Fluid placement and diversion, 496–509
 - ball sealers, 497
 - mechanical acid placement, 496–97
 - particulate diverting agents, 497–508
 - viscous diversion, 508–9
- Fluid saturations, 4–6
- Fluid volume
 - calculations, total, 626–28
 - requirements, 624–29
- Fluosilicic acid reactions with sandstone minerals, 460
- Formation damage, 157–63
 - completion damage, 159–61
 - drilling damage, 157–59
 - injection damage, 162–63
 - production damage, 161–62
 - during well operations, sources of, 157–63
- Formation damage mechanisms, 151–57
 - biological damage, 157
 - chemical precipitation, 154–55
 - emulsions, 155–56
 - fine migration, mechanisms for, 154
 - mechanical damage, 156
 - particle plugging of pore spaces, 151–54
 - permeability, 155–56
 - wettability changes, 155–56
- Formation flow velocity
 - in gravel pack completion, 687–88
 - to HPF, 693–94
- Formation fluid sampling, 391–93
- Formation linear flow, 416
- Formation linear flow approximation, 577–78
- Formation sand production, factors affecting, 662–72
 - drawdown failure condition, 666–67, 671f
 - events to induce sand problems, 663f
 - Mohr circle, 663, 663f
 - Mohr-Coulomb criterion, 664–65, 664f, 666f
 - numerical simulation cases, conditions for, 667–69, 668t, 669f
 - productivity ratio vs. perforation
 - density, 672f
 - shut-in, 669–70
 - simulated failure criteria, 670f
- Frac-pack completion, 688–93
 - β factor correlations for, 693t
 - flowing perforations, number of, 692
 - model for radial and fracture-face damage, 689–90, 690f
 - skin, 690–91
- Fracture calibration injection falloff, 429–37, 430, 431f
 - closure stress, 430–37
 - fluid efficiency, 430, 432, 433t, 435
 - fracture height, 432, 433t, 436
 - fracture models, 432, 433t, 434
 - fracture width, 432, 433t, 436
 - g-function, 430
 - leakoff coefficient, 430, 432, 433t, 435
 - log-log diagnostic plot, 430, 431f
 - parameters, 430
 - power law fracture surface growth assumption, 430, 432
 - sequence of events observed in, 430, 431f
- Fracture diagnostics, 646–50
 - fracture geometry measurement, 647–50
 - fracturing pressure analysis, 646–47
 - Nolte-Smith analysis pressure response modes, 647t
 - Nolte-Smith plot, 646–47, 647f
- Fracture direction in reservoir rock, 606–7, 608–9
- Fractured oil well model match, 422f

- Fractured well behavior in low-permeability reservoirs, 574–79
 - Agarwal-Gardner type curves, 578–79, 578f
 - finite fracture conductivity performance, 578–79
 - formation linear flow approximation, 577–78
 - infinite fracture conductivity performance, 574–78
 - long-term, 575–76, 577f
- Fractured well performance, 585–92
 - shale reservoirs, 586–92
 - tight gas reservoirs, 586
- Fractured well productivity, 566–73
- Fracture geometry, 609–16. *See also* Fracture width
 - complex, creating, 615–16
 - evolving, 628–29, 629f
 - measurement, 647–50
 - TSO treatments, 615
- Fracture geometry and net pressure, 616–35
 - design fracture treatment to achieve optimal dimensions, 634–35
 - fluid volume calculations, total, 626–28
 - fluid volume requirements, 624–29
 - height migration, 621–23, 622f, 624f
 - net fracturing pressure, 616–20, 621
 - pad volume calculations, total, 626–28
 - proppant schedule, 629–30, 631f
 - propped fracture width, 631–35
- Fracture geometry for maximizing fractured well productivity, 566–73, 568f, 569f, 570f
 - calculating, 571–72
 - F*-function constants, 573, 573t
 - unified fracture design, 567–73
- Fracture geometry measurement, 647–50
 - microseismic monitoring, 648–50
 - tiltmeter mapping, 650
 - tracers and temperature, 650
- Fracture height
 - fracture calibration injection falloff, 432, 433t, 436
 - mapping, with microseismic monitoring, 650f
 - measured with radioactively tagged proppant, 382–83, 384f
 - migration, 621–23, 622f, 624f
 - production log evaluation, measurement of, 381
 - temperature log interpretation of, in production log evaluation, 382, 383f
- Fracture initiation pressure, calculating, 606
- Fracture injection tests, 603
- Fracture length, 562–66, 565f
- Fracture models
 - KGD, 432, 433t
 - PKN, 433t, 434
 - radial, 432, 433t
- Fracture patterns, 586–89, 588f, 589f
 - drainage, 589f
 - microseismic map of, 589f
 - in tight reservoirs, 586, 588, 588f
- Fracture ports, 653
- Fracture properties in HPF, 697t
- Fractures. *See* Acid fracturing
- Fracture width
 - fracture calibration injection falloff, 432, 433t, 436
 - KGD model, 609–10, 614, 614f
 - non-Newtonian fluid, 610, 613
 - PKN model, 609, 610–13, 611f
 - radial model, 609, 615
- Fracturing. *See* Acid fracturing; Hydraulic fracturing for well stimulation
- Fracturing fluids, 635–42
 - frictional pressure drop during pumping, 641–42
 - perfect, 646
 - rheological properties, 636–41
 - selection guide, 637f
 - usage, 635f
- Fracturing horizontal wells, 651–55
 - fracture orientation in, 651–52, 651f
 - well completions for multiple fracturing, 652
- Fracturing pressure analysis, 646–47
- Frictional pressure drop
 - Δp_F , 176–79
 - during pumping, 641–42
 - well length, 11
- Friction factor correlation, Eaton, 228, 229f
- Froth flow, 222, 223f, 224f, 226
- Froude number, 223, 224f, 226
- Full-strength mud acid, 470
- Furui et al. model, 100–103
 - schematic of, 101f
 - well performance with, 102–3
 - wormhole, 531–35, 534f

G

Gas

- effect on pump efficiency, 350–52, 350f
- in reservoir fluid, 11
- use of term, 4

Gas anchors, 352

Gas compressibility factor

- calculated, in transient IPR for gas well, 88–90t
- correction for nonhydrocarbon gases, 68–71
- for mixtures of hydrocarbon gases, 63–65, 64f
- of sour gas, 70–71, 70t

Gas compressors, power requirements for, 309–10

Gas coning, 379–80, 380f

Gas deviation factor. *See* Gas compressibility factorGas flow, 218–20, 241–43. *See also* Gas-liquid flow

- capacity of low-pressure gas line, 219–20
- excessive, 374, 378–79, 378f, 379f
- kinetic energy pressure drop in, 218
- performance for different choke sizes, 242, 243f
- preferential, 376–77
- single-phase, 218–20, 241–43

Gas formation volume factor, 7–8, 74–75

Gas gravity, 61–63

- pseudocritical properties from, 66–68

Gas isothermal compressibility, 75–76

Gas lift, 11, 299–332

- depleting reservoir, 330, 330f
- economics of, 324–26, 325f, 325t
- introduction, 299
- near-wellbore damage and, 232f, 321, 322–24
- onset of, 331–32
- performance, GLR and, 261–62
- purpose of, 261
- requirements *vs.* time, 328–32
- tubing size *vs.* gas-lift requirements, 326–27, 327f, 328f, 329f
- types of, 300–301, 301f
- valves, unloading wells with multiple, 310–12

Gas-lift design

- continuous, 303–12
- optimization of, 312–16

Gas-lift design, continuous, 303–12

- flowing gradient, natural *vs.* artificial, 303–4
- gas compressors, power requirements of, 309–10

Gas-lift design, optimization of, 312–16

- GLR values, 312–15, 315f, 316f, 318f, 319f
- injection rate increase, impact of, 312–13

- maximum production rate with gas lift, 314–16, 315f, 316f

- sustaining production rate while pressure depletes, 313–14

Gas-lift performance curve, 316–28, 321f

- development of, 319–20
- IPR and optimum gas lift, 321f
- time dependency, 320f

Gas-lift system, 299–302. *See also* Gas-lift valves

- completions of, 299, 300, 301f
- schematic of, 300f

Gas-lift valves, 300–301, 302f

- multiple, unloading wells with, 310–12, 311f
- opening and closing, 301
- positioning, 300
- pressure regulator, 301, 302f

Gas-liquid flow, 243–47

- choke size for, 244–46
- horizontal, predicting, 225–26
- through chokes, 243–47

Gas-liquid ratio (GLR)

- continuous gas-lift design, 303–4
- gas lift performance, 261–62
- gradient curves for, 303
- gradient curves for range of values, 265f
- liquid production rate *vs.*, 319f, 320f
- maximum gas-lift production rate, 312–15, 315f, 316f, 318f
- optimum gas-lift performance, 317–21, 317f
- VFP and, impact on, 264–65

Gas production gathering systems. *See* Surface gathering systems

Gas viscosity, 71–74, 72–73f

Gas well

- acid injection into, 494–96
- horizontal, inflow performance relationship for, 114–15
- material balance, 294–96
- performance and production forecast, 294–96, 296t
- transient flow of, 84–91

Gas well deliverability, 270–73, 272f

- approximation of, 76–79
- curve, formation of, 82–83, 84f
- flow rate *vs.* bottomhole pressure for gas well, 78–79, 78t, 79f
- IPR and VFP in, 270–73, 272f
- for non-Darcy flow, 79–84, 84f
- tubing size and, 272–73, 273f

Gel frac vs. Waterfrac map, comparison of, 649f
 Generalized expression, 281–82
 G-function, 430
 Gilbert correlation, 243, 244–46, 244t
 GLR. *See* Gas-liquid ratio (GLR)
 Gradient curves, 213, 213f
 expanded-scale, 332f
 in gas-lift requirements vs. time, 329f
 for GLR, 265f, 303
 intersection of gas injection pressure with, 309f, 310
 in tubing size vs. gas-lift requirements, 326–27, 327f, 328f
 Gravel pack completion, 678–88
 β factor correlations for, 693t
 formation flow velocity, 687–88
 gravel and screen sizing, 682–86, 683–84t
 gravel pack evaluation, 688
 high-rate water pack, 686–88
 log showing response to voids in gravel pack, 689f
 productivity of gravel-packed wells, 686
 skin factors, 148–51
 types, 678, 679f
 Gravel packing, 10, 10f
 Gravel pack placement, 678–80
 crossover method of, 680, 681f
 for inside-casing gravel packs, 680, 681f
 in open-hole or underreamed casing completions, 679, 680f
 Gravel sizing, 682–86, 683–84t
 Gray correlation, 206–10
 Griffith correlation, 198–201
 Gross height, 4

H

Hagedorn-Brown correlation, 228
 modified (mH-B), 192–93, 266, 266t
 original, 193–98
 Hagen-Poiseuille equation for laminar flow in pipe, 171, 172
 Halo, 688
 Hawkins' formula, 122–26
 HCl. *See* Hydrochloric (HCl) acid
 Height. *See* Fracture height
 Height migration, 621–23, 622f, 624f
 Heterogeneities, 2, 3f. *See also* Acid-mineral reaction kinetics

HF. *See* Hydrofluoric (HF) acid
 High-conductivity vertically fractured vertical well, production data analysis for, 420–24, 423f
 High-performance fracturing (HPF), 693–97
 in deviated production wells, 694–97, 698f
 flow directly to abandoned perforations, 696f
 formation flow velocity to, 693–94
 perforating strategy for, 697–98
 reservoir and fracture properties, 697t
 High-permeability layers
 excessive flow through, 378–79, 378f, 379f
 preferential flow through, 376–77
 High-permeability reservoirs, 560f
 High-rate horizontal well, pressure drop in, 252–54
 High-rate water pack, 686–88
 Holdup behavior, 185–87
 Holdup phenomenon, 185–87
 Horizontal anisotropy, 113
 Horizontal borehole, measurements along, 393, 393f
 Horizontal gas wells, inflow performance relationship for, 114–15
 Horizontal permeability, 401
 Horizontal pipes, flow in, 217–36
 Beggs-Brill correlation, 226–28
 Dukler correlation, 231–34
 Eaton correlation, 228–31
 flow regimes, 220–26, 221f
 gas, single-phase flow, 218–20
 liquid, single-phase flow, 217–18
 pressure gradient correlations, 226
 pressure traverse, calculating, 234–36
 two-phase flow, 220–36
 wellbore pressure drop for, 252–56
 Horizontal well
 acidizing, 554–55, 554f
 damage skin effect, 134–37
 drainage pattern formed around, 96f
 gas, inflow performance relationship for, 114–15
 inflow, two-phase correlations for, 115–16
 introduction, 95–97
 multilateral well technology, 116–17, 117f
 perforation skin factor for, 145–46
 production from, 95–117
 productivity index for, vs. vertical wells, 108–9

- pseudosteady state flow, 103–13
 - steady-state well performance, 97–103
 - Horizontal wellbores, flow in, 250–56. *See also*
 - Pressure drop
 - HPF. *See* High-performance fracturing (HPF)
 - Hydraulic fracture, 9
 - defined, 559
 - diagram of, 560f
 - tubing size selection in gas well, 272–73
 - Hydraulic fracturing for well stimulation, 559–94
 - choke effect for transverse hydraulic fractures, 592–94
 - conductive fracture length, 562–66, 565f
 - effective wellbore radius, 564f
 - fractured well behavior, 574–79
 - fractured well performance, 585–92
 - fracture geometry for maximizing fractured well productivity, 566–73, 568f, 569f, 570f
 - fracture length, 562–66, 565f
 - fracture patterns, 586–89, 588f, 589f
 - high-permeability reservoirs, production and recovery acceleration, 560f
 - introduction, 559–62
 - low-permeability reservoirs, 561f, 574–79
 - non-Darcy flow, 579–85
 - shale reservoirs, fractured well performance for, 586–92
 - skin effect, 562–66, 565f
 - SRV, 562f, 588
 - tight gas reservoirs, fractured well performance for, 586, 588f
 - Hydraulic fracturing treatments, design and execution of, 601–55
 - fracture diagnostics, 646–50
 - fracture geometry, 609–16
 - fracture geometry and net pressure, created, 616–35
 - fracturing fluids, 635–42
 - fracturing horizontal wells, 651–55
 - introduction, 601–2
 - proppants and fracture conductivity, 642–46
 - proppant schedule, 629–30, 631f
 - reservoir rock, fracturing of, 602–9
 - Hydrocarbon mixture, schematic phase diagram of, 42f
 - Hydrocarbons, 4
 - Hydrocarbon saturation, 5
 - Hydrochloric (HCl) acid
 - acid capacity number for, 510
 - constants in HCl-mineral reaction kinetics models, 455t
 - effective diffusion coefficient of, 460, 461f
 - preflush, 509–11
 - preflush volume, calculating, 452
 - weak acid reactions with carbonates, 454–55
 - Hydrofluoric (HF) acid
 - constants in HF-mineral reaction kinetics models, 456t
 - dissolving power of, 451t
 - reactions with sandstone minerals, 455–60
 - Hydrostatic pressure, 10–11
- I**
- Inclined wells, skin components for, 126–27
 - Incompressible, single-phase flow of, 168–79
 - annular flow, 179
 - laminar or turbulent flow, 168–69
 - pressure-drop calculations, 172–79
 - velocity profiles, 169–72
 - Infinite-acting behavior, transition to pseudosteady state from, 29
 - Infinite-acting radial flow, 564, 566
 - Infinite-acting reservoir
 - IPR calculations, 275–77
 - prediction of production rate in, 25–26
 - rate decline for, 26f
 - Infinite fracture conductivity performance, 574–78
 - Inflow performance for two-phase reservoir, 55–56
 - Inflow performance relationship (IPR), 11, 13, 14f, 34–37. *See also* IPR curve
 - changes in, 267–68, 268f
 - gas reservoirs, 270–73, 272f
 - horizontal gas wells, 114–15
 - pseudosteady-state, influence of average reservoir pressure, 35, 37, 37f
 - skin effect on, 267, 267f
 - steady-state, influence of skin effect, 35, 36f
 - transient, 34–35, 36f, 87–91
 - transient production rate forecast, 275–77
 - of two-phase reservoirs, 268–70, 269f
 - VFP and, combination of, 262–68
 - Initial reservoir pressure, 275
 - Injected gas
 - bottomhole pressure, 313
 - point of, 305–8
 - pressure of, 304–5

Injection damage, 162–63
 Injection rate, 472–96. *See also* Acid volume
 Injection well diagnosis, 383, 384–85
 Inside-casing gravel pack, 678, 679f, 680, 681f
 In-situ average density, 194, 200, 201, 205, 207, 209
 In-situ average liquid velocity, 198
 In-situ stresses, 602–3
 Integral of RNP (IRNP)
 computing, 398, 399f
 vertically fractured vertical well, diagnostic plot, 424f
 Intermittent flow, 220–27
 plug, 221f, 222
 slug, 220, 221f, 222, 222f, 223f, 224f, 226
 Intermittent gas lift, 300–301, 301f
 Interstitial water saturation, 4
 Inverse injectivity, 491
 IPR curve, 262, 263f. *See* Inflow performance relationship (IPR)
 with declining reservoir pressure, 330f
 at different reservoir pressures, 331f
 in gas well deliverability, 271–73, 272f, 273f
 for oil well under pseudosteady-state conditions, 279f
 optimum gas-lift performance, 317–21, 317f, 321f
 for solution gas-drive reservoir, 292f
 for steady-state flow, 275
 transient, 275–77, 276f
 for two wellhead flowing pressures in two-phase reservoir, 270f
 Isothermal compressibility, 75–76, 277
 Isotropy, 112

J

Joshi model, 97–100
 schematic of, 97f
 well performance with, 99–100, 100f

K

KGD fracture model, 432, 433t
 with fracture width, 609–10, 614, 614f
 Kinetic energy pressure drop, 217–19
 computing, 228, 230
 Δ in, meaning of, 234
 differential form of, 218–19

 due to change, 174–76
 neglecting, 228, 230, 235
 pressure gradient correlations, 226, 230, 231, 232
 in single-phase gas flow, 218
 in single-phase liquid flow, 217
 through choke, 240
 Kinetics of a reaction, 453. *See also* Acid-mineral reaction kinetics

L

Laminar or turbulent flow, 168–69
 Leakoff coefficient, 430, 432, 433t, 435
 Lean gas reservoirs, 7
 Limited-entry geometry, 411
 Limited-entry vertical well, 410–12
 buildup analysis for, 413–14, 414f
 flow regimes for, 410–11, 410f
 log-log diagnostic plot, 412f
 test design, 415–16, 415f
 Liquid density, 48–49, 49f
 Liquid flow. *See also* Gas-liquid flow
 kinetic energy pressure drop in, 217
 pressure drop in water injection supply line, 218
 single-phase, 217–18, 240–41
 Liquid holdup, 192
 Beggs-Brill correlation, 226–28
 Dukler correlation, 231–34, 233f
 Eaton correlation, 228–31, 229f
 Liquids in gas wells, lifting, 359–61. *See also* Plunger lift
 Logging while drilling (LWD), 2
 Log-log diagnostic plot
 fracture calibration injection falloff, 430, 431f
 limited-entry vertical well, 412f
 well rate and pressure transient analysis, 395–96, 395f
 Longitudinal fractures, 651, 651f
 Low-conductivity vertically fractured vertical well
 buildup analysis for, 425–26
 production data analysis for, 426–28, 428f, 428t
 Low-permeability reservoirs
 fractured well behavior in, 574–79
 production and reserves enhancement from, 561f
 Low-pressure gas line, flow capacity of, 219–20
 Low productivity, 372

M

Mandhane flow regime map, 223, 223f, 225, 226

Maps/mapping

fracture height, 650f

Gel frac *vs.* Waterfrac, comparison of, 649f

with microseismic monitoring, 650f

of multi-stage fracture treatment, 649f

tiltmeter, 650

Matrix acidizing, 443–64

vs. acid fracturing, 443

acid-mineral reaction kinetics, 453–60

acid-mineral reaction stoichiometry, 446–52

acid transport to mineral surface, 460–61

chemical reactions, primary, 448t

in damaged and undamaged wells, benefits of, 444–46, 445–46f

dissolving power of acids, 450t

dissolving power of HF acid, 451t

HCl preflush volume, calculating, 452

introduction, 443–46

molecular weights of species in, 449t

precipitation of acid reaction products, 461–64

spending of acid components, 451t

Matrix acidizing design for carbonates, 535–41

acid selection design chart, 537f

acid type and concentration, 535–36

acid use guidelines, 536t

acid volume and injection rate, 536–38

fluid diversion in carbonates, 540–41

monitoring the acidizing process, 538–40

viscoelastic surfactant, 540–41, 541f

Matrix stimulation

correlations of porosity *vs.* permeability and, 8

near-wellbore permeability recovered or improved by, 9

skin effect reduced or eliminated through, 13

Measurements

acid-mineral reaction kinetics, 454

along horizontal borehole, 393, 393f

electrical resistivity formation, 5–6

fracture geometry, 647–50

fracture height with radioactively tagged proppant, 382–83, 384f

petroleum thermodynamic properties, 7

porosity, 3–4

pressure, 14

production logging, 14

rate-*vs.*-pressure drop relationships, 14

reaction kinetics, 454

well testing, 2, 14

wireline formation test, 392f, 393, 393f

Measurements while drilling (MWD), 2

Mechanical acid placement, 496–97

Mechanical damage, 156

Mechanical energy balance equation, 172, 179, 192, 193–94, 335

MH-B (modified Hagedorn-Brown method), 192–93

Microseismic monitoring, 648–50

biwing fracture, events with, 648f

map comparison of Gel frac *vs.* Waterfrac, 649f

map of multi-stage fracture treatment, 649f

mapping fracture height with, 650f

Minifrac, 303. *See also* Fracture calibration injection falloff

Mist flow

annular, 222, 223f, 224f, 226

distributed, 221f, 222, 222f

Mobility, 9

Model match

buildup analysis, 409f, 414f

fractured oil well, 422f

parameters, 423t, 428t

Modified Hagedorn-Brown method (mH-B), 192–93

Mohr circle

in drawdown failure condition, 666–67, 667f

in formation sand production, 663, 663f

Mohr-Coulomb criterion, 664–65, 664f, 666f

Moody friction factor chart, 176, 178f

Multilateral well technology, 116–17, 117f

Multiphase flow in wells, 184–213

holdup behavior, 185–87

pressure traverse calculations, 210–13

two-phase flow regimes, 187–91

two-phase pressure gradient models, 191–210

Multiple fracturing, well completions for, 652

openhole fracturing, 652

open hole with liners and sleeves for, 652–53, 653–54f

perf and plug fracturing, 655

Multi-stage fracture treatment, map of, 649f

N

$N_{Ac,F}$ and $N_{Da,S}$, determining from data, 477–78, 478f

Natural gas

correlations and calculations for, 66–76

gas formation volume factor, 74–75

- Natural gas (*continued*)
- gas gravity, pseudocritical properties from, 66–68
 - gas isothermal compressibility, 75–76
 - gas viscosity, 71–74, 72–73f
 - gravity of, 62–63
 - molecular weights and critical properties for, 62t
 - nonhydrocarbon gases, 68–71
- Natural gas reservoirs
- gas gravity, 61–63
 - gas well deliverability, 76–84
 - gas well transient flow of, 84–91
 - introduction, 61–66
 - production from, 61–91
 - real gas law, 63–66
- Naturally flowing well, 11
- Near-well
- damage and perforations, 145
 - radial flow, 9
- Near-wellbore
- condition and damage characterization (*See* Skin effects)
 - permeability, 9
 - region, 20
 - treatment (*See* Matrix acidizing)
 - zones, 10, 10f
- Net fracturing pressure, 616–20, 621
- Net height, 4
- Newtonian fluid
- non-, with fracture width, 613
 - single-phase flow of compressible, 179–84
 - single-phase flow of incompressible, 168–79
- No-flow boundary reservoir, production from, 28–29
- Nolte-Smith analysis pressure response modes, 647t
- Nolte-Smith plot, 646–47, 647f
- Non-Darcy flow
- coefficient, estimation of, 83
 - in formation, correlations for, 81–82t
 - fractured well performance, effect on, 579–85
 - gas well deliverability, 79–84, 84f
 - hydraulic fracturing for well stimulation, 579–85
- Nonhydrocarbon gases
- gas compressibility factor correction for, 68–71
 - presence of, 68
- Non-Newtonian fluid with fracture width, 613
- No-slip holdups, 186, 192
- N_{Re} (Reynolds number), 168–69
- O**
- Oil
- formation volume factor, 7–8
 - inflow performance for two-phase reservoir, 55–56
 - production gathering systems (*See* Surface gathering systems)
 - reservoir, material balance for (*See* Oil material balance)
 - in reservoir fluid, 4
 - saturated, properties of, 42–52
 - single-phase oil inflow performance relationships, summary of, 39
 - undersaturated, transient flow of, 24–26
 - understaturated oil reservoirs, production from, 19–39
 - use of term, 4
 - viscosity, estimating, 49–50
 - water-oil ratio, 39
- Oil and gas resource triangle, 585f
- Oilfield units, 15–17
- converting to SI units, 16–17, 16t
- Oil material balance, 277–86
- generalized expression, 281–82
 - graph for two-phase reservoir, 286f
 - production and fluid data, 284t
 - under pseudosteady-state conditions, 278–80
 - reservoir variables, calculating, 282–86
 - saturated, 283–86
 - straight lines for calculating, 282–83, 285t, 295
 - undersaturated, 277–78
- Oil-wet rocks, 4
- Omana correlation, 244, 245, 246
- Open hole
- completion, 10, 10f, 679, 680f
 - fracturing, 652
 - gravel pack, 678, 679f
 - with liners and sleeves, 652–53, 653–54f
 - log determination of porosity and fluid saturations, 366–68, 367f
 - performance evaluation, 366–68
- Opening time distribution factor, 625
- Over flush, 625

P

- Paccaloni
 design chart for monitoring acidizing, 489–90, 490f
 maximum Δp , maximum rate procedure, 489–90, 490f
- Pad
 defined, 624
 volume calculations, total, 626–28
- Partial completion
 radial flow, 411
 skin factor, 128–34
- Particle plugging of pore spaces, 151–54
- Particulate diverting agents, 497–508
 cake resistance, effect on acid placement, 506–8
 flow distribution during acidizing with, 502–6
 summary of, 498t
- Payne et al. correction, 192, 204, 205
- Pay thickness, 4
- PCP (progressing cavity pump), 351f, 352–53, 352f
- Penny-shaped fractures, 615
- Penny-shaped model, 609
- Perf and plug fracturing, 655
- Perfect fracturing fluids, 646
- Perforated liner completions, 146–48
- Perforations
 acid volume design for ellipsoidal flow from, 479–80
 density, vs. productivity ratio, 672f
 ellipsoidal flow around, 476f
 flowing, in Frac-pack completion, 692
 in HPF, 696f
 in HPF, strategy for, 697–98
 near-well damage and, 145
- Perforation skin effect
 calculating, 141
 for horizontal wells, 145–46
- Performance curves, choke, 246–47, 247f
- Permeability
 anisotropy (*See* Anisotropy)
 data, schematic of laboratory-derived, 54f
 effect of, on oil flow in two-phase reservoir, 54–55
 effects of, 37–39
 flow regime analysis, 401
 fluid damage and, 155–56
 models, 483–85
 in petroleum production system, 8–9
 vs. porosity, 8
 response to acidizing, 485
 values, 37–39
 water production, 37–39, 38f
- Petroleum production engineering, role of, 1–17
 introduction, 1–2
 petroleum production system, components of, 2–11
 units and conversions, 15–17
 well productivity and production engineering, 11–15
- Petroleum production system, components of, 2–11
 permeability, 8–9
 reservoir hydrocarbons, volume and phase of, 2–8
 surface equipment, 11
 well, 10–11
 zone near well, sandface, and well completion, 9–10
- Petroleum thermodynamic properties, 7
- Phase diagram, 6, 6f, 7
- Piceance Basin stratigraphic column, 586, 587f
- PKN fracture model, 433t, 434
 with fracture width, 609, 610–13, 611f
- Plug flow, 221f, 222
- Plunger lift, 359–61
 life cycle, 360, 361f
 operation, 360f
 principle of, 360
 purpose of, 359–60
 well completion, 360, 361f
- Plunger stroke length, 340–41
- Pore spaces, particle plugging of, 151–54
- Porosity, 3–4
 vs. permeability, 8
- Positive-displacement pumps, 335, 338–53
 progressing cavity, 352–53
 sucker rod pumping, 338–52
- Postflush, 511
- Potential energy change, pressure drop due to, 173–74
- Potential energy pressure gradient, 192
- Power law
 fluids, rheological properties of, 640–41
 fracture surface growth assumption, 430, 432
 model, 172
- Precipitate zone, effect on well productivity, 462–63, 464f

- Precipitation models, 482–83, 483f
- Precipitation of acid reaction products, 461–64
- Preflush and postflush design, 509–11
 - HCl preflush, 509–11
 - postflush, 511
- Pressure buildup
 - analysis, 406–7, 410f
 - test, 394, 394f
- Pressure depletion, gas-oil ratio *vs.*, 294f
- Pressure drawdown equation, 25
- Pressure drawdown-related problems, 13
- Pressure drop
 - in high-rate horizontal well, 252–54
 - horizontal well flow profile with small choke size, 255f
 - importance of, 250–52
 - kinetic energy, 217–19
 - relative, 251–52
 - single-phase flow, 252
 - two-phase flow, 252–56
 - in water injection supply line, 218
 - wellbore *vs.* reservoir, 251t
- Pressure-drop calculations, 172–79, 235–36, 238–39t, 249t
 - Δp_F , frictional pressure drop, 176–79
 - Δp_{KE} , pressure drop due to kinetic energy change, 174–76
 - Δp_{PE} , pressure drop due to potential energy change, 173–74
 - pressure traverse, 235–36
- Pressure drop equation, 179–82
- Pressure gradient, 10–11
 - correlations, 226
 - curves, 213, 213f
 - kinetic energy pressure drop in, 226, 230, 231, 232
 - models, two-phase, 191–210
- Pressure gradient calculations
 - Beggs-Brill correlation, 227–28
 - Dukler correlation, 232–34
 - Eaton correlation, 230–31
- Pressure-normalized rate, 397–98
- Pressure profiles in well, 336f
- Pressure radius of investigation, 396–97
- Pressure traverse calculations, 210–13, 234–36
 - with fixed length interval, 211–13
- Pressure-volume-temperature (PVT). *See* PVT (pressure-volume-temperature) properties
- Prime mover power requirements, 341–45
- Production damage, 161–62
- Production data analysis methods, 397–98, 399f
- Production engineer, 11–14
- Production engineering, objectives of, 11–14
- Production log evaluation, 370–87
 - abnormally high injection rate, 385–87, 386f
 - bottomwater production, excessive, 380–81
 - cased hole formation evaluation, 369–70
 - cement evaluation, 368–69, 369f
 - channeling, 374–375f, 374–76, 376f
 - example of, 371f
 - flow profile used to evaluate damaged well, 372
 - fracture height, 381–83, 384f
 - gas coning, 379–80, 380f
 - gas production, excessive, 374
 - gas production from thief zone, excessive, 378–79, 378f
 - high-permeability layers, preferential flow through, 376–77, 377f
 - injection well diagnosis, 383, 384–85
 - low productivity, 372
 - production logging, 372–74, 373f, 381
 - water coning, 379–80, 379f
 - water production, excessive, 374
- Production logging
 - strategy and analysis, 372–74, 373f
 - for well treatment evaluation, 381
- Productivity index, 11–13
 - dimensioned, 12–13
 - dimensionless, 13, 28
 - maximizing, in cost-effective manner, 22
- Progressing cavity pump (PCP), 351f, 352–53, 352f
- Property correlations for two-phase systems, 47–52
 - downhole properties, estimating, 51–52
 - liquid density, 48–49, 49f
 - oil viscosity, 49–50
 - water presence, accounting for, 50–52
- Proppant
 - characteristics of, 642
 - closure stress *vs.* proppant conductivity, 643, 644f
 - commonly used, 642, 643f
 - fluid volume requirements, 624
 - fracture conductivity and, 642–46
 - propped fracture conductivity, 643–45
 - schedule, 629–30, 631f
 - settling velocities, 645–46
 - transport, 645
- Propped fracture
 - vs.* acid fracture performance, 553–54

- conductivity, 643–45
 - width, 631–35
 - Pseudocritical properties from gas gravity, 66–68, 67f
 - Pseudolinear flow, 416, 416f, 418–20
 - Pseudoradial flow, 416, 416f, 418–20
 - Pseudosteady-state flow, 26–29, 103–13
 - Babu-Odeh model, 103–9
 - Economides et al. model, 109–13
 - IPR curves, 34, 37f
 - production forecast under, 278–80
 - production from no-flow boundary reservoir, 28–29
 - transition to pseudosteady state from infinite acting behavior, 29
 - Pseudo-three-dimensional (p3-D) model, 609
 - p3-D (pseudo-three-dimensional) model, 609
 - Pump-assisted lift, 335–61
 - dynamic displacement pumps, 354–59
 - introduction, 335–37
 - liquids in gas wells, 359–61
 - positive-displacement pumps, 338–53
 - pressure increase from downhole pump, 337
 - Pump efficiency, effect of gas on, 350–52
 - Pumping, frictional pressure drop during, 641–42
 - PVT (pressure-volume-temperature) properties, 7, 43–46
 - below bubble-point pressure, 43, 45f
 - of saturated oil reserves, obtaining, 44, 46f
- R**
- Radial flow geometries for vertical wells, 405
 - Radial fracture model, 432, 433t
 - with fracture width, 609, 615
 - Radial fractures, 615
 - Rate decline data, recovery from, 388–90, 389f
 - Rate-normalized pressure (RNP), 397–98.
 - See also* Integral of RNP (IRNP)
 - Rate transient analysis (RTA), 387–90. *See also* Well rate and pressure transient analysis
 - Reaction kinetics. *See* Acid-mineral reaction kinetics
 - Real gas law, 63–66
 - Real gas pseudopressure, 88–90t
 - Relative permeability. *See* Permeability
 - Relative roughness, 176, 177f
 - Reservoir, 2–3
 - classification of, 6–7
 - fluid, components of, 11
 - height, 4
 - HPF properties, 697t
 - limited production rate, 273
 - permeability, 401
 - pressure, estimating, 405–6
 - schematic showing, 3f
 - thickness, 4
 - Reservoir hydrocarbons, volume and phase of, 2–8
 - areal extent, 7–8
 - classification of reservoirs, 6–7
 - fluid saturations, 4–6
 - porosity, 3–4
 - reservoir, 2–3
 - reservoir height, 4
 - Reservoir rock, fracturing of, 602–9
 - breakdown pressure, 602, 604, 605, 605f, 606f
 - critical depth for horizontal fracture, 607–8, 608f
 - fracture direction, 606–7, 608–9
 - fracture initiation pressure, calculating, 606
 - in-situ stresses, 602–3
 - stresses vs. depth, 604
 - Reservoir variables, calculating, 282–86
 - saturated reservoirs, 282
 - undersaturated reservoirs, 282–86
 - Resistivity log, 5–6, 5f
 - Retrograde condensate reservoir, 7
 - Retrograde condensation region, 7
 - Revaporization, 7
 - Reynolds number (N_{Re}), 168–69
 - Rheological properties of fracturing fluids, 636–41
 - of borate-crosslinked fluid, 638–39f, 638–40
 - determination of, of power law fluids, 640–41
 - Rod pump performance, analyzing from dynamometer cards, 347–50
 - Ros correlation, 243, 244–46, 244t
- S**
- Sand exclusion, 677–98
 - Frac-pack completion, 688–93
 - gravel pack completion, 678–88
 - high-performance fractures, 693–98
 - Sandface, in petroleum production system, 9–10
 - Sand flow modeling, 662–75
 - formation sand production, factors affecting, 662–72
 - in wellbore, 672–75

- Sand management, 676–77
 - cavity completion, 677
 - completion failure avoidance, 698–99
 - introduction, 661
 - sand exclusion, 677–98
 - sand flow modeling, 662–75
 - sand production prevention, 676–77
- Sand problems, events to induce, 663f
- Sand production prevention, 676–77
- Sandstone acidizing design, 469–513
 - acid additives, 512
 - acidizing treatment operations, 512–13
 - acid selection, 470–71, 471t
 - acid volume and injection rate, 472–96
 - fluid placement and diversion, 496–509
 - introduction, 469–70
 - permeability response to, 485
 - preflush and postflush design, 509–11
- Sandstone acidizing models, 472–85
 - acid and fast-reacting mineral concentration profiles, 475f
 - acid volume design for ellipsoidal flow from perforation, 479–80
 - acid volume design for radial flow, 478–79
 - acid volume needed to remove drilling mud damage, 480–81, 481f
 - dimensionless groups in, 476t
 - ellipsoidal flow around perforation, 476f
 - $N_{Ac,F}$ and $N_{Da,S}$, determining from data, 477–78, 478f
 - permeability, 483–85
 - precipitation, 482–83
 - two-acid, three-mineral, 481–82
 - two-mineral, 472–81
- Sandstone minerals
 - fluosilicic acid reactions with, 460
 - HF acid reactions with, 455–60
 - relative reaction rates of, 459
- Saturated oil, properties of, 42–52
 - bubble-point pressure and, 42–43, 45f
 - correlations to obtain PVT properties of, 44, 46f
 - general, 42–46
 - two-phase systems, property correlations for, 47–52
- Saturated reservoirs, 6
 - material balance for, 283–86
 - variables, calculating, 282
- SCF (standard cubic ft), 8
- Screenout, 608, 625
- Screen sizing, 682–86, 683–84t
- Segregated flow, 220–26
 - annular, 220, 221, 221f, 222, 223f, 224f, 226
 - stratified, 220–21, 221f, 223f, 224f
 - wavy, 220, 221, 221f
- Semi-analytical modeling approach, 590
- Separation facility, 11, 13
- Settling velocities, 645–46
- S_H , calculation of, 141–42
- Shale reservoirs, 586–92
 - decline curve analysis, 590, 591f
 - dual-porosity approach, 592
 - fracture patterns, 586–89, 588f, 589f
 - productivity of fractured horizontal wells in, predicting, 588, 589–90, 589f
 - semi-analytical modeling approach, 590
- Single-phase flow regimes
 - of compressible, Newtonian fluid, 179–84
 - gas, 218–20, 241–43
 - of incompressible, Newtonian fluid, 168–79
 - liquid, 217–18, 240–41
 - oil inflow performance relationships, summary of, 39
 - VFP combined with IPR, calculating, 262–64, 264f
 - wellbore pressure drop for, 252
- SI units, 15–17
 - converting to oilfield units, 16–17, 16t
- Skin components
 - inclined wells, 126–27
 - partial completion, 128–34
 - vertical wells, 126–27
 - well deviation, 128–34
- Skin effects, 121–63
 - deviated, 126, 130
 - evolution, carbonate acidizing design, 539–40, 540f
 - formation damage mechanisms, 151–57
 - formation damage sources, 157–63
 - Hawkins' formula, 122–26
 - horizontal well damage skin effect, 134–37
 - hydraulic fracturing for well stimulation, 562–66, 565f
 - introduction, 121–22
 - IPR, 35, 36f, 267, 267f
 - matrix stimulation to reduced or eliminate, 13
 - perforation, 141, 145–46
 - phase change-dependent, 124
 - well deliverability, 267, 267f

- Skin factors, 138–51. *See also* Well completion
 skin factors
 acid treatment data, 492t
 anisotropy, 134
 calculating, 490–94
 cased well completion, 138–46
 evolution during acidizing, 486f, 490–93, 493t, 494f
 example results, 493t
 flow regime analysis, estimating, 405
 Frac-pack completion, 690–91
 gravel pack completion, 148–51
 injection rate, effect of, 486f
 limited-entry vertical well, 413
 partial completion, 128–34
 viscous, in gas well treatment, 495–96, 496f
- Sleeves, 653
- Slip velocity, 186–87, 672
- Slotted liners, 10, 10f
- Slotted or perforated liner completions, 146–48
- Slug flow, 188, 191, 220, 221f, 222, 222f, 223f, 224f, 226
- Slurry packing, 686
- Solution gas drive, 286–94, 292f
- Sour gas, 68
 gas compressibility factor of, 70–71, 70t
 viscosity of, calculating, 74
- Spontaneous potential (SP), 4, 5f
- Standard conditions, 4, 7–8
- Standard cubic ft (SCF), 8
- STB (stock tank barrels), 8
- Steady-state flow
 IPR curve for, 275
 VFP curve for, 275
- Steady-state performance, 19–24, 97–103
 effect of drainage area on, 23, 24t
 Furui model, 100–103
 Joshi model, 97–100, 97f
 production rate calculation and rate improvement, 22–23
 schematic for, 20f
- Stepwise calculation procedure. *See* Pressure traverse calculations
- Stimulated reservoir volume (SRV), 562f, 588
- Stock tank barrels (STB), 8
- Stratified flow, 220–21, 221f, 223f, 224f
- Stresses
 vs. depth, 604
 in-situ, 602–3
- Stripper wells, 39
- Sucker rod pumping, 338–52
 beam loads, 345–47
 beam pumping units, 345, 345t
 equipment, 338–39, 338–39f
 gas, effect on pump efficiency, 350–52, 350f
 performance, analyzing from dynamometer cards, 347–50
 prime mover power requirements, 341–45
 rod load service factors, 347t
 speed, calculation of required, 339–40
 steel sucker rod and tubing properties, 342–43t
 stroke length, 340–41
 volumetric displacement with, 339–40
- Surface equipment, in petroleum production system, 11, 12f
- Surface gathering systems, 247–50, 248f, 249f
 analysis of, 248–49
 pressure distribution in, 250f
 pressure drop calculation results, 249t
- s_V , calculating, 142
- s_{wb} , calculating, 143–45
- Sweet gas, 68
- T**
- Taitel-Dukler flow regime map, 190–91, 190f, 223, 224f
- Tarner's method, 287–88, 290t
- Taylor bubbles, 188
- Telltale screen, 680
- Temperature, 650
- Test design, limited-entry vertical well, 415–16, 415f
- Theile modulus, 522
- Thief zone. *See* High-permeability layers
- 3-D model, 609
- 3-D techniques, 7
- Three-well fault block, 32–34, 32f
- Tight gas reservoirs, 586, 588f
- Tiltmeter mapping, 650
- Time-averaged quantity, 185
- Time-distance diagram showing regions of precipitation, 482–83, 482f
- Tip screenout (TSO) treatments, 608, 615
- Total compressibility, 278, 283
- Tracers, 650

- Transient IPR curves
 - curves for, 91f
 - for gas well, 87–91
 - inflow performance relationship, 34–35, 36f
 - viscosity, gas deviation factor, real gas pseudopressure for, 88–90t
 - Transient production rate forecast, 275–77, 276–77f
 - Transient well analysis, 387–437
 - Arps decline curve analysis, 388, 388t, 390
 - expected ultimate recovery, 388–90, 389f
 - flow regime analysis, 400–437
 - formation fluid sampling, 391–93
 - limited-entry vertical well, 410–12
 - rate transient analysis, 387–90
 - well rate and pressure transient analysis, 393–99
 - wireline formation test, 390–93
 - Transport proppants, 645
 - Transverse fractures
 - horizontal well fracturing, 651, 651f
 - hydraulic, choke effect for, 592–94
 - Treatment design, competing factors influencing, 472
 - TSO (tip screenout) treatments, 608, 615
 - Tubing
 - balance point of, 306, 307f
 - limited wells, 273
 - performance curve, 306, 308f
 - pickling, 513
 - Tubing size
 - vs. gas-lift requirements, 326–27, 327f, 328f, 329f
 - in gas well deliverability, 272–73, 273f
 - 2-D model, 609–10. *See also* Fracture width
 - Two-acid, three-mineral model, 481–82
 - Two-mineral model, 472–81
 - acid and fast-reacting mineral concentration profiles, 475f
 - acid volume design, 478–80
 - acid volume needed to remove drilling mud damage, 480–81, 481f
 - dimensionless groups in, 476f
 - ellipsoidal flow around perforation, 476f
 - $N_{Ac,F}$ and $N_{Da,S}$, determining from data, 477–78, 478f
 - Two-phase correlations for horizontal well inflow, 115–16
 - Two-phase flow regimes, 187–91, 189f
 - description of, 188, 189f
 - in horizontal pipes, 220–36
 - map, 188, 190–91
 - original Hagedorn-Brown correlation, 193–98
 - predicting, 191
 - in reservoir, 53–55
 - schematic of, 185f
 - Two-phase pressure gradient models, 191–210
 - Beggs-Bill method, 201–6
 - bubble flow: Griffith correlation, 198–201
 - flow regimes other than bubble flow: original Hagedorn-Brown correlation, 193–98
 - Gray correlation, 206–10
 - modified Hagedorn-Brown method, 192–93, 266, 266t
 - relative performance factors, 193t
 - Two-phase reservoirs, 6
 - IPR and VFP of, 268–70, 269f
 - material balance graph for, 286f
 - production forecast from, 286–94
 - Two-phase reservoirs, production from
 - Fetkovich's approximation, 57–58
 - flow, 53–55
 - introduction, 41–42
 - oil inflow performance, 55–56
 - production from, 41–58
 - property correlations for, 47–52
 - saturated oil, properties of, 42–52
 - Vogel inflow performance, 55–57, 57f
- ## U
- Unconventional resources, 585. *See also* Shale reservoirs; Tight gas reservoirs
 - Underreamed casing completions, 679, 680f
 - Underreamed-casing gravel pack, 678, 679f
 - Undersaturated oil, transient flow of, 24–26
 - Undersaturated reservoirs, 6
 - material balance for, 277–78
 - variables, calculating, 282–86
 - Understaured reservoirs, production from, 19–39
 - inflow performance relationship, 34–37
 - introduction, 19
 - pseudosteady-state flow, 26–29
 - single-phase oil inflow performance relationships, summary of, 39
 - steady-state performance, 19–24
 - undersaturated oil, transient flow of, 24–26
 - water production, relative permeability, effects of, 37–39
 - wells draining irregular patterns, 30–34

Unified fracture design, 567–73
 Units and conversions, 15–17, 404t

V

Valves, equivalent lengths of, 238–39t
 Velocity profiles, 169–72
 Vertical flow performance (VFP), 11, 13, 14f.
 See also VFP curve
 of gas reservoirs, 270–73, 272f
 GLR's impact on, 264–65
 IPR and, combination of, 262–68, 263f
 transient production rate forecast, 275–77
 of two-phase reservoirs, 268–70, 269f
 Vertically fractured vertical well, 416–28
 flow regimes, 416–19, 416f
 high-conductivity, 420–24, 423f
 IRNP diagnostic plot, 424f
 low-conductivity, 425–28, 428f, 428t
 model match parameters, 422f, 423t, 428t
 pressure buildup data, 424f
 Vertical permeability, 401
 Vertical-to-horizontal anisotropy, 95,
 97–98, 112
 Vertical wells, skin components for, 126–27
 VES (viscoelastic surfactant), 540–41, 541f
 VFP. *See* Vertical flow performance (VFP)
 VFP curve, 262, 263f. *See also* Vertical flow
 performance (VFP)
 in gas well deliverability, 271–73, 272f,
 273f
 for oil well under pseudosteady-state
 conditions, 279f
 for solution gas-drive reservoir, 292f
 for steady-state flow, 275
 transient, 275–77, 276f
 for two wellhead flowing pressures in
 two-phase reservoir, 270f
 Viscoelastic surfactant (VES), 540–41, 541f
 Viscosity, calculating
 gas, 71–74, 72–73f
 oil, 49–50
 sour gas, 74
 transient IPR for gas well, 88–90t
 Viscous diversion, 508–9
 Vogel inflow performance, 55–57, 57f
 Void fraction, 186
 Volume equalized power law, 640–41
 Volumetric flow rate, 168–69, 170f
 Volumetric model, 526–29, 528–29f

W

Water
 flow through high-permeability layers,
 376–77, 377f
 presence of, accounting for, 50–52
 in reservoir fluid, 11
 sensitivity, 154
 Water block, 156
 Water coning, 379–80, 379f
 Water injection supply line, pressure drop
 in, 218
 Water-oil ratio, 39
 Water production
 excessive, in production log evaluation,
 374
 relative permeability, effects of, 37–39, 38f
 Water-wet rocks, 4
 Wavy flow, 220, 221, 221f
 Well
 configuration, 336f
 deviation, skin from, 128–34
 draining irregular patterns, 30–34
 performance enhancement, 13–14
 petroleum production system, 10–11
 pressure profiles, 336f
 stimulation (*See* Hydraulic fracturing for well
 stimulation)
 zone near, 9–10
 Wellbore, sand flow in, 672–75
 sand accumulation in wellbore, 675
 sand erosion, 675
 sand production to surface, 673–75, 674f
 Wellbore crossflow, 392
 Wellbore flowing pressure, 19
 Wellbore flow performance, 167–213
 introduction, 167
 multiphase flow in wells, 184–213
 single-phase flow of compressible, Newtonian
 fluid, 179–84
 single-phase flow of incompressible,
 Newtonian fluid, 168–79
 Wellbore pressure drop. *See* Pressure drop
 Well completion
 in petroleum production system, 9–10
 techniques, 9–10, 10f
 Well completion, cased and perforated, 138–46
 near-well damage and perforations, 145
 perforation skin effect, calculating, 141
 perforation skin factor for horizontal wells,
 145–46

- Well completion, cased and perforated (*continued*)
 s_H , calculating, 141–42
 s_V , calculating, 142
 s_{wb} , calculating, 143–45
- Well completion skin factors, 138–51
 cased, perforated completions, 138–46
 gravel pack completions, 148–51
 slotted or perforated liner completions, 146–48
- Well deliverability, 261–73
 analysis, 19
 bottomhole flowing pressure, 261
 declining reservoir pressure, 267–68, 268f
 gas, 270–73, 272f
 introduction, 261–62
 IPR and VFP, combination of, 262–68, 263f
 skin effect, 267, 267f
 two-phase reservoir, 268–70, 269f
- Wellhead
 assembly, 1, 12f
 flowing pressure, 265–67, 266f, 269f
- Well logging techniques, 4
- Well performance evaluation, 13–14, 365–437
 cased hole logs, 368–87
 introduction, 365–66
 open-hole performance evaluation, 366–68
- Well production forecast, 275–96
 depleting pressure, cumulative, 291t
 gas well performance, 294–96, 296t
 introduction, 275
 material balance, 277–86
 production and fluid data, 284t
 production rate, incremental, and total
 cumulative recovery, 280t
 under pseudosteady-state conditions, 278–80
 rate vs. time, 276–77, 277f
 Tarner's method, 287–88, 290t
 transient production rate forecast, 275–77,
 276–77f
 two-phase reservoir, production forecast from,
 286–94, 293t
- Well productivity and production engineering,
 11–15
 organization of book, 14–15
 production engineering, objectives of, 11–14
- Well rate and pressure transient analysis, 393–99
 IRNP, 398, 399f
 log-log diagnostic plot, 395–96, 395f
 pressure buildup data, 394, 394f
 pressure radius of investigation, 396–97
 production data analysis methods, 397–98,
 399f
- Well testing, 1
 areal extent and, 7
 measurements, 2, 14
 purpose of, 14
- Wettability changes, fluid damage and,
 155–56
- Wirelineformation test, 390–93
 differential depletion, 392, 393
 horizontal borehole, 393, 393f
 measurements, 392f, 393, 393f
 multiprobe formation test, 391, 391f
 reservoir description, 392f
- Wormhole formation and growth, 522–25
 from acid injection into a perforated
 completion, 521f
 acid volumes needed to propagate
 wormholes through linear San Andres
 dolomite cores, 525f
 conical wormhole forms, 523
 in large block experiment, 520f
 morphologies at different injection rates,
 521f
 post-stimulation buildup test data for
 carbonate matrix acidizing, 522f
 propagation efficiency, 525f, 535f
 structures created by different injection rates,
 524f
 Theile modulus, 522
- Wormhole propagation models, 525–35
 Buijse-Glasbergen model, 529–31,
 531f
 Furui et al. model, 531–35, 534f
 volumetric model, 526–29, 528–29f
- X**
- Xiao et al. correlation, 226
- Z**
- Zone near well, 9–10