

PICARD: SOLAR DIAMETER, IRRADIANCE AND CLIMATE

Luc Damé¹, David Cugnet¹, Michel Hersé¹, Dominique Crommelynck², Steven Dewitte², Alexandre Joukoff², Isabelle Ruedi³, Werner Schmutz³, Christoph Wehrli³, Christian Delmas⁴, Francis Laclare⁴, Jean-Pierre Rozelot⁴

¹*Service d'Aéronomie du CNRS, BP 3, F-91371 Verrières-le-Buisson Cedex, France*

Tel: +33 1 64474328, Fax: +33 1 69202999, e-mail: luc.dame@aerov.jussieu.fr

²*Institut Royal Météorologique, 3 av. Circulaire, B-1180 Bruxelles, Belgium*

³*PMOD, World Radiation Center, Dorfstrasse 33, CH-7260 Davos Dorf, Switzerland*

⁴*CERGA, Observatoire de Calern, F-06460 St Vallier de Thiey, France*

ABSTRACT

The PICARD microsatellite mission will provide 3 to 4 years simultaneous measurements of the solar diameter, differential rotation and solar constant to investigate the nature of their relations and variabilities. The 110 kg satellite has a 42 kg payload consisting of 3 instruments: SODISM, which will deliver an absolute measure (better than 4 milliarcsec) of the solar diameter and solar shape, SOVAP, measuring the total solar irradiance, and PREMOS, dedicated to the UV and visible flux in selected wavelength bands. Now in Phase B, PICARD is expected to be launched by 2005. We review the scientific goals linked to the diameter measurement with interest for Earth Climate, Space Weather and Helioseismology, present the payload and instruments' concepts and design, and give a brief overview of the program aspects.

INTRODUCTION

Since the solar energy is one of the major driving inputs for terrestrial climate and since it exists some correlations between surface temperature changes and solar activity, it appears important to know on what time scale the solar irradiance and other fundamental solar parameters, like the diameter, vary in order to better understand and assess the origin and mechanisms of the terrestrial climate changes.

Global effects, such as diameter changes, large convective cells, the differential rotation of the Sun's interior and the solar dynamo at the base of the convective zone, can probably produce variations in the total irradiance or, at least, correlate with these variations associated, during maximum, with the changing emission of bright faculae and the magnetic network. The aim of these correlations is double: on one side prediction and on the other explanation of the past history of climate, like the Maunder minimum period.

To establish long-term links and trends between solar variability and climate changes, it is necessary to achieve not only high precision but also absolute measurements, what the diameter measurements of PICARD shall bring. Further, this high precision allows "instantaneous" monitoring of the diameter changes, i.e., with a proper orbit for the microsatellite, oscillations and, in particular, the gravity modes.

SCIENTIFIC OBJECTIVES

Why the diameter?

From 1666 to 1719, Jean Picard and his student Philippe de la Hire measured the solar diameter, observed the sunspots and determined the Sun rotation velocity. Fortunately, these measurements covered the Maunder minimum and some time after. The data were re-examined by Ribes *et al.* (1987) who, after removing the seasonal variation of the solar diameter, obtained the annual means at 1 AU. These values, averaged for the Maunder minimum period, and after while the Sun recovered a significant activity, show a definitive difference of the order of 0.5 to 1 arcsec, corresponding to a larger Sun diameter during the Maunder minimum. As expected, few sunspots were observed. Moreover, Picard's data also showed a slow down of the Sun rotation velocity at equator and significantly more sunspots in the south Sun hemisphere than in the north.

Diameter and Earth's climate

The solar constant measurements performed in space by the radiometers since 1978 were modeled using the sunspots number and faculae. This allowed to reconstruct the solar constant variation till 1610 (Lean, 1997). This showed that the solar constant experienced a significant decrease during the Maunder minimum. The temperature in the northern hemisphere has been also reconstructed for the same period. The cooling of this period is known as the Little Ice Age. The similarity of the temperature and solar constant variations strongly suggests the Maunder minimum as the cause of the Little Ice Age. To assess this suggestion, climate models were run by Soudrny (1994) that showed the Maunder minimum as the possible cause of the Little Ice Age. Volcanic eruptions (major ones) also play a certain role, but their effects do not extent more than a few years.

As during the Maunder minimum where, as suggested by Picard's data, the Sun radius experienced a significant change, the modern data of Sun diameter measurements and sunspots number, set together by Laclare *et al.* (1996), reveal a relation between the Sun radius and solar constant variations corresponding to an increase of the Sun radius for a decrease of the solar constant (cf. Fig. 1). Therefore, in order to establish experimentally without ambiguity the Sun constant and diameter relationship, we propose to operate from space by measuring simultaneously both quantities from the same platform

and in non-magnetic lines or continua. The importance of the measurements for climatology is straightforward taking into account the Little Ice Age and the Maunder minimum events.

Prediction and precision

The total solar irradiance measure made by radiometers from space over the last 20 years, is excellent in relative terms (10^{-5}) but poor in absolute. The amplitude of the variation over the cycle (0.1 %) is small and is about the same than the uncertainty on the absolute value from one instrument to the other. Prediction tendency of climate change from such data is not straightforward and adjustment of data sets of different origins an art (cf. Fröhlich and Lean, 1998). On the contrary, and if the relation irradiance-diameter is established by PICARD, the diameter measure which is precise, reproducible and absolute to 4 mas (or even better when the HIPPARCOS data will be recalibrated by FAME or GAIA) and which, accordingly to Laclare *et al.* (1996), has an amplitude over the solar cycle of 0.4 arcsec or so, provides a proper — and quantified — sampling of the activity change over the cycle. Furthermore, the diameter measure will be done in the visible but also in the UV at 230 nm a wavelength band much more variable (6 to 8%) with the solar cycle and well known for its role in the chemistry of ozone, incidentally one of the possible links between solar activity and Earth climate.

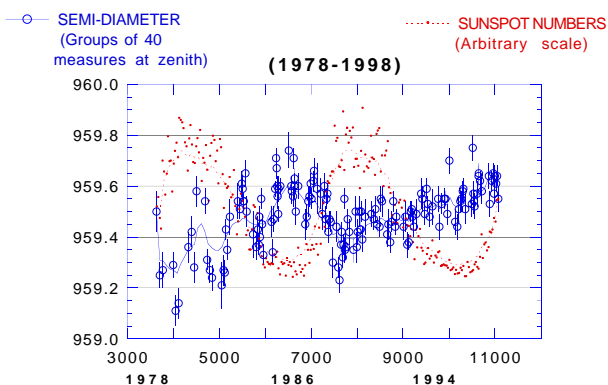


Fig. 1: Opposing phase observed between the sunspots number and the semi-diameter measured at CERGA's Astrolabe (1978–1998).

Note that we measure the solar radius using the inflexion point of the radial intensity curve, a measure less sensitive to the instrumental photometry and point spread function (diffraction, jitter, *etc.*). In practice an average profile is first obtained and fitted using a smooth function (double hyperbolic tangent with 7 parameters). Then, each individual radius corresponding to a limb pixel is determined using two parametric deviations from this profile, intensity and limb displacement, applying the appropriate corrections for diffraction, jitter, diffusion and the integration and purely geometrical effects of the CCD. A precision of 10 mas is achieved, mostly corresponding to the photon noise limit. Because centering is essential, the whole process is, in fact repeated so that the generation of the

averaged limb profile recentering is not affected by solar activity (identified) and the limb shape deformations. Cumulating these individual radius measure by hundreds, allow to achieve a precision better than a mas on the global but also specific radius (polar, equatorial or of higher orders).

Lyman alpha monitoring

Lyman alpha irradiance has been monitored since 1977 and more recently by UARS since 1991. The SORCE satellite will be launched in late 2002 and it will also monitor Lyman alpha irradiance. Since these irradiance monitoring experiments observe the Sun as a star, there is no information about the physical causes of the observed irradiance changes. To identify the causes of changes in Lyman alpha, one needs to compare the full disk irradiance data with images. PICARD will provide high spatial resolution (1 arcsec) and continuous (every 45 minutes) Lyman alpha images which will complement the SORCE measurements. These images will make possible to better account for the observed Lyman alpha changes and also for a better reconstruction of the long-term Lyman alpha data set. Lyman-alpha irradiance is important for the ozone changes and for the formation of the ionospheric D-region in the Earth's atmosphere. Its understanding should result in significant progress in atmospheric science and aeronomy.

Oscillations

Another major objective of PICARD is to attempt the detection of the gravity modes (g-modes) of the Sun. These modes are of prime importance to understand the structure and dynamics of the solar core which cannot be studied by using solar pressure modes (p-modes) alone. So far the g-modes have not been discovered by any set of instruments onboard the SOHO spacecraft (Appourchaux *et al.*, 2000). The $1-\sigma$ upper limit of g-modes amplitude at around 200 μHz is typically 1 mm/s or 0.1 ppm (Fröhlich *et al.*, 1998). Given a velocity amplitude of 1 mm/s at 200 μHz , the displacement of the solar surface would be of about 1.6 m p-p which is equivalent to a variation of solar radius of about 2 μarcsec . This level could be marginally detected by PICARD although not the method used for detecting the g-modes. Nevertheless, it is worth noticing that MDI/SOHO was able to — without an optimized telescope and imaging scheme as we have — to observe a 10 μarcsec high frequency p-mode (5 min.) solar limb oscillation signal (Kuhn *et al.*, 1997).

With PICARD we want to detect intensity fluctuations at the solar limb that will perturb the equivalent solar radius signal. Appourchaux and Toutain (1998) reported to have detected p-modes using the limb data of the LOI instrument. In some case the amplification with respect to full-disk integrated data is about 4, i.e. it means that a p-mode with an amplitude of 1 ppm in full disk is observed with an amplitude of 4 ppm at the limb (cf. Damé *et al.*, 1999). Analyses of Toutain *et al.* (1999) and Toner *et al.* (1999) confirmed such an amplification factor of 5.

If we hope that the same amplification factor holds for the g-modes, we may detect them faster with the limb data of PICARD than with SOHO ones. A pessimistic derivation gave 20 years for the detection of the first few g-modes with SOHO (Fröhlich *et al.*, 1998). With PICARD we can seriously envisage detecting them in less than 2 years with the amplification factor above.

PICARD PAYLOAD

To carry the proposed measurements PICARD has 3 instruments: SODISM, the "SOlar Diameter Imager and Surface Mapper", for the measure of the diameter and differential rotation (this is, therefore, a whole Sun imager), SOVAP (SOlar VARIability PICARD), for the measure of the total absolute solar irradiance (correlation with SODISM measurements) and PREMOS (PREcision MONitoring of Solar variability), a package of 3 set of 4 UV and visible Sun photometers. Fig. 2 presents an artist view of PICARD's microsatellite. SODISM is realized by the Service d'Aéronomie du CNRS, France, with a contribution from the Space Science Department of ESTEC, SOVAP by the Royal Meteorological Institute of Belgium, and PREMOS by the World Radiation Center of Switzerland.

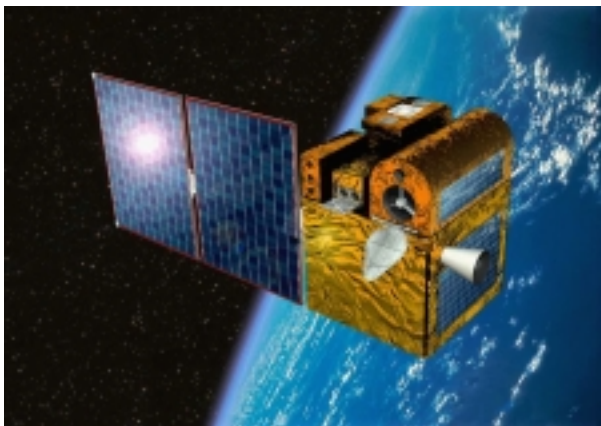


Fig. 2: Artist view of PICARD microsatellite: $60 \times 60 \times 80$ cm^3 in size. Shown are the 3 instruments: SODISM, telescope and guiding, right, SOVAP, differential radiometer, center, and PREMOS (flux monitors) left, near the solar panels. In the back, one can see the electronics box supporting two S-band antennae and a solar pointer (acquisition maneuvers).

SODISM

SODISM is a simple telescope of useful diameter 110 mm. It forms a complete image of the Sun on a large, back thinned, CCD of 2048×2048 useful pixels. The pixel, $13.5 \mu\text{m}$, corresponds to 1.05 arcsec (at 1 AU) and the effective spatial resolution is also about an arcsec (at the limb). SODISM observes in 4 wavelengths bands the whole Sun (230 nm, 548 nm, 160 nm and Lyman alpha) and 2 calibration channels (cf. Table 1) accessible through the use of 2 cascading filter-wheels, each with 5 positions.

Operational modes

The main observing wavelength is 230 nm (8 nm bandwidth). It corresponds to a mostly flat UV continuum formed in the high photosphere. It is the best possible choice of wavelength since it is sensitive to UV variations (about half of the MgII index variability for instance), it corresponds to the ozone bands (and by chemical interaction in the stratosphere, the UV may affect the stratospheric dynamics and, consequently, the clouds coverage — which may be one of the paths of the Sun influence on the Earth's climate) and the limb darkening in this continuum is limited.

UV nominal mode	230 nm
Visible	548 nm
Active regions	160 nm
Prominences and ionosphere	Lyman alpha
CCD Flat Field	"Diffusion"
Scaling factor	"Star field"

Table 1: Observing and calibration modes of SODISM/PICARD.

In addition, SODISM/PICARD observes 548 nm which is near the center wavelength of the 100 nm bandpass used by Francis Laclare CERGA's group for the solar diameter measurement with the Astrolabe (and, in the near future, with the new DORAYSOL instrument). The 160 nm and Lyman alpha filters are used for identification of active regions and prominences. This is essential to prevent activity manifestations to affect the "quiet" radius determination. This possibility to avoid, in the diameter computation, the pixels at the limb affected by faculae, active regions, prominences, sunspots or pores, is an essential feature of SODISM/PICARD since activity, therefore, does not add noise to the diameter measure (active solar pixels are not accounted).

The diffusion plates are simply used to monitor the CCD response and sensitivity (Flat Field). The CCD itself is a complete state-of-the-art system (EEV 4280 2048×4096 pixels back thinned and with frame transfer) hopefully developed in parallel of our program for the asteroseismology satellite program COROT.

Finally, specific to PICARD — and providing an ABSOLUTE diameter reference better than 4 mas (milliarcsec) — is the "Star field" channel. It provides access to stellar fields in which (with a limit magnitude of 6 or so) stars' triplets (and more: field with 5 and 6 stars also available) of the HIPPARCOS reference catalog are imaged, allowing to scale our diameter measure and, if required, to identify and to follow any structural change in the focus or CCD dimensions which could affect the diameter measure.

Optical concept

SODISM has a sound optical concept allowing to achieve a near distortion free and dimensionally stable image of the solar limb. It has a symmetry of revolution (no complex optics — filters at normal incidence — nothing else than the two mirrors and a filter set in the

optical path) and a single telescope-detector-guiding telescope support structure for common referencing and stability. The telescopes mirrors are made of SiC without coatings (reflectivity of 35–40 % in the UV and yet 20 % in the visible). Advantage is indeed that the photometry will not change by aging and degradation of coatings since there are no coatings. Further, the primary and secondary mirrors will help to remove 96 % of the visible solar flux, preserving the filters from degradation and, due to the high conductivity of SiC, this flux will be evacuated to external radiators.

Mechanical/thermal stability

To provide a stable measurement of semi-diameters to a couple mas over the two to six years duration of the mission, SODISM/PICARD mechanical stability has to be excellent intrinsically and controlled. The design selected achieves mechanical and thermal stability because of the choice of a single monolithic structure — a tube of carbon-carbon — to link the SiC mirrors of the telescope and to the detector. As well the guiding telescope is in the same structure, its mirrors and the 4-quadrant detector being directly placed in the carbon-

carbon tube. This new type of structure (developed for example by ALCATEL SPACE, cf. Bailly *et al.*, 1997) allows to reduce the thermal regulation to half a degree for a relative change of the diameter < 1 mas (1 thousand of a pixel). The isotropic property of carbon-carbon and a detailed knowledge of the experiment (interferometric calibration), will help to further gain, by modelisation, a factor 100 to 1000 on the short term diameter variations (useful for the solar limb oscillations). This means that couples of μarcsec could be inferred, allowing a direct monitoring of limb oscillations. Note that, beside focusing, the only other systematic error which affects the diameter directly is the size of the detector (silicium has an expansion coefficient of $\sim 2 \cdot 10^{-6}$ and requires, to keep errors below ± 0.5 mas, a ± 0.1 °C temperature regulation).

Fig. 3 shows the structure design of the SODISM/PICARD telescope, with the carbon-carbon tubes, the INVAR plates and SiC mirrors. Note also the small titanium feet which account for the dilatation of the platform (instrumental plateau base plate in aluminum but with a carbon skin).

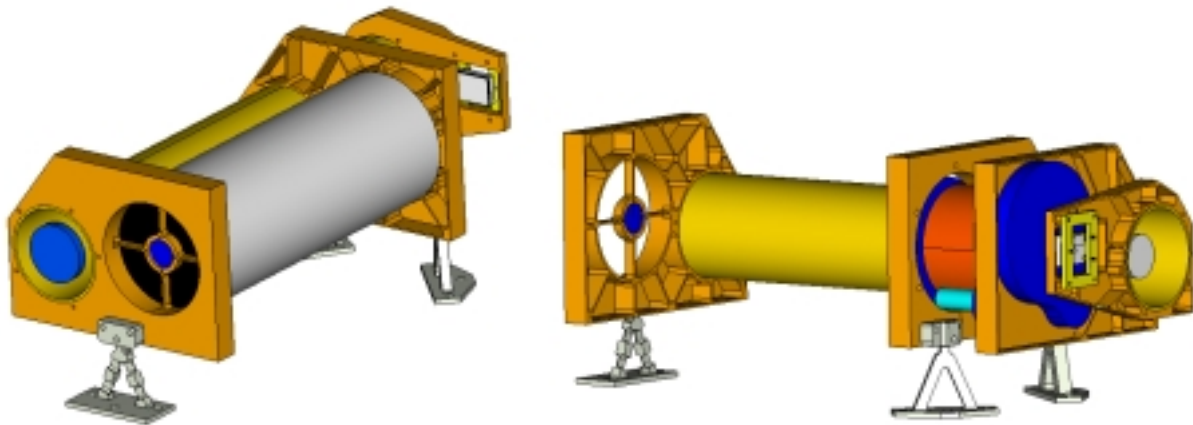


Fig. 3: Mechanical structure of the SODISM/PICARD telescope (350 mm between the primary and secondary mirror and 150 mm between the primary and the CCD surface: total length without cover of 550 mm). Note the 3 Invar plates linked together with the 550 mm long carbon-carbon tube of $\text{Ø}100$ mm. The primary mirror is mounted on 3 piezoelectrics driven by a guiding telescope directly placed inside the C-C tube. The CCD (cooled to -40°C), is uncoupled from the Invar plate by a Cordierite support.

Measurements	Solar diameter, differential rotation and full Sun UV and visible imaging
Number of channels	6 (230, 548, 160 nm, Ly α , "Flat Field" & "Star Field")
Telescope focal length — solar image	2650 mm — $\text{Ø}25$ mm
Telescope optics	Primary $\text{Ø}120$ mm (used: 110 mm) ; Secondary $\text{Ø}34$ mm (used: 25 mm)
EEV-4280 back thinned CCD detector	2048x4096 $13.5 \mu\text{m}$ square pixels (frame transfer: 2048x2048 pixels used)
Guider acquisition range	1.2°
Guider nominal pointing range	$\pm 30''$
Guider servo bandwidths	0 to a few Hz (platform) ; a few Hz to 50 Hz (fine guiding on the primary)
Quad-cell image displacement sensitivity	Better than 0.01 arcsec
Piezo displacement range	$\pm 6 \mu\text{m}$ (± 1 arcmin)
Pointing precision maximum residual jitter	0.1" (1 tenth of a pixel)
Absolute solar shape precision	Better than 4 mas (6 stars HIPPARCOS enhanced calibration in 2003)
Relative semi-diameter precision	Better than 1 mas

Table 2: Characteristics of SODISM.

Pointing

Image guiding and stabilization is provided by a telescope with similar optical properties than the main telescope and directly implemented in the carbon-carbon structural tube. The 4-quadrant detector assembly is fine guiding the piezoelectrics which activate the primary mirror of the telescope. Fine guiding is used so that the image of the Sun on the CCD does not move by more than 0.1 arcsec, i.e. 1 tenth of a pixel (about 1 tenth of the Airy disk as well at 230 nm). The 4-quadrant detector will also provide (by access to the low frequency part of the control signal) accurate guiding to the microsatellite itself. In that case the coarse guiding of the stellar sensor is overruled by our sensor when the Sun acquisition is effective in the nominal $\pm 0.6^\circ$ field of view. The 4-quadrant detector is provided by ESTEC and similar to the one used with success on SOHO by the LOI/VIRGO instrument.

Ground program: PICARDSOL

The Engineering Model of SODISM will be used in CERGA, France, in conjunction with the newly working DORAYSOL and the longstanding (25 years of observations) Astrolabe of Francis Laclare. As such, and for the first time, the same instrument will be used in space and on ground to measure the solar diameter, deduce atmospheric bias and state on ground instruments possible accuracy. It is expected that the ground instrument will operate for more than a solar cycle. A new generation seeing monitor, measuring the coherence length and temporal coherence (MISOLFA), will also be used in conjunction with PICARDSOL and DORAYSOL to better assess atmospheric effects on the ground diameter measure (in order to validate the past historical measurements).

SOVAP

To measure the solar constant, PICARD will use a SOVA 1 type radiometer, SOVAP, the "P" standing for PICARD. SOVA 1 is a differential absolute solar radiometer developed at the RMIB, Royal Meteorological Institute of Belgium (Crommelynck and Domingo, 1984). The RMIB radiometers have been flown in Space 8 times from 93 to 98. SOVAP radiometric core is formed by two blackened cavities constructed side by side on a common heat sink. In between each cavity and the heat sink a heat flux transducer is mounted. The difference between the two transducers' outputs gives a differential heat measurement, in which the common part of the thermal surrounding radiation seen by the two cavities is eliminated. By the symmetrical construction and good insulation thermal asymmetry is minimized. SOVAP characteristics are summarized in Table 3.

PREMOS

This instrument is provided by the World Radiation Center, Davos, Switzerland. It consists in 4 "filter radi-

ometers", based on the same principle than a radiometer (equilibrium of the flux inside a cavity) but with the preselection of a known and reduced spectral bandwidth. These photometers are observing in the UV and the visible, at the same wavelengths, 230 and 548 nm than SODISM and in two other UV wavelengths: 311 and 402 nm. 3 sets of these 4 photometers are used — one being a reference — in order to monitor aging effects. The 230 nm channel has a dual function: it estimates the UV flux in this ozone sensitive bandwidth, and it indicates a possible degradation of SODISM's CCD sensitivity.

Measured quantity	Total irradiance (Wm^{-2})
Number of channels	2
Number of reference voltages	6
Cavity type	Cylindrical, diffuse black
Diameter precision aperture	1 cm
Slope angle	2.5°
Solar sampling period	3 minutes
Duty cycle	50 %
Instrument noise	$< 0.1 \text{ Wm}^{-2}$

Table 3: Characteristics of SOVAP (default measurement mode).

Measured quantity	Spectral irradiance at 230, 311, 402 and 548 nm (Wm^{-2})
Number of photometers	12 (3 sets of 4)
FWHM bandwidth	8 nm at 230, 311 and 548 nm 5 nm at 402 nm
Cavity type	Cylindrical, diffuse black
Full view angle	2.5°
Slope angle	0.7°
Diameter precision aperture	3 mm
Accuracy of aperture area	$< 10^{-3}$
Cross-Talk	$< 10^{-5}$

Table 4: Characteristics of PREMOS.

THE PICARD MISSION

The PICARD's system uses most of the basic components of the CNES microsatellite product line, namely, the ground segment (MIGS) made of the "Centre de Contrôle Microsatellites" (CNES Toulouse), a band S station (and most probably a complementary station at high latitude) and the flight microsatellite segment. These components will be qualified by the first microsatellite mission of the product line, namely, the mission DEMETER. The PICARD system is operated mostly the same way than DEMETER and, in this way, confirms the generic character wanted and developed for the microsatellite product line.

Orbit

The PICARD's mission requires, ideally, an orbit with constant viewing of the Sun or, at minimum, with limited or short duration eclipses. The expected mission lifetime is 3 to 4 years with a possible extension to 6 years. Launch opportunities are essentially Sun Syn-

chronous Orbits (SSO) with local time 6h/18h (little or no eclipses). Several scenarios are still under consideration for the PICARD flight which is not expected before 2005 (the launch date and expected life time are important since the diameter/constant relationship will definitively be better determined during the near linear part of the rising cycle than at minimum when the "constant" is mostly "constant"...). If 4 years can be envisaged based on the experience of the first microsatellites, and since our payload is not expected to degrade (telescope with SiC mirrors, etc.), a launch in 2005 is then possible.

Brief or non-eclipsing Sun-synchronous viewing orbits are essential in order to achieve both the thermal stability for the absolute long term diameter measurement and the near continuous sampling for the long periods g-modes oscillations. At present launch is planned with a dedicated Dnepr Russian rocket on a 750 km SSO orbit.

Pointing needs

The pointing needs on the PICARD satellite (for the scientific measure) is a pointing in the Z axis (telescope axis), towards the Sun, and with a precision of $\pm 0.01^\circ$. This performance will be achieved by the attitude control system using an ecartometry information from the

payload (from the SODISM guiding telescope: pointing differences between the telescope and the Sun center direction). This, by itself, illustrates nicely the optimization capacity offered by the microsatellite system.

Pointing needs also imply a specific configuration of the stellar sensors (two heads) to preserve a permanent stellar pointing calibration along the orbit (stellar calibration need for the SODISM telescope scaling factor).

Characteristics

To the exception of the attitude control system, the microsatellite platform for PICARD is very similar of the one of DEMETER. Globally, the adaptations are reasonable (in cost and complexity) and confirm the right choice of recurring technologies in the initial microsatellite product line.

Table 5 summarizes the essential characteristics of the present PICARD's microsatellite. The performances are derived, mostly, from the microsatellite product line. To the exception of the power allowance, somewhat critical, these are well along the payload needs (cf. Table 6).

Characteristics	PICARD Microsatellite
Size (cm ³) [L x W x H]	60 x 75 x 80
Mass (kg)	Platform (with lest): 68 kg Payload: 42 kg max Total 110 kg (for 120 kg nominal: 10 kg margin)
Power (w)	Platform: 30 W (average on an orbit) Payload: 42 W (average on an orbit) Total: 72 W
Pointing accuracy	3 axis stabilized, 0.1°
Pointing stability (platform)	0.01°
Pointing stability (SODISM)	0.1" (active pointing control on the primary mirror)
Mass Memory	1 Gbits
Telemetry flow	400 Kbits/s (1.5 Gbits/day)
TC (commands)	10 Kbits (immediate or delayed)
Orbit restitution	1 km
Onboard datation	< 0.5 s (TU difference)

Table 5: Performances of PICARD microsatellite.

Characteristics	PICARD Payload	SODISM	SOVAP	PREMOS	Electronics boxes (2)
Mass (kg)	41.8	17.9	5.8	4.1	10 & 4
Size (cm ³)	60x60x30 18x19x19*	60x27x28	35x15x15	30x9x20	<16x26x26 <18x19x19*
Power (W)	32.9	18.4	10.1	4.4	NA
Thermal Control (W)	9.0	9.0	—	—	NA
Average Telemetry (Mbits/day)	1510	1500	5	5	NA

* this electronic's box is placed under the microsatellite platform

Table 6: Characteristics of PICARD model payload.

Table 6 summarizes the mass, power and nominal telemetry characteristics of the PICARD mission. Note that the PICARD Mission Center will normally be operated by the RMIB and that, most probably, antennae (S band) in Toulouse and Kiruna will be used for telemetry

needs (about 1.5 Gbits per day). Depending on the data compression scheme selected, a higher telemetry rate (1.9 Gbits per day) could require a third antenna.

ACKNOWLEDGEMENTS

We are thankful to the CNES Microsatellite Division and Direction des Programmes and in particular to B. Tatry, C. Bouzat, J.-Y. Prado, F. Dulac and N. Papineau for their support to the mission, and would like to acknowledge the PICARD project and scientific teams (10 collaborators, 27 Co-Investigators) whom are doing a remarkable work towards a successful PICARD's mission.

REFERENCES

- Appourchaux, T. *et al.*, Observational Upper Limits to Low-Degree Solar g-Modes, *Ap. J.* 538(1), 401-414 (2000).
- Appourchaux, T. and Toutain, T., in *Sounding Solar and Stellar Interiors*, IAU Symposium 181 (Poster Volume), Eds. J. Provost and F.X. Schmider, 5 (1998).
- Bailly, B. *et al.*, High Stability Carbon/Carbon Telescope Structure, *Proc. ICSO'97, CNES International Conference on Space Optics*, Ed. G. Otrio, S4, 1-11 (1997).
- Crommelynck, D. and Domingo, V., Solar Irradiance Observations, *Science* 225, 180-181 (1984).
- Damé, L. *et al.*, PICARD: Simultaneous Measurements of the Solar Diameter, Differential Rotation, Solar Constant and their Variations, in *Symposium on Helioseismology and Solar Variability*, *Adv. in Space Research* 24(2), 205-214 (1999).
- Fröhlich, C. and Lean, J., The Sun's total irradiance: Cycles, trends, and related climate change uncertainties since 1976, *Geophysical Research Letters* 25(23), 4377 (1998).
- Fröhlich, C. and the Phoebus Group, in *Structure and Dynamics of the Sun and Solar-like Stars*, *Proceedings of the SOHO 6 / GONG 98 workshop*, Boston, USA, ESA SP-418, 67 (1998).
- Kuhn, J.R. *et al.*, Precision Solar Astrometry from SOHO/MDI, in *Sounding Solar and Stellar Interiors*, IAU Symposium 181, Eds. J. Provost and F.X. Schmider, 103-110 (1997).
- Laclare, F., Delmas, C., Coin, J.P. and Irbah, A., Measurements and Variations of the Solar Diameter, *Solar Physics* 166, 211-229 (1996).
- Lean, J., The Sun's Variable Radiation and its Relevance for Earth, *Annu. Rev. Astron. Astrophys.* 35, 33-67 (1997).
- Ribes, E., Ribes, J.C. and Barthalot, R., Evidence for a Larger Sun with a Slower Rotation during the Seventeenth Century, *Nature* 326, 52-55 (1987).
- Sadourny, R., Sensitivity of Climate to Long-term Variations of the Solar Output, in *The solar engine and its influence on terrestrial atmosphere and climate*, Ed. E. Nesme-Ribes, NATO ASI Series I, vol. 25, 479-491, Springer Verlag (1994).
- Toner, C.G., Jefferies, S.M. and Toutain, T., Increasing the Visibility of Solar Oscillations, *Ap. J.* 518(2), L127-L130 (1999).
- Toutain, T., Berthomieu, G. and Provost, J., Light perturbation from stellar nonradial oscillations: an application to solar oscillations, *A. & A.* 344, 188-198 (1999)