

Prediction of yield and long-term failure of oriented polypropylene: kinetics and anisotropy

Citation for published version (APA):

Erp, van, T. B., Reynolds, C. T., Dommelen, van, J. A. W., & Govaert, L. E. (2008). *Prediction of yield and long-term failure of oriented polypropylene: kinetics and anisotropy*. Poster session presented at Mate Poster Award 2008 : 13th Annual Poster Contest.

Document status and date:

Published: 01/01/2008

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Prediction of yield and long-term failure of oriented polypropylene: kinetics and anisotropy

T.B. van Erp, C.T. Reynolds, J.A.W. van Dommelen, L.E. Govaert



Introduction

Polymer products are often manufactured by injection molding in which the molten material is subjected to shear and elongational flow, inducing a degree of orientation¹. As a result, especially for semi-crystalline polymers, the mechanical behavior becomes anisotropic. The present study is focussed on the deformation kinetics of oriented polypropylene tapes and a viscoplastic model is proposed to predict the off-axis yield and failure behavior.

Materials and methods

An isotactic polypropylene tape is extruded and subsequent solid state drawing is performed at a drawing temperature of 120°C producing different tapes with draw ratios of $\lambda = 1, 4$ and 6.

Dogbone-shaped samples are cut directly from the tapes at different angles θ between 0° and 90°, with respect to the drawing direction (DD), see figure 1, to perform uniaxial tensile tests and long-term failure experiments.

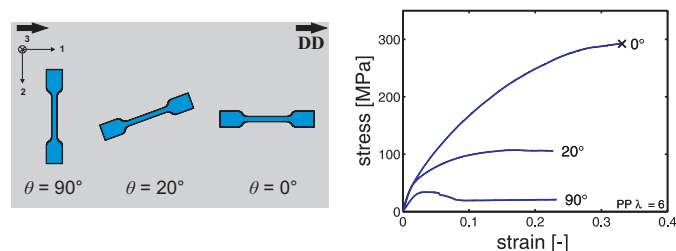


Figure 1 : Orientation of samples with respect to the DD and the resulting stress-strain curves showing evident anisotropic behavior.

Modeling

A phenomenological anisotropic viscoplastic model for the rate-dependency of the yield stress is presented. In this model, the anisotropic yield criterion of Hill² is used as a criterion for flow based on a given stress situation and combined with the Eyring-flow theory. The deformation rate tensor \mathbf{D}_p is given by:

$$\mathbf{D}_p = \dot{\lambda} \mathbf{N}$$

where $\dot{\lambda}$ is the magnitude of plastic flow and \mathbf{N} the direction of the deformation rate given by an associated flow rule.

A failure criterion is adopted which states that the product of the time and strain rate at failure is constant for any stress³. Here, the equivalent plastic strain rate is used and consequently, failure will occur when an equivalent critical strain is exceeded. Time-to-failure is given by:

$$t_f = \frac{\bar{\epsilon}_{cr}}{\dot{\epsilon}_p}$$

Results

The model is developed such that the anisotropy is decoupled from the deformation kinetics. First, for different tapes the anisotropy is determined using Hill's criterion², see figure 2. Second, the deformation kinetics are determined. Remarkably, parallel slopes are found using a double logarithmic scale. Therefore, Hill's criterion is a powerful tool since this provides the possibility to factorize the deformation kinetics for different orientations. The results of the predicted yield stress and time-to-failure, for iPP tape with draw ratio of six, are presented in figure 3.

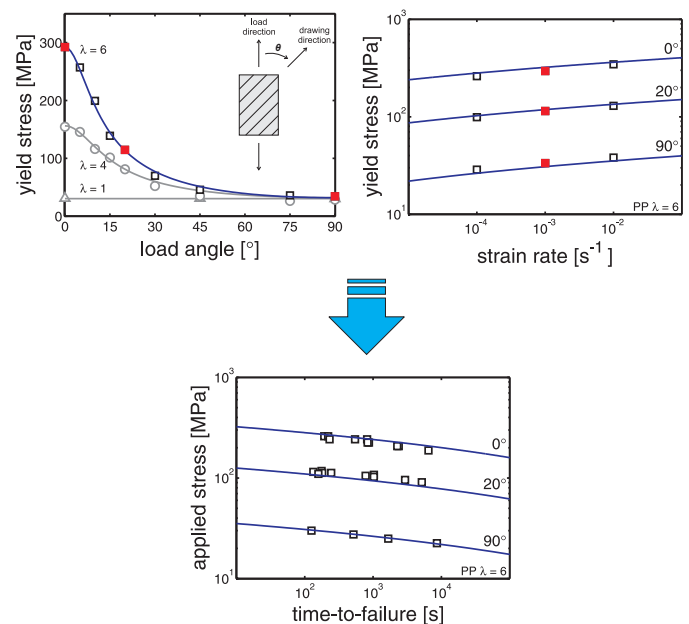


Figure 2 : Orientation and draw ratio dependence (top left) combined with rate dependence (top right) resulting in prediction of time-to-failure for oriented PP tape.

Conclusions

The objective of capturing orientation effects in oriented tapes is fulfilled. The presented anisotropic viscoplastic model is based on factorization of the strain rate and draw ratio dependence and is capable of quantitatively predicting the strain rate, angle and draw ratio dependence of the yield stress as well as time-to-failure in various off-axis static loading conditions characterized solely of the transverse direction.

References

- [1] B.A.G. SCHRAUWEN ET AL.. *Macromolecules*, **37**, 8618, (2004)
- [2] R. HILL. *Oxford University Press, London*, (1950)
- [3] E.J. KRAMER AND E.W. HART. *Polymer*, **25**, 1667, (1984)