

**PROPULSIVE SMALL EXPENDABLE DEPLOYER SYSTEM (ProSEDS)  
SPACE EXPERIMENT**

*CONF. PAPER.  
IN-18  
376552*

Mr. Les Johnson  
Mail Code PS02, NASA Marshall Space Flight Center  
Huntsville, Alabama 35812  
205-544-0614 (phone) 205-544-6669 (fax)

Dr. Brian Gilchrist  
The University of Michigan  
Space Physics Research Laboratory  
2455 Hayward, Ann Arbor, Michigan 48109-2143  
734-763-6230 (phone) 734-764-5137 (fax)

Drs. Robert D. Estes & Enrico Lorenzini  
Smithsonian Astrophysical Observatory  
60 Garden Street, Cambridge, Massachusetts 02138  
617-495-7261 (phone) 617-496-7670 (fax)

Ms. Judy Ballance  
Chief Engineers Office/EE61  
National Aeronautics and Space Administration  
George C. Marshall Space Flight Center  
Huntsville, Alabama 35812  
judy.ballance@msfc.nasa.gov  
205-544-6042 (phone)

**Abstract**

The Propulsive Small Expendable Deployer System (ProSEDS) space experiment will demonstrate the use of an electrodynamic tether propulsion system. The flight experiment is a precursor to the more ambitious electrodynamic tether upper stage demonstration mission which will be capable of orbit raising, lowering and inclination changes—all using electrodynamic thrust. ProSEDS which is planned to fly in 2000, will use the flight proven Small Expendable Deployer System (SEDS) to deploy a tether (5km bare wire plus 15 km spectra) from a Delta II upper stage to achieve ~0.4N drag thrust, thus demonstrating deorbit thrust. The experiment will use a predominantly 'bare' tether for current collection in lieu of endmass collector and insulated tether approach used on previous missions. ProSEDS will utilize tether-generated current to provide limited spacecraft power. In addition to the use of this technology to provide orbit transfer of payloads and upper stages from LEO to higher orbits it may also be an attractive option for future missions to Jupiter and any other planetary body with a magnetosphere.

**INTRODUCTION**

Since the 1960's there have been at least 16 tether missions. In the 1990's, several important milestones were reached, including the retrieval of a tether in space, successful deployment of a 20-km-long tether in and operation of an electrodynamic tether with tether current driven in both directions—power and thrust modes (Johnson 1997). A list of known tether missions is shown in Table 1. The ProSEDS mission, to be flown in 2000, is sponsored by NASA's Advanced Space Transportation Program Office at The George C. Marshall Space Flight Center (MSFC).

TABLE 1. Known Tether Flights

NAME	DATE	ORBIT	LENGTH	COMMENTS
Gemini 11	1967	LEO	30 m	spin stable 0.15 rpm
Gemini 12	1967	LEO	30 m	local vertical, stable swing
H-9M-69	1980	suborbital	500 m	partial deployment
S-520-2	1981	suborbital	500 m	partial deployment
Charge-1	1983	suborbital	500 m	full deployment
Charge-2	1984	suborbital	500 m	full deployment
ECHO-7	1988	suborbital	?	magnetic field aligned
Oedipus-A	1989	suborbital	958 m	spin stable 0.7 rpm
Charge-2B	1992	suborbital	500 m	full deployment
TSS-1	1992	LEO	<1 km	electrodynamic, partial deploy, retrieved
SEDS-1	1993	LEO	20 km	downward deploy, swing & cut
PMG	1993	LEO	500 m	electrodynamic, upward deploy
SEDS-2	1994	LEO	20 km	local vertical stable, downward deploy
Oedipus-C	1995	suborbital	1 km	spin stable 0.7 rpm
TSS-1R	1996	LEO	19.6 km	electrodynamic power generation and science
TiPS	1996	LEO	4 km	long life tether


### **ProSEDS FLIGHT EXPERIMENT OVERVIEW**

A flight experiment to validate the performance of the bare electrodynamic tether in space and demonstrate its capability to produce thrust is planned by NASA for the year 2000. The ProSEDS (Propulsive Small Expendable Deployer System) experiment will be placed into a 400 km circular orbit as a secondary payload from a Delta II launch vehicle (Figure 1). Once on orbit, the flight-proven SEDS will deploy 15 km of insulating Spectra tether attached to an endmass, followed by 5km of predominantly bare wire tether (Figure 2). Upward deployment will set the system to operate in the generator mode, thus producing drag thrust and electrical power. The drag thrust provided by the tether, with an average current of 0.5A, could deorbit the Delta II upper stage in approximately 17 days, versus its nominal  $\geq 6$  months lifetime in a 400 km circular orbit (Figure 3). Approximately 100 W electrical power will be extracted from the tether to recharge mission batteries and to allow extended measurements of the system's performance. A plasma contactor will be attached to the Delta II to complete the circuit and emit electrons back into space. Performance and diagnostic instruments mounted on the Delta II will be used to correlate the propulsive forces generated by the electrodynamic tether and the existing plasma conditions. These instrument will measure plasma density, temperature, energy, and potential. ProSEDS will be the first tether mission to produce electrodynamic thrust, use a bare wire tether, and recharge mission batteries using tether-generated power.

FIGURE 1. Artist concept of ProSEDS on a Delta II

**Electrodynamic Tethers**

The ProSEDS flight experiment will demonstrate electrodynamic propulsion (through drag thrust) in space. From theoretical analyses and preliminary plasma chamber tests, bare tethers appear to be very effective anodes for collecting electrons from the ionosphere and, consequently, attaining high currents with relatively short tether lengths (Colombo 1981). A predominantly uninsulated (bare wire) conducting tether, terminated at one end by a plasma contactor, will be used as an electromagnetic thruster. A propulsive force of  $F = IL \times B$  is generated on a spacecraft/tether system when a current,  $I$ , from electrons collected in space plasma, flows down a tether of length,  $L$ , due to the emf induced in it by the geomagnetic field,  $B$ . Preliminary test indicate that a thin uninsulated wire could be

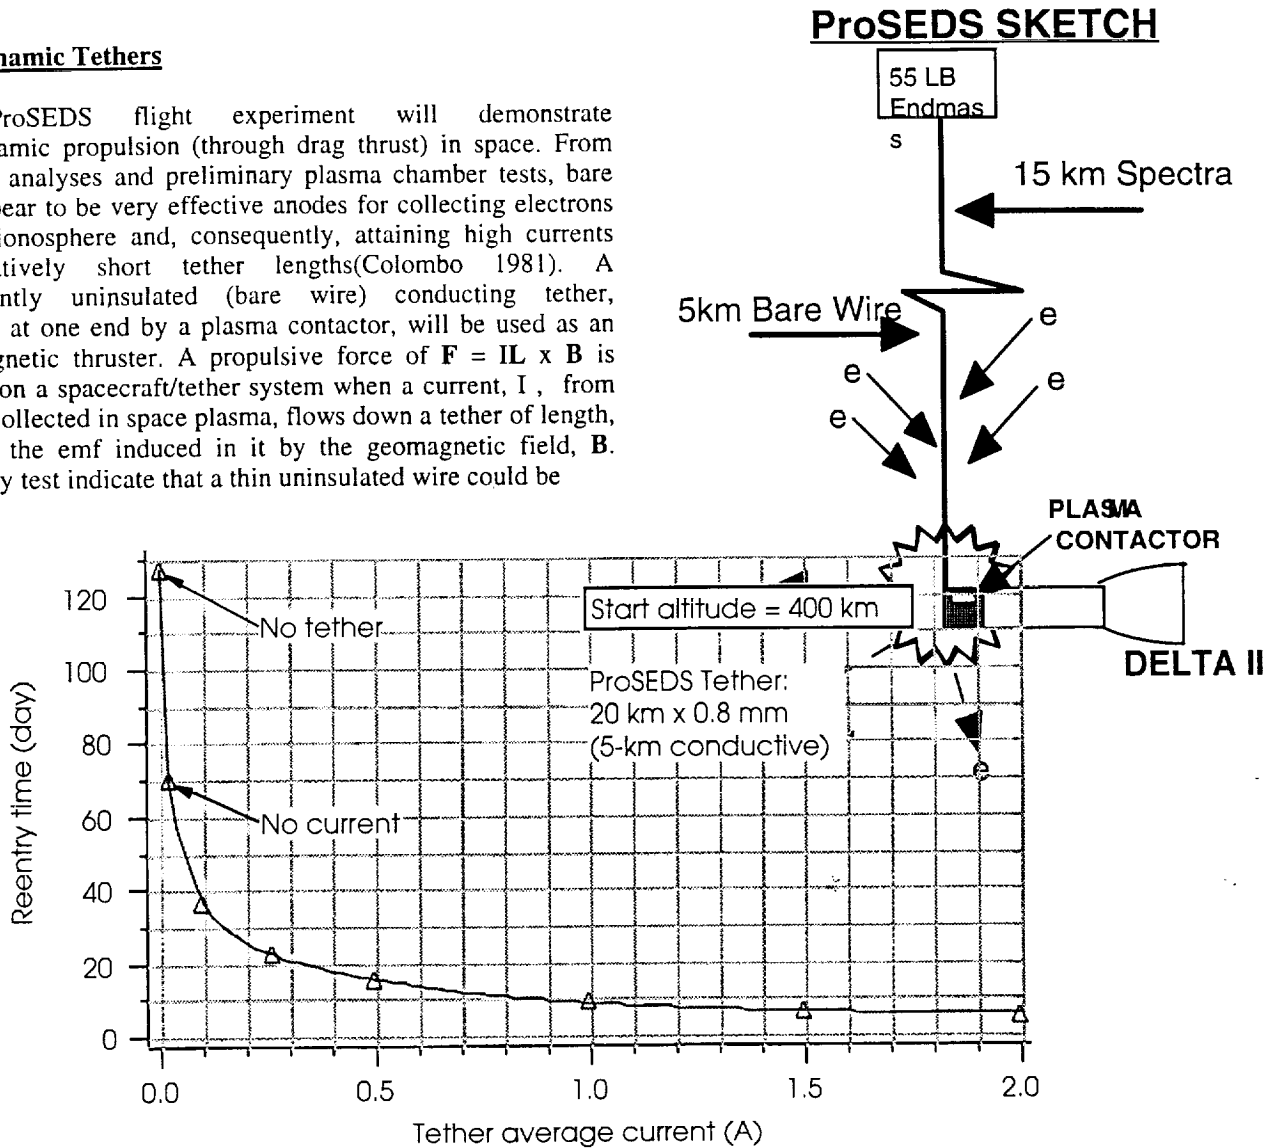

40 times more efficient as a collector than previous systems (Figure 4).

FIGURE 2. ProSEDS Sketch

FIGURE 3. Predicted demonstration of ProSEDS Propulsive Drag Thrust provided by Enrico Lorenzini/SAO. The Delta II reentry time versus tether average current.


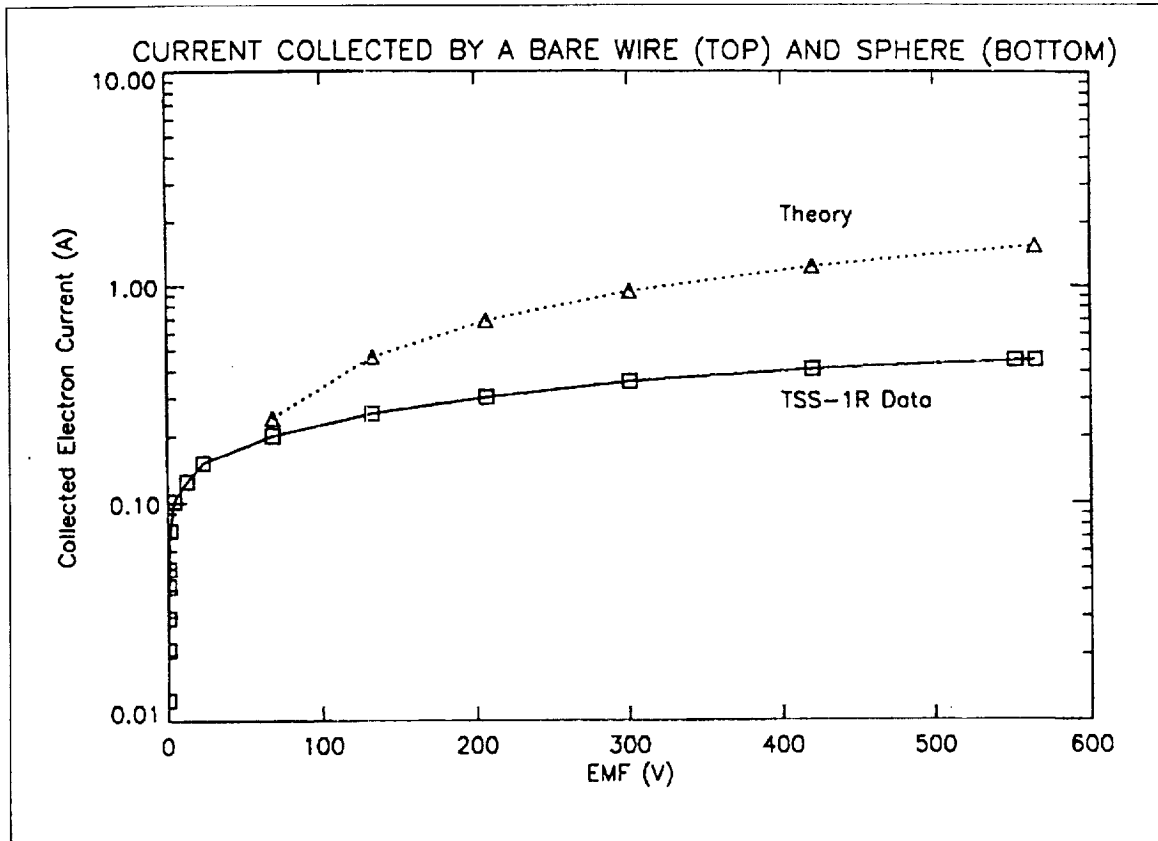


FIGURE 4. Current collected by a bare wire versus a sphere in plasma chamber results provided by Jim Sorensen and Nobie Stone/NASA.

### FUTURE APPLICATIONS FOR ELECTRODYNAMIC TETHERS

The main advantage of electrodynamic tethers is that they can be used as propellantless (no resupply required) space propulsion systems. Tethers take advantage of the natural plasma environment and sunlight to provide thrust and power. For example, if solar arrays and an external power supply are used, an emf can be generated in the tether such that current collected from the ionosphere produces thrust rather than drag. This thrust can then be used to raise the orbit of the system or change its inclination - all without propellant or rocket engines. It is envisioned that this type of propulsion could be used on a reusable upper stage to provide a low recurring cost alternative to chemical stages. The electrodynamic tether upper stage could be used as an orbital tug to move payloads within low earth orbit (LEO) after insertion. The tug would rendezvous with the payload and launch vehicle, dock/grapple the payload and maneuver it to a new orbital altitude or inclination within LEO

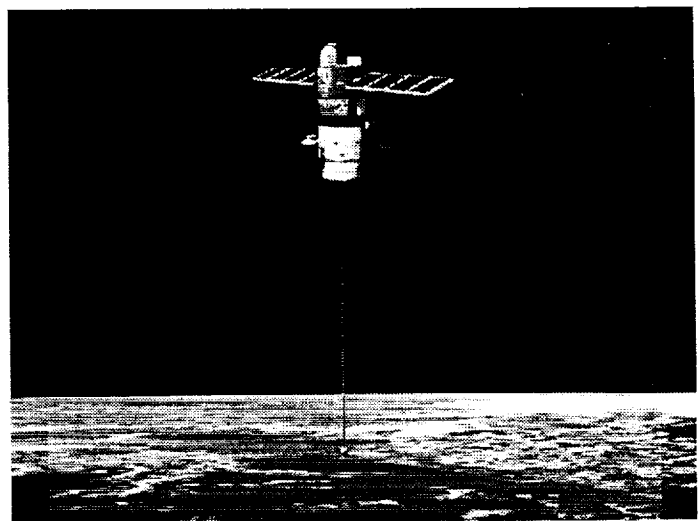

without the use of boost propellant. The tug could then lower its orbit to rendezvous with the next payload and repeat the process. Such a system could conceivably perform several orbital maneuvering assignments without resupply, making it low recurring cost space asset. The ProSEDS itself could be used operationally to extend the capability of existing launch systems by providing a propellantless system for deorbiting spent stages. The launch service provider need not carry additional fuel for the soon-to-be-required deorbit maneuver, thus allowing all the onboard fuel to be used for increasing the vehicle's performance. Similarly, satellites thus equipped could safely deorbit at their end of life without using precious onboard propellant. Both of these applications would help reduce the increasing threat posed by orbital debris. An electrodynamic tether system (Figure 6) could be used on the International Space Station (ISS) to supply a reboost thrust of 0.5-0.8N, thus saving up to 6000kg of propellant per year (Johnson 1996). The reduction of propellant needed to reboost the ISS equates to a \$2B savings over it's 10 year lifetime(Johnson 1996). Other advantages of using the electrodynamic tether on ISS are that the microgravity environment is maintained and external contaminants are reduced. Yet another use for electrodynamic tethers is the exploration of any planet with a magnetosphere, such as Jupiter. Jupiter's rapid rotation produces a condition where a tether can produce power and raise orbit passively and simultaneously. MSFC is working with the Jet Propulsion Laboratory (JPL) to determine the use of electrodynamic tethers for future Jovian missions such as the Europa Orbiter and Jupiter Polar Orbiter (Figure 7).

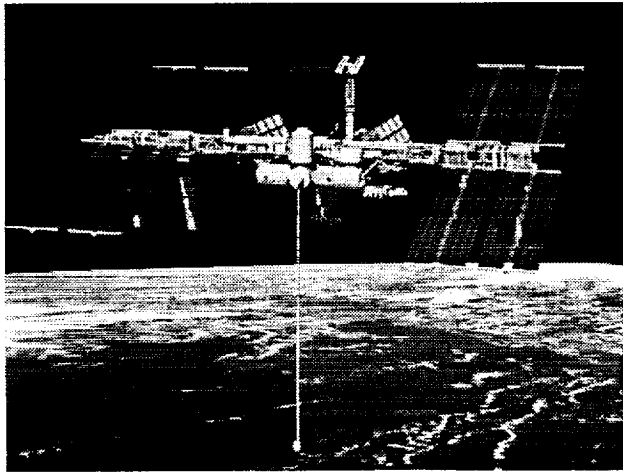


FIGURE 6. ISS with Electrodynamic for Reboost

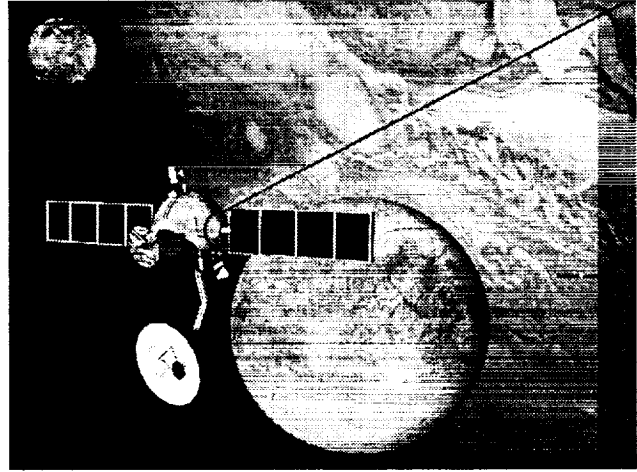


FIGURE 7. Jovian Electrodynamic Tether Concept

## CONCLUSIONS

Tether technology has advanced significantly since its inception over 30 years ago. The recent successes of the SEDS system show that tethers are ready to move from experiment and demonstration to application. One of the most promising applications for tethers is space propulsion and transportation. The use of electrodynamic tether propulsion for reusable upper stages, planetary missions, space station, and launch vehicle deorbit applications will soon be demonstrated with the ProSEDS mission. The ProSEDS mission will demonstrate and validate the production of power in space using a bare wire tether which produces drag thrust propulsion.

## Acknowledgments

This paper was prepared for the ProSEDS project, which is sponsored by the Advanced Space Transportation Program Office of the National Aeronautics and Space Administration (NASA) located at Marshall Space Flight Center (MSFC). Data contributions to this paper were provided by Nobie Stone and Jim Sorensen of MSFC and Enrico Lorenzini of Harvard-Smithsonian Center for Astrophysics.

### References

- Colombo, G. (1981) "Study of certain launching techniques using long tethers," NASA-CR-164060.
- Johnson, L., R. Estes, and E. Lorenzini. (1997) "Space Transportation Systems Using Tethers," in Sixth Alumni Conference of the International Space University, Houston, TX, NASA Conference Publication 3355, 89-96.
- Johnson, L., J. Carroll, R. Estes, B. Gilchrist, E. Lorenzini, M. Martinez-Sanchez, J. Sanmartin, and E. Vas (1996) "Electrodynamic Tethers for Reboost of the International Space Station and Spacecraft Propulsion," in 1996 AIAA Space Programs and Technology Conference, Huntsville, AL, AIAA 96-4250.