

University of Groningen

## Scalable input-to-state stability for performance analysis of large-scale networks

Besselink, B.; Knorn, S.

*Published in:*  
IEEE Control Systems Letters

*DOI:*  
[10.1109/LCSYS.2018.2843174](https://doi.org/10.1109/LCSYS.2018.2843174)

**IMPORTANT NOTE: You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.**

*Document Version*  
Publisher's PDF, also known as Version of record

*Publication date:*  
2018

[Link to publication in University of Groningen/UMCG research database](#)

*Citation for published version (APA):*

Besselink, B., & Knorn, S. (2018). Scalable input-to-state stability for performance analysis of large-scale networks. *IEEE Control Systems Letters*, 2(3), 507-512. <https://doi.org/10.1109/LCSYS.2018.2843174>

**Copyright**

Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

The publication may also be distributed here under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license. More information can be found on the University of Groningen website: <https://www.rug.nl/library/open-access/self-archiving-pure/taverne-amendment>.

**Take-down policy**

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

*Downloaded from the University of Groningen/UMCG research database (Pure): <http://www.rug.nl/research/portal>. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.*

# Scalable Input-to-State Stability for Performance Analysis of Large-Scale Networks

Bart Besselink<sup>ID</sup> and Steffi Knorn<sup>ID</sup>

**Abstract**—This letter investigates networks of interconnected systems and introduces the notion of “scalable input-to-state stability” (sISS). This concept is based on input-to-state stability (ISS) and can be interpreted as an extension of the well-known concept of string stability from simple line graphs to general graphs. It guarantees that the trajectories of all states are bounded at all times independently of the network’s size and structure and can hence be regarded as an important performance notion. Further, sufficient conditions are derived to guarantee sISS of homogeneous networks with well-defined interconnection structures. In fact, the conditions depend on local ISS Lyapunov functions but guarantee the global condition of sISS. Hence, a first step is made towards developing suitable extensions of string stability to general networks. Two examples are discussed to illustrate the theoretical result.

**Index Terms**—Large-scale systems, network analysis and control, stability of nonlinear systems, scalability.

## I. INTRODUCTION

ENGINEERING systems have become increasingly complex and diverse over the last decades and the emerging distinguishing feature of such systems is their large-scale interconnection, resulting from physical interaction or information exchange. Examples include formations of unmanned vehicles, smart grids, sensor networks, and traffic networks.

The complexity caused by the large-scale interconnected nature of such networks might lead to undesired behaviour such as instability or the amplification of perturbations as they propagate through the network. The latter is particularly undesirable as it could lead to cascaded failures or instabilities as the network size grows. Therefore, the main objective of this letter is to provide a *scalable notion of network performance* that prohibits the growth of perturbations.

Manuscript received March 6, 2018; revised May 7, 2018; accepted May 27, 2018. Date of publication June 1, 2018; date of current version June 15, 2018. Recommended by Senior Editor M. Arcak. (Corresponding author: Bart Besselink.)

B. Besselink is with the Bernoulli Institute for Mathematics, Computer Science, and Artificial Intelligence, University of Groningen, 9700 AB Groningen, The Netherlands and also with the Jan C. Willems Centre for Systems and Control, University of Groningen, 9700 AB Groningen, The Netherlands (e-mail: b.besselink@rug.nl).

S. Knorn is with the Department of Engineering Sciences, Uppsala University, 75121 Uppsala, Sweden (e-mail: steffi.knorn@angstrom.uu.se).

Digital Object Identifier 10.1109/LCSYS.2018.2843174

Stability analysis for large-scale interconnected systems has a long history (see [20], [33]) and also network-specific control objectives such as synchronisation and consensus have received a lot of attention, see, e.g., [11], [18], and [22] and the overview [16]. However, these notions have in common that they can be regarded as types of stability and convergence and, despite the long history of robust control [34], only few results are available on notions of *network performance* or *robustness*. Exceptions are given by [2] and [3] in which spatially invariant systems are considered. In particular, [2] captures the effect of external disturbances on large-scale interconnected systems in a concept known as coherence. Specifically, it is shown how measures of the rigidity of a formation scale with increasing network size.

One of the few fields in which network properties beyond stability-like notions are extensively studied is that of vehicle platooning, where formations of closely-spaced vehicles are considered (see [1] for a motivation). As the amplification of perturbations through such string of vehicles could, for large groups, lead to collisions, one of the main control objectives is to prohibit this amplification. This desired behaviour is captured in the notion of *string stability*. Roughly two formulations of string stability can be considered, which have in common that they characterise attenuation of perturbations. First, the early work [12] as well as [21] and [28] give a local definition in which perturbations from a vehicle to its follower are attenuated. Second, the approach in [4], [19], and [27] call for the existence of a bound on relevant error signals that is *independent* of the length of the platoon. This can be regarded as a global definition as it is based on the entire string, which has the advantage that the notion of string stability is not limited to unidirectional information flow structures as in the first approach. Also, the fact that the bound holds for any string length implies *scalability* of the platoon, as vehicles can be added or removed without requiring renewed string stability analysis.

The above definitions of string stability generally rely on the characterisation of input-output gains for suitable chosen inputs and outputs and linear systems are typically considered in these works. A formal definition on the basis of state trajectories, applicable also for non-linear systems, is given in [32]. Whereas autonomous systems are considered in this letter, an extension to platoons with disturbances is given in [5]. Similar definitions involving state trajectories can be found in [17] (for a first step towards an extension to more general network topologies, see [15]). These approaches have the advantages

that the effect of initial conditions and transients can explicitly be taken into account. For recent overviews of string stability properties, see [23], [31]. Finally, we stress that string stability should be regarded as a notion for *network performance* rather than stability. In fact, a vehicle formation can be stable in the classical sense even though perturbations grow as they propagate.

Motivated by the need for notions of performance for general large-scale interconnected systems and inspired by results in vehicle platooning, this letter studies scalable performance notions. It has the following two contributions.

First, we introduce scalable input-to-state stability (sISS) as a characterisation of the robustness of a large-scale interconnected system against external disturbances. Specifically, sISS requires the existence of bounds on state deviations that are *independent* of the network size. As such, this prohibits the amplification of disturbances as they travel through the network. This notion is inspired by input-to-state stability (ISS) [29] and extends the related notion of disturbance string stability [5] to more general network structures.

Second, we provide a sufficient condition for sISS for a class of homogeneous networks that is solely based on ISS properties of the subsystems and the interconnection structure. As such, this can be regarded as a *local* test for the *global* property of sISS, which is in fact independent of the network size. The sufficient condition is based on the construction of a so-called max-separable ISS Lyapunov function for the large-scale system and it is exactly this max-separable structure that enables scalable analysis. The usefulness of such structure in scalable analysis has been recognised before, see [24]. Finally, we mention that this approach draws inspiration from so-called general small-gain conditions for networked systems as studied in [7], [8], and [26].

This letter is organized as follows. The notion of sISS is introduced in Section II, whereas Section III presents the main results. Two examples are discussed in Section IV before conclusions are stated in Section V.

*Notation:* The field of real numbers is denoted by  $\mathbb{R}$  and  $\mathbb{R}_+ = [0, \infty)$ . On the real vector space  $\mathbb{R}^n$ , the Euclidean norm is denoted as  $|\cdot|$ . The vector for which all elements equal 1 is written as  $\mathbb{1} \in \mathbb{R}^n$ . A function  $\alpha : \mathbb{R}_+ \rightarrow \mathbb{R}_+$  is said to be of class  $\mathcal{K}$  if it is continuous, strictly increasing, and satisfies  $\alpha(0) = 0$ . If, in addition,  $\alpha$  is unbounded, then it is of class  $\mathcal{K}_\infty$ . Moreover, a function  $\beta : \mathbb{R}_+ \times \mathbb{R}_+ \rightarrow \mathbb{R}_+$  is said to be of class  $\mathcal{KL}$  if, for each fixed  $s$ ,  $\beta(\cdot, s) \in \mathcal{K}$  and, for each fixed  $r$ , the function  $\beta(r, \cdot)$  is strictly decreasing and  $\lim_{s \rightarrow \infty} \beta(r, s) = 0$ . Finally, for a bounded function  $x : \mathbb{R}_+ \rightarrow \mathbb{R}^n$ , we define  $\|x\|_\infty = \sup_{t \in \mathbb{R}_+} |x(t)|$ .

## II. SCALABLE INPUT-TO-STATE STABILITY

Consider the spatially invariant large-scale system comprised of  $N$  subsystems  $\Sigma_i$  of the form

$$\Sigma_i : \dot{x}_i = f(x_i, \{x_{i+j}\}_{j \in \mathcal{N}}, d_i), \quad (1)$$

with subsystem state  $x_i \in \mathbb{R}^n$ , local disturbance  $d_i \in \mathbb{R}^m$ , and  $i \in \mathcal{I}_N := \{1, 2, \dots, N\}$ . It is assumed that  $f(0, \{0, \dots, 0\}, 0) = 0$ ,  $f$  is locally Lipschitz in  $x_i$  and  $\{x_{i+j}\}_{j \in \mathcal{N}}$ , and continuous in  $d_i$ . In addition to its own state, the




Fig. 1. Example of  $\Sigma$  in (2) with  $\mathcal{N} = \{-2, -1, 1\}$  and  $N = 6$ .

dynamics of  $\Sigma_i$  in (1) depend on the states of its neighbours, as captured through the set of relative neighbours  $\mathcal{N} \subset \mathbb{Z}$  with  $0 \notin \mathcal{N}$ . In particular, the index  $i+j$  in characterizing the neighbours should be understood modulo  $N$  (precisely,  $i+j$  should be read as  $1 + ((i+j-1) \bmod N)$ , where  $k \bmod N$  denotes the remainder after Euclidean division of  $k$  by  $N$ ). Thus, as an example,  $\mathcal{N} = \{-1, 1\}$  characterises a circular interconnection structure with bidirectional coupling between neighbours. Another example is given in Figure 1.

After collecting the states and disturbances as  $x^T = [x_1^T \ \dots \ x_N^T]$  and  $d^T = [d_1^T \ \dots \ d_N^T]$ , the interconnected system  $\Sigma$  can be written compactly as

$$\Sigma : \dot{x} = F_N(x, d), \quad (2)$$

where

$$F_N(x, d) = \begin{bmatrix} f(x_1, \{x_{1+j}\}_{j \in \mathcal{N}}, d_1) \\ \vdots \\ f(x_N, \{x_{N+j}\}_{j \in \mathcal{N}}, d_N) \end{bmatrix} \quad (3)$$

with  $F_N(0, 0) = 0$ . We remark that the system (2) is well-defined for each  $N \geq N_{\min}$  with  $N_{\min} = 1 + \max\{|j| \mid j \in \mathcal{N}\}$ , which gives the minimal system size for which the absence of self-loops is guaranteed. In fact, it is easy to show that  $F_N$  in (3) is locally Lipschitz in  $x$  and continuous in  $d$  for any  $N$ . Thus, (2) can be regarded as a family of systems, in which each system is characterised by its number of subsystems  $N$ . We note that the number of neighbours for a given subsystem is independent of the network size.

In this letter, we are interested in a *scalable* performance notion of  $\Sigma$  in (2), i.e., a characterisation that is independent of the size  $N$ . This leads to the following definition.

*Definition 1:* The system (2) is said to be scalable input-to-state stable (sISS) if there exist functions  $\beta \in \mathcal{KL}$  and  $\sigma \in \mathcal{K}_\infty$  such that, for any  $N \in \mathbb{N}$  such that  $N \geq N_{\min}$ , for any initial condition  $x_i(0) \in \mathbb{R}^n$ ,  $i \in \mathcal{I}_N$ , and any disturbance function  $d_i(\cdot)$ ,  $i \in \mathcal{I}_N$ , the solution  $x_i(\cdot)$  satisfies

$$\max_{i \in \mathcal{I}_N} |x_i(t)| \leq \beta \left( \max_{i \in \mathcal{I}_N} |x_i(0)|, t \right) + \sigma \left( \max_{i \in \mathcal{I}_N} \|d_i\|_\infty \right) \quad (4)$$

for all  $t \geq 0$ .

This notion of sISS stability extends the concept of ISS originally introduced in [29]. The key distinguishing features are, first, the choice of norm on the state  $x$  in terms of the largest Euclidean norm over all subsystems and, second, the fact that the condition should hold for all  $N \geq N_{\min}$ . Exactly these features enable the interpretation of sISS as a *scalable performance notion* of large-scale systems. Namely, the fact

that the bound (4) holds regardless of system size means that state perturbations do not grow without bound whenever subsystems are added or removed. Stated differently, sISS prohibits the amplification of perturbations as they propagate through the network.

*Remark 1:* Even though sISS is defined for large-scale systems of the form (1), Definition 1 is independent of the interconnection structure and does not require homogeneity of the subsystem dynamics. Consequently, sISS could be defined for more general networks, as long as the network structure is well-defined and consistent for growing size  $N$ .

*Remark 2:* Taking a different perspective, sISS can be interpreted as an extension of the notion of string stability, see [23]. Whereas string stability characterises the attenuation of disturbances in a group of vehicles which can typically be regarded as a cascaded system, Definition 1 considers more general network structures. A formal definition of string stability was given in [32] (see also [12] for an early characterization) and is extended to include disturbances on all vehicles in [5]. Definition 1 can in fact be regarded as an extension of [5, Definition 3]. The work [31] provides an alternative approach in extending string stability to more general network topologies.

### III. MAIN RESULTS

In this section, a sufficient condition for sISS will be given in terms of ISS properties of the subsystems  $\Sigma_i$ . To this end, we assume that (1) is input-to-state stable with respect to the states of its neighbours  $\{x_{i+j}\}_{j \in \mathcal{N}}$  and the external disturbance  $d_i$ , which is easy to verify in practice.

*Assumption 1:* There exists a differentiable ISS Lyapunov function  $V : \mathbb{R}^n \rightarrow \mathbb{R}_+$  for the subsystems (1), i.e., the following two conditions hold:

i) There exist  $v_1, v_2 \in \mathcal{K}_\infty$  such that, for all  $x_i \in \mathbb{R}^n$ ,

$$v_1(|x_i|) \leq V(x_i) \leq v_2(|x_i|). \quad (5)$$

ii) There exist functions  $\alpha \in \mathcal{K}_\infty$ ,  $\gamma_j \in \mathcal{K}_\infty$ ,  $j \in \mathcal{N}$  and  $\mu \in \mathcal{K}_\infty$ , such that

$$\begin{aligned} & \frac{\partial V}{\partial x}(x_i) f(x_i, \{x_{i+j}\}_{j \in \mathcal{N}}, d_i) \\ & \leq -\alpha(V(x_i)) + \sum_{j \in \mathcal{N}} \gamma_j(V(x_{i+j})) + \mu(|d_i|) \end{aligned} \quad (6)$$

for all  $x_i \in \mathbb{R}^n$ , all  $x_{i+j} \in \mathbb{R}^n$  for  $j \in \mathcal{N}$ , all  $d_i \in \mathbb{R}^m$ .

We note that, due to the uniformity of the subsystems  $\Sigma_i$  in (1), the function  $V$  in Assumption 1 is independent of  $i$ .

Now, the main result of this letter can be stated as follows.

*Theorem 1:* Consider the large-scale system (2) and let the subsystems be such that Assumption 1 holds. If there exists a function  $\rho \in \mathcal{K}_\infty$  such that

$$-\alpha(s) + \sum_{j \in \mathcal{N}} \gamma_j(s) \leq -\rho(s) \quad (7)$$

for all  $s \geq 0$ , then (2) is scalable input-to-state stable.

*Proof:* To prove the result, it will be shown that the max-separable function  $V_N : \mathbb{R}^{Nn} \rightarrow \mathbb{R}_+$  defined as

$$V_N(x) = \max\{V(x_1), \dots, V(x_N)\} \quad (8)$$

is an ISS Lyapunov function for  $\Sigma$  in (2) for any  $N$ .

There to, take any  $N \in \mathbb{N}$  satisfying  $N \geq N_{\min}$  and consider (8). As  $V_N$  is generally not continuously differentiable, the upper-right Dini derivative of  $V_N$  in the direction  $v \in \mathbb{R}^n$  is introduced as

$$D^+ V_N(x, v) = \limsup_{h \rightarrow 0^+} \frac{V_N(x + hv) - V_N(x)}{h}, \quad (9)$$

see [25]. Given that  $V$  is differentiable according to Assumption 1, the max-separable structure (8) leads to

$$\begin{aligned} & D^+ V_N(x, F_N(x, d)) \\ & = \max_{j \in \mathcal{J}(x)} \frac{\partial V}{\partial x}(x_j) f(x_j, \{x_{j+l}\}_{l \in \mathcal{N}}, d_j), \end{aligned} \quad (10)$$

where  $\mathcal{J}(x) = \{j \mid V(x_j) = V_N(x)\}$  denotes the set of indices for which the maximum in (8) is obtained, see [6].

For a given  $x \in \mathbb{R}^{Nn}$ , let  $k \in \mathcal{J}(x)$  be an index (not necessarily unique) that achieves the maximum in (10). Then,

$$\begin{aligned} & D^+ V_N(x, F_N(x, d)) \\ & = \max_{j \in \mathcal{J}(x)} \frac{\partial V}{\partial x}(x_j) f(x_j, \{x_{j+l}\}_{l \in \mathcal{N}}, d_j), \\ & = \frac{\partial V}{\partial x}(x_k) f(x_k, \{x_{k+l}\}_{l \in \mathcal{N}}, d_k), \\ & \leq -\alpha(V(x_k)) + \sum_{l \in \mathcal{N}} \gamma_l(V(x_{k+l})) + \mu(|d_k|), \end{aligned} \quad (11)$$

where the inequality (11) follows from ISS of the subsystems through (6) in Assumption 1 (for  $i = k$ ). Now, as  $k \in \mathcal{J}(x)$ , it follows from the definition of  $\mathcal{J}(x)$  that

$$V(x_i) \leq V(x_k) = V_N(x) \quad (12)$$

for all  $i \in \mathcal{I}_N$ . Given that  $\gamma_l \in \mathcal{K}_\infty$ , the inequality (12) can be used to bound the right-hand-side of (11) to obtain

$$\begin{aligned} & D^+ V_N(x, F_N(x, d)) \\ & \leq -\alpha(V_N(x)) + \sum_{l \in \mathcal{N}} \gamma_l(V_N(x)) + \mu(|d_k|), \end{aligned} \quad (13)$$

where the substitution  $V(x_k) = V_N(x)$  (recall again (12)) is used in the first term of the right hand side. A similar reasoning exploiting the fact that  $\mu \in \mathcal{K}_\infty$  leads to

$$\begin{aligned} & D^+ V_N(x, F_N(x, d)) \\ & \leq -\alpha(V_N(x)) + \sum_{l \in \mathcal{N}} \gamma_l(V_N(x)) + \mu\left(\max_{l \in \mathcal{I}_N} |d_l|\right), \end{aligned} \quad (14)$$

whereas condition (7) gives

$$D^+ V_N(x, F_N(x, d)) \leq -\rho(V_N(x)) + \mu\left(\max_{l \in \mathcal{I}_N} |d_l|\right). \quad (15)$$

At this point, it is remarked that (15) holds for all  $x \in \mathbb{R}^{Nn}$ , all  $d \in \mathbb{R}^{Nm}$ , and, most importantly, for any  $N \geq N_{\max}$ . Moreover, (15) represents a characterization of ISS in dissipation form, albeit with non-smooth ISS Lyapunov function  $V_N$ . In order to employ results on ISS with non-differentiable ISS Lyapunov functions, we note that (15) gives rise to the so-called implication form

$$\begin{aligned} & (1 - \varepsilon)\rho(V_N(x)) \geq \mu\left(\max_{l \in \mathcal{I}_N} |d_l|\right) \\ & \implies D^+ V_N(x, F_N(x, d)) \leq -\varepsilon\rho(V_N(x)), \end{aligned} \quad (16)$$

for any  $\varepsilon \in (0, 1)$ . Then, the use of [7, Th. 2.3] (see also [10], [13] for extensions of ISS to the non-differentiable case) guarantees the existence of functions  $\tilde{\beta} \in \mathcal{KL}$  and  $\tilde{\sigma} \in \mathcal{K}_\infty$  such that

$$V_N(x(t)) \leq \tilde{\beta}(V_N(x(0)), t) + \tilde{\sigma}\left(\max_{i \in \mathcal{I}_N} \|d_i\|_\infty\right) \quad (17)$$

for all  $t \geq 0$ . Here,  $x(\cdot)$  is the state trajectory of (2) for  $x(0) \in \mathbb{R}^{Nn}$  and bounded disturbance function  $d(\cdot)$ .

In order to obtain a bound of the form (4), it is noted that the properties of the Lyapunov function  $V$  in Assumption 1 (see (5)) imply, for any  $i \in \mathcal{I}_N$ ,

$$|x_i(t)| \leq v_1^{-1}(V(x_i(t))) \leq v_1^{-1}(V_N(x(t))), \quad (18)$$

where the latter inequality is a result of the definition of  $V_N$  in (8). Note that  $v_1^{-1}$  exists as  $v_1 \in \mathcal{K}_\infty$  and recall that  $v_1^{-1}$  is itself of class  $\mathcal{K}_\infty$ . Similarly, it holds for any  $i \in \mathcal{I}_N$  that

$$V(x_i(0)) \leq v_2(|x_i(0)|) \leq v_2\left(\max_{i \in \mathcal{I}_N} |x_i(0)|\right), \quad (19)$$

where (5) is used again. Since (18) and (19) hold for any  $i \in \mathcal{I}_N$  (including where the respective maxima are obtained), the use of (18) and (19) in (17) yields

$$\begin{aligned} & \max_{i \in \mathcal{I}_N} |x_i(t)| \\ & \leq v_1^{-1}\left(\tilde{\beta}\left(v_2\left(\max_{i \in \mathcal{I}_N} |x_i(0)|\right), t\right) + \tilde{\sigma}\left(\max_{i \in \mathcal{I}_N} \|d_i\|_\infty\right)\right). \end{aligned} \quad (20)$$

Then, the use of the property (e.g., [29])

$$v_1^{-1}(s_1 + s_2) \leq v_1^{-1}(2s_1) + v_1^{-1}(2s_2), \quad (21)$$

for  $v_1^{-1} \in \mathcal{K}_\infty$ , leads to a bound of the form (4) with

$$\beta(s_1, s_2) = v_1^{-1}\left(2\tilde{\beta}(v_2(s_1), s_2)\right), \quad \sigma(s) = v_1^{-1}(2\tilde{\sigma}(s)). \quad (22)$$

We stress again that  $N$  was chosen arbitrarily, such that (20) holds for any  $N \in \mathbb{N}$  (with  $N \geq N_{\min}$ ). More importantly, the functions  $\rho$  and  $\sigma$  in (15) are *independent* of  $N$  as a result of the max-separable structure of the Lyapunov function  $V_N$  in (8). As a result, also  $\beta \in \mathcal{KL}$  and  $\sigma \in \mathcal{K}_\infty$  in (22) are independent of  $N$ , such that the bound (4) is uniform for all  $N \in \mathbb{N}$  and sISS as in Definition 1 is proven. ■

Theorem 1 provides a characterization of sISS that, first, depends on properties of the subsystems only, and, second, is independent of the network size  $N$ . As (7) is easy to verify, this theorem provides a practically relevant test for sISS.

*Remark 3:* The proof of Theorem 1 crucially depends on the introduction of the ISS Lyapunov function candidate (8), whose max-separable structure enables the desired scalability properties (see (18) and (19) for a relation to the signal norms used in (4)). This approach is inspired by results on ISS for networks originally developed in [7], [8], and [26]. However, whereas these works consider ISS for a given network of *fixed* size, Theorem 1 guarantees an ISS property of a family of systems with *arbitrary* network size, see Definition 1. We note that input-to-state stability of a network of fixed size (even if the ISS property holds regardless of size) does not imply sISS as uniformity of the gain functions is required

in (4), see Example 1. Nonetheless, for a fixed network size, the condition (7) reflects the results in [26, Sec. 3.4].

The results in Theorem 1 can directly be exploited in the scope of cascaded systems. To this end, consider

$$\begin{aligned} \dot{x}_1 &= f(x_1, 0, d_1), \\ \dot{x}_i &= f(x_i, x_{i-1}, d_i), \quad i \in \mathcal{I}_N \setminus \{1\}, \end{aligned} \quad (23)$$

where  $x_i \in \mathbb{R}^n$  and  $d_i \in \mathbb{R}^m$  for  $i \in \mathcal{I}_N$  as before. Also,  $f$  is assumed to be locally Lipschitz in the first two arguments, continuous in the third argument, and satisfies  $f(0, 0, 0) = 0$ . The cascaded system (23) can be regarded as a system  $\Sigma$  as in (2) with  $\mathcal{N} = \{-1\}$ , with the exception that the first subsystem has no incoming links.

Nonetheless, the following result is immediate.

*Corollary 1:* Consider the large-scale cascaded system (23) and let the subsystems be such that Assumption 1 holds for  $\mathcal{N} = \{-1\}$ . If there exists a function  $\rho \in \mathcal{K}_\infty$  such that

$$-\alpha(s) + \gamma_{-1}(s) \leq -\rho(s) \quad (24)$$

for all  $s \geq 0$ , then (23) is scalable input-to-state stable.

*Proof:* This is a direct result of Theorem 1 after observing that (6) also holds for subsystem 1 in (23) despite the absence of the incoming link from  $x_N$ . ■

Corollary 1 highlights the interpretation of sISS as a robustness property in which effects of neighbouring systems are taken to be adversarial (we note that such perspective also forms the basis for small-gain conditions as in, e.g., [14]). Namely, the removal of any interconnection in the large-scale system (2) does not affect the result of Theorem 1, enabling the scalable analysis of (classes of) heterogeneous networks. In a similar way, homogeneity of subsystem dynamics is not required as long as the same estimates (6) hold.

*Remark 4:* The relevance of Corollary 1 is in the scope of scalable stability properties for vehicle platoons usually referred to as string stability. Namely, such systems are generally modelled using a unidirectional and non-cyclic interconnection topology reflecting the case in which a vehicle only exploits information of its predecessor, e.g., [19], [27], and [30]. In the scope of vehicle platoons, disturbance propagation in cascaded systems of the form (23) along the lines of this letter is studied in [5].

#### IV. EXAMPLES

In this section, we present two simple examples to illustrate the results from the previous section. The first example illustrates Definition 1 by presenting a linear system that is ISS for each fixed  $N \in \mathbb{N}$ , but is *not* sISS. The second example is a non-linear system that has the sISS property.

*Example 1:* Consider the subsystems

$$\dot{z}_i = -2z_i + z_{i+1} + z_{i-1} + w_i, \quad (25)$$

with state  $z_i \in \mathbb{R}$ , disturbance  $w_i \in \mathbb{R}$ , and  $i \in \mathcal{I}_N$ . After defining  $z = [z_1 \ \dots \ z_N]^T$  and  $w = [w_1 \ \dots \ w_N]^T$ , the large-scale system comprising the subsystems (25) can

compactly be written as  $\dot{z} = -L_N z + w$ , where the matrix

$$L_N = \begin{bmatrix} 2 & -1 & 0 & \cdots & 0 & -1 \\ -1 & 2 & -1 & & & 0 \\ 0 & -1 & 2 & \ddots & & \vdots \\ \vdots & & \ddots & \ddots & \ddots & 0 \\ 0 & & & \ddots & 2 & -1 \\ -1 & 0 & \cdots & 0 & -1 & 2 \end{bmatrix} \quad (26)$$

has a circulant structure as the indices in (25) are interpreted modulo  $N$ . In this example, we are interested in the deviations from the average state and disturbance defined as

$$x_i = z_i - \frac{1}{N} \mathbf{1}^T z, \quad d_i = w_i - \frac{1}{N} \mathbf{1}^T w, \quad (27)$$

respectively. It is easily shown that this satisfies the dynamics

$$\dot{x} = -L_N x + d, \quad (28)$$

with  $x = [x_1 \ \dots \ x_N]^T$  and  $d = [d_1 \ \dots \ d_N]^T$ . We remark however that  $\mathbf{1}^T d(t) = 0$  for all  $t \geq 0$  and that, as  $\mathbf{1}^T x(0) = 0$  by definition, trajectories of (28) satisfy  $\mathbf{1}^T x(t) = 0$  for all  $t \geq 0$ . This not only follows from (27), but is also apparent from (28) as  $\ker \mathbf{1}^T$  is an  $L_N$ -invariant subspace. In fact, the restriction of  $L_N$  to  $\ker \mathbf{1}^T$  is asymptotically stable, from which it is immediate that (28) is input-to-state stable. Using the equivalence of norms

$$\max_{i \in \mathcal{I}_N} |x_i| \leq |x| \leq \sqrt{N} \max_{i \in \mathcal{I}_N} |x_i|, \quad (29)$$

there thus exist functions  $\beta_N \in \mathcal{K}\mathcal{L}$  and  $\sigma_N \in \mathcal{K}_\infty$  such that

$$\max_{i \in \mathcal{I}_N} |x_i(t)| \leq \beta_N \left( \max_{i \in \mathcal{I}_N} |x_i(0)|, t \right) + \sigma_N \left( \max_{i \in \mathcal{I}_N} \|d_i\|_\infty \right). \quad (30)$$

From the above, we conclude that (28) (restricted to  $\ker \mathbf{1}^T$ ) is ISS for each fixed  $N$ . In the remainder of this example, it will be shown that (28) is *not* sISS as in Definition 1.

To this end, observe that the smallest eigenvalue of the restriction of  $L_N$  to  $\ker \mathbf{1}^T$  (this is the second-smallest eigenvalue of  $L_N$  as  $L_N \mathbf{1} = 0$ ) is given by

$$\lambda = 2 - 2 \cos\left(\frac{2\pi}{N}\right) \quad (31)$$

with multiplicity 2, as follows from the theory of circulant matrices, see [9]. A corresponding eigenvalue  $v = [v_1 \ \dots \ v_N]^T$  has components

$$v_i = 1 - \cos\left(\frac{2\pi(i-1)}{N}\right), \quad i \in \mathcal{I}_N, \quad (32)$$

and is scaled such that  $\max_{i \in \mathcal{I}_N} |v_i| = v_1 = 1$ .

Now, we will construct a lower bound on  $\sigma_N$  in (30) by considering trajectories of (28) for the constant disturbance  $d(t) = rv$ ,  $t \geq 0$ , for some fixed  $r > 0$ . It readily follows from (32) that  $\mathbf{1}^T d(t) = 0$  for all  $t \geq 0$  as required and that  $\max_{i \in \mathcal{I}_N} \|d_i\|_\infty = r$ . Choosing  $x(0) = 0$ , the resulting trajectory of (28) satisfies

$$x(t) = \int_0^t e^{-L_N(t-s)} r v \, ds = \int_0^t r v e^{-\lambda(t-s)} \, ds, \quad (33)$$

where the latter equality follows from the fact that  $v$  is an eigenvalue of  $L_N$ . Consequently,  $\lim_{t \rightarrow \infty} x(t) = r \lambda^{-1} v$ . Thus,

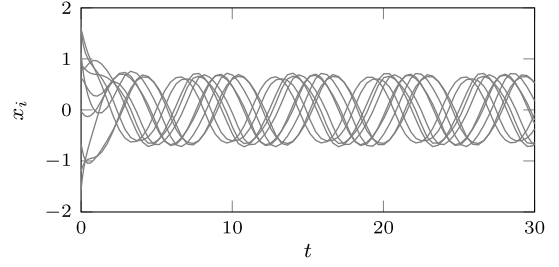


Fig. 2. Simulation results for the example system (36) with  $N = 10$ : state trajectories for randomly chosen initial conditions  $x_i(0) \in [-2, 2]$  and  $d_i(t) = \sin(t + \phi_i)$  with randomly chosen phase  $\phi_i$ .

for any  $\varepsilon > 0$ , there exists  $T > 0$  such that

$$\max_{i \in \mathcal{I}_N} |x_i(t)| \geq |x_1(t)| \geq \frac{r(1-\varepsilon)}{\lambda}. \quad (34)$$

for all  $t > T$ . Here, the latter inequality follows from the property  $v_1 = 1$ , see (32). By recalling  $\max_{i \in \mathcal{I}_N} \|d_i\|_\infty = r$  and comparing (34) to (30), it follows that the gain function  $\sigma_N$  necessarily satisfies

$$\sigma_N(r) \geq \frac{r(1-\varepsilon)}{\lambda} = \frac{r(1-\varepsilon)}{2 - 2 \cos\left(\frac{2\pi}{N}\right)}, \quad (35)$$

where (31) is used to obtain the equality. For a given  $r$  and  $\varepsilon$ , it is clear that (35) grows without bound as  $N$  grows. Hence, there does not exist a gain function  $\sigma \in \mathcal{K}_\infty$  such that  $\sigma_N(r) \leq \sigma(r)$ ,  $r \geq 0$  for all  $N \in \mathbb{N}$ . Consequently, the dynamics describing the deviations from the average in (28) is *not* scalable input-to-state stable.

*Remark 5:* The reasoning of Example 1 relies on  $L_N$  in (26) being circulant and can be easily extended to more general circulant matrices capturing relative measurements. Then, it can be concluded that such spatially invariant systems are not sISS, i.e., the performance measure capturing the deviation from the average scales unfavourably as the network size grows. Indeed, it is known that the system (28) suffers from a lack of *coherence*, as is shown in [2]. Nonetheless, we stress that the alternative performance measure of coherence differs significantly from sISS as stochastic disturbances and the  $\mathcal{H}_2$  system norm are studied in the former. Moreover, the notion of sISS is applicable to non-linear systems, whereas [2] considers linear systems.

*Example 2:* Consider the non-linear subsystems

$$\dot{x}_i = -x_i - x_i^3 + x_i x_{i-1}^2 + d_i \quad (36)$$

with state  $x_i \in \mathbb{R}$ , disturbance  $d_i \in \mathbb{R}$ , and  $i \in \mathcal{I}_N$ . Note that (36) is of the form (1) with  $\mathcal{N} = \{-1\}$ . To show that the system is scalable input-to-state stable as in Definition 1, we first show that Assumption 1 holds by choosing the function  $V(x_i) = x_i^2$ . Namely, a direct computation shows that

$$\begin{aligned} \frac{\partial V}{\partial x}(x_i) f(x_i, \{x_{i+j}\}_{j \in \mathcal{N}}, d_i) \\ = -2x_i^2 - 2x_i^4 + 2x_i^2 x_{i-1}^2 + 2x_i d_i, \end{aligned} \quad (37)$$

$$\begin{aligned} = -x_i^2 - x_i^4 + x_{i-1}^2 + d_i^2 \\ - (x_i^2 - x_{i-1}^2)^2 - (x_i - d_i)^2, \end{aligned} \quad (38)$$

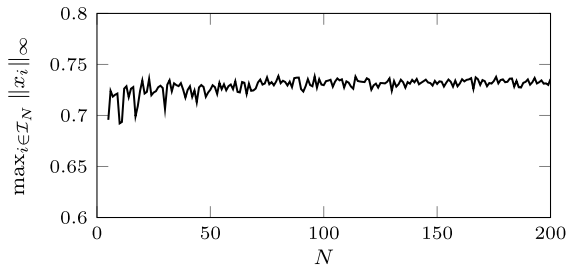


Fig. 3. Simulation results for the example system (36): maximum state perturbation  $\max_{i \in \mathcal{I}_N} \|x_i\|_\infty$  in steady-state for disturbances  $d_i(t) = \sin(t + \phi_i)$  with randomly chosen phase  $\phi_i$ .

where the result (38) is readily verified by completing the squares. Then, it follows that (36) satisfies (6) with

$$\alpha(s) = s^2 + s, \quad \gamma_{-1}(s) = s^2, \quad \mu(s) = s^2, \quad (39)$$

such that it can be verified that (7) holds with  $\rho(s) = s$ . Consequently, by Theorem 1, the system (36) is sISS.

Figure 2 shows a simulation of (36). It can be observed that all states remain bounded despite the influence of the disturbance and the effect of the initial conditions die away.

The same simulation is then repeated for systems with network size ranging from  $N = 10$  to  $N = 200$ . Figure 3 illustrates that the maximum state perturbations remain bounded independent of network size, i.e., the system is sISS.

## V. CONCLUSION

The notion of scalable input-to-state stability (sISS) is introduced as a performance notion for large-scale networks. It guarantees the boundedness of state trajectories independent of the network size, prohibiting the amplification of perturbations as they propagate through the network. A sufficient condition for sISS is given on the basis of ISS properties of the subsystems, providing a local and easily verifiable condition for the global performance notion of sISS.

We view these results as the first steps towards scalable performance notions for arbitrary large-scale networks and future work will aim at generalisations to allow for heterogeneous dynamics or more general interconnection structures.

## REFERENCES

- [1] A. Alam, B. Besselink, V. Turri, J. Mårtensson, and K. H. Johansson, "Heavy-duty vehicle platooning towards sustainable freight transportation: A cooperative method to enhance safety and efficiency," *IEEE Control Syst. Mag.*, vol. 35, no. 6, pp. 34–56, Dec. 2015.
- [2] B. Bamieh, M. R. Jovanovic, P. Mitra, and S. Patterson, "Coherence in large-scale networks: Dimension-dependent limitations of local feedback," *IEEE Trans. Autom. Control*, vol. 57, no. 9, pp. 2235–2249, Sep. 2012.
- [3] B. Bamieh, F. Paganini, and M. A. Dahleh, "Distributed control of spatially invariant systems," *IEEE Trans. Autom. Control*, vol. 47, no. 7, pp. 1091–1107, Jul. 2002.
- [4] P. Barooah and J. P. Hespanha, "Error amplification and disturbance propagation in vehicle strings with decentralized linear control," in *Proc. Joint 44th IEEE Conf. Decis. Control Eur. Control Conf.*, Seville, Spain, 2005, pp. 4964–4969.
- [5] B. Besselink and K. H. Johansson, "String stability and a delay-based spacing policy for vehicle platoons subject to disturbances," *IEEE Trans. Autom. Control*, vol. 62, no. 9, pp. 4376–4391, Sep. 2017.
- [6] J. Danskin, "The theory of max-min, with applications," *SIAM J. Appl. Math.*, vol. 14, no. 4, pp. 641–664, 1966.
- [7] S. N. Dashkovskiy, B. S. Rüffer, and F. R. Wirth, "Small gain theorems for large scale systems and construction of ISS Lyapunov functions," *SIAM J. Control Optim.*, vol. 48, no. 6, pp. 4089–4118, 2010.
- [8] S. Dashkovskiy, B. S. Rüffer, and F. R. Wirth, "An ISS small gain theorem for general networks," *Math. Control Signals Syst.*, vol. 19, no. 2, pp. 93–122, 2007.
- [9] P. J. Davis, *Circulant Matrices*. New York, NY, USA: Wiley, 1979.
- [10] G. Dirr, H. Ito, A. Rantzer, and B. S. Rüffer, "Separable Lyapunov functions for monotone systems: Constructions and limitations," *Discr. Continuous Dyn. Syst. B*, vol. 20, no. 8, pp. 2497–2526, 2015.
- [11] J. A. Fax and R. M. Murray, "Information flow and cooperative control of vehicle formations," *IEEE Trans. Autom. Control*, vol. 49, no. 9, pp. 1465–1476, Sep. 2004.
- [12] R. E. Fenton, R. L. Cosgriff, K. W. Olson, and L. M. Blackwell, "One approach to highway automation," *Proc. IEEE*, vol. 56, no. 4, pp. 556–566, Apr. 1968.
- [13] W. P. M. H. Heemels and S. Weiland, "Input-to-state stability and interconnections of discontinuous dynamical systems," *Automatica*, vol. 44, no. 12, pp. 3079–3086, 2008.
- [14] Z.-P. Jiang, A. R. Teel, and L. Praly, "Small-gain theorem for ISS systems and applications," *Math. Control Signals Syst.*, vol. 7, no. 2, pp. 95–120, 1994.
- [15] S. Knorn and A. Ahlén, "Deviation bounds in multi agent systems described by undirected graphs," *Automatica*, vol. 67, pp. 205–210, May 2016.
- [16] S. Knorn, Z. Chen, and R. H. Middleton, "Overview: Collective control of multiagent systems," *IEEE Trans. Control Netw. Syst.*, vol. 3, no. 4, pp. 334–347, Dec. 2016.
- [17] S. Knorn, A. Donaire, J. C. Agüero, and R. H. Middleton, "Passivity-based control for multi-vehicle systems subject to string constraints," *Automatica*, vol. 50, no. 12, pp. 3224–3230, 2014.
- [18] S. Kundu and M. Anghel, "A multiple-comparison-systems method for distributed stability analysis of large-scale nonlinear systems," *Automatica*, vol. 78, pp. 25–33, Apr. 2017.
- [19] R. H. Middleton and J. H. Braslavsky, "String instability in classes of linear time invariant formation control with limited communication range," *IEEE Trans. Autom. Control*, vol. 55, no. 7, pp. 1519–1530, Jul. 2010.
- [20] P. J. Moylan and D. J. Hill, "Stability criteria for large-scale systems," *IEEE Trans. Autom. Control*, vol. AC-23, no. 2, pp. 143–149, Apr. 1978.
- [21] G. J. L. Naus, R. P. A. Vugts, J. Ploeg, M. J. G. van de Molengraft, and M. Steinbuch, "String-stable CACC design and experimental validation: A frequency-domain approach," *IEEE Trans. Veh. Technol.*, vol. 59, no. 9, pp. 4268–4279, Nov. 2010.
- [22] R. Olfati-Saber, J. A. Fax, and R. M. Murray, "Consensus and cooperation in networked multi-agent systems," *Proc. IEEE*, vol. 95, no. 1, pp. 215–233, Jan. 2007.
- [23] J. Ploeg, N. van de Wouw, and H. Nijmeijer, " $\mathcal{L}_p$  string stability of cascaded systems: Application to vehicle platooning," *IEEE Trans. Control Syst. Technol.*, vol. 22, no. 2, pp. 786–793, Mar. 2014.
- [24] A. Rantzer, "Scalable control of positive systems," *Eur. J. Control*, vol. 24, pp. 72–80, Jul. 2015.
- [25] N. Rouche, P. Habets, and M. Laloy, "Stability theory by Liapunov's direct method," in *Applied Mathematical Sciences*, vol. 22. New York, NY, USA: Springer-Verlag, 1977.
- [26] B. S. Rüffer, C. M. Kellett, and S. R. Weller, "Connection between cooperative positive systems and integral input-to-state stability of large-scale systems," *Automatica*, vol. 46, no. 6, pp. 1019–1027, 2010.
- [27] P. Seiler, A. Pant, and K. Hedrick, "Disturbance propagation in vehicle strings," *IEEE Trans. Autom. Control*, vol. 49, no. 10, pp. 1835–1842, Oct. 2004.
- [28] S. Sheikholeslam and C. A. Desoer, "Control of interconnected nonlinear dynamical systems: The platoon problem," *IEEE Trans. Autom. Control*, vol. 37, no. 6, pp. 806–810, Jun. 1992.
- [29] E. D. Sontag, "Smooth stabilization implies coprime factorization," *IEEE Trans. Autom. Control*, vol. 34, no. 4, pp. 435–443, Apr. 1989.
- [30] S. S. Stanković, M. J. Stanojević, and D. D. Šiljak, "Decentralized overlapping control of a platoon of vehicles," *IEEE Trans. Control Syst. Technol.*, vol. 8, no. 5, pp. 816–832, Sep. 2000.
- [31] S. Stidl, M. M. Seron, and R. H. Middleton, "From vehicular platoons to general networked systems: String stability and related concepts," *Annu. Rev. Control*, vol. 44, pp. 157–172, 2017, doi: 10.1016/j.arcontrol.2017.09.016.
- [32] D. Swaroop and J. K. Hedrick, "String stability of interconnected systems," *IEEE Trans. Autom. Control*, vol. 41, no. 3, pp. 349–357, Mar. 1996.
- [33] D. D. Šiljak, *Large-Scale Dynamic Systems: Stability and Structure*. New York, NY, USA: North-Holland Books, 1978.
- [34] K. Zhou, J. C. Doyle, and K. Glover, *Robust and Optimal Control*. Upper Saddle River, NJ, USA: Prentice-Hall, 1996.