

# Solid State Fermentation of Soybean Hulls for Cellulolytic Enzymes Production

Khushal Brijwani and Praveen V. Vadlani

*Bioprocessing Laboratory, Department of Grain Science and Industry, Kansas State University, Manhattan, Kan. USA*

## 1. Introduction

Soybean hulls are the byproduct of soybean processing and accounts for 5-8% of the 96 million metric tons soybean crop of 2006 in USA (Mielenz et al., 2009). It is mechanically removed from the soybeans during the process of dehulling and commercially sold as it is or in form of compressed pellets mostly for the feed industry (Marshall and Wartelle, 2003). Soybean hulls have rich cellulosic composition, notably half of the composition is cellulosic i.e. cellulose and hemicellulose combined (Brijwani et al., 2010). Fungal solid state fermentation (SSF) of soybean hulls for cellulolytic enzyme production is a useful way of value addition of this under-utilized byproduct. A cellulolytic enzyme system is group of enzymes that work synergistically to hydrolyze lignocellulosic biomass. It is composed of endoglucanase (endo-1, 4- $\beta$ -D--glucanase, EC 3.2.1.4), exoglucanase (1,4- $\beta$ -D-glucan-cellobiohydrolase, EC 3.2.1.91), and  $\beta$ -glucosidase ( $\beta$ -D-glucoside glucanohydrolase, cellobiase, EC 3.2.1.21) (Holker et al., 2004; Esterbauer et al., 1991). Xylanase (EC 3.2.1.8), though not part of the group, complements the cellulolytic enzyme system as it is needed to elicit complete and efficient hydrolysis of the lignocellulosic biomass, which has an appreciable amount of hemicellulose or xylan (Brijwani et al., 2010; Brijwani, 2011). It has been widely accepted that Solid State Fermentation (SSF) is an attractive means to produce cellulase economically because of its lower capital investment and lower operating cost (Cen and Xia 1999). Further, the ability of SSF to minimize catabolite repression has been already described for several enzymes (Aguilar and Huitron 1986; Archana and Satayanaryana 1997; Siqueira et al. 1997; Solis-Pereyra 1996). SSF is defined as a fermentation process in which microorganisms grow on solid materials without the presence of free liquid and the moisture necessary for microbial growth exists in adsorbed state or complexed with solid matrix (Krishna, 2005). Both bacteria and fungi are known to produce cellulases using complex cellulosic substrates, however, fungal enzymes are generally complete comprising of all the cellulosic activities (Stockton et al., 1991).

The operating conditions like temperature, pH and moisture content are very important for microbial growth and efficient cellulase production in SSF. Optimization of parameters in multifactor experimental designs fall short in locating true optimum especially when there are interactions among independent variables, besides being time consuming (Giovanni 1983; Theodore and Panda 1995). One of the worthwhile techniques to identify the explanatory variable in the system is Response Surface Methodology (RSM) (Maddox and Richer 1977;

Hounsa et al. 1996). RSM is a collection of statistical techniques for designing experiments building models, evaluating the effect of factors and obtaining optimum conditions for desirable responses. RSM can be used to evaluate the significance of several factors especially when interactions exist among factors, and they are complex to determine (Liu and Tzeng 1998). RSM has been widely adopted among investigators in the field of bioprocessing and has been used to quantify complex interplay of parameters affecting biological system.

In SSF for cellulase production, cellulosic substrate acts as both the carbon source and as an inducer for cellulase production (Cen and Xia 1999). The crystallinity of cellulosic substrate influence the rate of hydrolysis, for instance, amorphous cellulose is readily digestible while crystalline cellulose requires synergistic action of both exo- and endo-glucanases (Mes-Hartree et al., 1988). SSF can be viewed as a discrete solid phase in which microorganisms grow on the surface of moist, discrete particles as well as inside and between them. The space between particles is occupied by a continuous gas phase (Botella et al., 2009). Availability of oxygen in the open spaces between particles is a major challenge in SSF (Thibault et al., 2000; Oostra et al., 2001). Physicochemical characteristics, crystallinity, bed porosity and specific volumetric surface, of the substrate (soybean hulls) could be vital for the induction of cellulolytic enzyme system in fungal cultures. In this chapter we have delineated the importance of soybean hulls as a substrate for cellulolytic enzyme production using SSF technique. We have discussed the role of symbiotic association of two fungal species in production of complete and balanced cellulolytic enzyme system from soybean hulls, and the use of optimization technique such as RSM for improved and standardized production of cellulases. Since the substrate features are central to enzymatic synthesis in fungal SSF, the final section of this chapter discusses the role of physicochemical characteristics in cellulolytic enzymes synthesis. There is plethora of information available on compositional features of substrate; however, studies on physical nature of substrate in inducing cellulolytic enzyme system is limited (Brijwani, 2011). We believe elucidating the significance of physicochemical characteristics would provide process designers an efficient tool in directing the production of various enzyme activities of the cellulolytic enzyme system as dictated by their end use application.

## 2. Soybean hulls as a substrate in solid state fermentation

Soybean hulls have rich cellulosic composition (cellulose - 33.49%, hemicellulose - 17.15%) and are low in lignin (9.88%) (Brijwani et al., 2010). Notably the rich cellulosic composition is appropriate for fungal growth and cellulase production. Carbon to nitrogen ration (C/N) is important determinant of SSF process efficiency (Krishna, 2005). Soybean hulls are lower in protein content (~10%) and often supplementation with good nitrogen source like wheat bran with protein content of approximately 20% is a judicious choice. Brijwani et al. (2010) showed that supplementation of four parts of soybean hulls with one part of wheat resulted in high titers of enzymes with balanced proportion of various activities. The 1:1 ratio of filter paper units and beta-glucosidase is generally recognized as balanced enzyme system that is able to overcome glucose inhibition of cellulases and drives reaction forward (Chahal et al., 1992; Mandels et al., 1981).

## 3. Mixed fungal solid state fermentation and response surface optimization

Fungal strains that produce cellulases are mainly comprised of *Trichoderma*, *Aspergillus*, *Penicillium* and *Fusarium* genera. *Trichoderma reesei* is the most widely employed fungus for

production of cellulolytic enzymes and has been extensively studied (Stockton et al. 1991). Strains of *Trichoderma* can accumulate high activities of endo and exo-glucanase, but are poor in  $\beta$ -glucosidase (Duff et al. 1987) whereas the strains of *Aspergillus* are high in  $\beta$ -glucosidase activity (Grajek 1987). Therefore, strains of both *Trichoderma* and *Aspergillus* can be successfully employed together in solid state fermentation for the production of multicomplex cellulase system. Brijwani et al. (2010) demonstrated that co-culturing of *T. reesei* with *A. oryzae* in 1:1 ratio significantly improved the production of beta-glucosidase levels in SSF of soybean hulls supplemented with wheat bran compared to mono culture of *T. reesei*.

A second order quadratic model (equation 1) comprising of main effects and interaction effects of three vital process variables – temperature ( $X_1$ , °C), pH ( $X_2$ ), and moisture ( $X_3$ , %) was fitted to experimental data of mixed culture fermentation of wheat bran supplemented with soybean hulls using central composite rotatable design (CCRD). The process variables were varied at two levels each and five central points were replicated for better estimation of error variance (Brijwani et al., 2010).

$$y = \beta_0 + \sum_{i=1}^3 \beta_i x_i + \sum_{i=1}^3 \beta_{ii} x_i^2 + \sum_{i=1}^2 \sum_{j=i+1}^3 \beta_{ij} x_i x_j \quad (1)$$

where,  $y$  = predicted response,  $\beta_0$  = constant coefficient,  $\beta_i$  = linear coefficient,  $\beta_{ii}$  = quadratic coefficient, and  $\beta_{ij}$  = interaction coefficient.

The analysis of variance (ANOVA) and three dimensional surface plots were generated using Design Expert 7.1. The optimized values of three independent variables for maximum activities were determined using numerical optimization package of Design Expert 7.1. Numerical optimization searches the design space using fitted model to find the optimized values of independent variables that maximize cellulase and  $\beta$ -glucosidase activities. Optimization was carried out with respect to filter paper units and beta-glucosidase activity. Both filter paper units (indicator of total cellulase activity: exo- and endo-cellulase combined) and beta-glucosidase are the lead activities needed for efficient hydrolysis of lignocellulosic biomass.

### 3.1 Cellulase optimization and model fitting

Maximum cellulase activity (10.55 FPU/g of dry substrate) was observed at pH 4.5, moisture content of 70%, and temperature of 30°C. The overall second order polynomial equation for cellulase activity as measured in terms of FPU (Filter Paper Units)/g was:


$$Y = 7.95 + 0.76X_1 + 0.34X_2 + 2.97X_3 + 0.21X_1X_2 + 0.82X_1X_3 - 0.026X_2X_3 - 2.56X_1^2 - 0.40X_2^2 - 1.10X_3^2 \quad (2)$$


The lower p-value and insignificant lack of fit was obtained with quadratic model that suggested good fit. Higher coefficient of regression (>95%) suggested that there was good agreement between predicted and estimated cellulase activity under different conditions of temperature, pH and moisture content. Coefficients and p-values of the model indicated that temperature and moisture content significantly affected the cellulase production. While, moisture content had linear effect on cellulase activity temperature had quadratic effect. The interaction effect of moisture and temperature was significant as compared to their corresponding interactions with pH.

The surface plots were made as function of temperature and pH, moisture content and temperature, and pH and moisture content (Fig. 1). At lowest temperature and low pH (Fig. 1a) the cellulase activity was lowest. Increasing the temperature with moderate increase in pH keeping moisture content fixed at 57.5%, resulted in an increased cellulase activity, which reached its maximum in the vicinity of 30°C. Further increase in temperature resulted in a drop in cellulase activity even at increased pH value. Keeping the pH constant at 4.50 the interaction of moisture and temperature in presented in Fig. 1b. It is evident that with increase in moisture and temperature, the cellulase activity increased. Increasing the temperature beyond 34°C resulted in reduced cellulase activity and maximum activity could be seen in the neighborhood of 70% moisture and 33°C. Similarly, keeping the temperature constant at 30°C and observing for interaction between pH and moisture (Fig. 1c) we found that with increase in moisture and pH, cellulase activity increased and reached maximum around 65% moisture content and pH > 4.25. Our results are in consonance with the results of (Latifian et al. 2007) who have reported that moisture had a significant effect on cellulase production using *T. reesei* QM 9414 and *T. reesei* MCG 77 and maximum enzyme activity was observed at 70% moisture content. They adopted the RSM approach and further reported a temperature and moisture content range of 25-30°C and 55-70%, respectively, for optimal cellulase production.

### 3.2 Beta-glucosidase optimization and model fitting

The maximum response (8.13 IU/g of dry substrate) occurred at 70% moisture content at pH of 4.5 and incubation temperature of 30°C.  $\beta$ -glucosidase data was fitted to a quadratic model with the following equation:

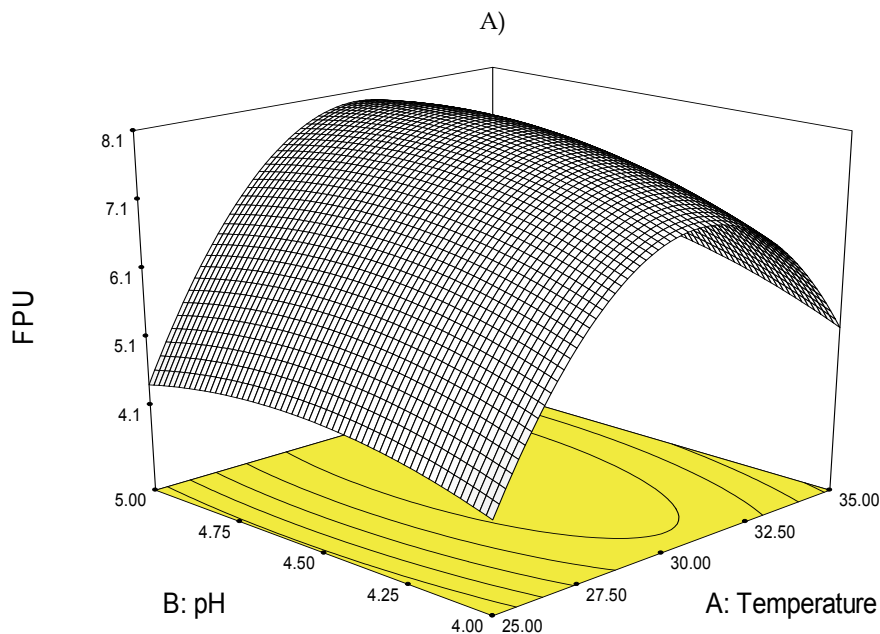

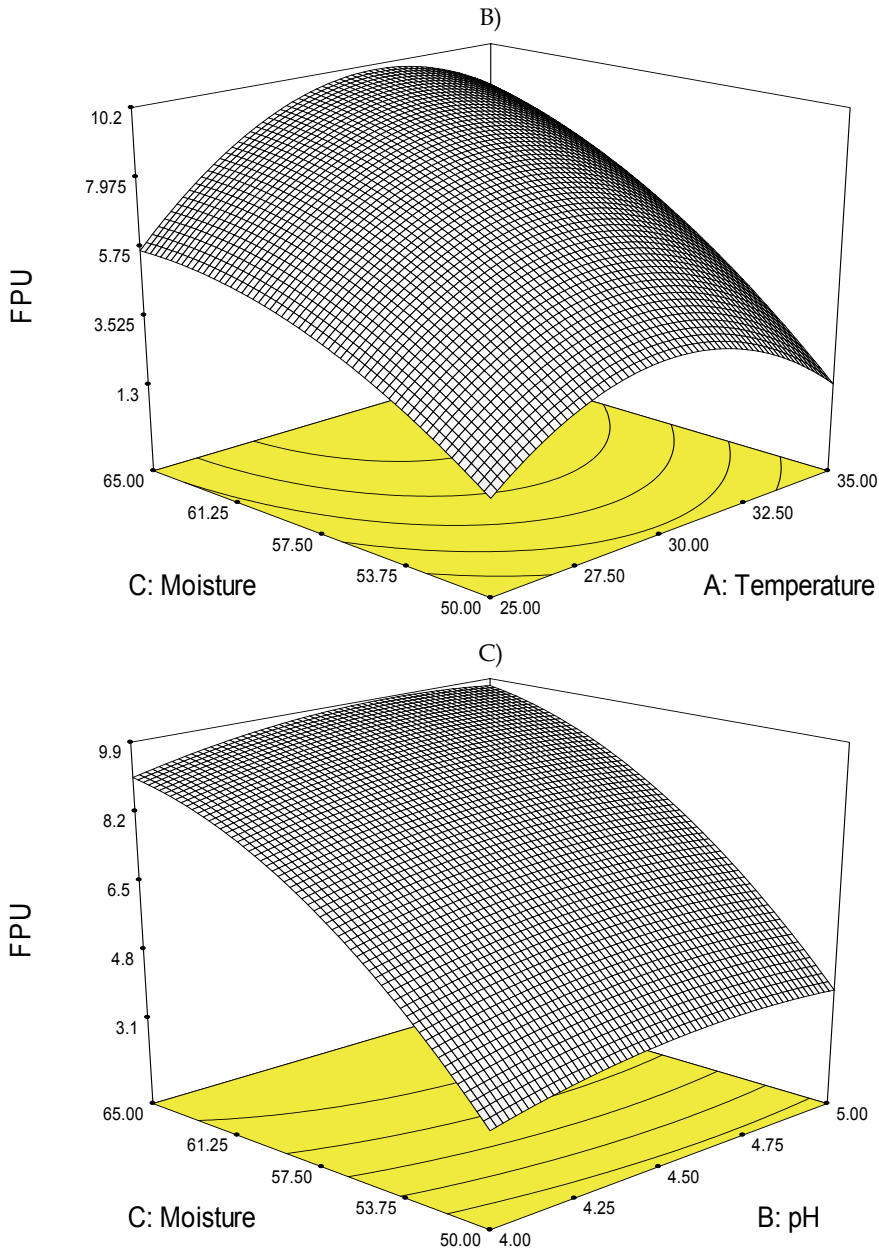


FPU: Filter Paper Units/g of dry substrate


Fig. 1. Surface plots illustrating the effect of A) temperature and pH, B) moisture and temperature, C) moisture and pH on cellulase activity measured as FPU (Filter Paper Units)/g dry substrate

$$Y = 4.90 + 0.25X_1 - 0.33X_2 + 1.73X_3 + 0.69X_1X_2 + 1.03X_1X_3 + 0.42X_2X_3 - 1.32X_1^2 - 0.24X_2^2 - 0.41X_3^2 \quad (3)$$

The lower p-value and insignificant lack of fit was obtained with quadratic model that suggested good fit. Higher coefficient of regression (>85%) suggested that there was good agreement between predicted and estimated cellulase activity under different conditions of temperature, pH and moisture content. Coefficients and corresponding p-values indicated that moisture and temperature had significant effect on  $\beta$ -glucosidase activity. While effect of moisture was linear the effect of temperature was quadratic. The interaction effects of three independent variables were not significant; however, interaction between moisture and pH was considerable.

The surface plots were made as function of temperature and pH, moisture content and temperature, and pH and moisture content (Fig. 2). At a fixed moisture content of 57.5% increasing the temperature and pH beyond 27.5 °C and 4.5, respectively, resulted in increased  $\beta$ -glucosidase activity which was maximum in the neighborhood of 32°C (Fig. 2a). At fixed pH of 4.5, by increasing moisture content and temperature,  $\beta$ -glucosidase activity increased and achieved maxima around 32°C and 65% moisture (Fig. 2b). At constant temperature of 30°C,  $\beta$ -glucosidase activity, increased with increasing moisture levels and showed maximum activity near 62% moisture content (Fig. 2c). The earlier studies conducted on RSM optimization (Singhania et al. 2007) using wheat bran employing *T. reesei* Rut C-30 reported a combination of 37.5% and 30°C as optimal conditions for moisture content and temperature, respectively, for maximum enzyme production; however, enzyme yields reported by them are substantially lower than the values obtained in this study. Further, enzyme yields also depend upon the substrates used and the interaction between substrate and moisture. This interaction depends on the water binding capacity of the substrates and availability of water for the growth of an organism.

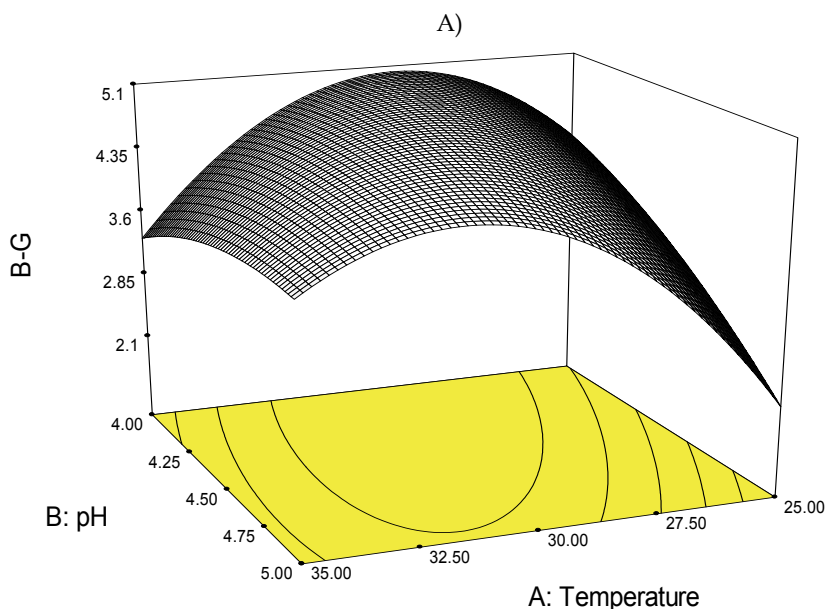

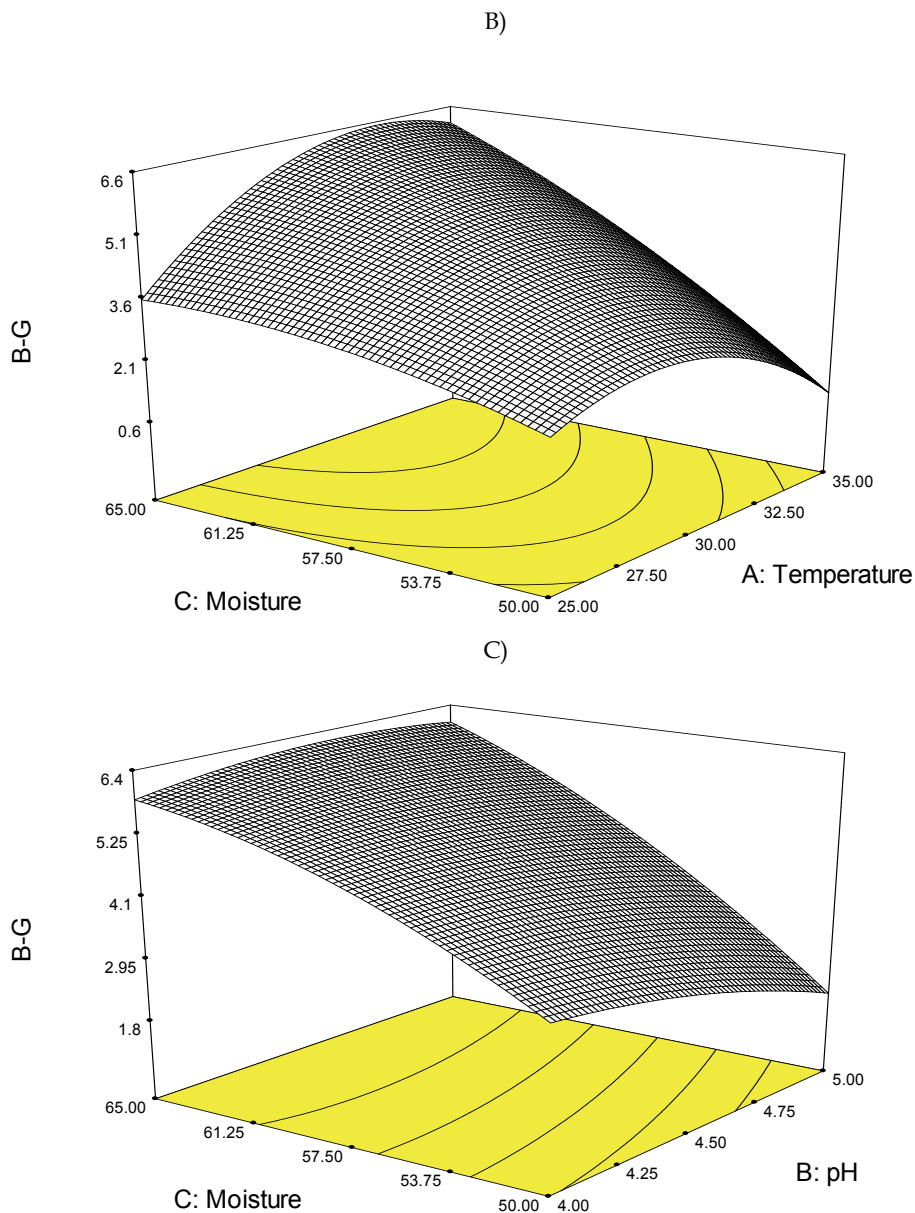

B-G:  $\beta$ -glucosidase activity as IU/g of dry substrate

Fig. 2. Surface plots illustrating the effect of A) temperature and pH, B) moisture and temperature, C) moisture and pH on  $\beta$ -glucosidase (B-G) activity measured as IU (International Units)/g dry substrate

### 3.3 Numerical optimization of independent variables to maximize cellulase and $\beta$ -glucosidase activities

Using Design Expert 7.1 numerical optimization subroutine design space was explored with fitted quadratic model to arrive at optimum temperature, moisture and pH conditions that maximize cellulase and  $\beta$ -glucosidase activities. In this task, goals were set to achieve maximum activities of cellulase and  $\beta$ -glucosidase by setting independent variables within the range of upper and lower limit. The optimized variables were found using desirability objective function that assigns relative importance to the responses. Solutions with higher desirability gave optimum temperature of 30 °C, pH of 5 and moisture content of 70%, and the corresponding cellulase and  $\beta$ -glucosidase activities were 10.55 FPU/g and 8.13 IU/g, respectively. Evidently, co-culturing of fungal cultures in SSF with proper optimization resulted in balanced production of enzymes with desired 1:1 ratio of filter paper units and beta-glucosidase activity.

## 4. Physicochemical characteristics of soybean hulls and production of cellulolytic enzyme system in fungal solid state fermentation

In solid state fermentation, substrate acts as both carrier and source of carbon for growth and productivity of fungal cultures. In literature, numerous studies have highlighted the importance of composition of carbon substrate in induction of cellulolytic enzyme system (Aro et al., 2005, Mach and Zeilinger, 2003; Bisaria and Mishra, 1989). Due to the discrete nature of SSF, the particulate nature of substrate becomes directly manifested such that the physicochemical characteristics: crystallinity, bed porosity and volumetric specific surface, can influence the production of cellulolytic enzyme system in fungal cultures (Brijwani, 2011). The relationship of cellulolytic enzyme system with physicochemical characteristics has been investigated in fungal cultures of *T. reesei* and *A. oryzae* present as mono and mixed forms (Brijwani, 2011). By subjecting soybean hulls to mild pretreatments (steam, and ambient temperature acid and alkali pretreatment) it was possible to alter the physicochemical characteristics without changing the total cellulosic composition of soybean hulls (Brijwani, 2011). Before going into details of the relationship of physicochemical characteristics with cellulolytic enzyme production it is vital to shed light on the techniques for measuring the physicochemical characteristics. Measurement of crystallinity is an arduous task especially for heterogeneous substrate like soybean hulls. With interlocking amorphous and crystalline regions there is dispersion in the scattering; consequently, the peak separation becomes challenging and accurate determination of crystallinity is compromised. In the forthcoming section elaborate details on techniques for measuring crystallinity of soybean hulls is presented. For measurement of other two physicochemical properties: bed porosity and volumetric specific surface, readers are directed to the recent work of Brijwani and Vadlani (2010).

### 4.1 X-ray diffraction studies of soybean hulls for measurement of crystallinity

Wide angle X-ray diffraction has been extensively used to measure the crystallinity of cellulosic substrates. There are several ways to measure crystallinity in the polymeric sample from an X-ray diffractogram; the most common is the Segal method (Segal et al., 1959). The method requires that amorphous material diffracts with the same intensity at 18° (~ 10 $\bar{1}$  plane) and 22° (002 plane) and that the crystalline cellulose does not contribute to the reflection at 18°. However, all materials give rise to X-ray scattering, and ensuring the



crystalline component does not produce similar reflection at certain scan angles would be difficult. In particular, when large quantities of amorphous hemicellulose and lignin with cellulose are present (as evident in lignocellulosic biomass), the scattering becomes diffusive and spread out. This creates difficulty in separating amorphous reflections from crystalline reflections. Because of the large crystallite size in pure crystalline substances, scattering is quite sharp and diffusive patterns can be avoided or at least minimized. However, in substrates with small crystallite size (20-50 Å), such as lignocellulosic biomass, separating amorphous scattering from crystalline scattering would no longer be trivial and would have serious overlaps (Thygesen et al., 2005; Kasai and Kakudo, 2005). Thus, we briefly present some of the other refined methods described in the literature that can be successfully used to determine crystallinity (a useful parameter in successful utilization of biomass for fuels and chemicals and an important parameter in this study) of lignocellulosic biomass.

Earlier developments in measuring crystallinity of polymeric substances with paracrystalline distortions (owing to amorphous scattering) took place with the work of Ruland (Ruland, 1961) and Vonk (Vonk, 1973). This method involves separation of crystalline peaks from amorphous peaks. The amorphous part of the scattering is obtained from standard amorphous substances, the reflections are then scaled down below the crystalline reflections, and the fraction of integrated intensity of the crystalline phase out of total intensity including the amorphous background is referred to as crystallinity of the sample. That approach was further refined as the Rietveld refinement (Rietveld, 1967; Rietveld, 1969), which uses the full diffraction pattern in a least squares fitting numerical procedure to fit the complete X-ray diffractograms including the background or diffusive scattering due to amorphous regions.

Several shape functions can fit the complete X-ray diffractograms using least squares fitting. However, it is very important to understand the three major sources that contribute to the shape function of the observed X-ray profile (Taupin, 1973): structure of material under consideration, spectral distribution of the X-ray source, and instrumental or non-spectral contributions. The observed profile  $h(2\theta)$  is a convolution ( $\Theta$ ) of the intrinsic specimen profile  $f(2\theta)$  with the spectral distribution ( $W$ ) and the instrumental function ( $G$ ) superimposed over the background  $b$  (Garvey et al., 2005):

$$h(2\theta) = [(W\Theta G)\Theta f](2\theta) + b \quad (4)$$

The Voigt function, which is a convolution of Gaussian and Lorentzian peak functions, would include both Gaussian intrinsic broadening of the specimen along with the Lorentzian instrumental profile that considers the background from amorphous scattering. The Voigt function, therefore, appropriately mimics the three major sources presented above. Using the Voigt function intensity of the reflection is represented by following equation:

$$f(2\theta) = \frac{a_0 \int_{-\infty}^{\infty} \frac{\exp(-(2\theta)^2)}{a_1^2 + \left(\frac{x-a_c}{a_g} - 2\theta\right)^2} d(2\theta)}{\int_{-\infty}^{\infty} \frac{\exp(-(-(2\theta)^2))}{a_1^2 + (2\theta)} d(2\theta)} \quad (5)$$

Where  $a_0$  is the amplitude of the peak,  $a_c$  is the center of the peak,  $a_1$  is the width of the Lorentzian component, and  $a_g$  is the width of the Gaussian component of the peak. The



whole process involves nonlinear least squares fitting of the Voigt function from the Peakfit program to full X-ray diffractograms. The major reflective planes in cellulosic material corresponding to following Miller indices (hkl) were identified: 101, 10 $\bar{1}$ , 002, 021, and 040 (Liu et al., 2005); 002 was the prominent reflection representing crystalline cellulose (sometimes resolved into 021 plane as well). The program was re-run locking these planes, and, consequently, five Voigt functions were fitted. The goodness of fit was assessed using R<sup>2</sup>. Crystallinity was calculated from equation (6) (Wada and Okano, 1997),

$$X_{cr}(\%) = \frac{I_{002} + I_{021}}{I_{101} + I_{10\bar{1}} + I_{002} + I_{021} + I_{040}} \times 100 \quad (6)$$


Where I followed by a subscript represents the integrated intensity of the particular Bragg plane. Five Bragg planes (subscripts of I in equation 6) have been generally identified in cellulosic samples from plant materials (Liu et al., 2005). Crystallinity, therefore, represents the fraction of  $\alpha$ -cellulose represented by planes 002 and 021 present in a particular sample.

#### 4.2 Effect of various pretreatments on physicochemical characteristics of soybean hulls


The X-ray diffractograms for five substrates: native soybean hulls (untreated), steam pretreated soybean hulls (121 °C, 15 psi), HCl pretreated soybean hulls (ambient temperature treatment with 1N HCl using 5% soybean hulls slurry for 24 h), H<sub>2</sub>SO<sub>4</sub> pretreated soybean hulls (ambient temperature treatment with 1N H<sub>2</sub>SO<sub>4</sub> using 5% soybean hulls slurry for 24 h), and NaOH pretreated soybean hulls (ambient temperature treatment with 1N HCl using 5% soybean hulls slurry for 24 h) is shown in Fig. 3A-E (notice the five peaks corresponding to identified lattice planes). Almost all diffractograms using this scheme had R<sup>2</sup>>0.95. For more details on pretreatment, readers are directed to Brijwani and Vadlani (2010). As seen from Fig. 1A-E, the gradual evolution of the 002 plane (2 $\theta$  ~ 22°) from native soybean hulls to pretreated hulls is an indication of increased crystallinity in pretreated solids. The pretreated soybean hulls had crystallinity in the range of 57 to 59% compared to untreated native soybean hulls that had 42% crystallinity. The increase is probably due to reduction in the amorphous phase and plausible correction in lattice defects of cellulose during ambient-temperature acid and alkali treatments and steam treatment (Brijwani, 2011). In a similar fashion pretreated substrates were more porous compared to native soybean hulls. The increase in bed porosity is likely due to modification of the internal structure of soybean hulls that led to redistribution and partial solubilization of hemicellulose and swelling of the biomass (Kumar et al., 2009). Volumetric specific surface (cm<sup>-1</sup>), on the other hand, was similar for pretreated and native soybean hulls. It should be noted that volumetric specific surface measurements were the outcome of particle size analysis done on dried substrates without any moisture addition to facilitate efficient sieving. Hence, the volumetric specific surface was more of a function of particle size and, therefore, was exclusively the representation of external surface area per unit volume. It, however, could not be the real representation of internal surface area that is the function of pore size and internal volume. The reason for showing volumetric specific surface in the current study is to identify research directions such that studying pore volume alongside porosity might provide more insight into the dynamics of cellulolytic enzyme production and its relationship with physical properties of the substrate (Brijwani, 2011).

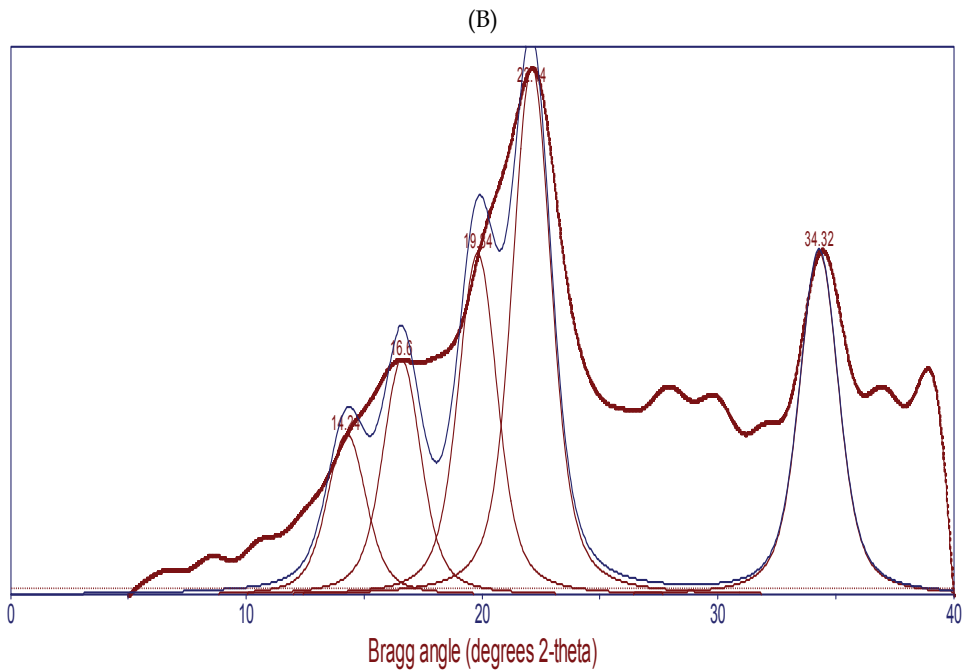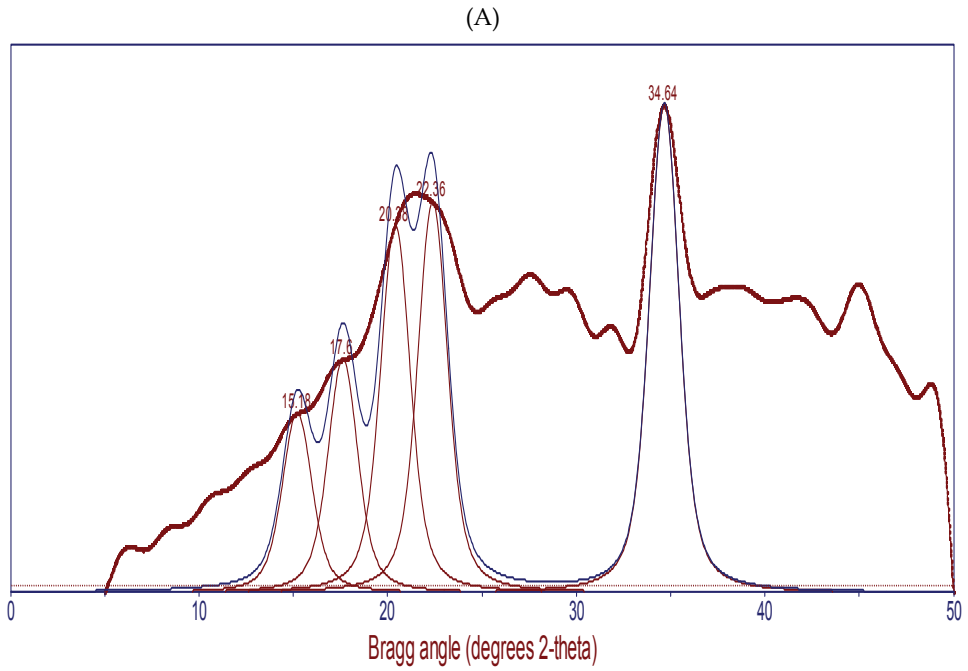

(C)

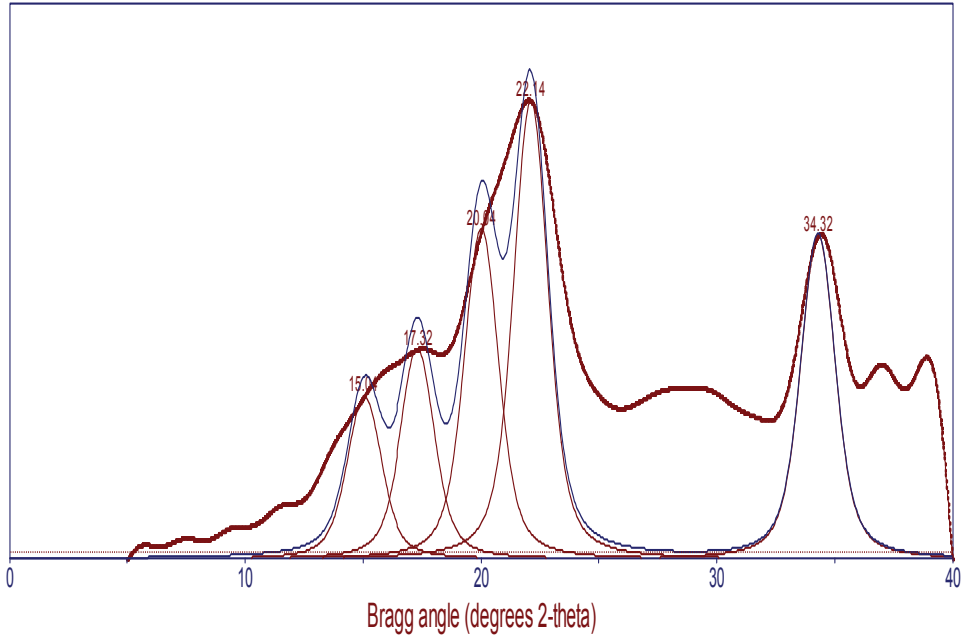

(D)

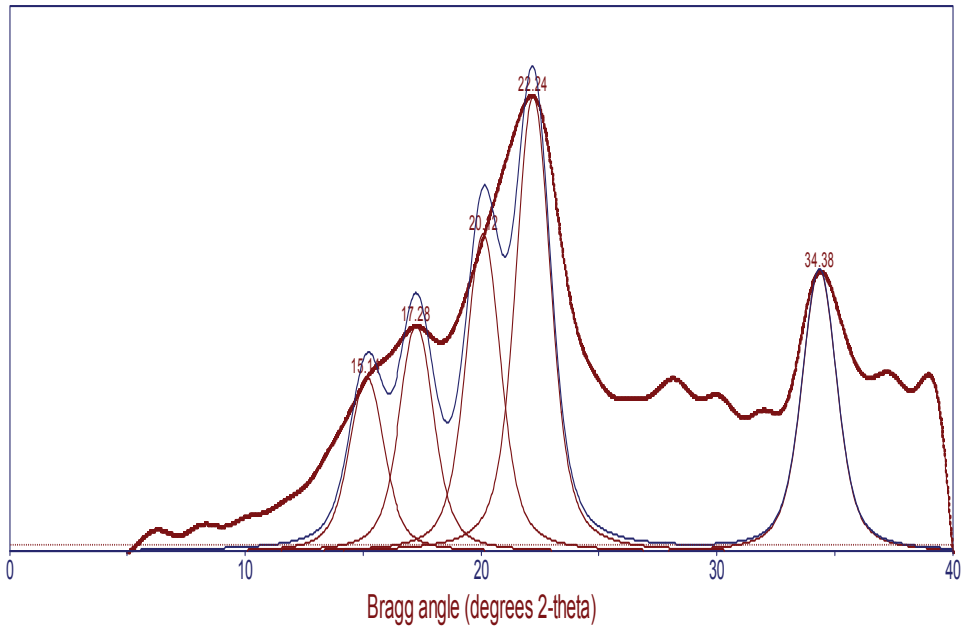

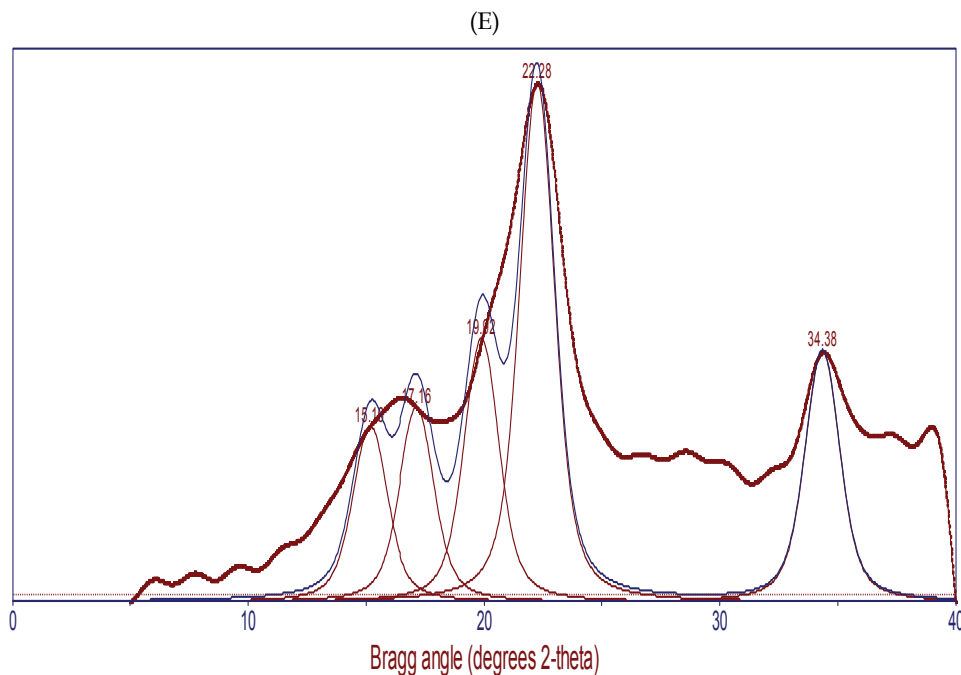


Fig. 3. X-ray Signatures. Gaussian smoothing followed by Voigt function was used to fit the diffractogram output of the instrument. (A) Native soybean hulls. The characteristics peaks identified were:  $2\theta = 15.18^\circ$  (101 plane),  $17.6^\circ$  ( $10\bar{1}$ ),  $20.38^\circ$  (021 plane),  $22.36^\circ$  (002 plane), and  $34.64^\circ$  (040 plane). (B) Steam treated soybean hulls. The characteristics peaks identified were:  $2\theta = 14.24^\circ$  (101 plane),  $16.6^\circ$  ( $10\bar{1}$ ),  $19.84^\circ$  (021 plane),  $22.14^\circ$  (002 plane), and  $34.32^\circ$  (040 plane). (C) HCl treated soybean hulls. The characteristics peaks identified were:  $2\theta = 15.04^\circ$  (101 plane),  $17.32^\circ$  ( $10\bar{1}$ ),  $20.12^\circ$  (021 plane),  $22.24^\circ$  (002 plane), and  $34.38^\circ$  (040 plane). (D)  $H_2SO_4$  treated soybean hulls. The characteristics peaks identified were:  $2\theta = 15.11^\circ$  (101 plane),  $17.28^\circ$  ( $10\bar{1}$ ),  $20.04^\circ$  (021 plane),  $22.14^\circ$  (002 plane), and  $34.32^\circ$  (040 plane). (E) NaOH treated soybean hulls. The characteristics peaks identified were:  $2\theta = 15.18^\circ$  (101 plane),  $17.16^\circ$  ( $10\bar{1}$ ),  $19.92^\circ$  (021 plane),  $22.28^\circ$  (002 plane), and  $34.38^\circ$  (040 plane).

#### 4.3 Effect of physicochemical characteristics on cellulolytic enzyme production in mixed and mono cultures of *T. reesei* and *A. oryzae*

In order to explicitly demonstrate the effect of crystallinity and bed porosity on cellulolytic enzyme production, we modeled both crystallinity and porosity using the general linear model of SAS with the following expression:

$$y_{ijk} = \mu + ab_{ij} + \epsilon_{ijk} \quad (7)$$

Where  $y_{ijk}$  is one of the enzyme activities as the dependent variable,  $\mu$  is the grand mean,  $ab_{ij}$  is the interaction effect of crystallinity and porosity, and  $\epsilon_{ijk}$  is random error with mean 0 and experimental error variance as its variance. The composition was not included as it

was fairly constant across treatments i.e., the total cellulosic composition (cellulose + hemicellulose) was not significantly different among the pretreatments (Brijwani, 2011). This was attributed to mild nature of the pretreatments. Similarly, volumetric specific surface was not included in the model as it did not change significantly upon pretreatment. Considering crystallinity and porosity together became necessary because of availability of a reduced number of degrees of freedom that refrained their independent analysis. It was very difficult to generate substrates for which one effect was varied while the other effect remained constant. Future studies in this direction will be beneficial, provided such substrates are available or easy to generate. Broadly speaking, the model represented by equation (7) is more reflective of one-way variance analysis than factorial variance analysis. On the basis of results in Table 1, both crystallinity and porosity had positive and significant improvements in all enzyme activities except xylanase production for *T. reesei*. Notice that only native and steam-treated soybean hulls were included in determining out the

Interaction	Culture	Cellulolytic enzyme system				Treatments considered
		Filter paper units (FPU/g-ds)	Beta-glucosidase (IU/g-ds)	Endoglucanase (IU/g-ds)	Xylanase (IU/g-ds)	
Crystallinity × Porosity	<i>Trichoderma reesei</i>	<0.0001*	0.0388*	<0.0001*	0.0472	Native, Steam
Crystallinity × Porosity	<i>Aspergillus oryzae</i>	<0.0001*	0.2736	<0.0001*	0.0065*	Native, Steam, HCl, H <sub>2</sub> SO <sub>4</sub>
Crystallinity × Porosity	<i>Aspergillus oryzae</i>	0.4629	0.9218	0.0005*	0.9912	Native, Steam
Crystallinity × porosity	Mixed	<0.0001*	0.0140*	<0.0001*	<0.0001*	Native, Steam, HCl, H <sub>2</sub> SO <sub>4</sub>
Crystallinity × porosity	Mixed	0.0044*	0.0449	0.0257*	0.9061	Native, Steam

“\*” indicates probability for a particular interaction is significant at 95% confidence Abbreviations

Native: - Untreated soybean hulls

Steam: - Steam-pretreated soybean hulls

HCl: - Soybean hulls pretreated with 1N HCl

H<sub>2</sub>SO<sub>4</sub>: - Soybean hulls pretreated with 1N H<sub>2</sub>SO<sub>4</sub>

NaOH: - Soybean hulls pretreated with 1N NaOH

Table 1. Effect of interaction between physical characteristics on production of cellulolytic enzyme system for three cultures

differences. This was a result of the higher sensitivity of *T. reesei* toward inhibitors present in acid- and alkali-treated substrates. In *A. oryzae*, when all four substrates were considered, we noticed that probabilities were significant in all cases. In general, acid-pretreated substrates, except in  $\beta$ -glucosidase production, performed lower than native and steam-pretreated substrates, which is probably the reason for the lower probabilities. Therefore, when acid substrates were removed from the model, the real effect of crystallinity and porosity on production of endocellulase became evident, and the effect increased significantly with increases in crystallinity and porosity. In mixed culture (Table 1), the effect was more or less level, and performance was nearly identical except that filter paper and beta-glucosidase activities were significantly higher in less crystalline and porous native soybean hulls than in highly crystalline and porous steam-treated soybean hulls.

Porosity is a physical parameter that ensures oxygen availability between the moist substrate particles. It is plausibly implicated in the growth of fungal cultures and, therefore, affects enzyme production from a growth point of view. Rahardjo et al. (2005a; 2005b) explained this phenomenon by using different kinds of model substrates that differed in the amount of open spaces for production of  $\alpha$ -amylase in solid-state cultures of *A. oryzae*. Crystallinity, on the other hand, might be the decisive factor in influencing expression levels of enzymes within a cellulolytic enzyme system, suggesting it might enrich one activity over another. This phenomenon was noticed in *T. reesei*, in which production of cellulase enzymes increased substantially in pretreated soybean hulls compared with native hulls but xylanase remained constant. We made similar observations in endocellulase production in *A. oryzae*. A positive effect of crystallinity was also reported for liquid cultures of *Trichoderma* spp. (Acebal et al., 1986; Evans et al., 1992; Aiello et al., 1996). Although no specific variation in different activities with varying crystallinity were mentioned in these studies, an overall increase in cellulase activity was reported during growth on pretreated crystalline biomass or standard crystalline cellulose.

## 5. Conclusions

The present study demonstrated for the first time the suitability of mixed-culture, solid-state fermentation in the production of an efficient cellulase enzymes complex from soybean hulls. Further, the role of physicochemical characteristics in production of cellulolytic enzymes in fungal SSF was comprehensively investigated. With recent advances in computation capability, whole X-ray diffractograms can be fitted to obtain reliable measures of crystallinity of heterogeneous material such as lignocellulosic biomass. Production of cellulase enzyme using co-cultures of *T. reesei* and *A. oryzae* grown on solid media containing 4:1 of soybean hulls and wheat bran were fitted to quadratic model using RSM. Both cellulase and  $\beta$ -glucosidase production showed significant dependence on temperature and moisture content as compared to pH. Temperature showed quadratic effect on the production of both cellulase and  $\beta$ -glucosidase while moisture had linear effect on cellulase and  $\beta$ -glucosidase production. The interaction effects of three independent variables were not significant though interaction of temperature and moisture was considerable for cellulase production, while interaction of moisture and pH was considerable for  $\beta$ -glucosidase production. The optimized values of three independent variables viz. temperature, pH and moisture content were predicted using numerical optimization that maximized cellulase and  $\beta$ -glucosidase activities. Results showed that co-culturing of fungal

species with proper optimization resulted in complete and balanced production of enzymes. Both bed porosity and crystallinity were significantly implicated in production of cellulolytic enzymes. We explicitly showed that exposure of crystallinity made *T. reesei* a robust producer of cellulolytic enzymes, whereas *A. oryzae* responded to crystallinity by being a good producer of endocellulase activity. The changes brought about by physical characteristics are an important design tool for process development of the SSF. By changing the physical attributes expression levels of enzymes can be varied such that physicochemical characteristics become the leading force in directing synthesis of the cellulolytic enzyme system in SSF.

## 6. Acknowledgements

The authors are grateful to the Center for Sustainable Energy and the Department of Grain Science and Industry, Kansas State University, for funding this project. This article is contribution no 11-079-B from the Kansas Agricultural Experiment Station, Manhattan, KS 66506.


## 7. References

- Acebal C, Castillon MP, Estrada P, Mata I, Costa E, Aguado J, Romero D, Jimenez F. Enhanced cellulase production from *Trichoderma reesei* QM 9414 on physically treated wheat straw. *Appl Microbiol Biotechnol* 1986;24:218-223.
- Aguilar G, Huitron C. Application of fed-batch treatments in the production of extracellular pectinases by *Aspergillus* sp. *Enzyme Microb Technol* 1986;8:541-545.
- Aiello C, Ferrer A, Ledesma A. Effect of alkaline treatments at various temperatures on cellulase and biomass production using submerged sugarcane bagasse fermentation with *Trichoderma reesei* QM 9414. *Bioresource Technol* 1996;57:13-18.
- Archana A, Satyanarayana T. Xylanase production by thermophilic *Bacillus licheniformis* A99 in solid state fermentation. *Enzyme Microb Technol* 1997;8:541-545
- Aro N, Pakula T, Penttila M. Transcriptional regulation of plant cell wall degradation by filamentous fungi. *Fems Microbiol Rev* 2005;29:719-739.
- Bisaria VS, Mishra S. Regulatory aspects of cellulase biosynthesis and secretion. *Crit Rev Biotechnol* 1989;9:61-103.
- Botella C, Diaz AB, Wang RH, Koutinas A, Webb C. Particulate bioprocessing: A novel process strategy for biorefineries. *Process Biochem* 2009;44:546-555.
- Brijwani K, Oberoi HS, Vadlani PV. Production of cellulolytic enzyme system in mixed-culture solid-state fermentation of soybean hulls supplemented with wheat bran. *Process Biochem* 2010;45:120-128.
- Brijwani K. Solid state fermentation of soybean hulls for cellulolytic enzyme production: Physicochemical characteristics of substrate, and bioreactor design and modeling. PhD Dissertation, Department of Grain Science & Industry, Kansas State University, 2011
- Cen P, Xia L. Production of cellulase in solid state fermentation. In: Scheper T, editor. *Recent progress in bioconversion of lignocellulosics*. *Advances in Biochemical Engineering/Biotechnology*. vol. 65. Berlin: Springer; 1999. p. 69.
- Chahal DS, McGuire S, Pikor H, Noble G. Production of cellulase complex by *Trichoderma reesei* RUT-C30 on lignocellulose and its hydrolytic potential. *Biomass* 1982;2:127-138.



- Duff SJB, Cooper DG, Fuller OM. Effect of media composition and growth conditions on production of cellulase and  $\beta$ -glucosidase by a mixed fungal fermentation. *Enzyme Microb Technol* 1987;9:47-52
- Esterbauer H, Steiner W, Labudova I, et al. Production of *Trichoderma* cellulase in laboratory and pilot scale. *Bioresource Technol* 1991;36:51-65.
- Evans ET, Wales DS, Bratt RP, Sagar BF. Investigation of an endoglucanase essential for the action of the cellulase system of *Trichoderma reesei* on crystalline cellulose. *J Gen Microbiol* 1992;138:1639-1646.
- Garvey CJ, Parker IH, Simon GP. On the interpretation of X-ray diffraction powder patterns in terms of the nanostructure of cellulose I fibres. *Macromol Chem Phys* 2005;206:1568-1575.
- Giovanni M. Response surface methodology and product optimization. *Food Technol* 1983;37:41-45, 83
- Grajek W. Hyperproduction of thermostable beta-glucosidase by *Sporotrichum (Chrysosporium)* thermophile. *Enzyme Microb Technol* 1987;9:744-748
- Holker U, Hofer M, Lenz J. Biotechnological advantages of laboratory scale solid state fermentation with fungi. *Appl Microbiol Biotechnol* 2004;64:175-186.
- Hounsa CG, Aubry JM, Dubourguier HC. Application of factorial and Doehlert designs for optimization of pectate lyase production by a recombinant *Escherichia coli*. *App Microbiol Biotechnol* 1996;45:764-770
- Kasai N, Kakudo M. X-ray diffraction by macromolecules. New York: Springer; 2005.p.504
- Krishna C. Solid state fermentation systems: An overview. *Crit Rev Biotechnol* 2005;25:1-30.
- Kumar P, Barrett DM, Delwiche MJ, Stroeve P. Methods for Pretreatment of Lignocellulosic Biomass for Efficient Hydrolysis and Biofuel Production. *Ind Eng Chem Res* 2009;48:3713-3729.
- Latifian M, Hamidi- Esphaini Z, Barzegar M. Evaluation of culture conditions for cellulase production by two *Trichoderma reesei* mutants under solid-state fermentation conditions. *Bioresour Technol* 2007;98:3634-3637
- Liu BL, Tzeng YM. Optimization of growth medium for the production of spores from *Bacillus thuringiensis* using response surface methodology. *Bioprocess Biosystem Eng* 1998;18:413-418
- Liu RG, Yu H, Huang Y. Structure and morphology of cellulose in wheat straw. *Cellulose* 2005;12:25-34.
- Mach RL, Zeilinger S. Regulation of gene expression in industrial fungi: *Trichoderma*. *Appl Microbiol Biotechnol* 2003;60:515-522.
- Maddox IS, Richer SH. Use of response surface methodology for rapid optimization of microbiological media. *J App Bacteriol* 1977;43:197-204
- Mandels M, Medeiros JE, Andreotti RE, Bisset FH. Enzymatic hydrolysis of cellulose- effect of physicochemical properties of cellulose on adsorption and rate of hydrolysis. *Biotechnol Bioeng* 1981;23:2009-2026.
- Marshall WE, Wartelle LH. Acid recycling to optimize citric acid-modified soybean hull production. *Ind Crop Prod* 2003;18:177-182.
- Mes-Hartree M, Hogan CM, Saddler JN. Influence of growth substrate on production of cellulase enzymes by *Trichoderma harzianum* E58. *Biotechnol Bioeng* 1988;31:725-729.
- Mielenz JR, Bardsley JS, Wyman CE. Fermentation of soybean hulls to ethanol while preserving protein value. *Bioresource Technol* 2009;100:3532-3539.

- Oostra J, le Comte EP, van den Heuvel JC, Tramper J, Rinzema A. Intra-particle oxygen diffusion limitation in solid-state fermentation. *Biotechnol Bioeng* 2001;75:13-24.
- Rahardjo YSP, Jolink F, Haemers S, Tramper J, Rinzema A. Significance of bed porosity, bran and specific surface area in solid-state cultivation of *Aspergillus oryzae*. *Biomol Eng* 2005a;22:133-139.
- Rahardjo YSP, Weber FJ, Haemers S, Tramper J, Rinzema A. Aerial mycelia of *Aspergillus oryzae* accelerate alpha-amylase production in a model solid-state fermentation system. *Enzyme Microb Technol* 2005;36:900-902.
- Rietveld HM. A profile refinement method for nuclear and magnetic structures. *J Appl Cryst* 1969;2:65-71.
- Rietveld HM. Line profiles of neutron powder-diffraction peaks for structure refinement. *Acta Cryst* 1967;22:151-152.
- Ruland W. X-RAY determination of crystallinity and diffuse disorder scattering. *Acta Cryst* 1961;14:1180-1185.
- Segal L, Creely JJ, Martin AE, Conrad CM. An empirical method for estimating the degree of crystallinity of native cellulose using X-ray diffractometer. *Tex Res J* 1959;29:786-794.
- Singhania RR, Sukumaran RK, Pandey A. Improved cellulase production by *Trichoderma reesei* RUT C30 under SSF through process optimization. *Appl Biochem Biotechnol* 2007;142:60-70
- Siqueira EMD, Mizuta K, Giglio JR. *Pycnoporus sanguineus*: a novel source of alpha-amylase. *Mycol Res* 1997;101:188-190
- Solis-Pereyra S, Favela-Torres E, Gutierrez-Rojas M et al. Production of pectinase by *Aspergillus niger* in solid state fermentation at high initial glucose concentrations. *World J Microbiol Biotechnol* 1996;12:257-260
- Stockton BC, Mitchell DJ, Grohmann K, et al. Optimum  $\beta$ -D glucosidase supplementation of cellulase for efficient conversion of cellulose to glucose. *Biotechnology Lett* 1991;13:57-62.
- Taupin D. Powder-diagram automatic-indexing routine. *J Appl Cryst* 1973;6:380-385.
- Theodore K, Panda, T. Application of response surface methodology to evaluate the influence of temperature and initial pH on the production of beta-1,3-glucanase and carboxymethylcellulase from *Trichoderma harzianum*. *Enzyme Micro Technol* 1995;17:1043-1049
- Thibault J, Pouliot K, Agosin E, Perez-Correa R. Reassessment of the estimation of dissolved oxygen concentration profile and  $K_{La}$  in solid-state fermentation. *Process Biochem* 2000;36:9-18.
- Thygesen A, Oddershede J, Lilholt H, Thomsen AB, Stahl K. On the determination of crystallinity and cellulose content in plant fibres. *Cellulose* 2005;12:563-576.
- Vonk CG. Computerization of Rulands x-ray method for determination of crystallinity in polymers. *J Appl Cryst* 1973;6:148-152.
- Wada M, Okano T, Sugiyama J. Synchrotron-radiated X-ray and neutron diffraction study of native cellulose. *Cellulose* 1997;4:221-232.

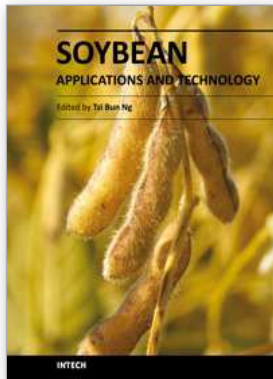

## **Soybean - Applications and Technology**

Edited by Prof. Tzi-Bun Ng

ISBN 978-953-307-207-4

Hard cover, 402 pages

**Publisher** InTech

**Published online** 26, April, 2011

**Published in print edition** April, 2011

Soybean is an agricultural crop of tremendous economic importance. Soybean and food items derived from it form dietary components of numerous people, especially those living in the Orient. The health benefits of soybean have attracted the attention of nutritionists as well as common people.

### **How to reference**

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Khushal Brijwani and Praveen V. Vadlani (2011). Solid State Fermentation of Soybean Hulls for Cellulolytic Enzymes Production, Soybean - Applications and Technology, Prof. Tzi-Bun Ng (Ed.), ISBN: 978-953-307-207-4, InTech, Available from: <http://www.intechopen.com/books/soybean-applications-and-technology/solid-state-fermentation-of-soybean-hulls-for-cellulolytic-enzymes-production>

# **INTECH**

open science | open minds

### **InTech Europe**

University Campus STeP Ri  
Slavka Krautzeka 83/A  
51000 Rijeka, Croatia  
Phone: +385 (51) 770 447  
Fax: +385 (51) 686 166  
[www.intechopen.com](http://www.intechopen.com)

### **InTech China**

Unit 405, Office Block, Hotel Equatorial Shanghai  
No.65, Yan An Road (West), Shanghai, 200040, China  
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元  
Phone: +86-21-62489820  
Fax: +86-21-62489821

© 2011 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](#), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.