

Some remarks on the history and future of averaging techniques in a posteriori finite element error analysis

Plenary lecture presented at the 80th Annual GAMM Conference, Augsburg, 25–28 March 2002

Carsten Carstensen*

Institute for Applied Mathematics and Numerical Analysis, Vienna University of Technology, Wiedner Hauptstraße 8–10, 1040 Vienna, Austria

Received 27 November 2002, accepted 10 July 2003

Published online 1 December 2003

Key words a posteriori error estimates, averaging techniques, gradient recovery, ZZ error estimator, reliability, efficiency

MSC (2000) 65G30, 65G99

Given a flux or stress approximation p_h from a low-order finite element simulation of an elliptic boundary value problem, averaging or (gradient-)recovery techniques aim the computation of an improved approximation Ap_h by a (simple) post processing of p_h . For instance, frequently named after Zienkiewicz and Zhu, Ap_h is the elementwise interpolation of the nodal values $(Ap_h)(z)$ obtained as the integral mean of p_h on a neighbourhood of z . This paper gives an overview over old and new arguments in the proof of reliability and efficiency of the error estimator $\eta_{\mathcal{A}} := \|p_h - Ap_h\|$ as an approximation of the error $\|p - p_h\|$ in (an energy norm) $\|\cdot\|$. High-lighted are the general class of meshes, averaging operators, or finite elements (conforming, nonconforming, or mixed). Emphasis is on old and new aspects of superconvergence and arguments to circumvent superconvergence at all within proofs of a posteriori finite element error estimates.

© 2004 WILEY-VCH Verlag GmbH & Co. KGaA, Weinheim

1 Introduction

This section presents some main concepts in a posteriori finite element error control and their purpose. Sect. 1.1 gives a vague but brief introduction to reliability and efficiency of (a posteriori) error estimators. Sects. 1.2 and 1.3 describe their usage in termination criteria for error control and in adaptive mesh-refining. Some remarks on references in Sect. 1.4 and the outline of the remaining part of this paper in Sect. 1.5 conclude this introduction.

1.1 Reliability and efficiency

Throughout the first section there is no formal need to have a boundary value problem

$$Lu = f \tag{1}$$

at hand for an elliptic (second-order) differential operator L plus boundary conditions. In fact, it suffices to think of p (the flux or stress) as the derivative of an unknown u which is approximated by a (known) finite element solution u_h and so yields a discrete (flux or stress) p_h . It is important that p_h is known as well as a right-hand side f in the underlying domain Ω and prescribed data on the boundary $\partial\Omega$ (the domain Ω is not visible in (1) but shall arise in applications below). Given a norm $\|\cdot\|$, the aim is to approximate the (unknown) error $\|p - p_h\|$ by a computable quantity η called error estimator.

Definition 1.1. (Error Estimator). A (computable) quantity η which is thought as an approximation to $\|p - p_h\|$ is called a *posteriori error estimator*, or *estimator* for brevity, if it is a function of known quantities $f, \Omega, \partial\Omega$ and u_h, p_h etc. of the data and the discrete solution.

This definition is very vague and not very useful on its own: The estimator $\eta := +\infty$ and $\eta := 0$ is even reliable and efficient, respectively, but certainly not interesting. The real purpose of an estimator is to provide lower *and* upper error bounds, in the following sense.

Definition 1.2. (Reliability). An estimator η is called *reliable* if

$$\|p - p_h\| \leq C_{\text{rel}} \eta + \text{h.o.t.}_{\text{rel}}. \tag{2}$$

Definition 1.3. (Efficiency). An estimator η is called *efficient* if

$$\eta \leq C_{\text{eff}} \|p - p_h\| + \text{h.o.t.}_{\text{eff}}. \tag{3}$$

* e-mail: Carsten.Carstensen@tuwien.ac.at

Definition 1.4. (Asymptotic Exactness). An estimator is called *asymptotically exact* if it is reliable and efficient and $C_{\text{rel}} = C_{\text{eff}}$ in (2)–(3).

Herein, C_{rel} and C_{eff} are multiplicative constants which do not depend on the mesh-size of an underlying finite element mesh \mathcal{T} for the computation of p_h and h.o.t. denotes higher-order terms. The latter are generically much smaller than η or $\|p - p_h\|$, but usually this depends on the (unknown) smoothness of the exact solution or the (known) smoothness of the given data. At this moment we have only one finite element mesh \mathcal{T} in mind, but could certainly think of a family $(\mathcal{T}_h)_{h \in \mathcal{H}}$ of regular triangulations with a (maximal) mesh-size h , in a parameter set $\mathcal{H} \subset (0, \infty)$, which can be arbitrarily small. Then, the higher-order terms h.o.t. can be defined by the property

$$\lim_{\mathcal{H} \ni h \rightarrow 0} \text{h.o.t.}_{\text{rel}} / \|p - p_h\| = 0 = \lim_{\mathcal{H} \ni h \rightarrow 0} \text{h.o.t.}_{\text{eff}} / \|p - p_h\|. \quad (4)$$

The constants C_{rel} and C_{eff} may (mildly) depend on \mathcal{T}_h but are supposed to be bounded,

$$\limsup_{\mathcal{H} \ni h \rightarrow 0} C_{\text{rel}} < \infty \quad \text{and} \quad \limsup_{\mathcal{H} \ni h \rightarrow 0} C_{\text{eff}} < \infty. \quad (5)$$

It is the mathematical task of a posteriori error analysis to provide sufficient and necessary conditions for the reliability and efficiency estimates (2)–(3) to hold and characterise or estimate the constants C_{rel} , C_{eff} and the higher-order terms h.o.t._rel, h.o.t._eff. The properties (4)–(5) may well serve as a guideline for the design of estimators, but they are usually not sufficient for practical purposes in error control.

1.2 A posteriori error control

There are at least two aspects where an error estimator is useful in practice: error estimation and adaptive mesh-refinement. For the first main usage, one is given a tolerance $\text{Tol} > 0$ and interested in a termination (of successively adapted mesh-refinements) based on the criterion

$$\|p - p_h\| \leq \text{Tol}.$$

Since the error $\|p - p_h\|$ is unknown, this is replaced by its upper bound (2) and then reads

$$C_{\text{rel}}\eta + \text{h.o.t.}_{\text{rel}} \leq \text{Tol}. \quad (6)$$

For a verification of (6), it is evident that we require not only η but also C_{rel} and h.o.t._rel. A qualitative knowledge such as in (4)–(5) does not suffice. Notice that one may call the computable upper bound

$$\tilde{\eta} := C_{\text{rel}}\eta + \text{h.o.t.}_{\text{rel}}$$

an error estimator (which then satisfies (2) with a reliability constant 1 and vanishing higher-order terms). If $\tilde{\eta}$ is not computable, the error control is incomplete and so useless. Fortunately, in the examples below, $\tilde{\eta}$ is computable and this enables guaranteed error control.

Notice that the error control is exclusively with respect to the norm $\|\cdot\|$. This paper focuses on energy norms and so ignores goal-oriented error control. The latter is important and the reader is referred (i) to [1, 6] for arguments that reduce the more general problem to energy-norm arguments and (ii) to [13] for a survey of the work of Rannacher et al. on a very successful computational approach.

1.3 Adaptive mesh-refining

The second main usage of an estimator η employs its local character, e.g. in the form

$$\eta^2 = \sum_{T \in \mathcal{T}} \eta_T^2 \quad (7)$$

with (computable) elementwise contributions η_T . The interpretation of η_T is often that of a local *indicator*. The idea then is to refine the element T if this indicator η_T is relatively large. The adaptive meshes in our work are generated by a refinement criterion such as

$$\frac{1}{2} \max\{\eta_K : K \in \mathcal{T}\} \leq \eta_T. \quad (8)$$

Notice that further strategies are required to avoid hanging nodes and degenerated elements. The use of η_T as a refinement criterion is essentially based on heuristics; one should therefore speak of a *refinement indicator* η_T (and not of an error indicator).

Notice that C_{rel} , C_{eff} do not enter in (8) while h.o.t._rel, h.o.t._eff are simply ignored therein.

The rigorous justification of adaptive mesh-refining algorithms by a proof of an error-reduction property started with [36, 37, 43]. Therein, one deduces convergence and even a *convergence rate*, but the number of elements generated by the adaptive algorithm is not under control. Hence optimal convergence rates are not guaranteed although expected and observed in many numerical experiments. Coarsening steps may be involved to prove optimal performance of adaptive mesh-refinement [14]. However, the coarsening seems rather a theoretical concept and less likely necessary in practice.

1.4 References

Amongst the most influential early publications on a posteriori error control are [4, 5, 38] followed by many others. It is not the aim of this paper to give credit to all the authors who enlighten the field but to guide the unexperienced reader into the area. We therefore refer to the survey articles [13, 39] and the books [1, 6, 39, 46]. However, further work in the context of averaging techniques and contributions from the author's group will be quoted throughout the remainder of this paper.

1.5 Outline of the paper

The abstract level of the introduction will be continued in Sect. 2 where an abstract overview concerns different classes of explicit and implicit estimators. Sect. 3 illustrates the estimators in a numerical example for a Laplace model equation. The focus then is on averaging techniques and their analysis. Sect. 4 discusses their asymptotic exactness based on superconvergence for structured grids. Reliability and efficiency of averaging techniques is shown in Sects. 5 and 6, respectively. Sect. 7 gives an overview over other applications. Finally, more global averaging techniques are addressed in Sect. 8. The paper finishes with some conclusion in Sect. 9.

2 Overview

This section is devoted to four classes of the most important error estimators presented under minimal notational assumptions. We adopt the (abstract) notation of Sect. 1 specified for model examples and particular applications in the sequel. More explanations will follow in Sect. 3 for the Poisson problem.

2.1 Explicit error estimators

In many cases, the underlying partial differential equation (PDE) in (1) gives rise to a residual

$$\text{Res} := f - Lu_h$$

which, often, is a linear and bounded functional $\text{Res} : X \rightarrow \mathbb{R}$ in a (real) Hilbert or Banach space X . Although f , L , and u_h are given, the dual norm

$$\|\text{Res}\|_{X^*} = \sup_{v \in X \setminus \{0\}} \frac{\text{Res}(v)}{\|v\|_X} \quad (9)$$

is usually difficult or laborious to compute. If the boundary value problem (1) is well posed and $\|\cdot\| = \|\cdot\|_X$ is a norm in X , there holds

$$c_1 \|\text{Res}\|_{X^*} \leq \|p - p_h\| \leq c_2 \|\text{Res}\|_{X^*}$$

with global positive constants c_1 and c_2 which solely depend on the bounds of L and L^{-1} . For the Laplace equation and the energy norm below there holds $c_1 = 1 = c_2$ and so the error equals the norm of the residual. Moreover, the computation of the real number (9) appears to be as expensive as the computation of the error $p - p_h$ itself and so (as p_h is known) of the exact solution p . Thus, the exact computation of (9) is not the goal of a posteriori error control, but the less expensive computation of lower and upper bounds is.

Lower bounds of (9) are easily deduced by any particular choice of v in X as edge or element bubble functions [46]. Upper bounds usually require weak interpolation operators in Sobolev spaces [18, 35]. The most popular residual-based explicit error estimator reads

$$\eta_E = \left(\sum_{T \in \mathcal{T}} h_T^q \|f - Lu_h\|_{L^q(T)}^q \right)^{1/q} + \left(\sum_{E \in \mathcal{E}} h_E \| [p_h] \|_{L^q(E)}^q \right)^{1/q}. \quad (10)$$

Here, \mathcal{T} is a triangulation into elements T of diameter h_T and \mathcal{E} is the set of edges therein; h_E denotes the diameter of the edge $E \in \mathcal{E}$. If $\|\cdot\|$ is the Lebesgue norm in $L^p(\Omega)$ then, typically, q is the coefficient of the dual $L^q(\Omega)$ defined by $1/p + 1/q = 1$. It is assumed that L can be evaluated for u_h on each element and that $[p_h]$ denotes the jump of a \mathcal{T} -piecewise uniformly continuous p_h over an interior edge E (with modifications along the boundary $\partial\Omega$).

2.2 Implicit error estimators

Localisation is the main step towards more accurate residual-based error estimators. At least two approaches are established, namely localisation by a partition of unity and localisation by domain decomposition with interfaces corrections. In fact, the localisation techniques are related to overlapping and non-overlapping domain decomposition techniques.

Given a mesh \mathcal{T} , the hat functions φ_z for each node z form the nodal basis ($\varphi_z : z \in \mathcal{N}$) for (conforming) first-order finite element schemes (without boundary restrictions). The partition of unity property

$$\sum_{z \in \mathcal{N}} \varphi_z = 1 \quad \text{in } \Omega$$

yields

$$\text{Res}(v) = \sum_{z \in \mathcal{N}} \text{Res}(\varphi_z Dv) \quad \text{and} \quad \|Dv\|_p^p = \sum_{z \in \mathcal{N}} \|\varphi_z^{1/p} Dv\|_p^p,$$

for a Sobolev semi-norm in (a power of) $X = W^{m,p}(\Omega)$ and the functional matrix Dv of all m th-order partial derivatives. Since

$$\text{Res}(\varphi_z v) \leq \sup_{\substack{w_z \in X \\ \|\varphi_z^{1/p} D w_z\|_p = 1}} \text{Res}(\varphi_z w_z) \|\varphi_z^{1/p} Dv\|_p =: \eta_z \|\varphi_z^{1/p} Dv\|_p$$

we infer

$$\|\text{Res}\| \leq \sup_{v \in X \setminus \{0\}} \sum_{z \in \mathcal{N}} \eta_z \|\varphi_z^{1/p} Dv\|_p \leq \left(\sum_{z \in \mathcal{N}} \eta_z^q \right)^{1/q} =: \eta_L. \quad (11)$$

The local estimator η_L assumes that the patchwise interface problems behind the definition of η_z can be solved exactly. In practice, η_z has to be approximated by a finite element method with proper accuracy. We refer to [26, 42] for details and mention that the idea goes back to [5].

The non-overlapping domain decomposition schemes employ artificial unknowns $\mu_{\partial T}$ at the interfaces which allow a representation of the form

$$\text{Res}(v) = \sum_{T \in \mathcal{T}} \left(\int_T R_T v \, dx + \int_{\partial T} (p_h \cdot \nu + \mu_{\partial T}) v \, ds \right).$$

Ladeveze suggested a certain choice of the interface corrections $\mu_{\partial T}$ such that the local problem on $T \in \mathcal{T}$ satisfies

$$\eta_T := \sup_{\substack{v \in X \\ \|Dv\|_{L^p(T)} = 1}} \left(\int_T R_T v \, dx + \int_{\partial T} (p_h \cdot \nu + \mu_{\partial T}) v \, ds \right) < \infty. \quad (12)$$

Depending on the differential operator L , several considerations are necessary to ensure $\eta_T < \infty$; for the Laplace and Lamé equation the constants and the rigid body motions have to vanish for the equilibrated local residual, respectively. The resulting equilibration error estimator

$$\eta_{EQ} = \left(\sum_{T \in \mathcal{T}} \eta_T^q \right)^{1/q} \quad (13)$$

seems to be very popular. Details on the implementation can be found in [1], a related correction technique in [6]. As for η_L , it is assumed that the local problem (12) is solved with sufficient accuracy.

2.3 Multilevel estimators

While the preceding estimators evaluate or estimate the residual of one finite element solution p_h , multilevel estimators concern at least two meshes \mathcal{T}_h and $\mathcal{T}_{h/2}$ and two discrete (solutions or) fluxes p_h and $p_{h/2}$. The interpretation is that $p_{h/2}$ is computed on a finer mesh, say, of halved mesh-size and $\mathcal{T}_{h/2}$ is obtained by one refinement of \mathcal{T}_h or that $p_{h/2}$ is computed with higher polynomial order. The point is that one believes that the error $\|p - p_{h/2}\|$ of the solution on the finer mesh $\mathcal{T}_{h/2}$ is systematically smaller than the error $\|p - p_h\|$ on the coarser mesh \mathcal{T}_h in the sense that

$$\|p - p_{h/2}\| \leq \varrho \|p - p_h\| \quad (14)$$

for some constant $\varrho < 1$. If this saturation assumption (14) holds, one obtains (2)–(3) for

$$\eta_{ML} = \|p_{h/2} - p_h\| \quad (15)$$

and $\text{h.o.t.}_{\text{rel}} = 0 = \text{h.o.t.}_{\text{eff}}$ with

$$C_{\text{rel}} = (1 - \varrho)^{-1} \quad \text{and} \quad C_{\text{eff}} = 1 + \varrho \quad (16)$$

by simple arguments with a triangle inequality [7]. Efficiency is robust in $\varrho \rightarrow 1$, but reliability is not: The reliability constant (16)_a tends to infinity as ϱ approaches 1. The limit $\varrho = 1$ in (14) reflects that $\|p - p_{h/2}\|$ is indeed smaller than or equal to $\|p - p_h\|$ which is natural for Galerkin-schemes and energy norms. However, the saturation assumption (14) assumes that ϱ is smaller than 1 and bounded away from 1 uniformly for the reliability of the multilevel estimator η_{ML} . This property is observed for fine meshes in practice and can be monitored during the calculation. The precise conditions under which (14) holds for coarse meshes lead to mild restrictions on the mesh and smooth, namely non-oscillatory, right-hand sides [37, 42]. Details are under current investigation; it should be stressed that $p_{h/2}$ is not really computed (but approximated) in practice [7].

2.4 Averaging estimators

The preceding estimator used two meshes and two discrete solutions for error control. Averaging techniques focus on one mesh and one known flux approximation p_h and do not need any underlying residual or boundary value problem at all. The procedure is simply to take a piecewise smooth p_h and approximate it by some globally continuous piecewise polynomials of higher degree Ap_h . A simple example, frequently named after Zienkiewicz and Zhu and sometimes even called ZZ estimator, reads as follows: For each node $z \in \mathcal{N}$ and its patch ω_z let

$$(Ap_h)(z) = \int_{\omega_z} p_h \, dx / \int_{\omega_z} 1 \, dx \quad \in \mathbb{R}^d \quad (17)$$

be the integral mean of p_h over ω_z . Then, define Ap_h by interpolation with (conforming, i.e. globally continuous) hat functions φ_z ,

$$Ap_h = \sum_{z \in \mathcal{N}} (Ap_h)(z) \varphi_z.$$

Given $Ap_h \in \mathcal{S}^1(\mathcal{T})^d$, where $\mathcal{S}^1(\mathcal{T}) = \text{span}\{\varphi_z : z \in \mathcal{N}\}$ denotes the (conforming) first-order finite element space, let the averaging estimator be defined by

$$\eta_A := \|p_h - Ap_h\|. \quad (18)$$

Notice that there is a minimal version

$$\eta_M := \min_{q_h \in \mathcal{S}^1(\mathcal{T})^d} \|p_h - q_h\| \leq \eta_A. \quad (19)$$

The efficiency of η_M follows from a triangle inequality, namely

$$\eta_M \leq \|p - p_h\| + \|p - q_h\| \quad \text{for all } q_h \in \mathcal{S}^1(\mathcal{T}),$$

and the fact that $\|p - p_h\| = \mathcal{O}(h)$ while (in all the examples of this paper)

$$\min_{q_h \in \mathcal{S}^1(\mathcal{T})^d} \|p - q_h\| = \text{h.o.t.}(p) =: \text{h.o.t.}_{\text{eff}}.$$

The latter is of higher order in the sense of (4)_b for a smooth solution p and (3) follows for $\eta = \eta_M$ and $C_{\text{eff}} = 1$.

It turns out that η_A and η_M are very close and accurate estimators in many numerical examples. This and the fact that the calculation of η_A is an easy post processing made η_A extremely popular. This paper is devoted to old and new arguments for the reliability of η_M and the efficiency of η_A in Sects. 4, 5, 6, and 7.

3 Estimator competition

This section is devoted to an elliptic model problem

$$1 + \Delta u = 0 \quad \text{in } \Omega \quad \text{and} \quad u = 0 \quad \text{on } \partial\Omega \quad (20)$$

for the L -shaped domain $\Omega = (-1, +1)^2 \setminus ([0, 1] \times [-1, 0])$ and its boundary $\partial\Omega$. The aim is the illustration of the practical performance of error estimators in a model situation.

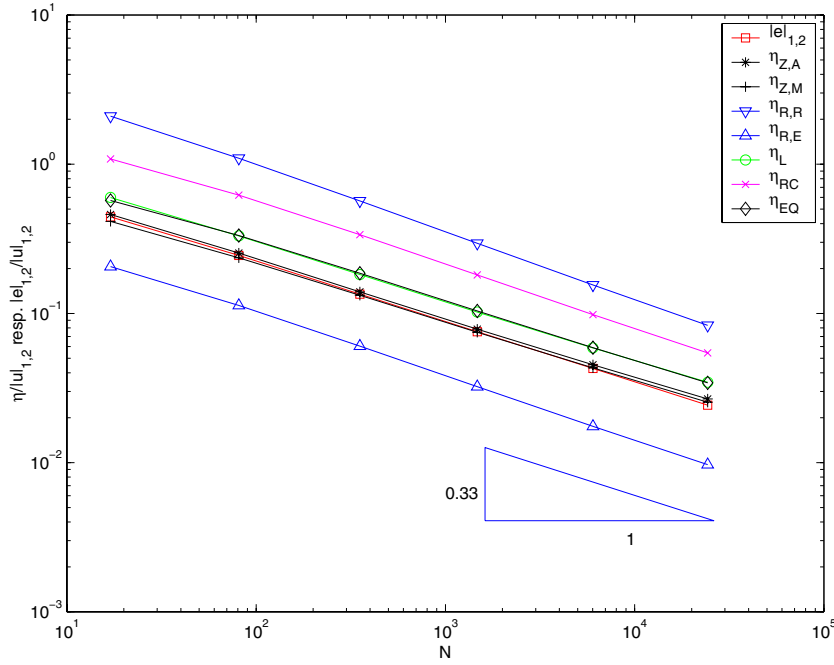


Fig. 1 Experimental results for Problem (20) with meshes $\mathcal{T}_1, \dots, \mathcal{T}_6$ and FE spaces (21). The relative error $|e|_{1,2}/|u|_{1,2}$ and various estimators $\eta/|u|_{1,2}$ are plotted as functions of the number of degrees of freedom N .

3.1 Energy error

The first mesh \mathcal{T}_1 consists of 17 free nodes and 48 elements and is obtained by, first, a decomposition of Ω in 12 congruent squares of size $1/2$ and, second, a decomposition of each of the boxes along its two diagonals into 4 congruent triangles. The subsequent meshes are successively red-refined (i.e., each triangle is partitioned into four congruent sub-triangles). Given any mesh \mathcal{T}_k the (conforming) P_1 finite element space reads

$$\mathcal{S}_k := \{v_h \in C(\overline{\Omega}) : \forall T \in \mathcal{T}_k, v_h|_T \text{ affine and } v_h = 0 \text{ on } \partial\Omega\} \quad (21)$$

and is of dimension $N = \dim(\mathcal{S}_k)$. The finite element solution u_h is defined by $u_h \in \mathcal{S}_k$ and

$$\int_{\Omega} \nabla u_h \cdot \nabla v_h \, dx = \int_{\Omega} v_h \, dx \quad \text{for all } v_h \in \mathcal{S}_k. \quad (22)$$

Given the unique (weak) solution u of (20), the error

$$e := u - u_h$$

is estimated in the energy norm (the Sobolev semi-norm in $H^1(\Omega)$)

$$|e|_{1,2} := \left(\int_{\Omega} |\nabla e|^2 \, dx \right)^{1/2}.$$

There is no analytic formula for an exact solution u and so $|e|_{1,2}$ was computed according to

$$|e|_{1,2}^2 = \int_{\Omega} \nabla e \cdot \nabla (u + u_h) \, dx = |u|_{1,2}^2 - |u_h|_{1,2}^2 \quad (23)$$

with an extrapolated value $|u|_{1,2}^2 \approx 0.21407315683398$. Fig. 1 displays the values of $|e|_{1,2}$ for different meshes $\mathcal{T}_1, \mathcal{T}_2, \dots, \mathcal{T}_6$ as a function of the number of degrees of freedom $N = 17, 81, 353, 1473, 6017, 24321, 97793$. It is this curve that will be estimated by computable upper and lower bounds. Notice that the two axis in Fig. 1 scale logarithmically such that any algebraic curve of growth α is mapped into a straight line of slope $-\alpha$. The experimental convergence rate is $2/3$ in agreement with the (generic) singularity of the domain and resulting theoretical predictions.

3.2 Explicit error estimators

The reliable estimator (10) reduces to

$$\eta_{R,R} := \left(\sum_{T \in \mathcal{T}} h_T^2 \|1\|_{L^2(T)}^2 \right)^{1/2} + \left(\sum_{E \in \mathcal{E}_\Omega} h_E \int_E [\partial u_h / \partial \nu_E]^2 ds \right)^{1/2}, \tag{24}$$

where only the normal component $[p_h] \cdot \nu_E = [\partial u_h / \partial \nu_E]$ of $p_h = \nabla u_h$ jumps across the interior edge E ; \mathcal{E}_Ω denotes the subset of \mathcal{E} of all interior edges. Written in the form (24), the estimator $\eta_{R,R}$ is reliable with constant $C_{\text{rel}} = 1$ and $\text{h.o.t.}_{\text{rel}} = 0$ for the class of meshes under consideration [26]. Fig. 1 displays $\eta_{R,R}$ as a function of the number of unknowns N . One clearly observes that $\eta_{R,R}$ is an upper bound of the right convergence rate (parallel to the line for $|e|_{1,2}$) and it is indeed well known that $\eta_{R,R}$ is efficient [46]. The efficiency constant C_{eff} is less established and the higher order terms $\text{h.o.t.}_{\text{eff}}$ usually involve $\|f - f_T\|_{L^2(T)}$ for the elementwise integral mean f_T of the right-hand side. Here, $f \equiv 1$ and so $\text{h.o.t.}_{\text{eff}} = 0$. Following an attempt in [25], Fig. 1 also displays an efficient variant $\eta_{R,E}$ which is a guaranteed lower error bound. The constants in $\eta_{R,E}$ involve geometric data and are derived in [25] to where we refer for details. It is important to observe that

$$\eta_{R,E} \leq |e|_{1,2} \leq \eta_{R,R}$$

is correct but the range between the lower and the upper bound is very large. One reason is that various geometries (the shape of the patches) lead to different constants and $C_{\text{rel}} = 1$ reflects the worst possible situation in \mathcal{T}_k . A local estimation yields an estimator $\eta_{R,C}$ [26] displayed in Fig. 1 as well. This reliable estimator requires the computation of local (patchwise) analytical eigenvalues and hence is very expensive. However, the explicit estimators $\eta_{R,C}$ and $\eta_{R,E}$ still overestimate and underestimate the true error by a huge factor (up to 10 and even more) in the simplest situation possible. This experimental evidence supports the design of more elaborate estimators: Used as a termination criterion (6), the reliable estimators based on (24) may be very cheap and easy. But the decision (6) may be too coarse and be satisfied for a mesh much finer than really necessary and so may yield an unnecessary overkill computation. Said differently, a cheap criterion can be too expensive. It pays to invest into a sharper error estimator.

For the model problem at hand, the volume contribution $\|h_{\mathcal{T}} f\|_2$ can be replaced by the edge contributions plus higher order terms. Different proofs are given in [33, 44]; this fact has been noticed before in [12, 43]. We will come back to this detail in Sect. 5.

3.3 Implicit estimators

For comparison, the two implicit estimators η_L and η_{EQ} are displayed in Fig. 1 as functions of N . It is stressed that both estimators are efficient and reliable with

$$C_{\text{rel}} = 1 \quad \text{and} \quad \text{h.o.t.}_{\text{rel}} = 0 = \text{h.o.t.}_{\text{eff}}.$$

For the class of meshes $\mathcal{T}_1, \mathcal{T}_2, \dots$, [26] showed $C_{\text{eff}} = 2.37$ and so

$$|e|_{1,2} \leq \eta_L \leq 2.37 |e|_{1,2}.$$

The practical performance of η_L and η_{EQ} in Fig. 1 is comparable and in fact much sharper than that of $\eta_{R,E}$ and $\eta_{R,R}$ (cf. [25] for more details).

3.4 Averaging estimator

The averaging estimators η_A and η_M of (17)–(19) are as well displayed in Fig. 1 as a function of N . Here, η_M is efficient up to higher order terms (since the exact solution $u \in H^{5/3-\varepsilon}(\Omega)$ is singular this is not really guaranteed) while its reliability is open, i.e., the corresponding constants have not been computed. Nevertheless, the picture for η_A and η_M is exclusively seen here from an experimental point of view. The striking numerical result is an amazing high accuracy of $\eta_M \approx \eta_A$ as empirical guesses of $|e|_{1,2}$. If we took C_{rel} into account, this effect would be destroyed. We observe $\eta_M \leq |e|_{1,2} \leq \eta_A$ except, perhaps, for the last mesh \mathcal{T}_6 (a possible numerical artefact from the extrapolation procedure (23)).

3.5 Further results and remarks

a. Adaptive meshes. Fig. 1 displays numerical results from [25] for a sequence of uniformly refined meshes. The local refinement indicators η_T from (7) yield the basis for refinement rules (8) and resulting automatic mesh-refinement. In the example at hand, the corresponding convergence rates are improved from $2/3$ to the [optimal] value 1. This is true for all refinement indicators motivated by the estimators of Sects. 3.1–3.4. For the purpose of adaptive mesh-refining, the cheapest,

namely the residual-based explicit estimator, yields the best results. The refinement indicators based on averaging are slightly less effective, at least for the examples reported in [25].

Apart from the optimal convergence rate 1, the pictures in [25] that correspond to Fig. 1 for adapted meshes are similar; the factors of over- and underestimation are quite the same. It is interesting to observe that the three lines for the error $|e|_{1,2}$ and its estimators η_M and η_A are narrow in Fig. 1 but even closer (almost identical) for the adaptive meshes. One might speculate that the adapted meshes compensate the singularity at the origin and so lead to even higher accuracy, possibly to asymptotic exactness. (Here, the latter property is expected to be based on higher regularity.) Although not published, collaborators observed similar effects for 3D problems.

b. Nonconforming finite element methods. The error analysis of nonconforming finite element methods is more delicate than for conforming schemes ([15,16,34]). The Crouzeix-Raviart P_1^{nc} finite element method has been analysed in [11, 18] and empirically studied in [24]. Given the discrete space

$$\mathcal{S}_k^{\text{nc}} := \{v_h \in L^\infty(\bar{\Omega}) : \forall T \in \mathcal{T}_k, v_h|_T \text{ affine, } v_h \text{ continuous at midpoints of interior edges} \quad (25)$$

$$\text{and zero on midpoints of boundary edges}\}$$

and the \mathcal{T}_k -piecewise gradient $\nabla_{\mathcal{T}_k}$ based on the regular triangulation \mathcal{T}_k , the discrete solution u_h is defined by $u_h \in \mathcal{S}_k^{\text{nc}}$ and

$$\int_{\Omega} \nabla_{\mathcal{T}_k} u_h \cdot \nabla_{\mathcal{T}_k} v_h \, dx = \int_{\Omega} f v_h \, dx \quad \text{for all } v_h \in \mathcal{S}_k^{\text{nc}}.$$

The discrete flux (i.e. the elementwise gradient) reads

$$p_h := \nabla_{\mathcal{T}_k} u_h$$

and leads to estimators η_E in (10), η_L in (11), η_{EQ} in (13), η_{ML} in (15), η_A in (18), and η_M in (19).

Numerical experiments in [24] support a high accuracy of the averaging estimators $\eta_A \approx \|p - p_h\| \approx \eta_M$ for adaptively refined meshes.

c. Mixed finite element methods. The error analysis of mixed finite element methods is even more delicate than for conforming and nonconforming finite element schemes ([15,16,34]). The Raviart Thomas RT_0 finite element method involves the flux p_h as the main variable in

$$\text{RT}_0(\mathcal{T}_k) := \{q_h \in H(\text{div}, \Omega) : \forall T \in \mathcal{T} \exists a_T \in \mathbb{R}^d \exists b_T \in \mathbb{R}, q_h(x) = a_T + b_T x \quad \text{for } x \in T\}$$

while the discrete displacements u_h are \mathcal{T}_k -piecewise constant, denoted $u_h \in \mathcal{L}^0(\mathcal{T}_k)$. The discrete solution (p_h, u_h) is a pair in $\text{RT}_0(\mathcal{T}_k) \times \mathcal{L}^0(\mathcal{T}_k)$ with

$$\int_{\Omega} p_h \cdot q_h \, dx + \int_{\Omega} u_h \text{div } q_h \, dx = 0 \quad \text{for all } q_h \in \text{RT}_0(\mathcal{T}_k), \quad (26)$$

$$\int_{\Omega} v_h \text{div } p_h \, dx = - \int_{\Omega} f v_h \, dx \quad \text{for all } v_h \in \mathcal{L}^0(\mathcal{T}_k).$$

The Sobolev space $H(\text{div}, \Omega)$ is defined as the vector space of all L^2 functions whose distributional divergence is in L^2 . Hence the terms $\text{div } q_h$ and $\text{div } p_h$ make sense in (26) while no derivative of u_h is included. The relation $p = \nabla u$ has only a very weak counterpart in (26)_a by an integration by parts [irreversible in the discrete situation]. This gives rise to further residuals analysed in [18,24]. The reliability of the averaging estimators η_A and η_M of (18) and (19), respectively, can be found in [24]. The numerical results of that paper show similar effects and support the high accuracy of $\eta_A \approx \|p - p_h\| \approx \eta_M$ for adaptively refined meshes.

d. Higher order finite element methods. A local version of averaging schemes is suggested in [10]. For each interior edge E with patch $\omega_E, \bar{\omega}_E = T_+ \cup T_-$ for $T_{\pm} \in \mathcal{T}_k$ with $E = T_+ \cap T_-$, one considers

$$\min_{q_E} \|p_h - q_E\|_{L^2(\omega_E)}.$$

Here, q_E is a global polynomial (on ω_E) of degree higher than that of $p_h|_{T_+}$ or $p_h|_{T_-}$. This leads to η_N , with

$$\eta_N^2 := \frac{1}{3} \sum_{E \in \mathcal{E}_{\Omega}} \min_{q_E} \|p_h - q_E\|_{L^2(\omega_E)}^2. \quad (27)$$

This reliable and efficient estimator has been tested empirically for the p -version and polynomial degrees 1, 2, ..., 6. The numerical results underline that (27) is, particularly for higher degrees, an accurate estimator. Although the reliability and efficiency constants depend on the polynomial degrees, this dependency appears to be very mild (in the examples considered) and even an hp -version seems to work [10].

4 Superconvergence and asymptotic exactness

This section is devoted to review the first justifications of averaging error estimators and to discuss their strong assumptions. Given a regular triangulation \mathcal{T}_k and the discrete space \mathcal{S}_k of (21) the nodal interpolation operator is defined by $(I_h f)(z) = f(z)$, i.e.

$$I_h : C(\overline{\Omega}) \cap H_0^1(\Omega) \rightarrow \mathcal{S}_k, f \mapsto \sum_{z \in \mathcal{N}} f(z)\varphi_z.$$

Superconvergence means that $u_h - I_h u$ is much smaller than $u_h - u = -e$; for instance, if

$$\|D(u_h - I_h u)\|_{L^2(\Omega)} \leq c(u) h^{1+\tau}$$

for the maximal mesh-size h in \mathcal{T}_h and some $\tau > 0$. One can read in [1, p. 96] that *the precise assumptions used to obtain such estimator differ according to the type of finite element approximation being used and it should be stressed that superconvergence only occurs in very special circumstances*. One old positive result due to M. Wheeler and J. Whiteman illustrates the difficulties.

Theorem 1. ([48]) *Let $\Omega_0 \subset \Omega_1 \subset \Omega$ be compactly included for $d = 2$ let \mathcal{T}_k be parallel in Ω_1 (i.e., each edge-patch ω_E is a parallelogram) and let $u|_{\Omega_1} \in H^3(\Omega_1)$. Then there holds*

$$\|\nabla(u_h - I_h u)\|_{L^2(\Omega_0)} \leq C \left(h^2 \|u\|_{H^3(\Omega_1)} + \|e\|_{L^2(\Omega_1)} \right). \tag{28}$$

The assumptions are extremely strong: No boundary conditions can be involved, very high regularity is required, and the grid is the affine image of a uniform standard triangulation. All this contradicts adaptive mesh-refinement as this a) yields unstructured grids, b) is performed to compensate for singularities of the exact solutions, and, of course, c) aims global error control and aims to reflect the effects of boundary approximation errors. The state of the art of superconvergence results cannot completely overcome those problems [6, 47]. There is, however, the vision that local symmetry in patches plus some regularity yields superconvergence phenomena and the bad influence of singularities, in the solution etc. is observed, but partly compensated by good meshes and so not dominant globally.

The following result provides one example of how superconvergence and (local) symmetry leads to asymptotically exact averaging estimators. To be realistic, we adapt the notation of Theorem 1 and define

$$\eta := \|\nabla u_h - A(\nabla u_h)\|_{L^2(\Omega_0)}$$

as the local version of η_M .

Theorem 2. ([44]) *Under the assumptions of Theorem 1 and if $\|e\|_{L^2(\Omega_1)} = \text{h.o.t.}$ there holds*

$$\eta = \|\nabla e\|_{L^2(\Omega_0)} + \text{h.o.t.}$$

Proof. It is understood that h is sufficiently small such that $A(\nabla u_h)|_{\Omega_0}$, computed on $\cup\{\omega_z : z \in \mathcal{N} \cap \overline{\Omega_0}\} \subset \Omega$, is based on the structured grid in Ω_1 . Given any element $T \in \mathcal{T}_k$ in $\overline{\Omega_0}$ let ω_T denote the patch of T , i.e.

$$\overline{\omega}_T = \cup\{K \in \mathcal{T}_k : K \cap T \neq \emptyset\} \subset \overline{\Omega_1}.$$

If u is a quadratic polynomial on ω_T , ∇u is affine and so is $A(\nabla I_h u)$. The value of $\nabla u - A(\nabla I_h u)$ at any vertex z of T is zero and so $\nabla u - A(\nabla I_h u) \equiv 0$ on T . For a proof let $\overline{\omega}_z^{\text{ref}} = \text{conv}\{(1, 0), (1, 1), (0, 1), (-1, 0), (-1, -1), (0, -1)\}$ be a standard patch of the node $z = (0, 0)$. Owing to symmetry one checks for $u(x) = x_1^2$, $u(x) = x_1 x_2$, and $u(x) = x_2^2$ by direct calculations that the gradients of $I_h u$ are asymmetric with respect to $z = 0$. Hence $A(\nabla I_h u) = 0$. This means that $\nabla u - A(\nabla I_h u)$ vanishes at $z = 0$ for all polynomials u of degree 2. Since I_h is exact for affine functions and A is exact for constant functions, $A(\nabla u - A(\nabla I_h u))(z) = 0$ for all polynomials u of degree ≤ 2 . Finally, an affine transformation of $\overline{\omega}_z^{\text{ref}}$ onto ω_z yields the assertion on the mesh at hand. Since z is any vertex, $\nabla u - A(\nabla I_h u) \equiv 0$ on $T \in \mathcal{T}_k$.

Since $\nabla v - A(\nabla I_h v)$ vanishes on T for a quadratic polynomial v and since A and I_h are linear operators, we deduce for $u \in H^3(\omega_T)$ that

$$\|\nabla u - A(\nabla I_h u)\|_{L^2(T)} \leq \|\nabla(u - v) - A(\nabla I_h(u - v))\|_{L^2(T)} \leq \|u - v\|_{H^1(T)} + \|A(\nabla I_h(u - v))\|_{L^2(T)}.$$

Let v be the nodal piecewise quadratic interpolation of u . Then $u - v$ vanishes at each node (and at the midpoints of edges) and so $I_h(u - v) = 0$. Hence

$$\|\nabla u - A(\nabla I_h u)\|_{L^2(T)} \leq c_3 h^2 \|u\|_{H^3(T)}$$

from standard approximation estimates. Since T has been arbitrary in $\overline{\Omega}_0$, we infer

$$\|\nabla u - A(\nabla I_h u)\|_{L^2(\Omega_0)} = \text{h.o.t.} \quad (29)$$

From the L^2 continuity of A and from (28) there holds

$$\|A(\nabla u_h - \nabla I_h u)\|_{L^2(\Omega_0)} = \text{h.o.t.} \quad (30)$$

The assertion follows from (29)–(30) and a triangle inequality (twice), namely

$$\begin{aligned} |\eta - \|\nabla e\|_{L^2(\Omega)}| &\leq \|\nabla u - A(\nabla u_h)\|_{L^2(\Omega_0)} \\ &\leq \|\nabla u - A(\nabla I_h u)\|_{L^2(\Omega_0)} + \|A(\nabla u_h - \nabla I_h u)\|_{L^2(\Omega_0)} \\ &= \text{h.o.t.} + \text{h.o.t.} \end{aligned} \quad \square$$

Historically, the result goes back to Duran, Muschietti, and Rodriguez (1992), Duran and Rodriguez (1992), and Rodriguez (1994) and is reported in [46].

5 Reliability on unstructured grids

An old argument for P_1 finite elements on regular (unstructured) triangulations and the Laplace equation $L = -\Delta$ compares the edge contributions $h_E \| [p_h] \|_{L^q(E)}^q$ and the volume contributions $h_T^q \| f \|_{L^q(T)}^q$ of the explicit error estimator (10) (with $p = 2 = q$). In the sequel, $h_{\mathcal{T}}$ and $h_{\mathcal{E}}$ denote the piecewise constant mesh-sizes on Ω and $\cup \mathcal{E}$, respectively; $\cup \mathcal{E}$ is the skeleton of all edges and $\nu_{\mathcal{E}}$ is the unit normal along $\cup \mathcal{E}$. Let us assume that each element has at least one vertex inside the domain.

Theorem 3. *There is an h -independent constant $c_4 > 0$ such that there holds*

$$\|h_{\mathcal{T}} f\|_{L^q(\Omega)} \leq c_4 \left\| h_{\mathcal{E}}^{1/q} [p_h] \right\|_{L^q(\cup \mathcal{E})} + c_4 \left(\sum_{z \in \mathcal{N} \cap \Omega} \min_{f_z \in \mathbb{R}} h_z^q \|f - f_z\|_{L^q(\omega_z)}^q \right)^{1/q}.$$

Remark 1. The point is that, for P_1 finite element schemes, the volume contribution is dominated by the edge contribution and higher order terms.

Remark 2. The theorem holds for conforming and nonconforming finite element schemes. In the first case, only the jump of the normal components enter the upper bound.

Remark 3. The theorem is found in [45] but the arguments have been employed [independently], e.g., in [12, 43].

Proof of Theorem 3. Since each element has at least one vertex inside the domain, each boundary node a has at least one neighbouring node b (i.e., a and b belong to the same element) inside the domain. Fix one selection \mathcal{I} of such pairs (a, b) and add (z, z) for all interior nodes. Then let

$$\psi_z := \sum_{\substack{x \in \mathcal{N} \\ (x, z) \in \mathcal{I}}} \varphi_x \quad \text{for } z \in \mathcal{K} := \mathcal{N} \cap \Omega. \quad (31)$$

For interior nodes z without any link to a neighbouring node on the boundary, (z, z) is the only chosen pair in (31) and $\psi_z = \varphi_z$. The purpose of (31) is simply not to enlarge the patches ($\text{supp } \psi_z = \overline{\omega}_z$) too much but to have a partition of unity (with parameter $se \mathcal{K}$ of free nodes)

$$\sum_{z \in \mathcal{K}} \psi_z \equiv 1 \quad \text{in } \Omega.$$

Because of this and since $h_{\mathcal{T}} \leq h_z$ on ω_z , there holds

$$\|h_{\mathcal{T}} f\|_{L^q(\Omega)}^q = \sum_{z \in \mathcal{K}} \left\| \psi_z^{1/q} h_{\mathcal{T}} f \right\|_{L^q(\omega_z)}^q \leq \sum_{z \in \mathcal{K}} h_z \left\| \psi_z^{1/q} f \right\|_{L^q(\omega_z)}^q. \quad (32)$$

For some fixed $f_z \in \mathbb{R}$ there holds

$$\left\| \psi_z^{1/q} f \right\|_{L^q(\omega_z)} \leq \left\| \psi_z^{1/q} f_z \right\|_{L^q(\omega_z)} + \left\| \psi_z^{1/q} (f - f_z) \right\|_{L^2(\omega_z)}. \quad (33)$$

With $c_5 := \max\{\|\psi_z\|_{L^q(\omega_z)} / \|\varphi_z\|_{L^q(\omega_z)} : z \in \mathcal{K}\} \leq (d + 1)!$ it remains to estimate

$$\left\| \psi_z^{1/q} f_z \right\|_{L^q(\omega_z)} \leq c_5 \left\| \varphi_z^{1/q} f_z \right\|_{L^q(\omega_z)} = c_5 |f_z|^{1/p} \|\varphi_z f_z\|_{L^1(\omega_z)}^{1/q}. \tag{34}$$

The main argument for the estimation of

$$\|\varphi_z f_z\|_{L^1(\omega_z)} = \left| \int_{\Omega} f \varphi_z dx + \int_{\Omega} \varphi_z (f_z - f) dx \right| \tag{35}$$

is the discrete equation with φ_z as a test function followed by an integration by parts in the model problem, i.e.

$$\int_{\Omega} f \varphi_z dx = \int_{\Omega} p_h \cdot \nabla \varphi_z dx = \int_{\cup \mathcal{E}} \varphi_z [p_h] \cdot \nu_{\mathcal{E}} ds \tag{36}$$

for the \mathcal{T}_h -piecewise constant discrete flux $p_h = \nabla_{\mathcal{T}_h} u_h$. The combination of (35)–(36) with Hölder’s inequality yields

$$\begin{aligned} \|\varphi_z f_z\|_{L^1(\omega_z)} &\leq \|\varphi_z [p_h] \cdot \nu_{\mathcal{E}}\|_{L^1(\cup \mathcal{E})} + \|\varphi_z (f - f_z)\|_{L^1(\omega_z)} \\ &\leq \left\| h_{\mathcal{E}}^{1/q} \varphi_z^{1/q} [p_h] \cdot \nu_{\mathcal{E}} \right\|_{L^q(\cup \mathcal{E})} \left\| h_{\mathcal{E}}^{-1/q} \varphi_z^{1/p} \right\|_{L^p(\cup \mathcal{E})} + \left\| \varphi_z^{1/q} (f - f_z) \right\|_{L^q(\omega_z)} \left\| \varphi_z^{1/p} \right\|_{L^p(\omega_z)} \\ &\leq \left\| \varphi_z^{1/p} \right\|_{L^p(\omega_z)} \left(\left\| \varphi_z^{1/q} (f - f_z) \right\|_{L^q(\omega_z)} + c_6 h_z^{-1} \left\| h_{\mathcal{E}}^{1/q} \varphi_z^{1/q} [p_h] \cdot \nu_{\mathcal{E}} \right\|_{L^q(\cup \mathcal{E})} \right). \end{aligned} \tag{37}$$

Here we considered the mesh-size independent constant

$$c_6 := \max_{z \in \mathcal{K}} h_z \left\| h_{\mathcal{E}}^{-1/q} \varphi_z^{1/p} \right\|_{L^p(\cup \mathcal{E}_z)} / \left\| \varphi_z^{1/q} \right\|_{L^p(\omega_z)}.$$

The combination of (34) and (37) plus Young’s inequality show

$$\begin{aligned} &\left\| \psi_z^{1/q} f_z \right\|_{L^q(\omega_z)}^q \\ &\leq c_5^q |f_z|^{q/p} \|\varphi_z f_z\|_{L^1(\omega_z)} \\ &\leq \left\| \varphi_z^{1/p} \right\|_{L^p(\omega_z)} |f_z|^{q/p} \left(c_5^q \left\| \varphi_z^{1/q} (f - f_z) \right\|_{L^q(\omega_z)} + c_5^q c_6 h_z^{-1} \left\| h_{\mathcal{E}}^{1/q} \varphi_z^{1/q} [p_h] \cdot \nu_{\mathcal{E}} \right\|_{L^q(\cup \mathcal{E})} \right) \\ &\leq \frac{1}{p} |f_z|^q \|\varphi_z\|_{L^1(\omega_z)} + \frac{1}{q} \left(c_5^q \left\| \varphi_z^{1/q} (f - f_z) \right\|_{L^q(\omega_z)} + c_5^q c_6 h_z^{-1} \left\| h_{\mathcal{E}}^{1/q} \varphi_z^{1/q} [p_h] \cdot \nu_{\mathcal{E}} \right\|_{L^q(\cup \mathcal{E})} \right)^q. \end{aligned}$$

Since $1 - \frac{1}{p} = \frac{1}{q}$ and $\left\| \varphi_z^{1/q} f_z \right\|_{L^q(\omega_z)} \leq \left\| \psi_z^{1/q} f_z \right\|_{L^q(\omega_z)}$ this (after taking the q -th root) leads to

$$\left\| \psi_z^{1/q} f_z \right\|_{L^q(\omega_z)} \leq c_5^q \left\| \varphi_z^{1/q} (f - f_z) \right\|_{L^q(\omega_z)} + c_5^q c_6 h_z^{-1} \left\| h_{\mathcal{E}}^{1/q} \varphi_z^{1/q} [p_h] \cdot \nu_{\mathcal{E}} \right\|_{L^q(\cup \mathcal{E})}. \tag{38}$$

The combination of (33) and (38) plus another Hölder inequality (in \mathbb{R}^2) shows

$$\begin{aligned} \left\| \psi_z^{1/q} f \right\|_{L^q(\omega_z)} &\leq (1 + c_4^q) \left\| \psi_z^{1/q} (f - f_z) \right\|_{L^q(\omega_z)} + c_5^q c_6 h_z^{-1} \left\| h_{\mathcal{E}}^{1/q} \varphi_z^{1/q} [p_h] \cdot \nu_{\mathcal{E}} \right\|_{L^q(\cup \mathcal{E})} \\ &\leq c_4 \left(\left\| \psi_z^{1/q} (f - f_z) \right\|_{L^q(\omega_z)}^q + h_z^{-q} \left\| h_{\mathcal{E}}^{1/q} \varphi_z^{1/q} [p_h] \cdot \nu_{\mathcal{E}} \right\|_{L^q(\cup \mathcal{E})}^q \right)^{1/q} \end{aligned}$$

for $c_4 := ((1 + c_5^q)^p + (c_5^q c_6)^p)^{1/p}$. This and (32) yield

$$\|h_{\mathcal{T}} f\|_{L^q(\Omega)}^q \leq c_4^q \sum_{z \in \mathcal{K}} h_z^q \left\| \psi_z^{1/q} (f - f_z) \right\|_{L^q(\omega_z)}^q + c_4^q \sum_{z \in \mathcal{K}} \left\| h_{\mathcal{E}}^{1/q} \varphi_z^{1/q} [p_h] \cdot \nu_{\mathcal{E}} \right\|_{L^q(\cup \mathcal{E})}^q.$$

With $\sum_{z \in \mathcal{K}} \left\| h_{\mathcal{E}}^{1/q} \varphi_z^{1/q} [p_h] \cdot \nu_{\mathcal{E}} \right\|_{L^q(\cup \mathcal{E})}^q = \left\| h_{\mathcal{E}}^{1/q} [p_h] \cdot \nu_{\mathcal{E}} \right\|_{L^q(\cup \mathcal{E})}^q$, this concludes the proof of Theorem 3. □

Theorem 4. *There exists a mesh-size independent constant $c_7 > 0$ such that there holds*

$$\eta_E := \left\| h_{\mathcal{E}}^{1/q} [p_h] \right\|_{L^2(\cup \mathcal{E}_\Omega)} \leq c_7 \min_{q_h \in \mathcal{S}^1(\mathcal{T})^d} \|p_h - q_h\|_{L^q(\Omega)} \quad \text{for all } p_h \in \mathcal{L}^0(\mathcal{T})^d.$$

Remark 4. The combination of Theorem 3 and 4 shows reliability of η_M and η_A , in terms of η_R , namely

$$\eta_R \leq c_4 c_7 \min_{q_h \in \mathcal{S}^1(\mathcal{T})^d} \|p_h - q_h\|_{L^q(\Omega)} + \text{h.o.t.}$$

Remark 5. Theorem 4 is mentioned in [24] and possibly expected by some experts since [44]. A proof of the corollary

$$\eta_E \leq c_8 \eta_A$$

can be found in [46].

Proof of Theorem 4. The main argument is an equivalence of (semi-)norms on finite-dimensional spaces which leads to inverse estimates, here,

$$h_E \int_E |[p_h]|^q ds \leq c_8 \min_{q_h \in \mathcal{S}^1(\mathcal{T}_z)^d} \|p_h - q_h\|_{L^q(\omega_z)}^q. \quad (39)$$

This estimate involves an arbitrary edge or face $E \in \mathcal{E}_\Omega$ with one fixed vertex $z \in E \cap \mathcal{N}$ and its patch ω_z . The estimate holds for all $p_h \in \mathcal{L}^0(\mathcal{T}_z)^d$ where $\mathcal{T}_z := \{T \in \mathcal{T} : z \in T \cap \mathcal{N}\}$ is the sub-grid of \mathcal{T} on ω_z . The q -th root of the left- and right-hand side of (39), respectively, defines a seminorm on $\mathcal{L}^0(\mathcal{T}_z)^d$ (where p_h belongs to). If the right-hand side vanishes for some $p_h \in \mathcal{L}^0(\mathcal{T}_z)^d$ then p_h is \mathcal{T}_z -piecewise constant and (equal to some $q_h \in \mathcal{S}^1(\mathcal{T}_z)^d$ and so) continuous on ω_z . Thus p_h is constant on ω_z and so $[p_h]$ vanishes on E as well. Hence the left-hand side of (39) is associated with a seminorm on $\mathcal{L}^0(\mathcal{T}_z)^d$ stronger than the right-hand side. Since $\dim \mathcal{L}^0(\mathcal{T}_z)^d$ is bounded by $d \text{card}(\mathcal{T}_z)$ and hence uniformly in h , there follows an estimate (39) with some constant c_8 that may depend on the geometry \mathcal{T}_z . A scaling argument (make $\omega_z \ni 0$ bigger by a constant factor and compute the left- and right-hand side of (39) for a proof) shows that c_8 does *not* depend on the diameter of ω_z . This proves (39).

The sum over all edges in (39) with some choice of related vertices $z = z_E$ leads to

$$\sum_{E \in \mathcal{E}_\Omega} h_E \int_E |[p_h]|^q ds \leq c_8 \sum_{E \in \mathcal{E}_\Omega} \min_{q_h \in \mathcal{S}^1(\mathcal{T}_{z_E})^d} \|p_h - q_h\|_{L^q(\omega_{z_E})}^q \leq c_8 \min_{q_h \in \mathcal{S}^1(\mathcal{T})^d} \sum_{E \in \mathcal{E}_\Omega} \|p_h - q_h\|_{L^q(\omega_{z_E})}^q. \quad (40)$$

(Notice that q_h plays a different role in the last two terms and $q_h|_{\omega_{z_E}}$ gives less flexibility in the latter term and so leads to the inequality.) The patches $(\omega_{z_E} : E \in \mathcal{E}_\Omega)$ have a finite overlap bounded by $\max_{T \in \mathcal{T}} \text{card}\{E \in \mathcal{E} : T \cap E \neq \emptyset\} \leq c_9$. Hence the upper bound in (40) is smaller than or equal to the q -th power of the right-hand side of Theorem 4 with $c_7 = (c_8 c_9)^{1/q}$. \square

An alternative proof of reliability of η_M follows [24, 25] with an argument of [33].

6 Efficiency on unstructured grids

The converse to Theorem 4 holds on unstructured grids for the residual estimators η_E . The next theorem therefore implies efficiency for η_A as well.

Theorem 5. *There exists a mesh-size-independent constant c_{10} such that for any $p_h \in \mathcal{L}^0(\mathcal{T})$ and Ap_h from (17) there holds*

$$\min_{q_h \in \mathcal{S}^1(\mathcal{T})^d} \|p_h - q_h\|_{L^q(\Omega)} \leq \|p_h - Ap_h\|_{L^q(\Omega)} \leq c_{10} \left\| h_{\mathcal{E}}^{1/q} [p_h] \right\|_{L^q(\cup \mathcal{E}_\Omega)}.$$

Remark 6. Theorem 5 is shown in the context of mixed boundary conditions in [20] and, furthermore, provides a quantitative bound on c_{10} .

Remark 7. Similar estimates have been observed before [10] and have certainly been known to the experts.

Proof of Theorem 5. The first inequality of the assertion is obvious (since $Ap_h \in \mathcal{S}^1(\mathcal{T})^d$) and the proof concentrates on the second. An inverse estimate

$$\|p_h - \fint_{\omega_z} p_h dx\|_{L^q(\omega_z)}^q \leq c_{11} \sum_{E \in \mathcal{E}_z} h_E \int_E |[p_h]|^q ds \quad (41)$$

is the main argument similar to the first step in the proof of Theorem 4. In (41), z is an arbitrary node with patch ω_z and $\fint_{\omega_z} p_h dx$ denotes the average of any $p_h \in \mathcal{L}^0(\mathcal{T}_z)^d$ over ω_z . Finally, $\mathcal{E}_z = \{E \in \mathcal{E}_\Omega : z \in E \cap \mathcal{N}\}$ denotes the set of all edges with vertex z . The main point is to see in (41) that any p_h with right-hand side zero has no jumps on ω_z and is therefore constant. Thus, p_h annihilates the left-hand side of (41) as well. The remaining arguments are the same as in the proof of Theorem 4 and hence neglected.

The assertion of Theorem 5 follows with Hölder inequalities from (41): Let $p_z := (Ap_h)(z)$ and calculate

$$\begin{aligned} \|p_h - Ap_h\|_{L^q(\Omega)}^q &= \int_{\Omega} \left| \sum_{z \in \mathcal{N}} (p_h - p_z) \varphi_z \right|^q dx \\ &\leq \int_{\Omega} \left(\sum_{z \in \mathcal{N}} \varphi_z \right)^{q/p} \left(\sum_{z \in \mathcal{N}} |p_h - p_z|^q \varphi_z \right) dx \\ &= \sum_{z \in \mathcal{N}} \int_{\omega_z} \varphi_z |p_h - p_z|^q dx \\ &\leq \sum_{z \in \mathcal{N}} \left\| p_h - \int_{\omega_z} p_h dx \right\|_{L^q(\omega_z)}^q \\ &\leq c_{11} \sum_{z \in \mathcal{N}} \sum_{E \in \mathcal{E}_z} h_E \int_E |[p_h]|^q ds \\ &= c_{11} \sum_{E \in \mathcal{E}_{\Omega}} \sum_{z \in E \cap \mathcal{N}} h_E \int_E |[p_h]|^q ds \\ &\leq c_{11} \max_{E \in \mathcal{E}} \text{card}(E \cap \mathcal{N}) \sum_{E \in \mathcal{E}} h_E \int_E |[p_h]|^q ds. \end{aligned}$$

□

7 Applications

This section gives an overview of some applications to Stokes and Lamé equations or to elastoplastic, obstacle, and degenerated problems in which averaging techniques are known to work. The arguments for the reliability and efficiency proof are partly those from the previous Sects. 5 and 6 plus particular techniques.

7.1 Stokes' equations

The stationary viscous flow inside a bounded volume $\Omega \subset \mathbb{R}^2$ of viscosity $\mu > 0$ is described by the velocity field $u : \Omega \rightarrow \mathbb{R}^2$ and the pressure variable $p : \Omega \rightarrow \mathbb{R}$. Since it appears to be the more complicated situation, mixed boundary conditions are assumed, i.e. $\Gamma := \partial\Omega = \Gamma_N \cup \Gamma_D$ for the closed Dirichlet boundary Γ_D and the relatively open Neumann (or traction) boundary Γ_N . Suppose that both, Γ_D and Γ_N , are of positive surface measure. Let ν denote the exterior unit normal vector along the Lipschitz boundary Γ . Then the *Stokes problem* reads: Given $f \in L^2(\Omega)^2$, $u_D \in H^1(\Omega)^2$, and $g \in L^2(\Gamma_N)^2$, find $(u, p) \in H^1(\Omega)^2 \times L^2(\Omega)$ with

$$\begin{aligned} \text{div } \sigma + f &= 0 \quad \text{in } \Omega, \\ \sigma &:= 2\mu \varepsilon(u) - pI, \\ \varepsilon(u) &:= (\nabla u + \nabla u^T)/2, \\ \text{div } u &= 0 \quad \text{in } \Omega, \\ u &= u_D \quad \text{on } \Gamma_D, \\ \sigma \nu &= g \quad \text{on } \Gamma_N. \end{aligned}$$

(Here, I denotes the 2×2 -identity matrix and u_D, f , and g are smoother for the results below.)

Remark 8. In case $\Gamma_N = \emptyset$ and $\Gamma_D = \Gamma$ one requires an additional constraint such as $\int_{\Omega} p(x) dx = 0$ to fix a global additive constant in the pressure variable.

Remark 9. The above formulation is based on the symmetric strain rate $\varepsilon(u)$ and leads to the correct model from the physical point of view. This is important since traction boundary conditions $\sigma \nu = g$ are present. In the literature, one often finds the non-symmetric form with $\sigma = 2\mu \nabla u - pI$. It is known that the two models are equivalent if $\Gamma_N = \emptyset, \Gamma = \Gamma_D$; but it is emphasised that this is untrue in the present situation.

The weak form of the (above symmetric) Stokes problem is straightforward and leads to a mixed FEM with unknown u_h and p_h . The proper choice of finite spaces for the discrete velocities u_h and the discrete pressures p_h is less trivial; particularly

for piecewise polynomials of low-order. For instance, Kouhia and Stenberg considered u_h in $\mathcal{S}_k \times \mathcal{S}_k^{\text{nc}}$ (cf. (21) and (25) for \mathcal{T}_k) and piecewise constant p_h .

It is known that, for sufficiently fine meshes, there exist unique exact and discrete solutions (u, p) and (u_h, p_h) , respectively, with quasioptimal a priori error bounds [41]. A posteriori error estimates are studied in [9, 27]. In particular, for a discrete stress field

$$\sigma_h := 2\mu\varepsilon_{\mathcal{T}}(u_h) - p_h I,$$

there holds reliability and efficiency of

$$\eta_A := \|\sigma_h - A\sigma_h\|_{L^2(\Omega)} \leq \eta_M := \min \|\sigma_h - \tau_h\|_{L^2(\Omega)} \quad \text{for } \tau_h \in \mathcal{S}_N^1(\mathcal{T}).$$

Here $\mathcal{S}_N^1(\mathcal{T})$ is the subspace of symmetric matrices in $\mathcal{S}_1(\mathcal{T})^{d \times d}$ which satisfy the traction boundary conditions at each node on $\bar{\Gamma}_N$ and $A\sigma_h \in \mathcal{S}_N^1(\mathcal{T})$. For proofs and details see [27]. It is surprising, but is a result of the mathematical analysis, that the averaging concerns the stress field σ_h only and not the variables $\varepsilon_{\mathcal{T}}(u_h)$ and p_h separately. The numerical examples in [27] underline the high accuracy of η_A in this application.

7.2 Linear elasticity

The small deformations $u : \Omega \rightarrow \mathbb{R}^2$ of a 2D elastic body are modelled by the *Navier-Lamé equations*: Given $f \in L^2(\Omega)^2$, $u_D \in H^1(\Omega)^2$, $g \in L^2(\Gamma_N)^2$, find $u \in H^1(\Omega)^2$ with

$$\begin{aligned} \operatorname{div} \sigma + f &= 0 \quad \text{in } \Omega, \\ \sigma &:= \mathbb{C} \varepsilon(u) := \lambda \operatorname{tr}(\varepsilon(u))I + 2\mu \varepsilon(u), \\ \varepsilon(u) &:= (\nabla u + \nabla u^T)/2, \\ u &= u_D \quad \text{on } \Gamma_D, \\ \sigma \nu &= g \quad \text{on } \Gamma_N. \end{aligned}$$

The setting $\Gamma = \Gamma_D \cup \Gamma_N$ is the same as in the preceding application. The new aspect is compressibility with the material constant λ which tends to infinity as the Poisson ratio tends to $1/2$ for rubber-like materials. It is known in the incompressible limit for $\lambda \rightarrow \infty$, that the elastic problem turns into the Stokes problem as $\lambda \operatorname{tr}(\varepsilon(u)) \rightarrow p$ and $\operatorname{tr} \varepsilon(u) = \operatorname{div}(u) \rightarrow 0$. In principle, the linear elastic problem can be discretized by u_h in $\mathcal{S}_1 \times \mathcal{S}_1$. This leads to quasioptimal convergence in the energy norm

$$\left\| \mathbb{C}^{-1/2}(\sigma - \sigma_h) \right\| \leq C(\lambda) h_{\max} \|D^2 u\|_{L^2(\Omega)}$$

for a smooth exact solution u . Therein, the multiplicative constant $C(\lambda)$ may deteriorate if $\lambda \rightarrow \infty$. Fig. 2 displays a numerical example from [28] for three different materials with Poisson ratios $\nu = 0.3, 0.49, \text{ and } 0.499$. For a uniform sequence of meshes on an L -shaped domain Ω with known singular exact solution u , we computed discrete solutions $u_h \in \mathcal{S}_1 \times \mathcal{S}_1$ within a standard P_1 FE. The error of the corresponding discrete stress $\sigma_h := \mathbb{C} \varepsilon(u_h)$, with the fourth-order material tensor \mathbb{C} in $\sigma = \mathbb{C} \varepsilon(u)$, reads, in its energy norm

$$\left\| \mathbb{C}^{-1/2}(\sigma - \sigma_h) \right\|^2 := \int_{\Omega} (\sigma - \sigma_h) : \varepsilon(u - u_h) dx.$$

The quantity $\|\mathbb{C}^{-1/2}(\sigma - \sigma_h)\|$ is plotted as a function of the number of degrees of freedom in Fig. 2. For uniform meshes we observe a suboptimal convergence rate caused by the singularity of u . The experimental convergence rate appears to be independent of the Poisson ratio ν (i.e. of λ) in contrast to the multiplicative constant $C(\lambda)$. This phenomenon is called locking [15]: In Fig. 2, the numerical result for a uniform mesh with $N = 10000$ degrees of freedom and $\nu = 0.499$ is worse than that for the coarsest mesh with $N = 16$ degrees of freedom for $\nu = 0.3$. The situation is even more dramatic for larger and larger $\lambda \rightarrow \infty$.

Fig. 2 displays three sequences of adaptively refined meshes for $\nu = 0.3, 0.49, \text{ and } 0.499$ as well. The coarse meshes coincide with the results for the uniformly refined ones but then adaptivity improves with a convergence rate larger than 1 until the error is much smaller. Said differently, the effect of the multiplicative constant $C(\lambda)$ is seen in the beginning for $N \leq 100$ and decreases for larger N . Does this indicate the conjecture that adaptivity overcomes locking?

The error control by averaging schemes via

$$\eta_M := \min_{\tau_h \in \mathcal{S}_N^1(\mathcal{T})} \left\| \mathbb{C}^{-1/2}(\sigma_h - \tau_h) \right\|_{L^2(\Omega)} \leq \eta_A := \left\| \mathbb{C}^{-1/2}(\sigma_h - A\sigma_h) \right\|_{L^2(\Omega)}$$

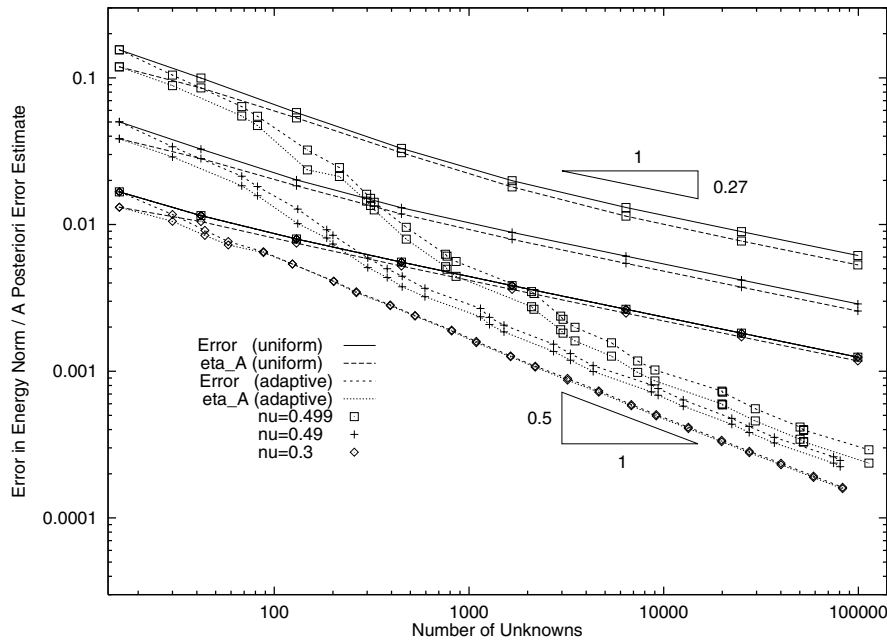


Fig. 2 Locking in compressible linear elasticity: The energy norm $\|\mathbb{C}^{-1/2}(\sigma - \sigma_h)\|$ and estimators η_A are plotted versus the number of unknowns N for uniform and adapted meshes in the $P_1 \times P_1$ conforming FEM.

is displayed in Fig. 2 as well. It is proved in [28] that $\eta_M \leq \eta_A$ is reliable up to λ -depending constants and, clearly, η_M is efficient with respect to λ -independent constants. As observed in Fig. 2, even a very poor finite element solution is estimated very accurately.

The preceding discussion focused on conforming FEM and large errors caused by locking in the incompressible limit $\lambda \rightarrow \infty$. More appropriate FEMs can overcome this locking. The first hint is to use ansatz and test functions which lead to stable FEM for the Stokes problem regarded as the limit problem for incompressibility. The choice of $\mathcal{S}_k \times \mathcal{S}_k^{nc}$ due to Kouhia and Stenberg [41] is appropriate for that and led in [28] to robust and accurate estimates. Therein, the finite element schemes as well as their error estimators are highly accurate and λ -independent.

7.3 Elastoplasticity

This section briefly describes the perspectives and limitations of averaging techniques in elastoplastic evolution problems. Therein, a time-discretisation is performed followed by a spatial discretisation in each time-step. Averaging error estimators $\eta_M \leq \eta_A$ for the exact and discrete stress field σ and σ_h , respectively, have the same definition as in Sect. 7.2 for each time step. It can be proved for an implicit time-discretisation that

$$\|\mathbb{C}^{-1/2}(\sigma - \sigma_h)\|^2 \leq \int_{\Omega} (\sigma - \sigma_h) : \varepsilon(u - u_h) dx = \int_{\Omega} (\sigma - \sigma_h) : \varepsilon(u - u_h - v_h) dx \quad \text{for all } v_h \in \mathcal{S}_h \times \mathcal{S}_h.$$

This term is an upper bound for error terms such as the stress error in the energy norm. Moreover, if hardening is present, the stress error controls the displacement error $\|u - u_h\|_{H^1(\Omega)}$ up to hardening-depending multiplicative constants. For details and proofs we refer to [2, 3, 17]. Therefore, one can proceed as in linear elasticity to derive reliability and efficiency of $\eta_M \leq \eta_A$. The constant C_{rel} , however, depends crucially on the hardening; the estimates are *not* valid (in this form) for perfect plasticity.

It should be emphasised that reliability holds solely for the spatial discretisation; the accumulated error in time is *not* controlled by $\eta_M \leq \eta_A$; the result holds for Hencky materials only. The control of the time-discretisation error appears to be an important open question. However, the numerical results in [3] provide numerical evidence that η_A is indeed a very accurate (spatial) error estimator.

7.4 Obstacle problems

This section briefly reports on the surprising result that, for a nonlinear variational inequality (in a simple situation) the same averaging estimator

$$\eta_M := \min_{q_h \in \mathcal{S}_h(\mathcal{T})^d} \|p_h - q_h\| \leq \eta_A := \|p_h - Ap_h\|$$

as for the variational equation is reliable and efficient: An affine obstacle has no further influence! To be more precise, let K denote the set of admissible deformations,

$$K := \{v \in H_0^1(\Omega) : 0 \leq v \text{ almost everywhere in } \Omega\} \quad \text{with} \quad H_0^1(\Omega) := \{v \in H^1(\Omega) : v = 0 \text{ on } \partial\Omega\}.$$

Then the weak form of the obstacle problem reads: Given $f \in L^2(\Omega)$ find $u \in K$ with

$$\int_{\Omega} \nabla u \cdot \nabla(u - v) dx \leq \int_{\Omega} f(u - v) dx \quad \text{for all } v \in K.$$

The FE discretisation replaces K by the discrete version

$$K_h := K \cap \mathcal{S}_1$$

and hence determines $u_h \in K_h$ with

$$\int_{\Omega} \nabla u_h \cdot \nabla(u_h - v_h) dx \leq \int_{\Omega} f(u_h - v_h) dx \quad \text{for all } v_h \in K_h.$$

The main difference of the variational inequality and the model example of Sect. 3 can be expressed in the residuals $\varrho \in H^{-1}(\Omega)$ and $\varrho_h \in \mathcal{S}_1$,

$$\begin{aligned} \varrho(v) &:= \int_{\Omega} v f dx - \int_{\Omega} \nabla u \cdot \nabla v dx \quad \text{for all } v \in H^1(\Omega), \\ \varrho_h &:= \sum_{z \in \mathcal{K}} \left(\int_{\Omega} f \varphi_z dx - \int_{\Omega} \nabla u_h \cdot \nabla \varphi_z dx \right) \psi_z / \int_{\Omega} \varphi_z dx \in \mathcal{S}_1. \end{aligned}$$

It is elementary to verify that the error $e := u - u_h$ in the energy norm reads

$$|e|_{1,2}^2 = \int_{\Omega} f(e - e_h) dx - \int_{\Omega} \nabla u_h \cdot \nabla(e - e_h) dx + \int_{\Omega} \varrho_h e dx - \varrho(e)$$

for some $e_h := \sum_{z \in \mathcal{K}} \left(\int_{\Omega} e \varphi_z dx \right) \varphi_z / \int_{\Omega} \varphi_z dx \in \mathcal{S}_1$. The approximation error $e - e_h$ can be analysed as in Sect. 5. The additional terms with ϱ_h and ϱ reflect the variational inequality. Indeed, one can show that $0 \leq \varrho(e)$ and

$$\varrho_h(z) \leq 0 = \varrho_h(z)u_h(z) \leq u_h(z) \quad \text{for all } z \in \mathcal{K}.$$

Hence the arguments of Sect. 5 lead to the a posteriori error estimate [23]

$$|e|_{1,2}^2 \leq C\eta_M^2 + \text{h.o.t.}(f) - \int_{\Omega} \varrho_h u_h dx.$$

The last term can be analysed further. Indeed, $\varrho_h u_h$ vanishes on an element $T \in \mathcal{T}$ or, at least, $\varrho_h(a) < 0 = u_h(a) = \varrho_h(b) < u_h(b)$ for two nodes a and b of T . Inverse inequalities based on $\varrho_h \leq 0 \leq u_h$ yield a bound of $\|\varrho_h u_h\|_{L^1(T)}$ in terms of the mesh-size, $|\varrho_h|_{1,2}$, and $\|\nabla u_h - A(\nabla u_h)\|_2$. The details and proofs can be found in [23]. The final result reads

$$|e|_{1,2} \leq C_{\text{rel}}\eta_M + \text{h.o.t.}(f).$$

For non-affine obstacles and nonconforming discretisations (i.e. $K_h \not\subset K$) some consistency terms arise and may dominate the upper bound, cf. [23]. Numerical results in [23] provide empirical evidence for a surprisingly high accuracy of η_A .

7.5 Degenerate problems

The preceding examples concerned uniformly convex minimisation problems on affine or convex subsets. The p -Laplacian is a first nonlinear equation with less strong convexity which requires a particular analysis. This is based on an appropriate quasi-norm, a metric that depends on the exact or discrete solution. The techniques of Sects. 5 and 6, however, can be adopted to this setting and then yield reliable and efficient error estimators [31].

The situation is even more difficult and essentially open for convexified problems where the energy minimisation functional is not strictly convex. Very much as a surprise came numerical evidence in a 2-well benchmark example allowing for microstructures that η_A yields an accurate stress error estimation [30].

8 Averaging on large patches

This section aims to sketch future perspectives of averaging techniques based on an old argument that, the author learned from L.B. Wahlbin, goes back to an Oberwolfach conference in the eighties and is known to the experts since then. The technique is employed in [40] for a posteriori L^∞ estimates. In this section we sketch only one (much) simpler result for the energy norm. Suppose that we are given two meshes \mathcal{T}_H and \mathcal{T}_h such that \mathcal{T}_h is a uniform refinement of \mathcal{T}_H such that typical mesh-sizes H and h of \mathcal{T}_H and \mathcal{T}_h , respectively, satisfy

$$H^2 \ll h \ll H.$$

Suppose the notation of Sect. 3 for $\mathcal{T} = \mathcal{T}_h$ with exact solution u and discrete (fine) solution u_h . Let $\mathcal{S}_2(\mathcal{T}_H)$ denote the \mathcal{T}_H -piecewise quadratic polynomial subspace of $C(\Omega)$. Let u_H and u_{hH} denote the finite element approximations in $\mathcal{S}_2(\mathcal{T}_H)$ of u and u_h , respectively.

Theorem 6. (Essentially known to the experts). *There exists a constant c_{12} such that for smooth u*

$$\eta := \|\nabla u_h - \nabla u_{hH}\| \text{ is computable}$$

and reliable for small h/H in the sense that

$$\|\nabla u - \nabla u_h\| \leq \frac{\eta + \text{h.o.t.}(u)}{1 - c_{12}h/H}$$

and always efficient

$$\eta \leq \|u - u_h\| + \text{h.o.t.}(u).$$

Here, h.o.t.(u) means of higher order when compared with $\|\nabla u - \nabla u_h\|$. For an unstructured grid \mathcal{T}_H , H denotes the minimal mesh-size in \mathcal{T}_H and h denotes the maximal mesh-size in \mathcal{T}_h . The constant c_{12} depends on the shape of the elements through an interpolation estimate, inverse inequality, and a stability estimate as seen in the proof.

Proof of Theorem 6. For $e := u - u_h$ and $v := u_H - u_{hH}$ with interpolant v_h in $\mathcal{S}^1(\mathcal{T}_h)$, the Galerkin orthogonality implies

$$\|\nabla e\|^2 = \int_{\Omega} \nabla e \cdot \nabla(e - v) \, dx + \int_{\Omega} \nabla e \cdot \nabla(v - v_h) \, dx.$$

Since $e - v = (u_{hH} - u_h) + (u - u_H)$, a Cauchy inequality gives

$$|e|_{1,2}^2 \leq \|\nabla e\| (\|\nabla u_h - \nabla u_{hH}\| + \|\nabla u - \nabla u_H\|) + \|h/H \nabla e\| \|H/h \nabla(v - v_h)\|.$$

The quadratic approximation of the smooth function u leads to a higher order term,

$$\|u_h - u_{hH}\| + \|u - u_H\| = \eta + \text{h.o.t.}(u).$$

An interpolation inequality for the nodal interpolation v_h of v , an inverse inequality (as $v - v_h$ is a polynomial on each $T \in \mathcal{T}_h$ and $D_h^2 v$ denotes the piecewise second derivatives), and a stability estimate of the Galerkin-scheme $C_{\text{stab}} = 1$ read

$$\|H/h \nabla(v - v_h)\| \leq C_{\text{interpol}} \|H D_h^2 v\|, \quad \|H D_H^2 v\| \leq C_{\text{inv}} \|\nabla v\|, \quad \text{and} \quad \|\nabla v\| \leq C_{\text{stab}} \|\nabla e\|.$$

The combination of the aforementioned estimates proves reliability with $c_{12} = C_{\text{interpol}} C_{\text{inv}} C_{\text{stab}}$. Efficiency follows with a triangle inequality

$$\eta \leq \|\nabla(e - v)\| + \|\nabla(u - u_H)\| \leq \|\nabla e\| + \text{h.o.t.}(u). \quad \square$$

As a consequence for $h/H \rightarrow 0$, the estimator η is asymptotically exact if the patches in \mathcal{T}_H become larger and larger compared to the finer mesh \mathcal{T}_h . This analysis gives no result for $\mathcal{T}_h = \mathcal{T}_H$ and c_{12} should not be expected to be too small. However, depending on the shape of the elements in \mathcal{T}_H there exist an integer K such that K red-refinements (each of which is a refinement of every element into four congruent sub-triangles) result in a mesh \mathcal{T}_h which yields an efficient and reliable error estimator η .

Remark 10. In the same spirit, the smoothing steps within a multigrid method can be used to compute an averaged quantity with superconvergence properties and a corresponding error estimator [8].

Remark 11. Averaging techniques on larger and larger patches are suggested in [21] for the computation of $\|D^2 z\|$ within a duality approach for a posterior error control [13].

9 Conclusions

The use of averaging or gradient recovery techniques can be recommended as a simple and often very efficient tool to monitor the stress or flux error. For a large class of finite elements methods and their applications, reliability has been established and numerical evidence exists that the estimators $\eta_M \leq \eta_A$ are highly accurate.

The conditions for reliability are smoothness of coefficients and right-hand sides but not necessarily of the Lipschitz domain or the (unknown) exact solution. At the moment, time-depending problems and problems with accumulated errors or with pollution are excluded. Moreover, the robustness of averaging estimators with respect to crucial parameters jumping or oscillating coefficients requires particular attention.

The practical performance of η_A is often highly accurate but, owing to [24, 27, 28], seems to depend on local symmetry and local smoothness. Even for singular solutions, an appropriately adapted mesh balances the error and often improves the quality of the error estimations. It is conjectured but not (fully) understood that local superconvergence phenomena are responsible for the high accuracy.

Goal-oriented error control is excluded in this paper, but certainly very important from the conceptual and practical view point. Therein, the effective approximation of dual solutions [13] is another important field of further applications of averaging techniques in the future.

This paper aimed to mark the state of the art in the popular usage of averaging error estimators. One may conclude in that their efficiency and reliability is now understood. Their success in practical applications is observed and conjectured but not (fully) theoretically justified. This approach clearly has limitations (consistency term, non-smooth right-hand sides, etc.), but works perfectly fine if applied appropriately.

Acknowledgements The author wishes to express his thanks to J. Albery, S. Bartels, S. Funken, and R. Klose for interactive collaborations throughout the years. Without their contributions, the understanding of averaging schemes would have been much less elaborated.

References

- [1] M. Ainsworth and J. T. Oden, *A Posteriori Error Estimation in Finite Element Analysis*, Wiley-Interscience (John Wiley & Sons, New York, 2000).
- [2] J. Albery and C. Carstensen, Numerical analysis of time-depending primal elastoplasticity with hardening, *SIAM J. Numer. Anal.* **37**(4), 1271–1294 (2000) (electronic).
- [3] J. Albery and C. Carstensen, Averaging techniques for reliable a posteriori FE-error control in elastoplasticity with hardening, *Comput. Methods Appl. Mech. Eng.* **192**, 1435–1450 (2003).
- [4] I. Babuška and A. Miller, A feedback finite element method with a posteriori error estimation, Part I: The finite element method and some properties of the a posteriori estimator, *Comput. Methods Appl. Mech. Eng.* **61**, 1–40 (1987).
- [5] I. Babuška and W. C. Rheinboldt, Error estimates for adaptive finite element computations, *SIAM J. Numer. Anal.* **15**, 736–754 (1978).
- [6] I. Babuška and T. Strouboulis, *The Finite Element Method and its Reliability* (The Clarendon Press, Oxford University Press, 2001).
- [7] R. E. Bank and A. Weiser, Some a posteriori error estimators for elliptic partial differential equations, *Math. Comput.* **44**(170), 283–301 (1985).
- [8] R. E. Bank and J. Xu, Asymptotically exact a posteriori error estimators, Part I: Grids with superconvergence; Part II: General unstructured grids, Preprint.
- [9] W. Bao and J. W. Barrett, A priori and a posteriori error bounds for a non-conforming linear finite element approximation of a non-Newtonian flow, *RAIRO Model. Math. Anal. Numer.* **32**(7), 843–858 (1998).
- [10] S. Bartels and C. Carstensen, Each averaging technique yields reliable a posteriori error control in FEM on unstructured grids, Part II: Higher order FEM, *Math. Comput.* **71**(239), 971–994 (2002).
- [11] S. Bartels, C. Carstensen, and G. Dolzmann, Inhomogeneous Dirichlet conditions in a priori and a posteriori finite element error analysis, *Kieler Berichtsreihe* **1** (2002).
- [12] R. Becker, R. Rannacher, A feed-back approach to error control in finite element methods: basic analysis and examples, *East-West J. Numer. Math.* **4**(4), 237–264 (1996).
- [13] R. Becker and R. Rannacher, An optimal control approach to a posteriori error estimation in finite element methods, *Acta Numer.*, 1–102 (2001).
- [14] P. Binev, W. Dahmen, and R. DeVore, *Adaptive Finite Element Methods with Convergence Rates*, IGPM Report, RWTH Aachen, (2002), preprint available at http://www.igpm.rwth-aachen.de/dahmen/rep_02.html.
- [15] D. Braess, *Finite Elements* (Cambridge University Press, Cambridge, 2001).
- [16] S. C. Brenner and L. R. Scott, *The Mathematical Theory of Finite Element Methods* (Springer Verlag, New York, 2002).
- [17] C. Carstensen, Numerical analysis of the primal problem of elastoplasticity with hardening, *Numer. Math.* **82**(4), 577–597 (1999).
- [18] C. Carstensen, Quasi-interpolation and a posteriori error analysis in finite element method, *M2AN* **33**, 1187–1202 (1999).
- [19] C. Carstensen, A unifying theory of a posteriori finite element error control, Preprint (2002).
- [20] C. Carstensen, All first-order averaging techniques for a posteriori finite element error control on unstructured grids are efficient and reliable, preprint (2002).
- [21] C. Carstensen, Estimation of higher Sobolev norm from lower order approximation, preprint (2002).
- [22] C. Carstensen, Merging the Bramble-Pasciak-Steinbach and the Crouzeix-Thomé criterion for H^1 -stability of the L^2 -projection onto finite element spaces, *Math. Comput.* **71**(237), 157–163 (2002).

- [23] C. Carstensen and S. Bartels, Averaging techniques yield reliable a posteriori finite element error control for obstacle problems, *Publ. Max-Planck-Inst. Math. Sci. (Leipzig)* **2** (2001), preprint available at <http://www.mis.mpg.de/preprints/2001/prepr0201-abstr.html>.
- [24] C. Carstensen and S. Bartels, Each averaging technique yields reliable a posteriori error control in FEM on unstructured grids. I. Low order conforming, nonconforming and mixed FEM, *Math. Comput.* **71**(239), 945–969 (2002).
- [25] C. Carstensen, S. Bartels, and R. Klose, An experimental survey of a posteriori Courant finite element error control for the Poisson equation, *Adv. Comput. Math.* **15**, 1–4, 79–106 (2001).
- [26] C. Carstensen and S. A. Funken, Coupling of nonconforming finite elements and boundary elements I: A priori estimates, *Computing* **62**(3), 229–241 (1999).
- [27] C. Carstensen and S. A. Funken, A posteriori error control in low-order finite element discretisations of incompressible stationary flow problems, *Math. Comput.* **70**(236), 1353–1381 (2001).
- [28] C. Carstensen and S. A. Funken, Averaging technique for FE-a posteriori error control in elasticity, Part II: λ -independent estimates, *Comput. Methods Appl. Mech. Eng.* **190**, 4663–4675 (2001).
- [29] C. Carstensen and S. A. Funken, Averaging technique for a posteriori error control in elasticity. III. Locking-free nonconforming FEM, *Comput. Methods Appl. Mech. Eng.* **191**, 8–10, 861–877 (2001).
- [30] C. Carstensen and K. Jochimsen, Adaptive finite element error control for non-convex minimization problems: Numerical two-well model example allowing microstructures, *Computing* (to appear).
- [31] C. Carstensen, W. Liu, and N. Yan, A Posteriori Error Estimators Based on Gradient Recovery for Finite Element Approximation of p -Laplacian, Report UKC/IMS/01/44 (2001).
- [32] C. Carstensen and S. Müller, Local stress regularity in scalar non-convex variational problems, *SIAM J. Math. Anal.* (to appear), preprint 49 of DFG Priority Program Multiscale Problems available at <http://www.mathematik.uni-stuttgart.de/mathA/1st1/mehrskalen/>.
- [33] C. Carstensen and R. Verfürth, Edge residuals dominate a posteriori error estimates for low order finite element methods, *SIAM J. Numer. Anal.* **36**(5), 1571–1587 (1999).
- [34] P. G. Ciarlet, *The Finite Element Method for Elliptic Problems* (North-Holland Publishing Co., Amsterdam, 1978).
- [35] P. Clément, Approximation by finite element functions using local regularization, *RAIRO, Sér. Rouge Anal. Numer.* **R-2**, 77–84 (1975).
- [36] W. Dörfler, A convergent adaptive algorithm for Poisson's equation, *SIAM J. Numer. Anal.* **33**, 1106–1124 (1996).
- [37] W. Dörfler and R. H. Nochetto, Small data oscillation implies the saturation assumption, *Numer. Math.* **91**(1), 1–12 (2002).
- [38] K. Eriksson and C. Johnson, Error estimates and automatic time step control for nonlinear parabolic problems I, *SIAM J. Numer. Anal.* **24**(1), 12–23 (1978).
- [39] K. Eriksson, D. Estep, P. Hansbo, and C. Johnson, Introduction to adaptive methods for differential equations, *Acta Numer.*, 105–158 (1995).
- [40] W. Hoffmann, A. H. Schatz, L. B. Wahlbin, and G. Wittum, Asymptotically exact a posteriori estimators for the pointwise gradient error on each element in irregular meshes. I. A smooth problem and globally quasi-uniform meshes, *Math. Comput.* **70**, 235, 897–909 (2001).
- [41] R. Kouhia and R. Stenberg, A linear nonconforming finite element method for nearly incompressible elasticity and Stokes flow, *Comput. Methods Appl. Mech. Eng.* **124**(3), 195–212 (1995).
- [42] P. Morin and R. H. Nochetto, and K. G. Siebert, Local problems on stars: a posteriori error estimation, convergence, and performance, *Math. Comput.*, to appear.
- [43] R. H. Nochetto, Removing the saturation assumption in a posteriori error analysis, *Ist. Lomb. Accad. Sci. Lett. Rend. A* **127**, 67–82 (1993).
- [44] R. Rodriguez, Some remarks on Zienkiewicz-Zhu estimator, *Int. J. Numer. Methods Partial Diff. Equ.* **10**, 625–635 (1994).
- [45] R. Rodriguez, A posteriori error analysis in the finite element method, in: *Finite Element Methods. 50 Years of the Courant Element*, Conference held at the Univ. of Jyväskylä, Finland, 1993, edited by M. Krizek (Marcel Dekker, New York, NY); *Inc. Lect. Notes Pure Appl. Math.* **164**, 389–397 (1994).
- [46] R. Verfürth, *A Review of A Posteriori Error Estimation and Adaptive Mesh-Refinement Techniques* (Wiley-Teubner, 1996).
- [47] L. B. Wahlbin, *Superconvergence in Galerkin Finite Element Methods* (Springer-Verlag, Berlin, 1995).
- [48] M. Wheeler and J. Whiteman, Superconvergent recovery of gradients on subdomains from piecewise linear finite-element approximations, *Numer. Methods Partial Differ. Equ.* **3**(4), 357–374 (1987).