

# Statistical Optimization of Biohydrogen Production from Palm Oil Mill Effluent by Natural Microflora

Zatilfariyah Rasdi, Nor Aini Abdul Rahman\*, Suraini Abd-Aziz, Phang Lai-Yee, Mohd Zulkhairi Mohd Yusoff, Chong Mei-Ling and Mohd Ali Hassan

Department of Bioprocess Technology, Faculty of Biotechnology and Biomolecular Sciences, University Putra Malaysia, 43400 UPM, Serdang, Selangor, Malaysia

**Abstract:** In this study, palm oil mill effluent (POME) was used as the substrate for biohydrogen production. Heat-treated POME sludge acclimated with POME incubated at 37°C for 24 hours was used as seed culture. Preliminary screening on the effects of inocula sizes, heat treatment, substrate concentration and pH of incubation by using a factorial design (FD) were conducted under mesophilic condition (37°C) using a serum vial (160 mL). The experimental results from two-level FD showed that pH and Chemical Oxygen Demand (COD) of POME significantly affected biohydrogen production. Optimizations of the specific hydrogen production ( $P_s$ ) and the hydrogen production rate ( $R_m$ ) were achieved by using a central composite design (CCD). The maximum  $P_s$  of 272 mL  $H_2$ /g carbohydrate was obtained under optimum conditions of pH 5.75 and substrate concentration of 80 g/L. The maximum  $R_m$  of 98 mL  $H_2$ /h was calculated under the optimum conditions of pH 5.98 and substrate concentration of 80 g/L. The optimized conditions obtained were subjected to a confirmation run and it showed reproducible data with a  $P_s$  of 226 mL  $H_2$ /g carbohydrate and  $R_m$  of 72 mL  $H_2$ /h.

**Keywords:** Palm oil mill effluent, biohydrogen, central composite design.

## INTRODUCTION

The production of palm oil as one of the major edible oils consumed in the world has increased tremendously in the last decade and is led by Malaysia, Indonesia and Thailand. However, during the milling process, a huge volume of palm oil mill effluent (POME) is being produced. Due to its characteristic of having a high organic content, the treatment and disposal of this waste is an economic burden on the palm oil industry. Thus, creating a marketable product from this waste would reduce the treatment cost. Recovery of energy from waste might reduce the cost of wastewater treatment, and contribute to reducing our dependence on fossil fuel. Hydrogen and energy production could mitigate these waste treatment problems [1].

Recently the feasibility of applying anaerobic fermentation of organic waste to produce hydrogen had been demonstrated by various laboratories [2-4]. Anaerobic systems have great potential to treat POME because of its highly organic content characteristic. These systems do not require high energy for aeration, thus allowing the recovery of energy in the form of biogas [5].

Biohydrogen is a promising clean fuel ultimately derived from renewable energy sources and it is environmental-friendly. During the combustion of hydrogen, water will be produced as the sole product. It is high in energy yield and it could be produced by low-energy intensive processes [6]. Biohydrogen production is a complex process which is greatly influenced by many factors. These factors include

substrate specificity, substrate concentration, reactor configuration, hydraulic retention time (HRT), organic loading rate (OLR), pH, temperature, oxidation-reduction potential, and nutritional requirements [4].

The optimization of fermentation conditions, particularly nutritional and environmental parameters are of primary importance for bioprocess development [7]. Other than nutrient composition, substrate concentration was found to be one of the most important factors affecting biohydrogen production [8, 9, 11]. Chong *et al.* [10] also reported that hydrogen production was strongly inhibited by pH values as low as pH 5. A natural source has been used to provide inocula which are being selected for spore farmers and to destroy methanogens [12]. There are many research reports on different pretreatments such as base-enrichment [13], acid treatment [14] and heat treatment [10]. However, the enrichment of inocula by heat treatment is most common.

Conventional techniques such as a one-factor-at-a-time method is time consuming and laborious to perform. Therefore, statistical optimization has been chosen to depict the interactions among different factors and also to efficiently deal with a large number of factors [15]. The main objective of this study was to optimize the parameters for hydrogen production by natural microflora by using the Response surface methodology (RSM) approach. The individual and the interactive effects of pH, different temperatures of heat treatment, different inoculum sizes and substrate concentrations on biohydrogen production were investigated in this study.

## MATERIALS AND METHODS

### Seed Sludge

The POME sludge used in this study was obtained from the anaerobic digester for POME treatment at FELDA Sert-

\*Address correspondence to this author at the Department of Bioprocess Technology, Faculty of Biotechnology & Biomolecular Sciences, University Putra Malaysia 43400 UPM, Serdang, Selangor, Malaysia; E-mail: nor\_aini@biotech.upm.edu.my

ing Hilir Palm Oil Mill, Negeri Sembilan, Malaysia. Prior to use, the seed sludge was first allowed to settle and heated to inactivate the methanogens.

### Substrate

The POME was obtained from FELDA Serting Hilir Palm Oil Mill located at Serting, Negeri Sembilan, Malaysia. Fresh hot POME (80-90°C) was collected and kept in a cold room at 4°C to avoid its degradation. The POME was used within a week and fresh POME was collected again from the same mill to ensure that its characteristic was consistent.

### Biohydrogen Fermentation

The POME sludge was acclimatized in POME and incubated anaerobically at 37 °C for 24 h before being used as inoculum. POME with COD ranging from 40 - 80 g/L COD inoculated with 10 to 20 % (v/v) of inoculum was incubated for 24 h in serum bottles to produce hydrogen. All the experiments were carried out in a 160 mL serum bottle containing 100 mL POME (medium). These bottles were flushed with nitrogen gas to ensure anaerobic conditions throughout the experiments, and were capped tightly with rubber septum (butyl rubber) [16]. Then, the bottles were incubated at 37°C. The total gas volume was measured at 3 h intervals by releasing the pressure in the bottles using the syringe and water displacement method. All the experiments were carried out in triplicates.

### Analytical Methods and Data Analysis

The biogas content was analyzed using a gas chromatograph equipped with a thermal conductivity detector and the column was packed with Porapack Q (80/100 mesh). The temperatures of the injector and the column were kept at 100°C and 50°C, respectively. Nitrogen was used as the carrier gas with a flow rate of 30 mL/min. The COD of the samples were measured according to the standard methods [17]. The carbohydrate content was measured according to the phenol-sulphuric method.

The modified Gompertz equation was used to model the kinetics of the hydrogen production and to determine the specific hydrogen production potential ( $P_s$ ). The cumulative hydrogen production in the experiments followed the modified Gompertz equation [9]:

$$H = P \exp \left\{ - \exp \left[ \frac{R_m e}{P} (\lambda - t) + 1 \right] \right\} \quad (1)$$

$H$  represents the cumulative volume of hydrogen produced (ml),  $P$  the hydrogen potential (ml),  $R_m$  the maximum

production rate (ml/h),  $e$  the 2.71828... and  $\lambda$  the lag time (h). The values of  $P$ ,  $R_m$  and  $\lambda$  for each batch were determined by best fitting the hydrogen production data for this equation using the Statsoft Statistica 6.0.

The hydrogen gas production was calculated from the serum bottle headspace measurements of gas composition and the total volume of biogas at each interval using the following equation:

$$V_{H,i} = V_{H,i-1} + C_{H,i} (V_{G,i} - V_{G,i-1}) + V_H (C_{H,i} - C_{H,i-1}) \quad (2)$$

$V_{H,i}$  and  $V_{H,i-1}$  are cumulative hydrogen gas volume at the current (i) and previous (i-1) time intervals,  $V_{G,i}$  and  $V_{G,i-1}$  the total biogas volumes in the current and previous time intervals,  $C_{H,i}$  and  $C_{H,i-1}$  the fraction of hydrogen gas in the headspace of the bottle measured using gas chromatography in the current and previous intervals, and  $V_H$  the total volume of headspace in the bottle [10].

### OPTIMIZATION PROCEDURE

#### a) Two-Level Factorial Design

In a factorial design, the influence of all experimental variables, factors and interaction effects on the responses are investigated [18]. Four variables, which were expected to affect biohydrogen production were selected based on a previous study. The significant effects of these variables on biohydrogen production were tested using a 2-level factorial design. The variables in the design were listed in Table 1. According to the 2-level four variables concept, a complete matrix would have been based on  $2^4 = 16$  runs, and 6 runs were center point runs for statistical reasons. Thus, a factorial matrix of 22 runs was used. Each variable was investigated at high (+1) and low (-1) levels. Runs of the center point were included in the matrix and statistical analysis was used to identify the effect of each variable on hydrogen production. The runs were randomized for statistical reasons. The significances of the variables were identified on the basis of confidence levels above 95% ( $P < 0.05$ ). Table 2 shows the design matrix with a hydrogen production potential and rate of hydrogen production as a response.

#### b) Central Composite Design (CCD)

The Response surface methodology (RSM), a mathematical and statistical technique for building models, evaluating relative significance of several independent variables (i.e., environmental factors), and for determining optimum conditions for desirable responses [4] was employed in this study. CCD is a widely used experimental RSM in order to estimate a second-order polynomial approximation (quad-

**Table 1. Variables in Actual Values, for Screening by the 2-Level Factorial Design**

	Variable	Unit	Low Level	High Level
			(-1)	(+1)
A	pH		5	6
B	Heat treatment	°C	70	100
C	Inoculum size	%	10	20
D	Substrate concentration	g/L	40	80

**Table 2. Two-Level Factorial Design of Variables (in Coded Levels) with P and R<sub>m</sub> as the Response**

Run	Factors				Response	
	pH	Heat Treatment (°C)	Inoculum Size (%)	Substrate Concentration (g/L)	P (mL)	R <sub>m</sub> (mL/hr)
1	5	70	10	40	1.4	20.0
2	6	70	10	40	38.9	4.8
3	5	100	10	40	4.1	19.9
4	6	100	10	40	48.5	2.7
5	5	70	20	40	0.8	20.0
6	6	70	20	40	33.2	4.2
7	5	100	20	40	2.1	20.0
8	6	100	20	40	47.9	7.4
9	5	70	10	80	109.4	18.4
10	6	70	10	80	107.6	14.0
11	5	100	10	80	113.6	14.4
12	6	100	10	80	105.5	11.4
13	5	70	20	80	111.1	14.9
14	6	70	20	80	115.8	14.0
15	5	100	20	80	106.2	14.4
16	6	100	20	80	113.9	10.7
17	5.5	85	15	60	38.2	4.4
18	5.5	85	15	60	43.8	5.9
19	5.5	85	15	60	31.7	6.8
20	5.5	85	15	60	36.8	7.2
21	5.5	85	15	60	39.0	6.5
22	5.5	85	15	60	34.5	6.8

ratio) to a response in that region [15]. In each case, the matrix incorporated five central points and 2 axial points (with one variable set at extreme ±1 level and the other variable at central point level). Table 3 shows the actual and the coded levels of the variables tested for each isolate. The coding of the variables was done following the equation:

$$x_i = \frac{X_i - X_i^*}{\Delta X_i} \tag{3}$$

where  $x_i$  is the coded value of the  $i$ th test variable,  $X_i$  an uncoded value of the  $i$ th test variable,  $X_i^*$  the value of  $X_i$  at the center point of the investigated area, and  $\Delta X_i$  is the step size.

$$Y = A_0 + \sum_{i=1}^k A_i X_i + \sum_{i=1}^k A_{ii} X_i^2 + \sum_{i=1}^k \sum_{j=1}^k A_{ij} X_i X_j \tag{4}$$

The response variable ( $P_s$  and  $R_{max}$ ) was fitted using a predictive polynomial quadratic equation in order to correlate the response variable to the independent variables. The general form of the predictive polynomial quadratic equation is where  $x_i$  are the input variables, which influence the response variable  $Y$ ,  $A_0$  the offset term,  $A_i$  the  $i$ th linear coefficient,  $A_{ii}$  the quadratic coefficient and  $A_{ij}$  is the  $ij$ th interaction coefficient. As Eq. (3) is determined, it can be used to locate the optimum for the set of independent variables by the partial derivatives of the model response with respect to

**Table 3. Coded and Actual Values of Variables Selected for CCD**

Variable	Unit	-2	-1	0	1	2
A pH		4.5	5	5.5	6	6.5
B substrate concentration	g/L	20	40	60	80	100

the individual independent variables is equal to zero. In general, the model was considered to be efficient and workable if it had a significant *F*-value, and insignificant lack-of-fit *F*-value and a good  $R^2$  (multiple correlation coefficient).

The conditions that could give maximum hydrogen production were predicted using the numerical optimization in Design-Expert 7.0 (Stat Ease Inc.). Only the factors considered in model building were varied for prediction, other insignificant variables were maintained at constant values ('0' coded level) as in the 2-level factorial design.

## RESULTS AND DISCUSSION

### Preliminary Investigation on Biohydrogen Production by the 2-Level Factorial Design

Four variables which affect biohydrogen production were selected for the 2-level factorial design (Table 1). The effects of the selected variables on biohydrogen production were evaluated in 22 experiments including 6 center points. Table 2 shows the responses obtained in terms of hydrogen production potential ( $P_s$ ) determined by modified Gompertz equation. The responses obtained were statistically evaluated and the variables with confidence levels above 95% gave significant effect on hydrogen production.

pH ( $P < 0.0001$ ) showed a significant effect on both responses, biohydrogen production and hydrogen production rate. Besides pH, substrate concentration ( $P < 0.0001$ ,  $P = 0.0383$ ) was the most significant variable affecting both responses. Thus, the variables that significantly affected hydrogen production could be identified by using the 2-level factorial design.

Table 2 shows the maximum hydrogen production potential and hydrogen production rate were 116 mL and 20

mL/hr, respectively. The model for the hydrogen production potential was highly significant ( $P < 0.0001$ ), while the lack-of-fit was not significant ( $P > 0.05$ ) according to the analysis of variance (data not shown). The coefficient of determination ( $R^2$ ) was 0.9897, which explained 98% variability of the response variable.

### Central Composite Design

Based on the identification of variables by the 2-level factorial design, a central composite design was developed for variables that significantly affected hydrogen production. All the non-significant factors were maintained at central points ('0' coded level) of the levels used in the 2-level factorial design. Table 3 shows the coded and real values of the levels of variables selected in CCD. The design matrix of the variables together with the experimental results is shown in Table 4.

The significance test on the regression model and individual model coefficients were performed by using ANOVA. The backward elimination procedure was chosen to manually select the appropriate model coefficient by reducing the insignificant terms for the specific hydrogen production potential ( $P_s$ ) response. The significant model and the corresponding significant model terms are tabulated in Table 5. The regression model and terms were considered to be significant when the "Prob  $> F$ " was less than 0.05.

### Effects of pH and Substrate Concentration on Hydrogen Yield

By applying multiple regression analysis on the experimental data, the following second-order polynomial equation was used to explain the hydrogen production:

**Table 4. Central Composite Design of Variables for  $P_s$  and  $R_m$**

Run	Factor 1	Factor 2	Response 1 <sup>a</sup>	Response 2
	A: pH	B: Substrate Concentration (g/L)	Yield	$R_m$ (mL/hr)
1 <sup>b</sup>	5	40	26.25	43.43
2 <sup>b</sup>	6	40	72.15	60.77
3 <sup>b</sup>	5	80	203.09	52.19
4 <sup>b</sup>	6	80	239.02	104.33
5 <sup>b</sup>	4.5	60	25.49	12.74
6 <sup>b</sup>	6.5	60	164.56	36.30
7 <sup>b</sup>	5.5	20	85.04	92.54
8 <sup>b</sup>	5.5	100	312.75	144.27
9	5.5	60	195.51	59.26
10	5.5	60	242.81	68.08
11	5.5	60	194.56	44.44
12	5.5	60	223.67	67.91
13	5.5	60	223.81	71.85
14	5.5	60	203.32	65.09

<sup>a</sup>Response in terms of hydrogen production potential in mL  $H_2$ /g carbohydrate.

<sup>b</sup>The trials were replicated three times.

**Table 5.** Analysis of Variance for the Regression Model and the Respective Model Terms (Original and Adjusted ANOVA) for  $P_s$ 

ANOVA	Source		df	F-Value	Prob > F
Original	Model		5	13.41	0.0010
	A		1	8.27	0.0206
	B		1	40.77	0.0002
	AB		1	0.019	0.8938
	A <sup>2</sup>		1	17.87	0.0029
	B <sup>2</sup>		1	0.48	0.5078
	Residual		8		
	Lack of fit		3	7.72	0.0253
	Pure error		5		
	R <sup>2</sup>	0.89343			
	Adj R <sup>2</sup>	0.8268			
Adjusted	Model		3	26.10	<0.0001
	A		1	9.73	0.0109
	B		1	47.96	<0.0001
	A <sup>2</sup>		1	20.60	0.0011
	Residual		10		
	Lack of fit		5	4.99	0.0513
	Pure error		5		
	R <sup>2</sup>	0.8868			
	Adj R <sup>2</sup>	0.8528			

$$P_s = 203.28 + 30.00A + 66.59B - 31.09A_1^2 - 5.09B^2 - 2.49AB \quad (5)$$

where,  $P_s$  is the predicted hydrogen production potential; A and B are the coded values of pH and substrate concentration, respectively.

Analysis of variance (ANOVA) of the backward elimination model (Table 5) showed that the model was highly significant ( $P < 0.0001$ ), while the lack-of-fit was not significant ( $P > 0.05$ ). The high value of the regression coefficient ( $R^2 = 0.8868$ ) could explain 89% of the variability of the response variable suggesting that the model was an accurate representation of the data. Eq. (5) could appropriately describe the effects of pH and substrate concentration on the hydrogen yield obtained in this study. ANOVA of the adjusted model (Table 5) also showed that the linear effects of pH (A), substrate concentration (B) and quadratic effect of pH ( $A^2$ ) were the significant terms for hydrogen production, which means these terms had great impacts on hydrogen yield [20].

Stoichiometrically, each gram of carbohydrate produced a maximum of 553 mL  $H_2$  assuming acetic acid as the by-product. The maximum yield of 312 mL  $H_2/g$  carbohydrate was obtained represented 56.4% of the theoretical yield. This value was lower than that expected in theory because the

characteristics of palm oil waste varied from those of the synthetic waste. Subsequently, the maximum hydrogen yield of 272 mL  $H_2/g$  carbohydrate was estimated from Eq. (5) at pH 5.75 and substrate concentration of 80 g/L (Table 7).


Fig. (1) shows the response surface plot (a) and the corresponding contour plot (b) based on Eq. (5). As is shown in the figure, initial pH and substrate concentration were maintained at 5.75 and 80 g/L, respectively. The contour of  $P_s$  with respect to pH and substrate showed an elongated shaped running diagonally on the plot, suggesting that both factors were interdependent, or there was a significant interaction on  $P_s$  between pH and substrate concentration [4].

#### Effects of pH and Substrate Concentration on Hydrogen Production Rate

In a similar way, response surface analysis was performed for evaluating the effect of pH and substrate concentration on  $R_m$ . The quadratic model was constructed as follows:

$$R_m = 62.32 + 9.72A + 12.98B + 8.70AB - 9.62A^2 + 13.85B^2 \quad (6)$$

ANOVA of the model (Table 6) showed that the model was highly significant ( $P < 0.0001$ ), while the lack-of-fit was not significant ( $P > 0.05$ ). The model was accurate based on

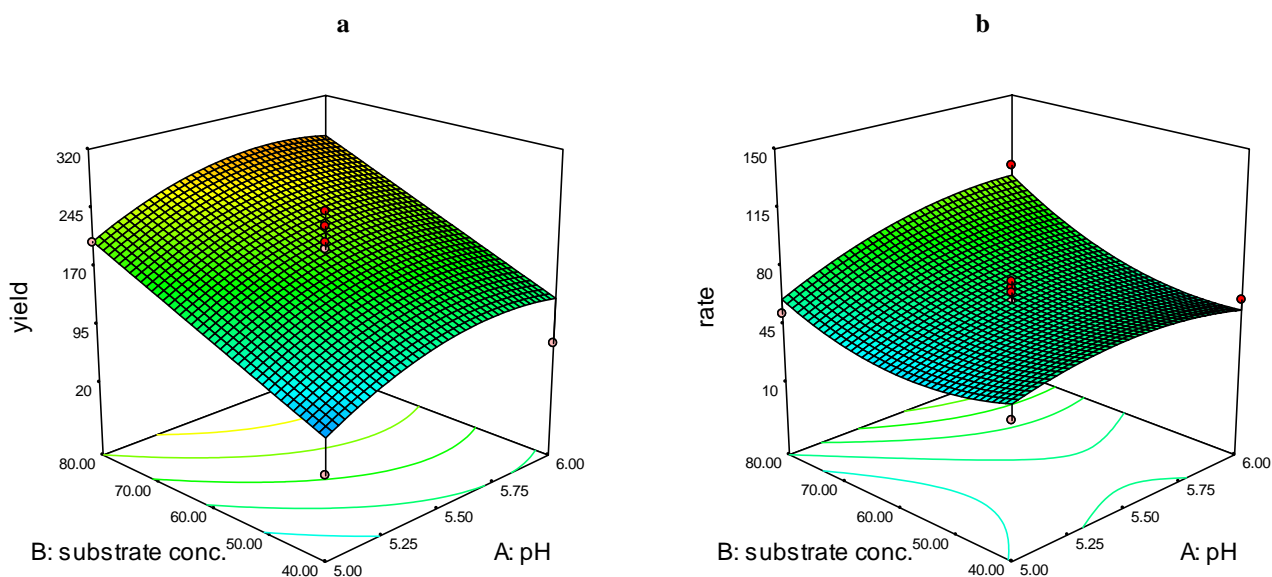

**Fig. (1).** Response surface plot and corresponding contour plot for  $P_s$  (a) and  $R_m$  (b).

**Table 6.** Analysis of Variance for the Regression Model and the Respective Model Terms for  $R_m$

ANOVA	Source		df	F-value	Prob > F
Original	Model		5	23.35	0.0001
	A		1	10.63	0.0115
	B		1	18.97	0.0024
	AB		1	2.84	0.1305
	$A^2$		1	20.99	0.0018
	$B^2$		1	43.51	0.0002
	Residual		8		
	Lack of fit		3	1.23	0.3909
	Pure error		5		
	$R^2$	0.9359			
	Adj $R^2$	0.8958			

the high value of the regression coefficient ( $R^2 = 0.9359$ ), indicating 94% variability of the response variable. Eq. (6) could describe the effect of pH and substrate concentration on hydrogen production rate very well.

Apart from that, ANOVA analysis (Table 6) also showed the significant terms for  $R_m$  which comprised the second-order effect of pH ( $A^2$ ) and the second-order effect of substrate concentration ( $B^2$ ). Independent factors, main effects of pH (A) and substrate concentration (B) did exert significant effects on the  $R_m$  in the system. These indicated that these factors had great impacts on the hydrogen production rate. However, the interactive effects of pH and substrate concentration (AB) were not significant on the hydrogen production rate thus indicating that this term had little impact on the hydrogen production rate.

The optimum conditions for  $R_m$  were found to be pH 5.98 and substrate concentration of 80 g/L after setting the partial

derivatives of Eq. (6) to zero with respect to the corresponding variables. The maximum response value for  $R_m$  was estimated as 98 mL/h (Table 7). The contour was plotted based on Eq. (6) (Fig. 1b). As is shown in Fig. (1b), the  $R_m$  significantly presented as a “saddle” [8]. The  $R_m$  increased from 70 to 88 mL/h while the pH level and substrate concentration increased from 5.5 to 6.0 and 60 to 80 g/L, respectively. It is evident that the hydrogen production rate reached maximum as the substrate concentration increased from 60 g/L to 80 g/L in the pH range of 5.5-6.0. Controlled pH could stimulate microorganisms to produce hydrogen and the system would achieve a maximum hydrogen production potential [8].

Table 7 shows the pH varied for the optimum conditions of  $P_s$  and  $R_m$ . A higher pH was likely more favorable for  $R_m$  compared to  $P_s$ . However, substrate concentration had a similar influence on  $P_s$  and  $R_m$  resulting in identical optimum substrate concentration values for both of them [4]. To opti-

**Table 7. Measured and Calculated Values of the Confirmation Experiments**

Optimum Conditions	Maximum Calculated Value	Experimental Value
pH = 5.75 substrate = 80 g/L	$P_s = 272^a$	$P_s = 226^a(23)$
pH = 5.98 substrate = 80 g/L	$R_m = 98^b$	$R_m = 72^b(13)$

<sup>a</sup>Response in terms of hydrogen production potential (mL H<sub>2</sub>/ g carbohydrate).  
<sup>b</sup>Response in terms of hydrogen production rate (mL H<sub>2</sub>/ hr).

mize  $P_s$  and  $R_m$ , an overlay contour plot was developed (Fig. 2). Based on the overlay plot, the optimal conditions were found to be at pH range from 5.4 to 6.0, while the substrate concentration was 80 g/L.


concentration of 80 g/L which confirmed that the area for the optimum point was true.

**Validation of the Identified Optimal Conditions**

Two additional confirmation experiments were conducted for the validity of the statistical experimental strategies and to gain a better understanding of biohydrogen production from mixed cultures. The chosen conditions for pH and substrate concentration, and the experimental results are listed in Table 7. The results obtained revealed that the optimum  $P_s$  and  $R_m$  measured were close to those estimated using RSM and this confirmed that the RSM analysis was a useful technique for optimizing the fermentative biohydrogen production processes [4].

Many researchers have reported the optimization of the fermentative hydrogen production process using the response surface methodology [4, 8, 11]. Table 8 summarizes the optimal temperatures, pH and substrate concentration obtained in this study in comparison to those obtained by previous researchers. Since the experimental conditions and response variable in this study and those of the other studies differed, the optimal (initial) pH and substrate concentration for biohydrogen production varied. However, most of the optimal temperatures were in the mesophilic range (35 – 40 °C).

The optimal substrate concentration obtained in this study was 80 g/L POME, while the optimal substrate concentration obtained by Atif *et al.* [20] was 70 g/L POME. The difference of the hydrogen yield obtained in this study and that of Atif *et al.* [20] was because of the different temperatures used during the fermentative hydrogen production. The optimal substrate concentrations obtained by Mu *et al.* [4] were about 25 g/L sucrose. The optimal initial pH ob-

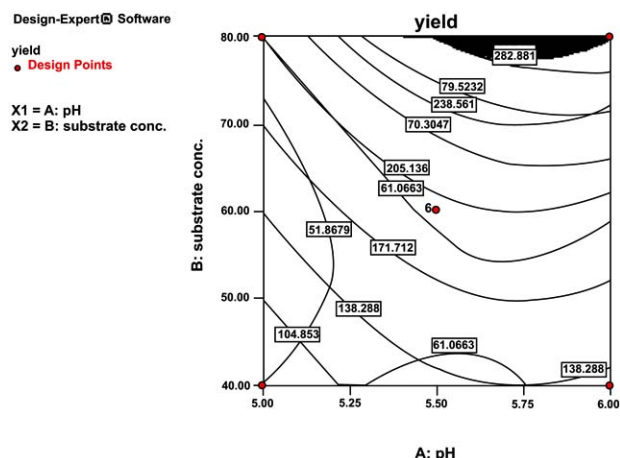

**Fig. (2).** The overlay plot of both contour for  $P_s$  and  $R_m$ .

To indicate the accurate optimum point from the overlay plot, the independent factors and all the responses that were considered to be important were optimized simultaneously using the numerical optimization method in the Design Expert Software [19]. From the analysis, the highest efficiency of hydrogen production occurred at pH 5.86 and substrate

**Table 8. Comparison of the Optimal Conditions for Biohydrogen Production Obtained in this Study and those of other Studies Using Mixed Culture**

pH	Temperature (°C)	Substrate	H <sub>2</sub> Yield (mL H <sub>2</sub> /g Carbohydrate)	Reference
5.5	34.8	Sucrose	252	[4]
5.4	37	Sucrose	90	[8]
4.5	37	Rice slurry	346	[21]
6.0 *	55	Starch	92	[22]
5.75*	37	POME	226 <sup>b</sup>	This study

\*initial pH.

tained in this study was 5.75, while the optimal initial pH obtained by Fan *et al.* [8] was 5.40.

## CONCLUSION

The initial pH and substrate concentration had impacts on fermentative biohydrogen production from POME individually and interactively. The maximum hydrogen yield of 272 mL H<sub>2</sub>/g carbohydrate was estimated at initial pH 5.75 and substrate concentration of 80 g/L. The maximum hydrogen production rate of 98 mL/hr was estimated at initial pH 5.98 and substrate concentration of 80 g/L. This showed that RSM is a useful tool to estimate the maximum value of biohydrogen production since it was successfully used to find the influences and interactions of the variables on the specific hydrogen production potential (yield) and the specific hydrogen production rate.

## ABBREVIATIONS

CCD	=	Central composite design
COD	=	Chemical oxygen demand
GC	=	Gas chromatograph
FD	=	Factorial design
POME	=	Palm oil mill effluent
P <sub>s</sub>	=	Specific hydrogen production
R <sub>m</sub>	=	Hydrogen production rate
RSM	=	Response surface methodology

## ACKNOWLEDGEMENTS

The authors would like to thank the National Science Fund and the Ministry of Science, Technology and Innovation (MOSTI) for financial support throughout this study.

## REFERENCES

- [1] O-Thong S, Prasertsan P, Intrasungkha N, Dhamwichukorn S, Birkeland NK. Optimization of simultaneous thermophilic fermentative hydrogen production and COD reduction from palm oil mill effluent by *Thermoanaerobacterium-rich* sludge. *Int J Hydrogen Energy* 2008; 33: 1221-31.
- [2] Karlsson A, Vallin L, Ejlertsson J. Effects of temperature, hydraulic retention time and hydrogen extraction rate on hydrogen production from the fermentation of food industry residues and manure. *Int J Hydrogen Energy* 2008; 33: 953-62.
- [3] Kyazze G, Dinsdale R, Hawkes FR, Guwy AJ, Premier GC, Donnison IS. Direct fermentation of fodder maize, chicory fructans and perennial ryegrass to hydrogen using mixed microflora. *Biores Tech* 2008; 99: 8833-39.
- [4] Mu Y, Wang G, Yu HQ. Response surface methodological analysis on biohydrogen production by enriched anaerobic cultures. *Enzyme Microb Tech* 2006; 38: 905-13.
- [5] Zhang Y, Yan L, Chi L, Long X, Mei Z, Zhang Z. Start-up and operation of anaerobic EGSB reactor treating palm oil mill effluent. *Int J Hydrogen Energy* 2008; 20: 658-63.
- [6] O-Thong S, Prasertsan P, Intrasungkha N, Dhamwichukorn S, Birkeland NK. Improvement of biohydrogen production and treatment efficiency on palm oil mill effluent with nutrient supplementation at thermophilic condition using an anaerobic sequencing batch reactor. *Enzyme Microb Tech* 2007; 41: 583-90.
- [7] Pan CM, Fan YT, Xing Y, Hou HW, Zhang ML. Statistical optimization of process parameters on biohydrogen production from glucose by *Clostridium* sp. *Fanp2. Biores Tech* 2008; 99: 3146-54.
- [8] Fan YT, Li CL, Lay JJ, Hou HW, Zhang GS. Optimization of initial substrate and pH levels for germination of sporing hydrogen-producing anaerobes in cow dung compost. *Biores Technol* 2004; 91: 189-93.
- [9] Lay JJ, Lee YJ, Noike T. Feasibility of biological hydrogen production from organic fraction of municipal solid waste. *Water Res* 1999; 33 (11): 2579-86.
- [10] Chong M-L, Rahim RA, Shirai Y, Hassan MA. Biohydrogen production by *Clostridium butyricum* EB6 from palm oil mill effluent. *Int J Hydrogen Energy* 2009; 34: 764-71.
- [11] Van Ginkel S, Sung S, Lay JJ. Biohydrogen production as a function of pH and substrate concentration. *Environ Sci Tech* 2001; 35: 4726-30.
- [12] Hawkes FR, Hussy I, Kyazze G, Dinsdale R, Hawkes DL. Continuous dark fermentative hydrogen production by mesophilic microflora: Principles and progress. *Int J Hydrogen Energy* 2007; 32: 172-84.
- [13] Lin CY, Chang CC, Hung CH. Fermentative hydrogen production from starch using natural mixed cultures. *Int J Hydrogen Energy* 2008; 33: 2445-53.
- [14] Ruggeri B, Tommasi T, Sassi G. Experimental kinetics and dynamics of hydrogen production on glucose by hydrogen forming bacteria (HFB) culture. *Int J Hydrogen Energy* 2009; 34: 753-63.
- [15] Wang J, Wan W. Optimization of fermentative hydrogen production process by response surface methodology. *Int J Hydrogen Energy* 2008; 33: 6976-84.
- [16] Venkata MS, Vijaya BY, Murali KP, Chandrasekhara RN, Lalit BV, Sharma PN. Biohydrogen production from chemical wastewater as substrate by selectively enriched anaerobic mixed consortia: Influence of fermentation pH and substrate concentration. *Int J Hydrogen Energy* 2007; 32: 2286-95.
- [17] American Public Health Association, Standard methods for examination of water and wastewater 19<sup>th</sup> ed. USA: Washington DC 1998; p. 1220.
- [18] Rodrigues L, Teixeira J, Oliveira R, Henny CM. Response surface optimization of the medium components for the production of biosurfactants by probiotic bacteria. *Process Biochem* 2006; 41: 1-10.
- [19] Sim JH, Azlina HK, Wei SL, Ghasem N. *Clostridium acetium* - A potential in catalyzing carbon monoxide to acetic acid: application of response surface methodology. *Enzyme Microb Tech* 2007; 40: 1234-43.
- [20] Atif AAY, Fakhru'l-Razi A, Ngan MA, Morimoto M, Iyuke SE, Veziroglu NT. Fed batch production of hydrogen from palm oil mill effluent using anaerobic microflora. *Int J Hydrogen Energy* 2005; 30(2): 1393-97.
- [21] Fang HHP, Li C, Zhang T. Acidophilic biohydrogen production from rice slurry. *Int J Hydrogen Energy* 2006; 31: 683-92.
- [22] Zhang T, Liu H, Fang HHP. Biohydrogen production from starch in wastewater under thermophilic condition. *Environ Manage* 2003; 69: 149-56.

Received: February 06, 2009

Revised: May 27, 2009

Accepted: June 09, 2009

© Rasdi *et al.*; Licensee Bentham Open.

This is an open access article licensed under the terms of the Creative Commons Attribution Non-Commercial License (<http://creativecommons.org/licenses/by-nc/3.0/>) which permits unrestricted, non-commercial use, distribution and reproduction in any medium, provided the work is properly cited.