

# Strategic business modeling: representation and reasoning

Jennifer Horkoff · Daniele Barone · Lei Jiang ·  
Eric Yu · Daniel Amyot · Alex Borgida · John Mylopoulos

Received: 1 November 2011 / Revised: 7 August 2012 / Accepted: 13 September 2012  
© Springer-Verlag Berlin Heidelberg 2012

**Abstract** Business intelligence (BI) offers tremendous potential for business organizations to gain insights into their day-to-day operations, as well as longer term opportunities and threats. However, most of today's BI tools are based on models that are too much data-oriented from the point of view of business decision makers. We propose an enterprise modeling approach to bridge the business-level understanding of the enterprise with its representations in databases and data warehouses. The business intelligence model (BIM) offers concepts familiar to business decision making—such as goals, strategies, processes, situations, influences, and indicators. Unlike many enterprise models which are meant to be used to derive, manage, or align with IT system imple-

mentations, BIM aims to help business users organize and make sense of the vast amounts of data about the enterprise and its external environment. In this paper, we present core BIM concepts, focusing especially on reasoning about situations, influences, and indicators. Such reasoning supports strategic analysis of business objectives in light of current enterprise data, allowing analysts to explore scenarios and find alternative strategies. We describe how goal reasoning techniques from conceptual modeling and requirements engineering have been applied to BIM. Techniques are also provided to support reasoning with indicators linked to business metrics, including cases where specifications of indicators are incomplete. Evaluation of the proposed modeling and reasoning framework includes an on-going prototype implementation, as well as case studies.

Communicated by Dr. Tony Clark, Balbir Barn, Alan Brown, and Florian Matthes.

J. Horkoff (✉) · D. Barone · L. Jiang · J. Mylopoulos  
Department of Computer Science, University of Toronto,  
Toronto, Canada  
e-mail: jenhork@cs.utoronto.ca; jenhork@cs.toronto.edu

D. Barone  
e-mail: barone@cs.toronto.edu

L. Jiang  
e-mail: leijiang@cs.toronto.edu

J. Mylopoulos  
e-mail: jm@cs.toronto.edu

E. Yu  
Faculty of Information, University of Toronto, Toronto, Canada  
e-mail: eric.yu@utoronto.ca

D. Amyot  
EECS, University of Ottawa, Ottawa, Canada  
e-mail: damyot@eecs.uottawa.ca

A. Borgida  
Department of Computer Science, Rutgers University, Camden, USA  
e-mail: borgida@cs.rutgers.edu

**Keywords** Business intelligence · Business model ·  
Conceptual modeling languages · Influence diagrams ·  
Goal · Situation · Key performance indicators ·  
Strategic planning

## 1 Introduction

Business intelligence (BI) offers tremendous potential for business organizations to gain insights into their day-to-day operations, as well as longer term opportunities and threats. The past decade has seen unprecedented interest in BI technologies and services, and a corresponding growth of the BI market. By now, most large organizations worldwide have a significant investment in BI. However, most BI systems are closely linked to the structure of available data, providing detailed statistics that may be hard to understand with respect to overall business strategy. A recent survey indicates that BI system users are less satisfied with system flexibility

and the ability to manage risk than they are with the system as a whole [1]. However, the flexibility required to modify BI queries, posing what-if analysis questions exploring risk factors, often requires technical knowledge concerning the structure of available data. Even state-of-the-art systems that raise the abstraction level of BI systems require detailed knowledge of queries and data dimensions (e.g., [2]). This need for technical knowledge poses a serious conceptual obstacle for most business users, who are interested in having their business data analyzed in their terms: strategic objectives, business models<sup>1</sup> and strategies, business processes, markets, trends and risks. BI data and statistics often focus on specific measures of current operations, without providing a clear link to how these measures affect business strategies, or how they facilitate planning and decision making. Consequently, the gap between the world of business and the world of IT-supplied data remains one of the greatest barriers to the adoption of BI technologies [3].

As in the broader area of enterprise modeling, there is a need to provide modeling support at the strategic business level, so that data residing in databases and data warehouses can be interpreted and understood in business terms, thereby facilitating reasoning over strategic decisions. To bridge this business-data gap in BI, we have proposed a strategic business modeling approach that makes use of concepts from existing modeling approaches or methodologies familiar to business decision makers (e.g., strategy maps [4], SWOT analysis [5], the business motivation model [6]). The business intelligence model (BIM) [7,8] is a business modeling language that offers concepts such as goals, strategies, processes, situations, influences, and indicators, and techniques for reasoning about them. Unlike many enterprise models meant to be used to derive, manage, or align with IT system implementations, BIM aims to help business users organize and make sense of the vast amounts of data about the enterprise and its external environment. An enterprise model such as BIM may be viewed as the business-level counterpart to conceptual data models (e.g., entity-relationships models), so that strategic objectives, business processes, risks and trends can all be represented in a BIM model, for purposes of analysis and monitoring.

Consider for example, a consumer electronics retailer with vast amounts of data from diverse sources available for analysis through BI tools. Business analysts and strategists want to be able to pose a variety of analysis questions, without being constrained by the structure of current BI reports and queries, which are often technically-oriented and difficult to modify. Instead, they want to pose questions at the business level,

facilitating reasoning over and comparison of potential business strategies. For example: Should we develop technology in-house or acquire technology through acquisition? Which option is better for maintaining revenue growth and reducing risks? Given the state of the business according to current data, will we be able to maintain revenue growth without new strategic partnerships or technology acquisitions?

In this paper, we build on existing work to show how construction and analysis of BIM models (also called schemas, by analogy to database schemas) could allow organizations to answer such questions. We capture the necessary business objectives, risks, and measures by focusing on three key concepts in BIM: situation, influence and indicator. BIM models can also be used to reason about strategic objectives, such as “increase sales volume” or “maintain revenue growth”, by estimating the degree to which they are achieved, or the probability that they will be achieved. Reasoning over BIM models can use current business data from indicators, or can use hypothetical data in “what if?” scenarios, facilitating both exploration and monitoring of business objectives. Although reasoning over BIM can allow analysts to formulate questions at the level of business strategies, it is challenging to completely elicit or specify all necessary links to business data (indicators, business metrics). Accordingly, our proposed techniques support reasoning even if BIM models are incomplete, missing information regarding indicators, business metrics, or probabilistic information, especially during intermediate stages of model development. Supporting reasoning over incomplete indicators requires use of qualitative reasoning techniques, which come with different information requirements.

Our previous work has introduced elements of the BIM language, describing key concepts and applications of reasoning techniques [8–10]. Further work describes BIM reasoning with indicator values from business data [11, 12]. The work presented in this paper is an extension, improvement and integration of our published work, combining existing BIM papers into one consistent description of language concepts and reasoning. Specifically, we build on existing work by:

- Offering a more precise and detailed account of core BIM concepts;
- Using a consistent running example from real-world analysis reports to demonstrate all concepts and reasoning techniques;
- Describing in more detail a methodology for constructing BIM models;
- Providing an overview of BIM reasoning techniques, summarizing information requirements and linking them to our proposed methodology;
- Providing more detail concerning the use of existing reasoning approaches for BIM, including details concerning the mapping of BIM to existing languages and tools;

<sup>1</sup> We use the terms “enterprise model” and “business model” in a conceptual modeling sense, i.e., a collection of elements and relationships typically having a graphical representation, and not in the business sense of how an organization creates, delivers, and captures value.

- Extending and revising the description of reasoning with indicators, including composite indicators;
- Describing how to reason with incomplete indicators using a hybrid reasoning approach;
- Consolidating the description of tool support for BIM, including use of existing model reasoning tools and custom-build BIM prototypes.
- Summarizing ongoing studies applying BIM to real-world cases, including a consideration of model scalability.

This research is conducted in the context of the Business Intelligence Network, a Canada-wide strategic research network with academic and industry partners.

The rest of the paper is organized as follows. Section 2 introduces BIM concepts. Section 3 presents alternative reasoning techniques for BIM models. Some of these are based on existing proposals. Others are novel, such as the indicator reasoning techniques that depend on the availability of indicator and probabilistic information. Section 4 describes use of existing tool support as well as in-progress implementations of prototype tools. We summarize the results of ongoing case studies using BIM in Sect. 5. Section 6 discusses related work, while Sect. 7 provides conclusions and outlines future work.

## 2 Strategic business models

In this section, we provide a description of the key components of the BIM, including goal, situation, influence, and indicator. A version of the metamodel linking these concepts can be found in [7,8]. A running example is introduced to illustrate these concepts and the reasoning techniques proposed in later sections.

### 2.1 Running example: BestTech

The example presents the viewpoint of BestTech, a generic company developing and selling consumer electronics. Model contents have been extracted from real-world analysis reports, published by DataMonitor, a company that specializes in industry analysis for a number of industry sectors. The example, presented incrementally in the following sections (Figs. 1, 2, 3), contains an interrelated network of goals, situations, processes, indicators, and domain assumptions relevant to BestTech.

### 2.2 BIM concepts and relationships

This section describes BIM's key concepts and relationships—goal, situation, influence, and indicator—in detail,

using our running example for illustration. This section is an expansion and consolidation of the BIM description in [8–12].

#### 2.2.1 Goal

The concept of goal has a long history as part of enterprise modeling (e.g. [13,14]) and requirements analysis (e.g., [15–18]). A goal represents an objective of a business. Goals may be (AND/OR) refined into sub-goals so that their satisfaction depends on that of their sub-goals. Moreover, a goal may be satisfied in multiple ways if it or its sub-goals are OR-refined, in which case a choice needs to be made among alternatives. In addition, a goal's satisfaction may be affected by that of goals other than its sub-goals. Using typical goal model syntax such as in [15,17,18] goal-oriented elicitation within an enterprise produces a goal model consisting of an AND/OR refinement graph including positive/negative contributions.

Examples of goals in the BIM language are shown in Fig. 1. Notice how the “To increase sales” goal is AND-decomposed into sub-goals “To increase sales volume” and “To maintain gross margin”. Similarly, the “To increase sales volume” goal is OR-decomposed into two alternative sub-goals, namely “To open sales channels”, and “To offer promotions”. Further concepts in this figure (e.g., situation, influence, and indicator) are explained in the following sections.


The satisfaction of a goal can be inferred from the satisfaction level of other goals using label propagation algorithms [19,20]. We describe how these algorithms can be applied to BIM in Sect. 3.

In addition to goals, the BIM language supports the notion of processes within an enterprise, as well as domain assumptions describing properties required for goal satisfaction. Domain assumptions can be thought of as situations required to be true in order to achieve a goal. Domain assumptions can be part of a goal refinement alongside other sub-goals. We see an example of a domain assumption in Fig. 1 where “High demand” must be true in order for “Increase Sales” to be satisfied. A domain assumption may, in fact, be false (broken), in which case goal fulfillment is not possible.

Processes can be associated with a particular goal. We say that a process achieves a goal, represented by an *achieves* link. When used in this way, processes provide a “how” dimension to complement the intentional “why” dimension of goals. We further connect these concepts to business processes with the notion of indicator, explored in later sections.

#### 2.2.2 Situation

During strategic planning, SWOT analysis [5] is often used to identify internal and external factors that may influence

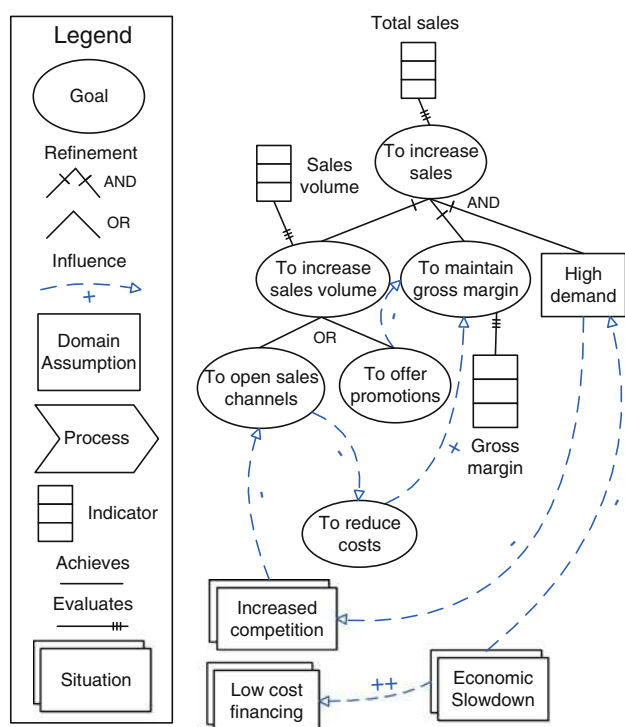

**Fig. 1** Example of goals, situations, and influences for BestTech

the fulfillment, favorable or unfavorable, of strategic goals. SWOT stands for Strengths (internal, favorable), Weaknesses (internal, unfavorable), Opportunities (external, favorable), and Threats (external, unfavorable). We propose to model these in terms of the notion of situation. Intuitively, a situation defines a partial state of affairs (partial model of the world) in terms of things that exist in that state, their properties, and interrelations [21]. Since we are interested in strategic business models, we focus on organizational situations. The same situation may be favorable for some organizational goals, represented via positive influence links on model concepts, but unfavorable for others, represented via negative influence. In our example, the situation “Increased competition” constitutes a threat to the goal “To open sales channels”), while “low cost financing” is an opportunity for “Healthy balance sheet” and therefore “Sufficient Funds”, and “economic slowdown” is a threat for “High Demand”.

Analogously to satisfaction levels for goals, we have *occurrence* levels for situations, which denote the degree to which a situation occurs in the current state-of-affairs.

### 2.2.3 Influence

To express the influence of situations on strategic goals and other situations, we extend the contribution relation from goals to situations. In order to support both reasoning over goal satisfaction/denial and reasoning using conditional probabilities, BIM supports two types of influence

links: logical and probabilistic. Quantitative logical influence links are an estimation of the positive or negative influence of an object on another, while probabilistic influence links estimate the probability of an object being satisfied (denied) given the satisfaction (denial) of another object. In either case, influence links can have varying strengths specified in qualitative or quantitative terms.

**Logical influence.** As in many goal modeling approaches (e.g., [15, 17, 18]), one goal influences another if its satisfaction/denial implies (partial) satisfaction/denial of the other. Such relations also hold between situations and goals. We call this type of influence *logical*.


The influence strength is modeled using qualitative values: + (weak positive), ++ (strong positive), – (weak negative), and – – (strong negative), as in existing goal modeling frameworks. When logical qualitative values are not expressive enough to capture the difference between influence strengths, quantitative logical values in some standard range (e.g.,  $[-1, 1]$ ) can be used. For example, + may correspond to 0.5 and ++ to 1.0. If the modeler wants to express a strength in between, a number (e.g., 0.7) may be used, instead of further qualitative values.

Figure 1 shows some examples of influences from situations to goals, e.g., the “Increased competition” situation, representing an external threat for the company, influences negatively the “To open sales channels” goal. Similarly, the situation “Economic slowdown” negatively influences the domain assumption “High demand”. An example of influence among goals can be seen in the negative link from “To offer promotions” to “To maintain gross margins”.

**Probabilistic influences.** To support probabilistic reasoning, we also support probabilistic influences among situations, goals and domain assumptions. In this case influence links represent the conditional probability of satisfaction. For example, in Fig. 1, if the partial positive influence link between “To reduce costs” and “To maintain gross margins” had a probabilistic type with a strength of 0.7, it would mean that the probability of “To maintain gross margin” occurring given the satisfaction of “To reduce costs” is 0.7 ( $P(\text{To reduce costs} \mid \text{To maintain gross margin}) = 0.7$ ). These strengths can be quantitative (e.g., 0.7, 70% chance of satisfaction) or qualitative (e.g., high chance of satisfaction). In Sect. 3.3, we show how this type of influence is used to support decision-theoretic analysis. We summarize supported influence types in Table 1, showing example

**Table 1** Example influence strengths for each combination of indicator and measurement type

	Influence Types	
	Logical	Probabilistic
Qualitative	++, +, -, --	High, Medium, Low ( $P(A B)$ )
Quantitative	+0.7, -0.7, +0.2, -0.2, 1.0	0.73, 0.2, 1.0 ( $P(A B)$ )

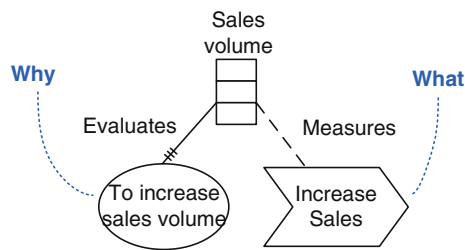

**Fig. 2** Detailed view of an example indicator

influence strengths for each combination of influence and measurement types.

#### 2.2.4 Indicator

A successful business depends both on its initial strategic planning and subsequent business operations. Performance measures play an important role in helping businesses align their daily activities with their strategic objectives. Generally speaking, performance measures quantify various aspects of business activities, including their input, execution and output, for monitoring, control and improvement purposes [22]. We model performance measures through indicators. An *indicator* (or in some cases, a key performance indicator) is a metric that evaluates performance with respect to some objective, be it the degree of fulfillment for a strategic goal, or the quality of a business process or product. Such metrics can be directly derived from data, or can use a formula to combine values. In BIM, indicators constitute a conceptual bridge connecting a BIM model to enterprise data found in a variety of data sources.

In BIM, each indicator is associated with a particular model element (e.g., goal, situation). Indicators associated with a goal are also associated with a process which achieves the goal. Associating an indicator with a goal provides the “why” dimension, motivating the need for a specific measure, while association with a process provides the “how” dimension, linking the indicator to a concrete business process. We say that an indicator *evaluates* a particular goal (or situation) while it *measures* a process. A simple example is shown in Fig. 2, extracted and expanded from Fig. 1. Here the “Sales volume” indicator evaluates the “To increase sales volume” goal and measures the “Increase Sales” process. In order to simplify model presentation, we often omit the concrete processes which may be associated with indicators.

Further, example indicators can be found in Fig. 1, where “Gross margin” evaluates “To maintain gross margin” and “Total sales” evaluates “Increase Sales”.

Performance measures employed in a business environment often form an aggregation hierarchy—a higher-level measure is defined in terms of lower-level ones. Top level measures (e.g., “Total sales”, “Sales volume”) usually give a clear picture whether a business is moving towards fulfill-

ing its strategic objectives, while leaf level measures (e.g., “Number of competitors”, “Number of promotions”) are usually tied to specific actions and responsibilities.

When eliciting or defining hierarchies of composite indicators, the value of an indicator measuring a model element should depend on the values of indicators measuring elements one level lower in the hierarchy. Unfortunately, there are no guidelines on how this dependency should be defined consistently for a given BIM model. We address these issues, including indicator measurement and propagation, in Sect. 3.4.

#### 2.3 Construction of BIM models: sample methodology

In practice, BIM models can be built iteratively, either by starting with business goals and then working in a “top-down” fashion to derive required indicators and processes by asking “how” questions. Alternatively, one can start with indicators and processes and work “bottom-up” to elicit goals and situations by asking “why” questions. For illustration purposes, we describe here a hybrid method, performing “top-down” goal and situation elicitation based on the Tropos goal-modeling methodology [23], then matching existing indicators to elicited business goals and situations. This approach can reveal the need for indicators that do not yet exist in the current BI implementation. Such a hybrid approach is often applicable in practice, as many organizations have an existing set of business indicators and data sources.

We start our example by identifying business goals and their interrelationships. Such a process can be viewed as part of strategic planning [24], usually starting with the definition of an organization’s mission, followed by the specification of goals for fulfilling the mission, and the strategies to achieve these goals. In our Fig. 3 example, we have two root goals: “To maintain revenue growth” and “To reduce risks”. To achieve the first one, we need to achieve both “To increase sales” and “To maintain competitive advantage”. Influences are also identified among sub-goals. One of several alternative ways to maintain competitive advantage is “To acquire technology through partnership”. This alternative helps to reduce financial risk, but increases the dependence on external partners. A goal can be decomposed into both sub-goals and domain assumptions. For example, in addition to achieving the goals “To increase sales volume” and “To main gross margin”, the domain assumption “High demand” (for our products/services) needs to be true, in order fulfill the goal “To increase sales” (in dollar amount).

After goal modeling, we identify the internal and external factors that may influence fulfillment of the goals identified previously. Specifically, we start with domain assumptions in the model, and ask the question: what observable evidence could potentially support or challenge these assumptions.



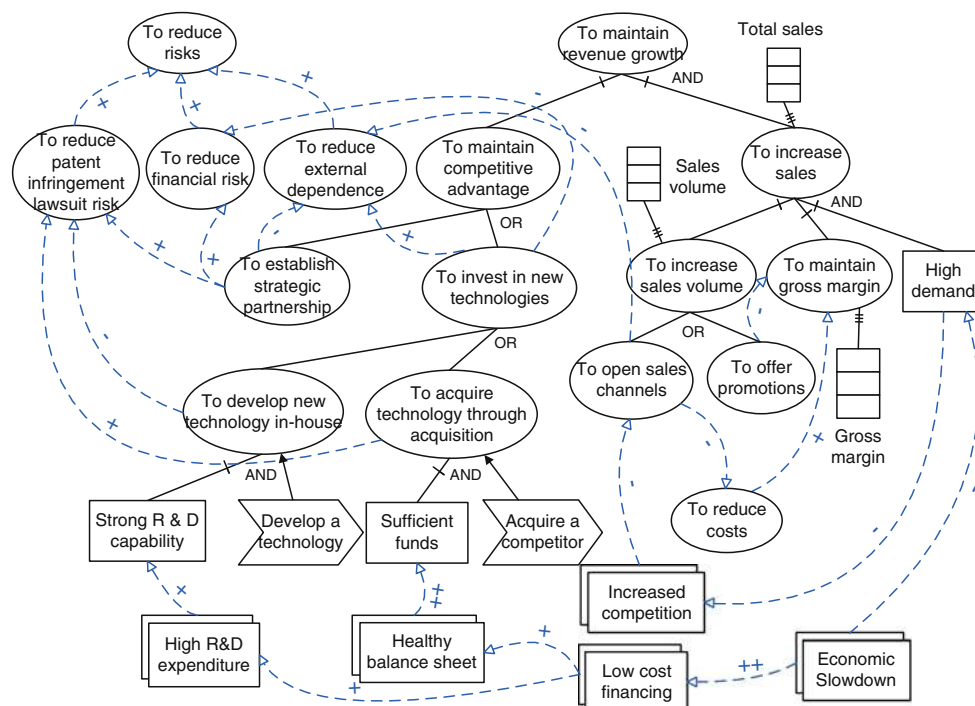


Fig. 3 BestTech model example

In our example, “High R&D expenditure” (strength) positively contributes to the domain assumption “Strong R&D capability”, while “Healthy balance sheet” (strength) suggests with a high degree of certainty that there are “Sufficient funds” available to make strategic investment. Situations may also influence goals directly. For example, the fact “Increased competition” (threat) may hinder the fulfillment of the goal “To open sales channels”. Influences may also occur among situations. For example, “Low cost financing” (opportunity), caused by “Economic slowdown”, positively contributes to “High R&D expenditure” and “Healthy balance sheet”.

To choose the right indicators for a given object, be it a goal, process or product, one must have a good understanding of what is important to the organization. Moreover, this importance is generally contextual. For instance, indicators useful to a finance team may be inappropriate for a sales force. Because of the need to develop a good understanding of what is important, performance indicators are closely associated with techniques for assessing the present state of the business. A very common method for choosing indicators is to apply a management framework such as the Balanced Scorecard [25], whereby indicators measure a range of factors in a business, rather than a single one (e.g., profits). Approaches such as Basili’s Goal-Question-Metric [26] are also available to help identify and validate indicators measuring goal satisfaction.

In our example, some indicators are associated with the goals under “To increase sales”. Note that these indicators

are composite indicators, and may be further decomposed. For example, “Gross margin” may be broken down by product/service categories, fiscal periods, or geographical locations. Also notice that although not shown, “Total sales” (in dollar amount) can be mathematically determined by “Sales volume” and “Gross margin”, entailing a hierarchical relation among these indicators. We return to the topic of composite indicators, including further examples, in Sect. 3.4.

Elicitation of business goals, relevant situations, and current indicators can be accomplished through a series of interviews, focus groups, or a review of available strategy documentation. Ideally, model construction would be iterative and participatory, involving business stakeholders at varying levels of the organization (e.g., management, technical personnel) in a process of model construction and validation. In practice, the number of relevant business goals and indicators may be large. Our Fig. 3 example is kept relatively simple for illustrative purposes, not reflecting realistic complexity. Uses of BIM in practice, including suggestions for modularization of BIM models to allow for scalability, are described in Sect. 5.

### 3 Reasoning with BIM models

Although the construction of a BIM model is useful as a means to clarify and communicate business objectives,

**Table 2** Reasoning techniques applied to BIM including required information and corresponding paper section

Reasoning technique	Required information	Described in section
Goal model reasoning	Initial reasoning values	3.2
Probabilistic decision analysis	Conditional probability tables, Utility functions	3.3
Reasoning with indicators	Atomic indicator values, Business formulae, Unit conversion factors	3.4
Hybrid reasoning (reasoning with incomplete indicators)	Atomic indicator values, (optional) business formulae, (optional) unit conversion factors, (optional) initial reasoning values	3.4.7

strategies, and organizational situations, much of the benefits of BIM models come from the capability to support reasoning. Reasoning with BIM allows an organization to answer strategic or monitoring questions. For example, Best-Tech may want to pose the following questions:

- Should we develop technology in-house or acquire technology through acquisition? Which option is better for maintaining revenue growth and reducing risks?
- Is it possible to maintain revenue growth while reducing risks? What strategies can achieve these goals?
- Given business metrics and target values, what increase in sales volume can be expected from the current number of sales channels and new promotions?
- Given the state of the business according to current data, will we be able to maintain revenue growth without new strategic partnerships or technology acquisitions?

In order to support a variety of analysis questions over BIM models, several types of reasoning approaches can be applied, including existing reasoning approaches for similar types of models and approaches making use of business metrics and indicators. The selection of a reasoning approach depends on the types of analysis questions posed, the methodological phase, and the availability of specific information. An end-user may prefer a reasoning approach over others depending on the quantity of domain information that she/he possesses, or on the available time she/he has for encoding such information into the model. Table 2 summarizes the types of reasoning described in this paper, including a summary of the information required for each procedure, and the paper section in which the reasoning approach is described. Earlier descriptions of each of the first three types of reasoning were provided in [10–12]. We provide an overview of each type of reasoning in the next section.

### 3.1 Overview of reasoning approaches

**Goal model reasoning.** If a BIM model is constructed in a top-down manner, eliciting relevant goals and strategies before deriving or eliciting indicators, reasoning must

operate in the absence of indicator values. Such models, used as part of strategic planning, often results in alternative strategies. It is important to be able to analyze and compare strategies at a high-level. Techniques that facilitate strategic analysis using enterprise goals have long been used as part of goal-oriented analysis [15, 19, 27–30]. These procedures propagate either qualitative or quantitative evidence through links in the model in order to evaluate the satisfaction of goals in the model given a particular strategy or target. Although quantitative propagation is supported, most techniques for goal model reasoning operate in the absence of concrete business measures, making them appropriate for high-level, strategic analysis in the absence of indicators. These approaches are suitable when the user is interested in an early analysis of the domain, exploring and improving the model while it may not yet be sufficiently complete or correct [29].

In this work, we select a particular goal reasoning technique (introduced by Giorgini et al. and described in [19, 20, 31]) and demonstrate how this technique can be used to analyze alternative strategies in BIM models. Other procedures, such as those described in [15, 27–29] could be similarly adapted.

**Probabilistic decision analysis.** In some cases it may be possible to derive probabilistic information concerning the likelihood of goal achievement given the achievement of other model elements. This information can be collected from business experts, depending on their level of expertise and confidence, or from past statistical data. If such information is available, probabilistic decision analysis can be applied to BIM models, providing an alternative method for choosing among business strategies. During strategic planning, a strategy is normally produced by making decisions at a number of decision points. At each point, a decision option is chosen from a pool of available options. Probabilistic decision analysis facilitates automated decision making, selecting strategies, using conditional probabilities and utility functions.

**Reasoning with Indicators.** If BIM model construction is performed in a bottom-up manner, indicators and their data sources will be derived or elicited from the business. In this case, reasoning techniques must support reasoning over

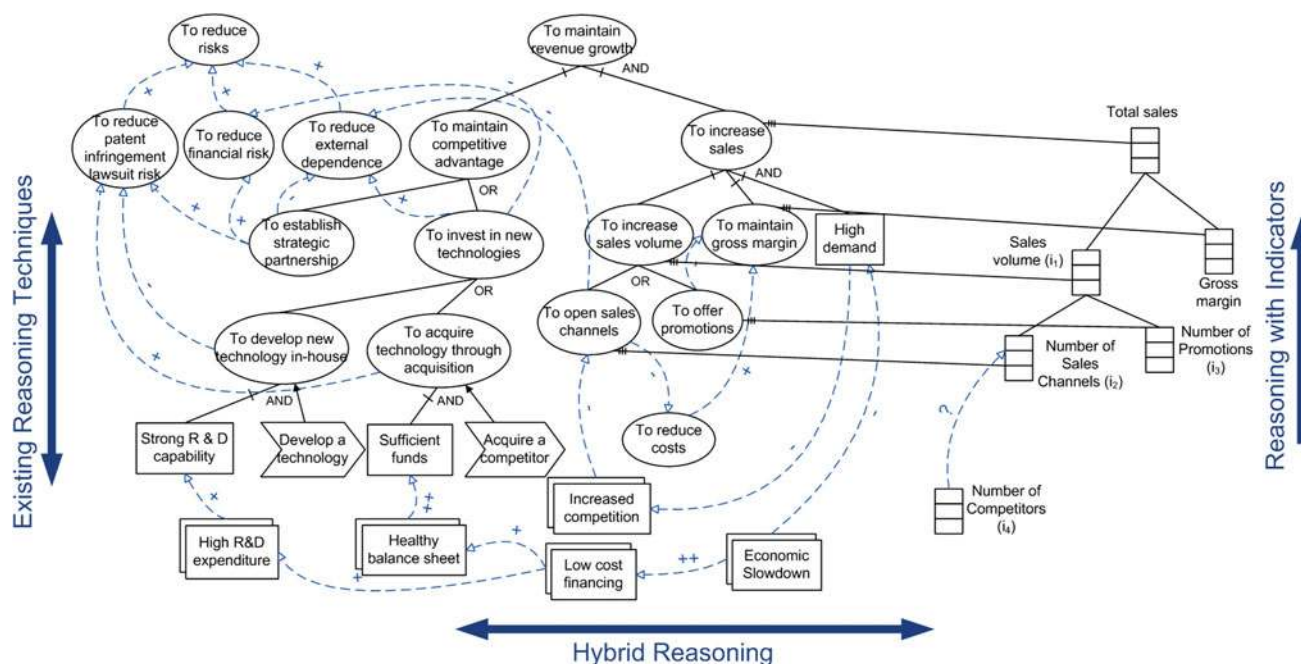


Fig. 4 Alternative view of Fig. 3 separating goal/strategy and indicator hierarchies showing application of reasoning techniques

indicators, using current values to calculate *composite* indicators, indicators whose values are obtained from those of their *components*. These components themselves may also be composite, leading to an aggregation hierarchy of indicators. In order to support indicator reasoning, we wish to propagate values of indicators from a lower level in a hierarchy to ones higher up. In some cases, a business metric or mathematical function may exist to combine composite indicator values. Such formulae may or may not include unit conversion factors. We describe methods which calculate composite indicator values using either available unit conversion factors or unit normalization, allowing for optional indicator weights.

In other cases, there is no well-defined mathematical function that relates atomic indicators to a composite one. This might simply be due to lack of knowledge about the indicators, or the intrinsic nature of the indicators at hand. We adapt existing techniques for goal model reasoning for reasoning with indicators, deriving values of composite indicators, even when the relationship between a composite indicator and its components cannot be fully described using well-defined mathematical functions.

#### Hybrid reasoning: reasoning with incomplete indicators.

As described in our example methodology (Sect. 2.3), model construction may typically consist of a mix of strategic planning and goal identification combined with the elicitation and understanding of existing business indicators. As a result, models will often not have indicators corresponding to all model elements. By combining techniques for reasoning with indicators with existing reasoning techniques,

we can create a hybrid technique which supports reasoning with incomplete indicators. Figure 4 shows an abstract view of our BestTech example, separating the strategic goal hierarchy from the indicator hierarchy. Here we can see that the indicator hierarchy is not complete with respect to the BIM model, and yet we would like to reason over the entire model. Existing reasoning techniques can be applied to the hierarchy on the left hand side, while indicator reasoning techniques can be applied to the right. Hybrid techniques, reasoning with incomplete indicators, can be used to bridge the gap between these views, propagating values from right to left (forward in the direction of the links) using quantitative normalization.

### 3.2 Reasoning with BIM models using goal modeling techniques

In this section, we explore application of an existing goal model reasoning technique in order to evaluate specific strategies and discover alternative strategies.

#### 3.2.1 Evaluation of specific strategies

Goal-oriented requirements engineering has studied the problem of systematic exploration of alternative designs for achieving specified goals. In some cases, a manager has specific strategies and she wants to compare them relative to given root goals (in order to eventually select one). A bottom-up/forward reasoning algorithm (e.g., [15, 19, 27–30]) starts



**Table 3** Qualitative propagation rules from Giorgini et al. [19] (the (OR), (+D), (−D), (++)D, (− − D) cases are dual w.r.t. (AND), (+S), (−S), (++)S, (− − S) respectively)

		$(G_2, G_3) \xrightarrow{\text{and}} G_1$	$G_2 \xrightarrow{+S} G_1$	$G_2 \xrightarrow{-S} G_1$	$G_2 \xrightarrow{++S} G_1$	$G_2 \xrightarrow{- - S} G_1$
Sat( $G_1$ )	$\min \left\{ \begin{array}{l} \text{Sat}(G_2), \\ \text{Sat}(G_3) \end{array} \right\}$	$\min \left\{ \begin{array}{l} \text{Sat}(G_2), \\ P \end{array} \right\}$	$N$	$\text{Sat}(G_2)$	$N$	
Den( $G_1$ )	$\max \left\{ \begin{array}{l} \text{Den}(G_2), \\ \text{Den}(G_3) \end{array} \right\}$	$N$	$\min \left\{ \begin{array}{l} \text{Sat}(G_2), \\ P \end{array} \right\}$	$N$	$\text{Sat}(G_2)$	

with an assignment of satisfaction values to some goals in a goal model. Such an assignment corresponds to a particular strategy to fulfill root goals. It then forward propagates these input values to the root goals, according to a set of pre-defined propagation rules.

Most goal-oriented analysis procedures support either qualitative or quantitative reasoning. Qualitative or quantitative values or label are assigned to or computed for each connected goal in the model. These values represent the level of positive and/or negative evidence received via relationships from other goals, which themselves have positive and/or negative evidence. Goal model propagation specifies what level of evidence propagated through what relationships produces what resulting level of evidence. Procedures described in [15, 19, 28, 29] support a qualitative scale of *satisfied* and *denied* levels. For example, the procedure in [19] supports two variables over each goal: goals have *satisfiability* (*S*) values but also *deniability* (*D*) values. During label propagation, a goal can be both “partially/fully satisfied” (PS/FS) and “partially/fully denied” (PD, FD). For a goal,  $G_1$ , these values are recorded by functions  $\text{Sat}(g_1)$  and  $\text{Den}(g_1)$ , respectively. Sat and Den values belong to the set  $\{N, P, F\}$  (none, partial, full). For simplicity, the same information can be recorded using predicates FS, PS, PD, and FD, over goals, to represent their level of satisfaction or denial (e.g., *PS(g) being true corresponds to  $\text{Sat}(g) = 'P'$* ). Typically, predicate labels are written on models as shorthand representing the level of satisfaction or denial in analysis results.

In this procedure, qualitative satisfaction and denial is propagated through the model using the semantics of model links (decomposition, contribution, etc.) For example, in Table 3, the rule  $(G_2, G_3) \xrightarrow{\text{and}} G_1$  states how labels are propagated when there is an AND-decomposition relation between goal  $G_1$  and sub-goals  $G_2$  and  $G_3$ .

Contribution links between goals, as used in this procedure, can be negative or positive, symmetric or asymmetric, and can have varying strengths. Polarity and strength are represented by a number of  $+/-$  symbols, specifically  $+$ ,  $++$ ,  $-$ , and  $--$ . In this case, symmetry refers to whether the links propagates only positive evidence (*S*), negative evidence (*D*) or both. For example,  $G_2 \xrightarrow{-S} G_1$  states how labels are propagated when there exists a weak asymmetric negative relation between goals  $G_2$  and  $G_1$ . If  $G_2$  is satisfied, then there is so evidence that  $G_1$  is denied, but if  $G_2$  is denied, then

nothing is said about the satisfaction of  $G_1$  (see [19] for further details.)

In order to use this procedure with the BIM syntax, we require a mapping between BIM and goal model concepts. The languages contain many overlaps, for example, goals and operationalization into processes. Giorgini et al. describe propagation over goals, but such propagation can be applied to the BIM concepts of situation, goal, and domain assumption. For the purpose of BIM concepts, propagation through AND/OR refinement can be treated in the same way as in existing goal reasoning techniques. The *achieves* link, can be thought of as a more specific type of AND/OR refinement. When applying reasoning, it is indistinguishable from AND/OR.

For the purpose of applying existing goal reasoning techniques to BIM, if influence links are qualitative logical influences as described in Table 1, we can apply contribution link propagation rules directly to influence links. Quantitative propagation is discussed later in this section.

Propagation using indicators, including *measures* and *evaluates* links, will be explored in Sect. 3.4, on reasoning with indicators.

**Running example.** In the context of BestTech, we have asked: Should we develop technology in-house or acquire technology through acquisition? Which option is better for maintaining revenue growth and reducing risks? Consider the input assignment depicted in Fig. 5, where we choose “To maintain competitive advantage” by partially fulfilling the goal “To develop new technology in-house”; we also assume that we fully satisfy the goal “To increase sales”. Notice that goals with input assignment are shaded. Bottom-up reasoning propagates these input labels up the goal hierarchy all the way to the two root goals (see Sect. 4 for a description of the various tools which can be used to facilitate this type of reasoning). When propagating evidence in this example, we treat all influence links as symmetric (propagating both positive and negative evidence). As described, each model element has two values (Sat and Den). However, we use the common shortcut of only displaying values which are not none (*N*).

As we can observe from the result (shown in Fig. 5), this strategy leads to “To maintain revenue growth” being partially satisfied, while “To reduce risks” is both partially satisfied and partially denied, producing a conflicting situation

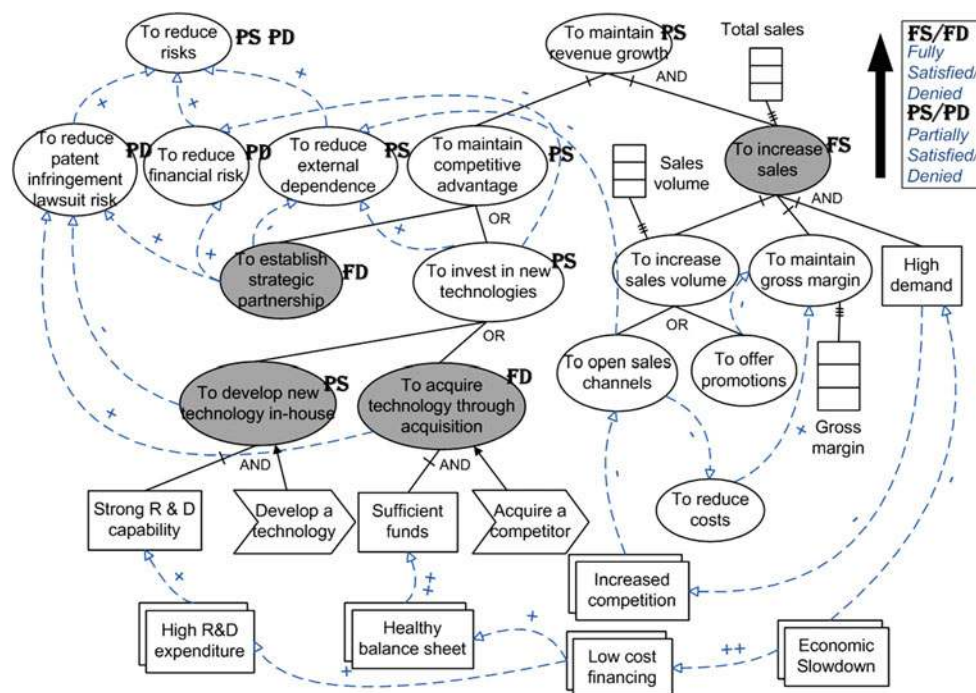


Fig. 5 Bottom-up goal reasoning example

for this goal. The analyst can use these results to investigate the cause of the conflict, looking for strategies which effectively achieve the “To reduce risks” goal.

**Quantitative propagation.** Figure 5 demonstrates a particular qualitative reasoning for goal modeling [19] adapted for BIM. Several existing procedures provide similar propagation using quantitative scales. For example, in Giorgini et al. [30], an expansion of the procedure in [19], satisfaction and denial values each range from 0 to 1. Here, positive or negative links (+, −) are assigned a quantitative strength or weight, also between 0 and 1. Propagation rules are adjusted to accommodate quantitative values, using link strengths and min/max operators over AND/OR links. This procedure intends for the resulting numbers to represent probabilistic values, as in a Bayesian network. If it were to be applied to BIM models, quantitative probabilistic indicators, as described in Table 1, would be used.


In the quantitative approaches to goal model reasoning, including the Giorgini et al. approach, the sources of initial quantitative satisfaction and denial values, as well as the numeric link weights, is controversial. Giorgini et al. advocate collecting the numbers from domain experts, but the accuracy and meaningfulness of such numbers have been questioned [32,33]. There is a need to ground these numbers in realistic business measures. We address this issue by attaching indicators to goals and other model elements, grounding quantitative data in real data. We describe the use of indicators in BIM reasoning in Sect. 3.4.

### 3.2.2 Discovering alternative strategies

In other cases, a manager may be interested in finding possible viable alternatives within a model, given certain constraints. Given a goal model and an assignment of desired satisfaction values (either qualitative or quantitative) to its *root goals*, a top-down/backward reasoning algorithm [30,34] can look for an assignment (*strategies*) to *leaf* goals, processes and domain assumptions that lead to the desired satisfaction values of those root goals.

**Running example.** We have asked: Is it possible to maintain revenue growth while reducing risks? What strategies can achieve these goals? We add as targets to our two root goals, *FS*(“To maintain revenue growth”) i.e., we strongly desire revenue growth, and *PS*(“To reduce risks”). The algorithm generates a possible strategy, shown in Fig. 6, which makes the required assignments true (here, the root goals with required assignments are shaded).

In this strategy, for example, the goal “To establish strategic partnership” is preferred to “To invest in new technologies”, while the goal “To offer promotion” is preferred to “To open sales channels”. However, similar to our bottom-up reasoning, the selection of these alternatives produces conflicting results for “To reduce risks” and “To reduce external dependencies”. Had we not wanted such conflicts, we could have also tried to specify  $\neg PD$ (“To reduce risk”), though there may be no solution that satisfies these conditions.



Decision analysis techniques rest on an empirically verified assumption that humans are capable of framing a decision problem, listing possible decision options, and quantifying uncertainty, but are rather weak in combining information into a rational decision. An influence diagram [35] is a decision model that supports decision-making by computing the expected utility value of each decision option; the option with the highest utility value is optimal and should be chosen by the decision maker. Influence diagrams include: *decision nodes* for specifying decision options, *chance nodes* for quantifying uncertainty, and *value nodes* for quantifying user preferences using utility functions.

- Goals, processes, domain assumptions and situations are translated to Chance Nodes, meaning that they are they represent uncertain quantities relevant to the decision problem; the uncertainties quantified by conditional probability distributions.
- Each AND-decomposition link is translated into an influence link if the target node is a goal; it is removed if the target is a domain assumption (since its truth value is not influenced by whether the parent goal is been pursued or not). Also notice, an AND-decomposition is not really a

- Each OR-decomposition link in BIM is translated into a decision node.
- Influence links among domain assumptions and situations, as well as those having goals as the source or target node, are translated into influence links. Note that the strength of the original influence link will not be used in the influence diagram; instead the user needs to define the conditional probability table for the source and target nodes.

 Springer



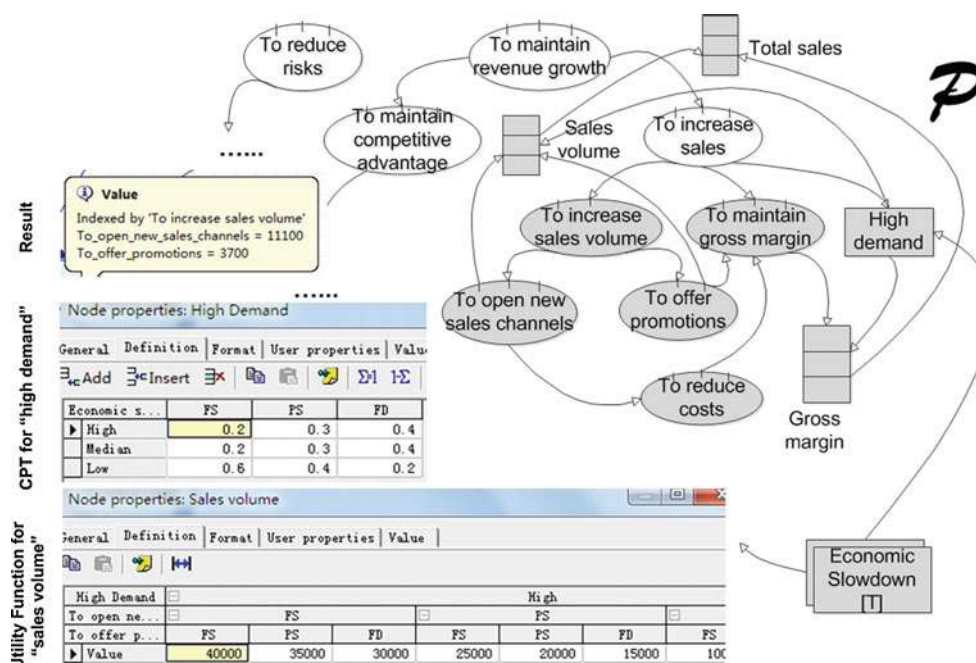


Fig. 7 Decision analysis

expected gain for the indicators “Sales volume” and “Gross margin” (which could then be combined into “Total sales”)?

To reason with an influence diagram, we need to estimate conditional probabilities of various events, such as high demand (domain assumption) for a certain product given economic slowdown (its parent node), or high sales volume given that we open a sales channel vs. we offer a promotion; these events directly or indirectly affect the outcome of a decision. The possible outcome of a chance node is not restricted to be binary. For example, we can talk about “high demand” being true, partially true or false. These probabilities are represented by a conditional probability tables (CPTs) for each event; the one for the event “High demand”, given its parent event “Economic slowdown”, is shown in Fig. 7. To support this form of reasoning, influence links must be probabilistic with strengths corresponding to the conditional probabilities in the probability tables.

In addition to CPTs, we also need to specify the utility function of each value node. A utility function introduces a measure of preference by mapping possible outcomes of a decision process on the set of real numbers. For example, the utility function for “Sales volume” given “To open sales channels”, “To offer promotions” and “High demand” is shown in Fig. 7. In particular, it maps {“High demand” = high, “To open sales channels” = FS; “To offer promotion” = FS} to the number 40,000, while {“High demand” = high, “To open sales channels” = FS, “To offer promotion” = PS} to 35,000. Notice it is the relative ordering of the utility function values that are important, not the absolute values. However, if values are very close (e.g., 35,000 and 34,950),

this may indicate that the models should be expanded to better differentiate between outcomes.

Given the CPTs for each event and the utility functions for each value node in the model, the algorithm produces utility values for the value nodes for all possible decision options (in our example, we have two decision options: “To open sales channels” and “To offer promotions”). The results show that the utility for “To open sales channels” is 11,100, which is higher than the 3,700 for “To offer promotions”. In this example, the option “To open sales channels” is preferable over “To offer promotions” as far as “Sales volume” is concerned.

### 3.4 Reasoning with indicators

In this section, we describe how indicators, linking to business data, can be used in analysis, including performance levels for indicators, composite indicators, and a variety of techniques for reasoning with indicators as part of BIM. Reasoning techniques include use of mathematical equations derived from business metrics to propagation rules derived from model structure, making use of unit conversion or normalization when needed. This section is an expansion and reorganization of material presented in [11, 12].

#### 3.4.1 Indicator performance levels

As described in Sect. 2.2.4, an *indicator* is a measure, quantitative or qualitative, of the progress or degree of fulfillment of organization goals. The subject of an indicator is

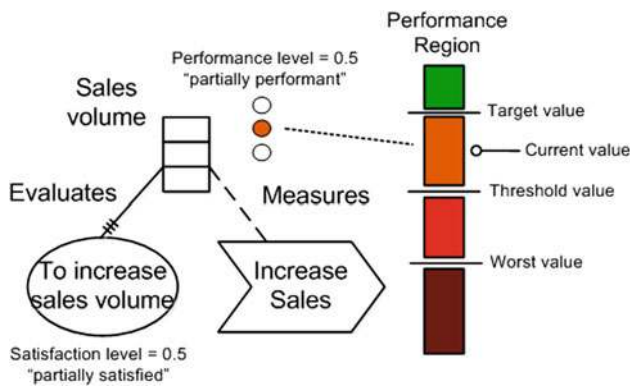


Fig. 8 Indicator goal example with performance region

a particular feature or quality of an element in the business environment, e.g., the workload of an employee, or the compliance of an internal process with respect to external regulations. To express *why* an indicator is needed, we rely on the *evaluates* relation. For example, the indicator “Sales volume” is needed (why) to evaluate the goal “To increase sales volume”.

Each indicator, has a *current value* (*cv*) which is evaluated against a set of parameters: *target* (*value*), *threshold* (*value*) and *worst* (*value*) [22]. The result of such an evaluation is a normalized value (ranging in  $[-1, 1] \subset \mathbb{R}$ ), which is often referred to as the *performance level* for an indicator.

Note that a current value can be assigned by: (i) extracting it at run-time from back-end data sources, (*dimensions* and *levels* [22] can be used to filter data from data warehouses); or (ii) supplied by users to explore “what-if” scenarios; or (iii) calculated by a *metric* expression in the case of composite indicators, as explored in Sect. 3.4.4.

An indicator can be *positive*, *negative*, or *bidirectional*, meaning that we want to maximize, minimize or balance its target. *Performance regions* are defined for each type of indicator by properly combining the indicator’s parameters. Figure 8 shows an example of performance region for a positive indicator, i.e., we want to maximize sales volume, in which  $Target \geq Threshold \geq Worst\ value$ .

The relative position of indicator current values within such regions allows calculation of the performance level for an indicator, as shown in Fig. 9. Notice how the worst and target values are mapped respectively to  $-1$  and  $+1$ , while the threshold value is mapped to  $0$ . A linear interpolation is used to approximate performance levels, as also described by Eq. (1) [36]:

$$pl(current\ v.) = \begin{cases} \frac{|current\ v. - threshold\ v. |}{|target\ v. - threshold\ v. |}, & \text{if } current\ v. \geq threshold\ v. \\ \frac{|current\ v. - threshold\ v. |}{|threshold\ v. - worst\ v. |}, & \text{if } current\ v. < threshold\ v. \end{cases} \quad (1)$$

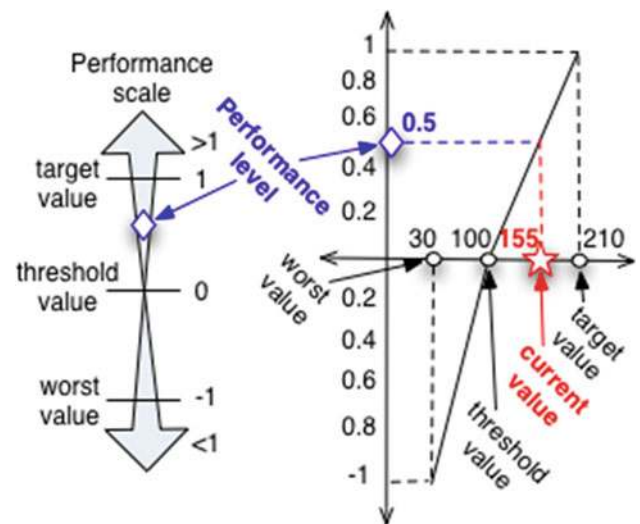


Fig. 9 Example of interpolation [36] to calculate performance levels

Other forms of interpolation can be used, e.g., polynomial, spline, etc. For instance, the performance level (*pl*) for Fig. 9, given a threshold of 100 (thousands of dollars in sales) and a target of 210 is:

$$pl(155) = \frac{|155 - 100|}{|210 - 100|} = 0.5$$

Performance levels are, in turn, propagated to the corresponding goals to *evaluate* satisfaction levels. For example, in Fig. 8, the performance level 0.5 is propagated to the satisfaction level of the corresponding goal which, in turn, is mapped to a “partial satisfied” state (orange color).


Indicators can also be used to evaluate situations in a similar way as for goals, by propagating a performance level of an indicator to the occurrence level of the situation evaluated by the indicator. For example, the indicator “Number of competitors” can measure occurrence level of the situation “Increased competition”.

### 3.4.2 Composite indicators

In a BIM model, indicators are associated with various business elements (e.g., goals, situations). These elements are generally *composite*, consisting of hierarchies of elements. Such structure implies hierarchies for indicators. For example in Fig. 10, the goal hierarchy results in a hierarchy for associated indicators. More specifically, “Number of sales channels” and “Number of Promotions” are *atomic* indicators of “Sales volume”, since they evaluate goals which are a sub-goal of “To increase sales volume”.

An alternative way to represent Fig. 10 is shown in Fig. 11, where the mirroring hierarchies of BIM concepts and indicators are shown separately. In this work, we follow the style of Fig. 10 in order to make the figures more visually compact.



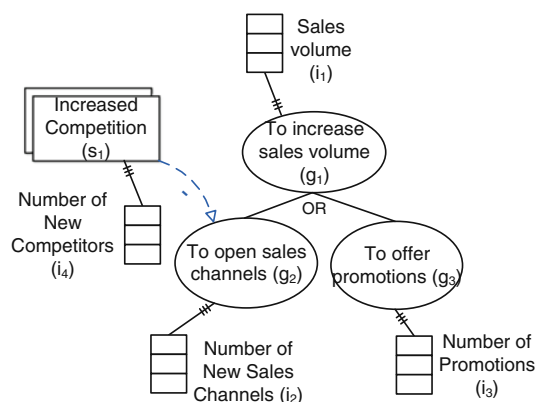

**Fig. 10** Example composite indicator and goal hierarchy

We have not yet considered how composite indicators should be combined (represented by “?”). Techniques to calculate the values for composite indicators are explored in the rest of this section and in the next one.

An alternative way to capture composite indicator values would be to avoid composite values and apply combined atomic indicators values directly to parent elements (goals, situations, etc.) as input for reasoning. For example, in Fig. 10, the composite value derived from combining the indicators “Number of sales channels” and “Number of Promotions” could be applied as the input analysis value for the goal “To increase sales volume”. However, business metrics often already form a hierarchy of compositions, and it is useful to retain this structure, keeping it separate from the conceptual business elements. We wish to explicitly differentiate between the goals and processes of the business and the metrics which evaluate the satisfaction levels of these elements; and we wish to make this differentiation not only at model leaves, but at all levels of the model. For example, “To increase sales volume” is a business goal which differs from the measure “Sales volume”. Keeping this separation emphasizes the links between the BI model and realistic data, differentiating the framework from existing intentional modeling frameworks.

In the rest of this section, we focus on algorithms that propagate values of indicators from a lower level in a hierarchy to higher-level indicators. In other words, we introduce a vari-

ety of ways to describe the combination of atomic indicators (the “?” in Fig. 11). These algorithms bear similarity to the label propagation in goal reasoning summarized in Sect. 3.

### 3.4.3 Indicator reasoning with varying levels of information


In an ideal case, all relations between atomic and composite indicators will be fully described using mathematical equations derived from business metrics. We call such equations *business formulae*, formulae used to calculate desired quantities using available data. Such formulae make computation of composite indicators computationally simple, precise, and automatable. For example, profits can be calculated directly from revenues and costs.

Depending on the units of atomic indicators, business formulae may require unit conversion factors. For example, costs may be calculated from both unit costs and employee hours, which can be converted into a currency value. In other cases, if unit conversion factors are not available, values can be converted to the same scale using normalization into a set range, producing performance levels as described in Sect. 3.4.1. We describe these methods in Sects. 3.4.4 and 3.4.5, respectively.

Collecting precise domain formulae can require much effort, especially if business formulae do not already exist in the organization. In less ideal cases, when business formulae do not (yet) exist, indicator values have to be derived using estimation/approximation techniques based on the structure of a BIM model. Although such techniques may produce results which are less precise, their use allows reasoning with incompletely defined indicators. We describe such a technique in Sect. 3.4.6. We can further consider the case when indicators are incomplete with respect to concepts in a BIM model, i.e., not all concepts are (yet) measured via an indicator. We describe a hybrid technique to allow for reasoning with incomplete indicators in Sect. 3.4.7.

We classify different levels of propagation into four categories, as described in Table 4, based on the availability of unit conversion factors and the information required for reasoning. The first column describes the type of indicator reasoning. The second column describes the means of unit conversion, either not required, using unit conversion fac-

**Fig. 11** Alternative representation of Fig. 10 showing separate hierarchies of goals and indicators

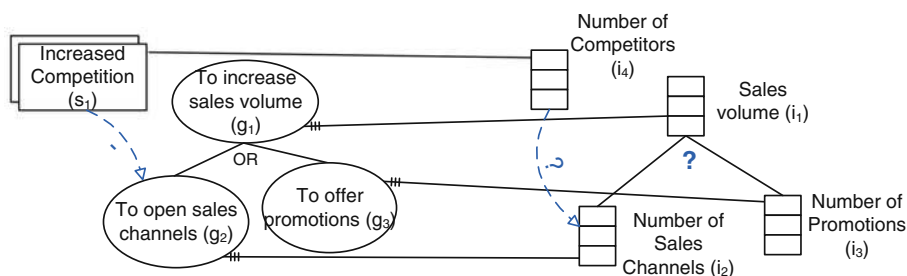

**Table 4** Classification of indicator reasoning technique based on unit conversion and required information

<div style="display: flex; align-items: center;"> <div style="writing-mode: vertical-rl; transform: rotate(180deg);">Information</div> <div style="margin: 0 5px;">↑</div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);">More</div> </div> <div style="display: flex; align-items: center;"> <div style="writing-mode: vertical-rl; transform: rotate(180deg);">↓</div> <div style="margin: 0 5px;">Less</div> </div>	Indicator reasoning without Business Formula	Unit Normalization (Performance Levels)	Atomic Indicator Values	3.4.6	<div style="display: flex; align-items: center;"> <div style="writing-mode: vertical-rl; transform: rotate(180deg);">Accuracy</div> <div style="margin: 0 5px;">↑</div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);">More</div> </div> <div style="display: flex; align-items: center;"> <div style="writing-mode: vertical-rl; transform: rotate(180deg);">↓</div> <div style="margin: 0 5px;">Less</div> </div>
	Hybrid Reasoning (with Incomplete Indicators)	Qualitative Normalization	Atomic Indicator Values, (Optional) {Business Formulae, Unit conversion factors, Initial Reasoning Values}	3.4.7	

tors, or quantitative or qualitative normalization. The third column describes the type of information required from the organization in order to use this type of indicator reasoning. The last column indicates in what sub-section of the paper this type of reasoning is described.

#### 3.4.4 Indicator reasoning using business formulae and unit conversion

When business formulae which combine atomic indicators exist or can be reasonably derived, these expressions should be used to derive the values of composite indicators. Such formulae should take into account values of atomic indicators associated with sub-goals (sub-elements). For example, in Fig. 10, the atomic indicators associated with the sub-goals “To open sales channels” and “To offer promotions” all contribute in some way to the composite indicator, “Sales volume”. In this case, our knowledge of the example enterprise tells us that the atomic indicator values can be aggregated together, as each value can make a positive, additive contribution to the sales volume. Other indicator values may be combined using a variety of mathematical operators (e.g., division, multiplication). If, for example, all atomic indicators used the same unit (e.g., time in hours), then no unit conversion is necessary, and the values could be combined with an appropriate metric elicited from the enterprise. However, in this case, each indicator is measured in a different unit (number of channels, number of promotions), and cannot be summed directly.

The definition or elicitation of equations calculating the values of composite indicator will often require some form of unit conversion. We account for this conversion via the elicitation or definition of a conversion factor for each atomic indicator having a different unit of measure.

**Unit conversion example.** For example, consider the two simple indicators “Employee cost” and “Working time” (not in our example model). Specifically, “Employee cost” can be defined as a composite indicator whose value relies on the atomic indicator “Working time”. In order to calculate the composite metric, we need to convert “Working time”

values measured in hours into “Employee cost” units. One possible conversion factor is to take the average of the wage per hour for all employees. Assuming that such an average is \$20/h and that the current value for “Working time” is 160 h, we can calculate an approximated current value for Employee cost as:

1.  $20 \text{ dollars} = 1 \text{ h} \rightarrow \frac{\$20}{\text{h}} = 1$ ,  
where 20 is the conversion factor (cf)
2.  $160 \text{ h} \cdot \$20 \text{ h} = \$3,200$

We will refer to a conversion factor using a function that maps the indicator being converted to the composite indicator using the conversion:  $cf(\text{source}, \text{destination})$ . Notice that in many cases a conversion factor is an estimate based on previous experience or statistics. For example, the average wage per hour could be \$30 instead of \$20 for a different company.


**Running example.** In our Fig. 10 example, elicitation in the particular enterprise could reveal that during a certain time period each sales channel produces, on average, an additional \$20,000 in sales, and that each promotion produces, on average, \$7,000 in sales. Thus, if sales volume is measured in thousands of dollars, the conversion factors for each sub-goal are 20 and 7, respectively. Potentially, an indicator could have multiple conversion factors, if, for example, it influences or is a refinement in more than one expression measuring a composite indicator. The conversion factors (cf) for our example subgoals are  $cf(i_2, i_1) = 20$  and  $cf(i_3, i_1) = 7$ , respectively.

When conversions are impossible, e.g., converting gallons to square feet, we have to fall back to a “normalized” approach or to a “qualitative” one; these are presented, respectively, in Sects. 3.4.5 and 3.4.6.

Once the conversion factors have been determined, the expression representing the business metric can be constructed. In this case, “Sales volume” is calculated by:

$$cv(i_2) cf(i_2, i_1) + cv(i_3) cf(i_3, i_1) = 20cv(i_2) + 7cv(i_3)$$

where  $cv(i)$  is the current value of an indicator,  $i$ , derived from data sources. In addition to factors from indicators associated with sub-goals, we must consider other business elements such as goals or situations that *influence* the goal. In the previous example, we have the situation “Increased competition”, which influences negatively the “To open sales channels” goal. The “Increased competition” situation is evaluated by the indicator “Number of competitors”. We can use a mathematical expression to capture the influence of the situation on the goal by expressing how the indicator associated with the situation ( $i_4$ ) affects the value for the indicator associated with the goal ( $i_2$ ). Elicitation within the enterprise could reveal that each competitor reduces the number of sales

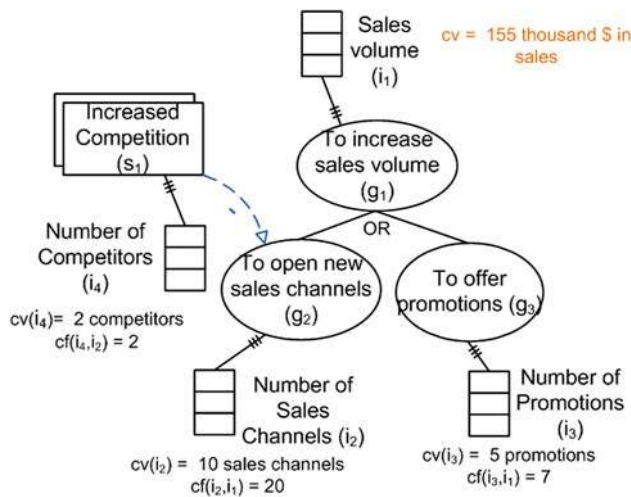

**Fig. 12** Example of reasoning with conversion factors and weights ( $cf$  = conversion factor,  $cv$  = current value,  $w$  = weight)

channels by, on average, two channels ( $cf(i_4, i_2) = 2$ ). This parameter must be chosen accurately by the designer who must rely on her/his domain experience and/or estimates of historical data. We can express the combined effect of situation  $s_1$  on goal  $g_2$  using the following expression:

$$cv(i_2) - cv(i_4)cf(i_4, i_2) = cv(i_2) - 2cv(i_4)$$

In particular,  $i_4$  is the current value of the indicator “Number of competitors”, and  $cf(i_4, i_2)$  is the conversion factor (in this case, 2) used to convert the indicator value into a number of sales channels (the unit of  $i_2$ ).

Combining formulae, the value for the composite indicator “Sales volume” can be expressed via:

$$(cv(i_2) - cv(i_4)cf(i_4, i_2))cf(i_2, i_1) + cv(i_3)cf(i_3, i_1) \\ = 20(cv(i_2) - 2cv(i_4)) + 7cv(i_3)$$

This expression is used in Fig. 12 to calculate the current value of the “To increase sales volume” indicator, corresponding to our desired BestTech analysis question: Given business metrics and target values, what increase in sales volume can be expected from the current number of sales channels and new promotions? In this example, the corresponding current value for each indicator is extrapolated from the data sources. In particular, for the indicator “Number of sales channels” we have a current value of 10.

**Indicator weights.** The effect of goals or influencing situations can be further refined by adding weights or importance to the value of each element. These optional values could be derived, for example, from domain experts using a prioritization elicitation method such as AHP [37]. As with conversion factors, indicators could have multiple weights if their values are used as part of the expression for more than one composite indicator. We express these values as  $w(\text{source}, \text{destination})$ ;

for example the weight for “Number of sales channels” used to compute indicator “Sales volume” is  $w(i_2, i_1)$ . The influence from sub-goals and situations, including conversion factors and weights, can be used to compute a final value for the composite indicator. In our Fig. 10 example, the final equation is as follows:


$$(cv(i_2) - cv(i_4)w(i_4, i_2)cf(i_4, i_2))w(i_2, i_1)cf(i_2, i_1) \\ + cv(i_3)w(i_3, i_1)cf(i_3, i_1)$$

Although, in this case we sum indicator values, the designer can customize each expression depending on the influence of situations and sub-goals as elicited from the domain. We allow users to express rich and flexible expressions capturing business formulae using the off-the-shelf grammar of the Jep Java Library (see Sect. 4).

### 3.4.5 Indicator reasoning using business formulae and performance levels

When conversion factors are not available, current values for composite indicators can be derived using range normalization, which takes values spanning a specific range and represents them in another range. In the case of indicators, we take the current indicator value and convert this value to a performance level, as described in Sect. 3.4.1. Once performance levels have been produced for the required indicators, these values can be combined using business metrics, as described in the previous section. As with reasoning using conversion factors, other, more complex metrics could be used to combine results for composite indicators. After applying each formulae, results which lie outside the  $[1, -1]$  range must again be normalized.

**Running example.** In our previous example for calculating the “Sales volume” composite indicator, if the conversion factors were not available, the current values for “Number of sales channels” and “Number of Promotions” would be converted to a normalized scale, producing performance levels for each indicator. These values would then be combined using the appropriate business formula, in this case, summation. When considering the effect of the situation “Increased competition”, the “Number of competitors” and “Number of Sales Channels” indicators would be converted into their corresponding performance levels, with the former subtracted from the latter, as described in the business metric. We show the combined results for “To increase sales volume” using business formulae with performance levels in Fig. 13. In this example, performance levels are calculated using current indicator values, as used in Fig. 12, as well as associated target and threshold values. For example, the current value of 10 sales channels is converted to a performance level ( $pl$ ) of 0.8 using the target and threshold values of 12 and 2, respectively.

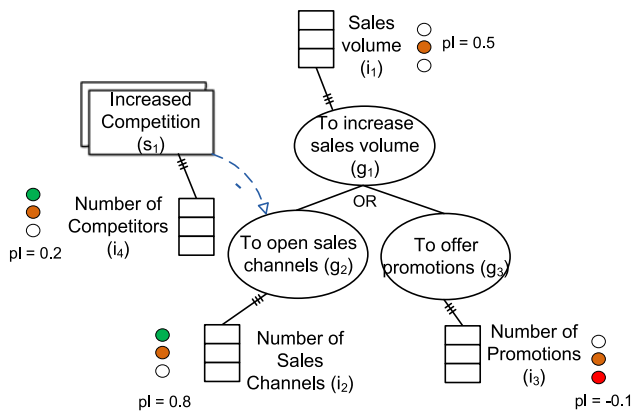

**Fig. 13** Example of reasoning with indicator normalization and business metrics

### 3.4.6 Indicator reasoning without business formulae

In cases where business formulae are not available to calculate the values for composite indicators, the structure of the BIM model mirroring the hierarchy of indicators can be used to derive formulae to calculate composite indicators following, for example, the propagation rules of Giorgini et al. [30]. In order to allow for this style of reasoning, which separates positive and negative evidence, we associate two variables to each indicator: positive performance ( $per+$ ) and negative performance ( $per-$ ), similar to the  $S$  (*satis-*

*fied*) and  $D$  (*denied*) values introduced previously. These variables represent the current evidence concerning performance or non-performance of an indicator  $i$ . The current values of atomic indicators as read from the data sources are normalized (computing performance levels) as described in Sect. 3.4.5, producing values in the range  $[-1, +1]$ . These values are converted to the two variables  $per+$  and  $per-$  according to the mapping in Table 5. The inputs to this table are a target, current value, threshold value, and worst value for each indicator, while the outputs are  $per+$  and  $per-$  values for each indicator. For quantitative performance, the variable  $|pl|$  represents the absolute value of the performance level produced from the rules specified in equation (1) from Sect. 3.4.5. For each indicator, the  $per+$  variable is mapped to a traffic light with a plus symbol on the top, while a minus symbol is used for the  $per-$  variable. Table 5 describes the mapping for positive indicators only. Similar mappings can be made for negative or bidirectional indicators. Values could also be mapped to the corresponding qualitative scale, as described in Giorgini et al. [30].

$Per + / -$  values are propagated up the hierarchy of indicators using propagation rules from Giorgini et al., translated into indicator terminology in Table 6.

Our adopted goal reasoning technique propagates positive and negative evidence separately, allowing the notion of conflicting evidence for goals. Applying this reasoning approach to indicators means that an indicator can be at the same time

**Table 5** Mapping rules ( $t$  = target value,  $cv$  = current value,  $th$  = threshold value,  $w$  = worst value,  $pl$  = performance level)


Input mapping rule	Resulting performance variables ( $per+$ , $per-$ )		Resulting evidence	Resulting indicator color ( $per+$ , $per-$ )	
	Quantitative	Qualitative			
$cv \geq t$	(1.0, 0.0)	(full, none)	Fully performant	+	-
				●	○
				○	○
				○	○
$th < cv < t$	( $ pl $ , 0.0)	(partial, none)	Partially performant	+	-
				●	○
				●	○
				○	○
$cv = th$	(0.0, 0.0)	(partial, none)	Partially performant	+	-
				○	○
				●	○
				○	○
$w < cv < th$	(0.0, $ pl $ )	(none, partial)	Partially non-performant	+	-
				○	○
				○	○
				○	○
$cv \leq w$	(0.0, 1.0)	(none, full)	Fully non-performant	+	-
				○	○
				○	○
				○	○
				○	●



**Table 6** Indicator propagation rules using model structure

	$(i_2, i_3) \xrightarrow{\text{and}} i_1$	$i_2 \xrightarrow{w+S} i_1$	$i_2 \xrightarrow{w-S} i_1$	$i_2 \xrightarrow{++S} i_1$	$i_2 \xrightarrow{--S} i_1$
$per^+(i_1)$	$per^+(i_3) \otimes per^+(i_2)$	$per^+(i_2) \otimes w$	$N$	$per^+(i_2)$	$N$
$per^-(i_1)$	$per^-(i_3) \oplus per^-(i_2)$	$N$	$per^+(i_2) \otimes w$	$N$	$per^+(i_2)$

The OR, (+D), (−D), (+ + D), (− − D) cases are dual w.r.t. AND, (+S), (−S), (+ + S), (− − S) respectively. See [30] for details

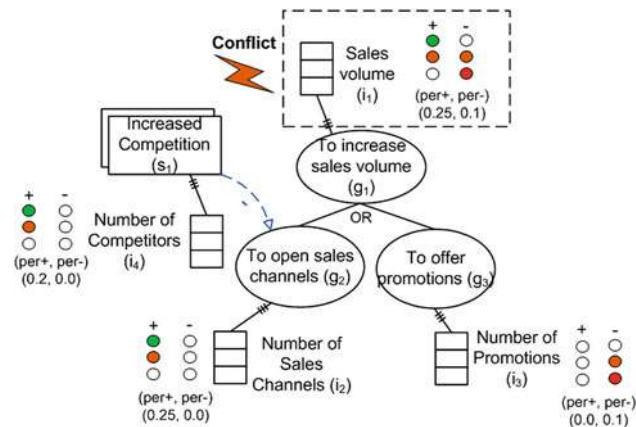**Fig. 14** Example of quantitative reasoning with indicators using model structure

“fully performant” and “fully non-performant”. Supporting such conflicts as part of our approach to reasoning with indicators allows the analyst to see the presence of conflicting evidence. This can be especially useful as part of initial BIM model development, with conflicting early analysis results potentially resolved by adding metrics derived from the enterprise. In this way, such reasoning can direct the elicitation of business metrics for contentious areas of the model.

**Running example.** We return to our previous BestTech analysis question: Given business metrics and target values, what increase in sales volume can be expected from the current number of sales channels and new promotions? Current values and performance levels are taken from the scenarios in Figs. 12 and 13. For example, the current value of ten sales channels is mapped to a performance level of 0.8, meaning that  $per^+$  starts at 0.8 as per our mapping rules in Table 5. This indicator is “partially performant” (green-orange).

By applying the same procedure for all the atomic indicators, we obtain the  $per^+/-$  values shown in Fig. 14. The next step is to rely on the propagation rules described in Table 6 to propagate and calculate the  $per^+/-$  values of the “Sales volume” indicator.

First, we consider the propagation of the values for the “Number of competitors” ( $i_4$ ) indicator to the “Number of sales channels” ( $i_2$ ) indicator through the negative influence link. In the quantitative procedure, such links require a numeric weight. In this case, the link can be treated as a quantitative logical link and assigned a value of 0.5.

Notice that, the influence from the “Increased competition” situation has a minus (−) symbol. As described by Giorgini et al. [30], this is a symmetric relation and it is a shorthand for the combination of the two corresponding asymmetric relationships  $i_4 \xrightarrow{-S} i_2$  and  $i_4 \xrightarrow{+D} i_2$  (the propagation rule for the latter is dual w.r.t. the former); this means that both satisfiability and deniability are propagated. Therefore, after propagation, we obtain:

$$per^+(i_2) = \min(per^-(i_4) \otimes w, per^+(i_2))$$

$$per^-(i_2) = \max(per^+(i_4) \otimes w, per^-(i_2))$$

Thus the  $i_4$  values of ( $per^+ = 0.2$ ,  $per^- = 0.0$ ) are propagated to the  $per^+/-$  values of  $i_2$  by using the operator with the influence weight (0.5). This results in a value of (0.25, 0.0). Combining this with the initial value for  $i_2$  of  $per^+/-$  of (0.8, 0.0) (using the min operator), we have a value of (0.25, 0.0) for  $i_2$ .

We then propagate the two indicators associated with the corresponding sub-goals by relying on the AND rule in the first column of Table 6. As the OR rules are dual with respect to the AND rules, the  $per^+$  and  $per^-$  variables are assigned the maximum and minimum values amongst the sub-indicators. The resulting propagation rules are:

$$per^+(i_1) = \max(per^+(i_2), per^+(i_3))$$

$$per^-(i_1) = \min(per^-(i_2), per^-(i_3))$$


Given the  $per^+/-$  value of (0.0, 0.1) for  $i_3$ , this produces a final value of (0.25, 0.1) for  $i_1$ . Results are shown in Fig. 14.

In this example, a conflict is discovered for the composite indicator “Sales volume” when values are propagated following the rules in Table 6. When such conflicts appear in a model, although undesirable, they do help to highlight particular aspects of a business that need user attention because of possible inconsistencies.

### 3.4.7 Hybrid reasoning: reasoning with incomplete indicators

Users may want to reason over a model in its intermediate stages, before complete indicators have been added. For this purpose, we introduce a forward reasoning procedure, as in Sect. 3.2.1, supporting analysis of current indicator data potentially combined with “what if?” alternative decisions. Future work can investigate how backward or probabilistic





which are both qualitative and quantitative, quantitative values can be converted to the qualitative scale (see Table 5), and reasoning can continue using qualitative values.

**Running example.** We provide a detailed example of this reasoning with partial indicators, with results shown in Fig. 15. Here, we have taken the reasoning with indicator results from Fig. 12 using business metrics and unit conversion. We transfer the results of this analysis to the corresponding evaluated BIM model elements. Mappings from current indicator values to *per*+ and *per*− values can be applied using the rules described in Table 5. When transferring performance values from indicators to satisfaction levels of evaluated BIM elements, *per* +/− values are transferred to *Sat*/*Den* values, respectively. Values transferred onto the BIM model elements are then propagated through the model using goal reasoning techniques as described in Sect. 3.2.1. Such propagation can be either quantitative or qualitative. In our example model, when quantitative propagation is used, we assume that all influence weights are +/− 0.5 for + and − links, and +/− 1.0 for ++ and −− links, respectively.

In order for reasoning results to be complete, we place initial analysis values on leaf elements not connected to indicators, in this case we follow the bottom-up reasoning example in Fig. 5 and place initial values of FD, PS, and FD on “To establish strategic partnership”, “To develop new technology in-house”, and “To acquire technology through acquisition”, respectively (shaded in grey). We have also

added initial values to the “Gross margin” indicator and the “High demand” domain assumption. Through these values we answer our final example BestTech analysis question: Given the state of the business according to current data, will we be able to maintain revenue growth without new strategic partnerships or technology acquisitions?

In our example, qualitative and quantitative values are combined when evaluating “To maintain revenue growth” and “To reduce external defence”. In some cases, results from indicator reasoning and goal modeling techniques are not consistent.

For example, the OR relationship between “To open sales channels” and “To offer promotions” have received analysis values through indicator propagation using a business metric indicating summation of these values (producing a value of  $pl = 0.5$ ), while the OR structure in the model leads to max/min propagation (producing a value of (0.25, 0.1)). In this case the values from the indicator reasoning are retained, as these values are derived directly from business formulae.

Results in our example show conflicting values for the high-level goals of “To reduce risks” and “To maintain revenue growth”. This is in contrast to our Fig. 5 bottom-up reasoning example, where only “To reduce risks” had conflicting values. In this case, use of indicator values reveals further conflicts and more detailed analysis results.

## 4 Tool support

### Goal model reasoning and probabilistic decision analysis.

In Sect. 3 we described how several existing goal and probabilistic reasoning techniques can be applied to BIM models. These techniques are supported by a variety of existing tools. Such tools can be used to approximately represent and then reason over BIM model. For example, the GR-Tool allows forward and backward qualitative and quantitative goal reasoning as described in [19, 20, 30] and as used in the examples in Sect. 3.2. jUCMNav allows forward qualitative and quantitative goal reasoning producing single analysis values that combines positive and negative evidence [38]. Indicators and indicator aggregation are also supported in jUCMNav. Probabilistic reasoning is supported by the GeNIe decision analysis tool, used to derive analysis results in Sect. 3.3. Figure 16 shows a view of several of these tools analyzing a model similar to the running example in Fig. 3. These screenshots are meant to give an idea of the types of interfaces and analyses that are possible with such tools. Details of the model can be seen more clearly in Figs. 1 and 3.

An early version of BIM has been implemented in the ADOxx metamodeling-based development and configuration environment [39]. Once a BIM model has been constructed in ADOxx, it can be projected onto various analysis

models. Currently we support exporting a BIM model as a goal model (containing only intentions and their relations) and as a Bayesian network (containing only situations or indicators and their relations), so that formal goal reasoning and probabilistic inference can be carried out using the GR-Tool [40], and GeNIe [41], respectively.

**Reasoning with indicators.** The ADOxx tool supports reasoning with indicators by supporting queries over BIM models via the AQL querying language provided with ADOxx [39].


Parallel to ADOxx development, we have implemented a visual editor prototype to draw BIM models and support indicator reasoning techniques described in Sect. 3.4. Our implementation uses *Graphiti* [42], an Eclipse-based graphics framework that enables easy development of state-of-the-art diagram editors for domain-specific modeling languages. The current version of the prototype implements the quantitative approach described in Sect. 3.4.4 by relying on Jep [43], a Java library for parsing and evaluating mathematical expressions. Jep supports strings, vectors, complex numbers and boolean expressions. We are working to expand the tool to support other types of reasoning, including a combination of indicator and goal reasoning techniques as described in Sect. 3.4.7.


Figure 17 provides a snapshot of the tool. Marker “A” highlights the BIM model and the toolbar containing business element constructs. Marker “B” highlights the property panel containing indicator parameters and current value. Marker “C” highlights the property panel containing the definition of the metric expression (notice available variables such as strengths, conversion factors, etc.).

## 5 Ongoing case studies

BIM concepts have been applied in several ongoing case studies. One study in the healthcare sector focuses on introducing and improving business intelligence systems in a hospital, in order to use the wealth of data that the organization produces to evaluate the quality and efficiency of its processes, the utilization of its resources, and the outcomes of its operations. The case focuses on a critical process within the hospital Emergency Department. From a research perspective, the study aims to evaluate the utility of BIM to design practitioners. Lessons learned include the ability of BIM concepts to enhance communication and collaboration between designers and domain experts, and to reduce common project risk factors that a BI solution may face during its lifecycle. BIM models functioned effectively both as communication tool and design blueprint. Case study outputs include a methodology for designing dimensional BIM models, relating to existing or new data sources. The study

**Fig. 16** Screenshots of several available reasoning tools (*top* GR-tool, *middle* jUCMNav, *bottom* GeNIe)

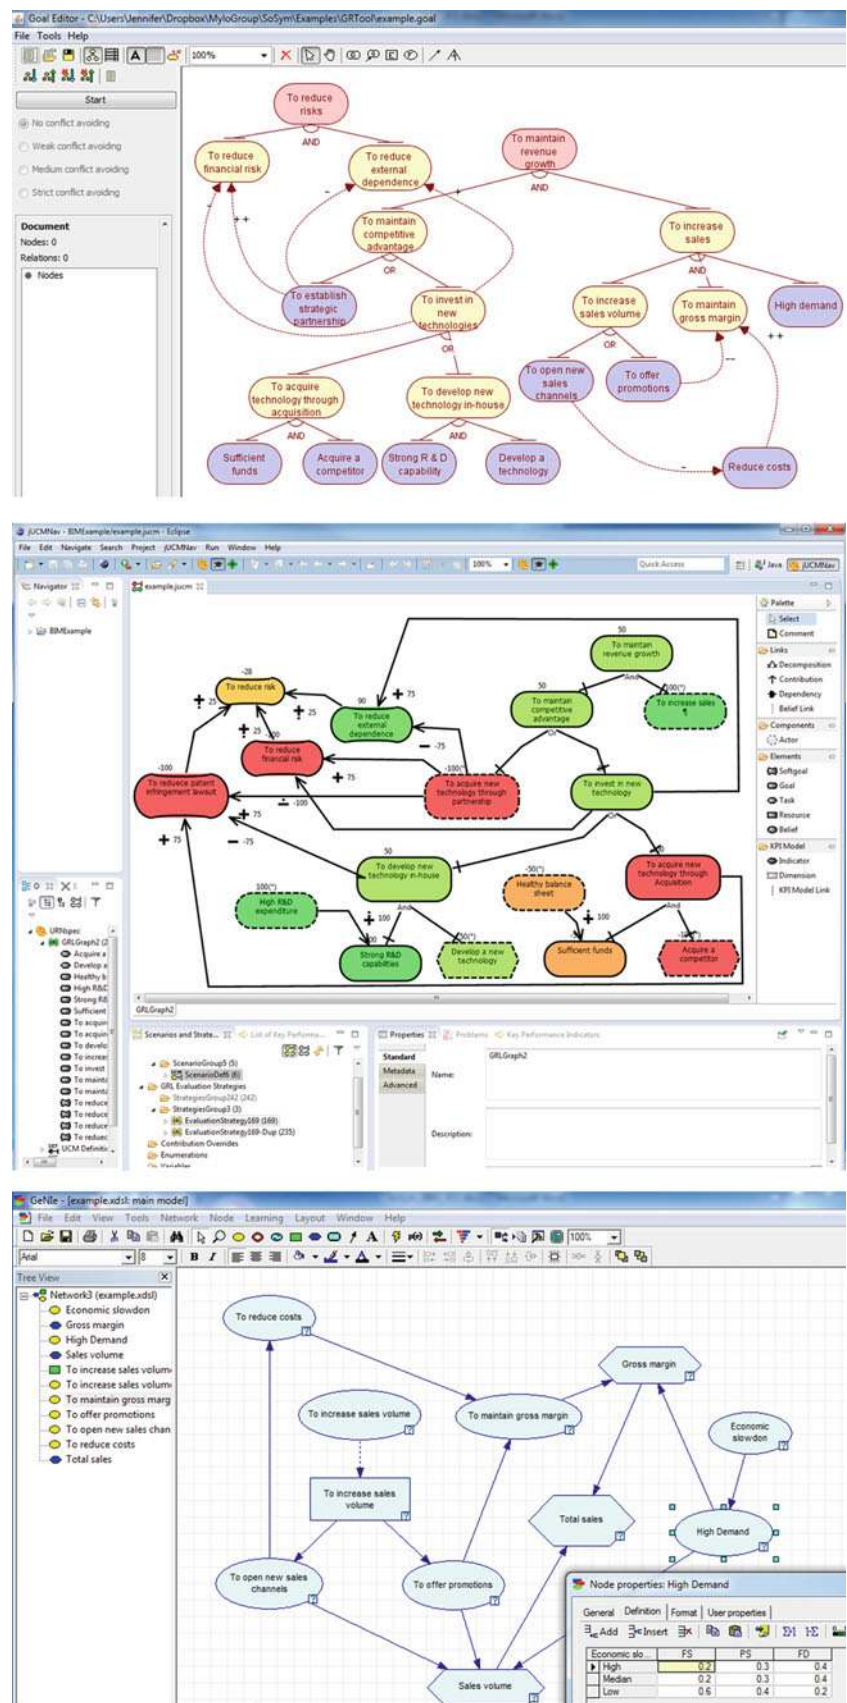

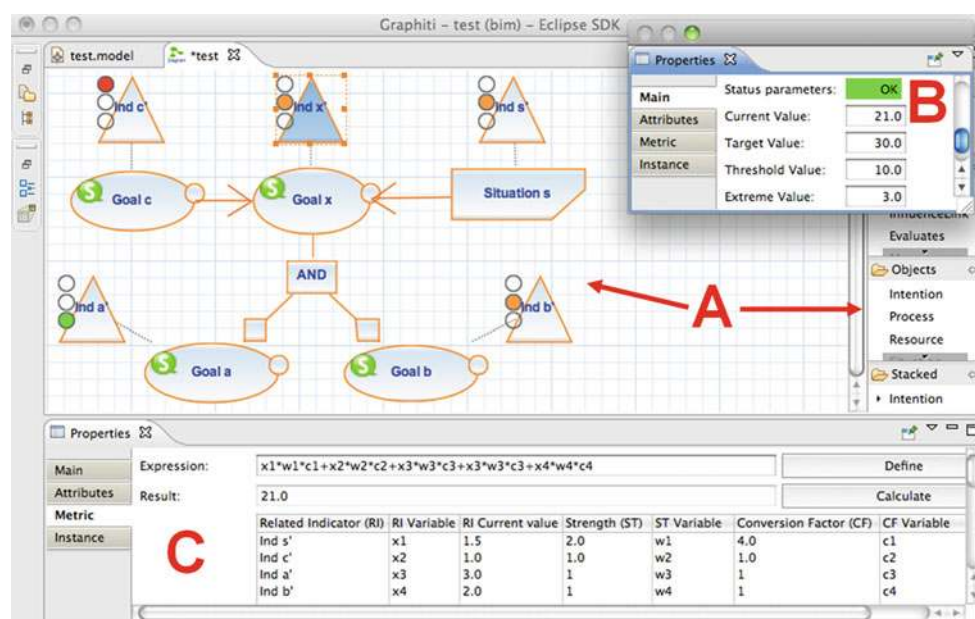

**Fig. 17** Graphiti visual editor and reasoning tool

developed an approach to modular creation of BIM models in order to deal with the scale of a real-world problem. Specifically, BIM concepts were organized into separate views: Goal/Strategy Map, Indicator Map, Process Map, Process Workflow, Resource Map, Actor Map, and individual Actor Goal Indicator Object Graphs (AGIO). Views could be combined as needed. The AGIO graphs focused on individual combinations of a single goal, indicator and actor, and were created using corresponding AGIO sheets (tables). An in-depth description of intermediate case study results and methods can be found in [44].

An additional study focused on using an earlier version of BIM in a large teaching hospital in order to manage an organizational transformation initiative to reduce antibiotic resistant infections (RARI) by changing the use of antibiotics. This approach used BIM along with Conceptual Integration Models in order to more explicitly describe the mapping between BIM business concepts and the structure of existing data, providing examples of how current indicator values can be derived through queries over available data. A more detailed description of the method and study can be found in [9].

A further case study, currently in its early stages, is using BIM models as part of a framework to design, deploy, and build an infrastructure for organizational innovation in the Ericsson Corporation. In this context, BIM is intended to make the goals behind innovation efforts explicit, capture barriers to innovation through situations, and monitor the readiness and success of innovation efforts using indicators.

## 6 Related work

**BIM.** Previous work has introduced early versions of the BIM language, describing concepts and usage scenarios [8–12]. We have consolidated and expanded this work, providing a more detailed and consistent description of BIM concepts and relationships. We describe more explicitly an example model construction methodology. Existing work has described how reasoning can be performed with BIM models by mapping BIM to existing modeling languages for which reasoning techniques have been provided [10]. Further work has described reasoning using indicator values from business data [11, 12]. In this work, we have gone beyond previous work by introducing a hybrid reasoning procedure that combines indicator and goal modeling approaches in the presence of incomplete indicators (Sect. 3.4.7). We improve and expand on analysis descriptions, using a consistent running example, and providing an overall view of analysis approaches, including information requirements and how each method may be used as part of a BIM modeling and analysis methodology (Sect. 3.1).

BIM is in the same spirit as other enterprise modeling languages (e.g., Archimate [45]), which bridges the business-data gap but with a different intent, e.g., for enterprise architecture. A longer term objective is to reconcile or combine these enterprise modeling approaches.

**BI surveys.** Work in [3] surveys approaches for information requirements analysis, approaches specifically for the development of BI-type analytical information systems.



Conclusions include the potential to enhance existing approaches by models and documentation that can be easily understood by IT, without losing precision. BIM fits these requirements by using a broad set of concepts taken from business analysis approaches.

Surveys of BI users have shown that although users are generally satisfied with BI capabilities, they are less satisfied with the flexibility of BI systems or their ability to provide risk management [1]. BIM addresses the need for more flexibility by allowing users to ask analysis questions using business terms instead of more technical queries over specific data structures. Enhanced risk management can be facilitated both by allowing users to ask “what if?” analysis questions and by explicitly capturing risk using situations.

**Commercial BI.** Existing software tools, such as IBM Cognos [2], have begun to raise the level of abstraction of data schemas used in BI, adding a layer that combines existing data sources. Although these advances are useful and necessary, they still only support concepts arising from the data, failing to capture top-down strategic planning aspects included such as objectives and situations, as included in BIM. In essence, BIM complements well these commercial products.

**Business modeling.** The use of business-level concepts, such as business objects, rules and processes, has been researched extensively for more than a decade [46–48], and is already practiced to some extent in both data engineering and software engineering. These efforts have more recently resulted in standards, such as the business process modeling notation (BPMN) [49]. These proposals focus on modeling business objects and processes, with little attention paid to business objectives. One exception is the business motivation model (BMM) [6], which proposes an extensive vocabulary for modeling business objectives (among other things). BMM includes several intentional concepts, such as vision, goal and objective; in our case, all these are modeled as goals. Similarly, our BIM models can capture concepts commonly found in strategy maps [4] and Balanced Scorecards [50] (e.g., strategic goals, performance measures, initiatives). However, BIM goes beyond these concepts by including the concept of situation, a fundamental concept for supporting SWOT analysis. BIM moves beyond the capabilities of strategy maps, balanced scorecards, and BMM by supporting reasoning (goal, probabilistic, and indicator) over models.

**Situation modeling.** Modeling of situations, especially unfavorable ones (e.g., weaknesses or threats), has received much attention in security engineering under the topic of vulnerability. For example, Elahi et al. [51] proposed a vulnerability-centric modeling ontology. More specifically, it identified the basic concepts for modeling and analyzing vulnerabilities, and proposed criteria to compare and evaluate security

frameworks based on vulnerabilities. Inspired by SWOT analysis, our proposal supports a more comprehensive classification of situations, covering both favorable and unfavorable ones, also internal or external to an organization.

**Goal models.** Modeling of goals has a long tradition within requirements engineering (e.g.,  $i^*$  [17], URN/GRL [18] and KAOS [16,33]). The goal concept has also been used in enterprise modeling, for example [13,14]. From these approaches, we have adopted intentional and social concepts. However, these models lack primitive constructs for situation, influence and indicator which are important to Business Intelligence applications.

**Indicators in RE.** Several proposals have used indicators as part of requirements engineering (RE). For example, van Lamsweerde [33] uses indicators to evaluate the degree of goal fulfillment. Recent proposals have extended URN to include indicators [36,52]. We share ideas with these works; however: (1) our approach pays special attention to methods for the construction of indicator hierarchies; (2) we provide more guidelines to distinguish “what” is measured and “why” it is measured; and (3) our indicators can be used to evaluate situations which, from our perspective, are fundamental for strategic reasoning. In [53], the authors propose a formal framework for modelling goals (and for evaluating their satisfaction) based on performance indicators. Our work shares similar intentions but focuses more on the concept of composite indicator, ways to define metric expressions to calculate their values, and reasoning with incomplete indicators.

Indicators have also been used in work focusing on self-adaptive software systems (e.g., [54]). Here they serve as monitored variables that determine whether a system is doing well relative to its mandate, or whether it should adapt its behavior.

A further approach has extended goal ( $i^*$ ) models for use in designing and monitoring data warehouse systems, defining awareness requirements over KPIs [55]. This approach allows for queries to be mapped to decomposed awareness requirements using OCL expressions translated to a query language (MDX). Our work goes beyond this approach by including concepts such as situation and indicator, and specifying how data query results captured by indicators can be linked to analysis of the entire goal model.

## 7 Conclusions and future work

As a first step towards bridging the gap between the worlds of business and data in the adoption of BI technologies, we have provided business modeling support so that business data can be interpreted and understood in business terms. In this paper, we have expanded and extended previous descriptions of BIM language and reasoning. Our expanded description of



BIM has focused on key concepts for building BIM models (goal, situation, influence, indicator), intended to capture the internal and external factors that affect the strategic goals of an organization, as well as the performance measures on their fulfillment. We have expanded previous narrative to provide a sample model creation methodology, combining “top-down” and “bottom-up” approaches.

We have presented a model-based approach to design and reason about an organization’s business environment and strategies, with a focus on indicators and indicator composition in the context of the BIM language.

BIM concepts have been used to facilitate several forms of reasoning over business data and objectives, supporting different analysis questions. We have shown how existing goal and probabilistic analysis techniques facilitating the analysis and discovery of alternative strategies can be applied to BIM models. We provided techniques to analyze the impact of strategies on organization goals, by relying on different types of knowledge measured through indicators. Using expressions based on the structure of the BIM model and performance levels, indicator reasoning approaches can be applied even when business metrics or unit conversions are incomplete. Also new to this paper, we have combined indicator reasoning techniques with existing goal reasoning techniques, allowing reasoning over an entire model even if the indicators do not yet have associated business metrics or are incomplete with respect to the BIM model. Facilitating reasoning with complete information makes the approach more realistically applicable, and allows reasoning over incomplete models as part of BIM model development. We argue that the indicators and composition mechanisms proposed here are more flexible and powerful than what is commonly found in related work, allowing reasoning with varying levels of specific information. All reasoning approaches have been illustrated using a running example derived from real analysis reports.

We have consolidated and expanded descriptions of prototype implementations and use of existing reasoning tools. Work in ongoing case studies applying BIM has been summarized, including mechanisms to scale BIM models to realistic levels of complexity.

We plan to expand our conceptual model to incorporate further aspects of the Balanced Scorecard and Strategy Map approaches, by allowing goals to be classified amongst four organizational perspectives (financial, customers, internal business processes, and learning and growth) [4,25]. Such perspectives can help to ensure that a balanced set of objectives are considered. Similarly, we intend to use the language meta-properties to classify BIM objects using BMM concepts such as vision, objective, mission, strategy, and tactic [6].

Along the lines of [55], future work will investigate linking indicators to business data through queries, allowing users

to query a BIM model, much like conventional database schemas, but in terms of business concepts. Such queries are to be translated through model mappings into queries defined over databases and data warehouses, and the answers are to be translated back into business-level concepts [9]. This work will involve deeper investigation of reasoning with instance level BIM models. We are extending our prototype to connect indicators to Business Intelligence suites, such as IBM Cognos [2] and the open source Pentaho [56].

## References

1. Isik, O., Jones, M.C., Sidorova, A.: Business intelligence (BI) success and the role of BI capabilities. *Intell. Syst. Account. Finance Manag.* **18**(4), 161–176 (2011)
2. IBM: Cognos Express Reporter. <http://www-01.ibm.com/software/analytics/cognos/express/reporter/> (2012). Accessed Apr 2012
3. Stroh, F., Winter, R., Wortmann, F.: Method support of information requirements analysis for analytical information systems. *Bus. Inf. Syst. Eng.* **3**(1), 33–43 (2011)
4. Kaplan, R.S., Norton, D.P.: *Strategy Maps: Converting Intangible Assets into Tangible Outcomes*. Harvard Business School Press, Cambridge (2004)
5. Dealtry, T.R.: *Dynamic SWOT Analysis*. Dynamic SWOT Associates, Birmingham (1994)
6. Object Management Group: Business Motivation Model, Version 1.0. Technical Report May, Object Management Group (2002). <http://www.omg.org/spec/BMM/1.0/>
7. Barone, D., Mylopoulos, J., Jiang, L., Amyot, D.: Business intelligence model, ver. 1.0. Technical Report CSRG-607. Department of Computer Science, University of Toronto (2010). <ftp://ftp.cs.toronto.edu/csr-technical-reports/607/>
8. Barone, D., Yu, E., Won, J., Jiang, L., Mylopoulos, J.: Enterprise modeling for business intelligence. In: *The Practice of Enterprise Modeling*, 3rd IFIP WG8.1 (PoEM’10). LNBP, vol. 68, pp. 31–45. Springer, Berlin (2010)
9. Barone, D., Peyton, L., Rizzolo, F., Amyot, D., Mylopoulos, J.: Towards model-based support for managing organizational transformation. In: *E-Technologies: Transformation in a Connected World. Lecture Notes in Business Information Processing*, vol. 78, pp. 17–31. Springer, Berlin (2011)
10. Jiang, L., Barone, D., Amyot, D., Mylopoulos, J.: Strategic models for business intelligence: reasoning about opportunities and threats. In: *Proceedings of the 30th International Conference on Conceptual Modeling (ER’11)*. LNCS, vol. 6998, pp. 429–443. Springer, Berlin (2011)
11. Barone, D., Jiang, L., Amyot, D., Mylopoulos, J.: Composite indicators for business intelligence. In: *Proceedings of the 30th International Conference on Conceptual Modeling (ER’11)*. LNCS, vol. 6998, pp. 448–454. Springer, Berlin (2011)
12. Barone, D., Jiang, L., Amyot, D., Mylopoulos, J.: Reasoning with key performance indicators. In: *Proceedings of the 4th IFIP WG8.1 Working Conference on the Practice of Enterprise Modeling (PoEM’11)*, pp. 82–96 (2011)
13. Stirna, J., Persson, A.: Ten years plus with EKD: reflections from using an enterprise modeling method in practice. In: *Proceedings of the 11th International Workshop on Exploring Modeling Methods in Systems Analysis and Design (EMMSAD’07)*, pp. 99–108. Springer, Berlin (2007)
14. Rolland, C., Prakash, N.: Bridging the gap between organisational needs and ERP functionality. *Requir. Eng.* **5**(3), 180–193 (2000)

15. Chung, L., Nixon, B.A., Yu, E., Mylopoulos, J.: Non-Functional Requirements in Soft-ware Engineering. International Series in Software Engineering, vol. 5. Kluwer Academic Publishers, Dordrecht (2000)
16. Dardenne, A., Lamsweerde, A.V., Fickas, S.: Goal-directed requirements acquisition. *Sci. Comput. Program.* **20**(1–2), 3–50 (1993)
17. Yu, E.: Towards modelling and reasoning support for early-phase requirements en-gineering. In: Proceedings of 3rd IEEE International Symposium on Requirements Engineering. pp. 226–235. IEEE Comput. Soc. Press, New York (1997)
18. ITU-T, Intern. Telecom. Union: Recommendation Z.151 (11/08): Recommendation Z.151 (11/08) User Requirements Notation (URN) Language definition. Technical Report, ITU-T International Telecommunications Union, Geneva (2008)
19. Giorgini, P., Mylopoulos, J., Nicchiarelli, E., Sebastiani, R.: Reasoning with goal models. In: Proceedings of the 21st International Conference on Conceptual Model-ing (ER'02). LNCS, vol. 3084, pp. 167–181. Springer, Berlin (2002)
20. Giorgini, P., Mylopoulos, J., Sebastiani, R.: Simple and minimum-cost satisfiability for goal models. In: Proceedings of the 16th Conference On Advanced Information Systems Engineering (CAISE'04). LNCS, vol. 3084, pp. 20–35. Springer, Berlin (2004)
21. Wetzel, T.: States of affairs. In: The Stanford Encyclopedia of Philosophy (Fall 2008 Edition), Stanford University, Stanford (2008)
22. Parmenter, D.: Key Performance Indicators. Wiley, New York (2007)
23. Bresciani, P., Perini, A., Giorgini, P., Giunchiglia, F., Mylopoulos, J.: Tropos: an agent-oriented software development methodology. *Auton. Agents MultiAgent Syst.* **8**(3), 203–236 (2004)
24. Uchil, A.: Goals-Based Strategic Planning: A No-Nonsense Practical Guide to Strategy. Outskirts Press, Denver (2009)
25. Kaplan, R.S., Norton, D.P.: The balanced scorecard: measures that drive performance. *Harv. Bus. Rev.* **70**(1), 71–79 (1992)
26. Basili, V., Rombach, H.: The TAME project: towards improvement-oriented software environments. *IEEE Trans. Softw. Eng.* **14**(6), 758–773 (1998)
27. Letier, E., Lamsweerde, A.V.: Reasoning about partial goal satisfaction for requirements and design engineering. *ACM SIGSOFT Softw. Eng. Notes* **29**(6), 53–62 (2004)
28. Amyot, D., Ghanavati, S., Horkoff, J., Mussbacher, G., Peyton, L., Yu, E.: Evaluating goal models within the goal-oriented requirements language. *Int. J. Intell. Syst.* **25**(8), 841–877 (2010)
29. Horkoff, J., Yu, E.: Interactive analysis of agent-goal models in enterprise modeling. *Int. J. Inf. Syst. Model. Des. (IJISMD)* **1**(4), 1–23 (2010)
30. Giorgini, P., Mylopoulos, J., Nicchiarelli, E., Sebastiani, R.: Formal reasoning techniques for goal models. *J. Data Semant.* **1**, 1–20 (2004)
31. Giorgini, P., Mylopoulos, J., Sebastiani, R.: Goal-oriented requirements analysis and reasoning in the Tropos methodology. *Eng. Appl. Artif. Int.* **18**(2), 159–171 (2005)
32. Elahi, G., Yu, E.: Requirements trade-offs analysis in the absence of quantitative mea-sures: a heuristic method. In: Proceedings of the 2011 ACM Symposium on Applied Computing, SAC '11, pp. 651–658. ACM, New York (2011)
33. Lamsweerde, A.V.: Reasoning about alternative requirements options. In: Conceptual Modeling Foundations and Applications. LNCS, vol. 5600, pp. 380–397. Springer, Berlin (2009)
34. Horkoff, J., Yu, E.: Finding solutions in goal models: an interactive backward reasoning approach. In: Proceedings of the 29th International Conference on Conceptual Modeling (ER'10). LNCS, vol. 6412, pp. 59. Springer, Berlin (2010)
35. Howard, R.A., Matheson, J.E.: Influence diagrams. *Decis. Anal.* **2**(3), 127–143 (2005)
36. Pourshahid, A., Chen, P., Amyot, D., Forster, A.J., Ghanavati, S., Peyton, L., Weiss, M.: Business process management with the user requirements notation. *Electron. Commer. Res.* **9**(4), 269–316 (2009)
37. Saaty, T.L.: How to make a decision: the analytic hierarchy process. *Eur. J. Oper. Res.* **48**, 9–26 (1990)
38. University of Ottawa: jUCMNav. <http://softwareengineering.ca/jucmnav/> (2011). Accessed Sept 2011
39. Open Model Initiative: Open Model Initiative. <http://www.openmodels.at/web/omi/resources> (2011). Accessed Sept 2011
40. GR-Tool: GR-Tool. <http://troposproject.org/tools/grtool/> (2010). Accessed Dec 2010
41. Loboda, T.D., Voortman, M.: GeNIe. <http://genie.sis.pitt.edu> (2012). Accessed Aug 2012
42. Eclipse Foundation: Graphiti. <http://www.eclipse.org/graphiti/> (2011). Accessed Sept 2011
43. Singular Systems: Jep Java. <http://www.singularsys.com/jep/> (2011). Accessed Sept 2011
44. Barone, D., Topaloglou, T., Mylopoulos, J.: Business intelligence modeling in action: a hospital case study. In: Proceedings of the 24th Conference on Advanced Information Systems Engineering (CAISE'12). LNCS, vol. 7328, pp. 502–517. Springer, Berlin (2012)
45. The Open Group: ArchiMate 2.0: An Open Group Standard. <http://pubs.opengroup.org/architecture/archimate2-doc/> (2012). Accessed Aug 2012
46. Sutherland, J.: Business objects in corporate information systems. *ACM Comput. Surv.* **27**(2), 274–276 (1995)
47. Loucopoulos, P., Katsouli, E.: Modelling business rules in an office environment. *SIGOIS Bull.* **13**(2), 28–37 (1992)
48. Jablonski, S.: On the complementarity of workflow management and business process modeling. *SIGOIS Bull.* **16**(1), 33–38 (1995)
49. Object Management Group: Business Process Modeling Notation (BPMN) Version 2.1. Technical Report (2009). <http://www.omg.org/spec/BPMN/1.2/>
50. Kaplan, R.S., Norton, D.P.: Balanced Scorecard: Translating Strategy into Action. Harvard Business School Press, Cambridge (1996)
51. Elahi, G., Yu, E., Zannone, N.: A vulnerability-centric requirements engineering frame-work: analyzing security attacks, countermeasures, and requirements based on vulnera-bilities. *Requir. Eng.* **15**(1), 41–62 (2010)
52. Pourshahid, A., Richards, G., Amyot, D.: Toward a goal-oriented, business intelligence decision-making framework. In: Proceeding of E-Technologies: Transformation in a Connected World. LNBIP, vol. 78, pp. 100–115. Springer, Berlin (2011)
53. Popova, V., Sharpanskykh, A.: Formal modelling of organisational goals based on per-formance indicators. *Data Knowl. Eng.* **70**(4), 335–364 (2011)
54. Souza, V., Lapouchnian, A., Mylopoulos, J.: System identification for adaptive software systems: a requirements-engineering perspective. In: Proceedings of the 30th International Conference on Conceptual Modeling (ER'11). LNCS, vol. 6998, pp. 346–361 (2011)
55. Souza, V., Mazón, J.N., Garrigós, I., Trujillo, J., Mylopoulos, J.: Monitoring strategic goals in data warehouses with awareness requirements. In: Proceedings of the 27th ACM Symposium on Applied, Computing, pp. 1075–1082 (2012)
56. Pentaho Corporation: Pentaho: Open Source Business Intelligence. <http://www.pentaho.com/> (2011). Accessed Sept 2011

## Author Biographies



**Jennifer Horkoff** University of Toronto, Canada. Dr. Jennifer Horkoff received her Ph.D. in December of 2011 from the University of Toronto, Department of Computer Science. Her dissertation, under the supervision of Dr. Eric Yu, focused on interactive analysis for agent-goal models in early Requirements Engineering. Her recent post-doctoral work at the University of Toronto focused on the design and analysis of intentional business intelligence models as part of the

NSERC Business Intelligence Network, a Canada-wide strategic research network with academic and industry partners. Dr. Horkoff is currently a post-doc position at the Department of Information Engineering and Computer Science at the University of Trento, Italy, under the supervision of Dr. John Mylopoulos, working as part of the Lucretius: Foundations for Software Evolution project. She has been an author or coauthor of 20 papers in peer-reviewed journals, conferences, or workshops mainly focusing on the techniques and application of goal modeling and goal modeling analysis. Dr. Horkoff has been involved in the organization of several workshops and conferences involving goal modeling and requirements engineering.



**Daniele Barone** University of Toronto, Canada. Daniele Barone is a post-doctoral fellow at the Department of Computer Science, University of Toronto. He received his Ph.D. in Computer Science from the University of Milano-Bicocca (Italy) in 2009. His research interests are in the areas of information and data quality, knowledge management, and business modeling. His research concentrates on methodologies and techniques to assess and improve the quality of

data in Organizations, and on concepts and techniques for modelling and analyzing the business environment, such as, goals, strategies, events, processes, resources, etc.



**Lei Jiang** University of Toronto, Canada. Dr. Lei Jiang received his Ph.D. in 2010 from the University of Toronto, Department of Computer Science. His dissertation, under the supervision of Prof. John Mylopoulos, focused on goal-oriented data modeling. His recent post-doctoral work at the University of Toronto focused on the design of a language for building and analyzing strategic business models, as part of the NSERC Business Intelligence Network. Dr. Jiang is currently

working at Canada Pension Plan Investment Board (CPPIB) on the modelling, design and implementation for financial data analytic applications.



**Eric Yu** University of Toronto, Canada. Eric Yu is Professor at the Faculty of Information, University of Toronto, Canada. His research interests are in the areas of information systems modeling and design, requirements engineering, knowledge management, and software engineering. Books he has co-authored or co-edited include: *Social Modeling for Requirements Engineering* (MIT Press, 2011); *Conceptual Modeling: Foundations and Applications* (Springer, 2009);

and *Non-Functional Requirements in Software Engineering* (Springer, 2000). He is an associate editor for the *Int. Journal of Information Systems Modeling and Design*, and serves on the editorial boards of the *Int. J. of Agent Oriented Software Engineering*, *IET Software*, and the *Journal of Data Semantics*. He was Program Co-chair for the 27th *Int. Conference on Conceptual Modeling (ER'08)*. He received his Ph.D. in Computer Science from the University of Toronto.



**Daniel Amyot** University of Ottawa, Canada. Daniel Amyot is Professor at the University of Ottawa, which he joined in 2002 after working for Mitel Networks as a senior researcher. His research interests include scenario-based software engineering, requirements engineering, business process modeling, aspect-oriented modeling, and healthcare informatics. Daniel is Associate Rapporteur for requirements languages at the International Telecommunication

Union, where he leads the evolution of the User Requirements Notation. He has a Ph.D. and an M.Sc. from the University of Ottawa (2001 and 1994), as well as a B.Sc. from Laval University (1992).



**Alexander Borgida** Rutgers University, USA. Alexander Borgida is a Professor in the Department of Computer Science, Rutgers University, New Brunswick, USA, which he joined after obtaining his Ph.D. from the University of Toronto. His general research interests center around conceptual modeling and its applications to improved software development. He has done specific research in knowledge representation (esp. description logics), data and

knowledge bases (e.g., exceptions) software specification (esp. requirements). He has (co)authored over 100 scientific papers, frequently serves on conference program committees and currently appears on the editorial board of 4 journals.



**John Mylopoulos** University of Trento, Italy. John Mylopoulos holds a distinguished professor position (*chiara fama*) at the University of Trento, and a professor emeritus position at the University of Toronto. He earned a Ph.D. degree from Princeton University in 1970 and joined the Department of Computer Science at the University of Toronto that year. His research interests include conceptual modelling, requirements engineering, data semantics and knowledge man-

agement. Mylopoulos is a fellow of the Association for the Advancement of Artificial Intelligence (AAAI) and the Royal Society of Canada (Academy of Sciences). He has served as programme/general chair of international conferences in Artificial Intelligence, Databases and Software Engineering, including IJCAI (1991), Requirements Engineering (1997), and VLDB (2004). Mylopoulos was recently awarded an advanced grant from the European Research Council for a project titled “Lucretius: Foundations for Software Evolution”.