

# INSTITUTE FOR FUSION STUDIES

DOE/ET-53088-635

IFSR #635

Superluminous Laser Pulse in an Active Medium

D.L. FISHER AND T. TAJIMA  
Department of Physics and  
Institute for Fusion Studies  
The University of Texas at Austin  
Austin, Texas 78712

December 1993

REC'D  
FEB 28 1994  
OSTI

THE UNIVERSITY OF TEXAS

AUSTIN

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

# Superluminal Laser Pulse in an Active Medium

D.L. FISHER AND T. TAJIMA  
Department of Physics and  
Institute for Fusion Studies  
The University of Texas at Austin  
Austin, Texas 78712

## Abstract

Physical conditions are obtained to make the propagation velocity of a laser pulse and thus the phase velocity of the excited wake be at any desired value, including that equal to or greater than the speed of light. The provision of an active-plasma laser medium with an appropriately shaped pulse allows not only replenishment of laser energy loss to the wakefield but also acceleration of the group velocity of photons. A stationary solitary solution in the accelerated frame is obtained from our model equations and simulations thereof for the laser, plasma and atoms.

PACS numbers: 52.40.Db, 42.50.Rh

## DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

for

We propose the use of an active laser medium to control the envelope propagation velocity of a laser pulse in a plasma to any design velocity  $v_{\text{env}}$ , including the speed of light or greater. Such a pulse is said to be superluminal. It is possible with appropriate construction of the laser pulse profile in the direction of propagation to "accelerate" the group velocity of that pulse. This is related to the process of self induced transparency<sup>1</sup> and to the triple soliton solutions already obtained for a (nonactive) plasma system.<sup>2, 3</sup> Since the pulse can travel at the design speed with no change in its structure, the phase velocity of the accelerating field will also be at the design speed in an active-plasma medium. The pre-excited active medium plays the role of a nonlinear amplifier, amplifying the front of the laser pulse and absorbing energy at the rear of the pulse in such a manner as to maintain its shape but at the same time increase the overall pulse speed. This apparent acceleration of the group velocity even beyond the speed of light does not violate the special theory of relativity as energy and information flow in fact does not exceed  $c$ . The leading edge of the pulse which is necessary for acceleration already contains information about the pulse and this information is extracted through the nonlinear amplification process. If the pulse is of finite length, the peak will travel only to edge of the pulse (the edge travels with the pulse group velocity) with the design velocity and with the group velocity thereafter.

The process of effective acceleration of the photon group velocity and the recovery of laser energy loss by the active medium has applications in photonics and telecommunications as well as to wakefield accelerators. With application to acceleration<sup>4</sup> the increase of the phase velocity of the wakefield could help overcome slippage between the particle bunch and accelerating field as the particle bunch outruns the accelerating field due to the difference between the phase velocity of the field and the particle velocity  $v \approx c$ . Secondly, since the energy used to induce the wake comes from the active medium not from the laser pulse, pump depletion<sup>5</sup> may be eliminated. The energy to induce the wakefield originally comes from the

active medium, leaving the structure of the pulse unchanged with the final energy density of the material reduced by the amount necessary to induce the wakefield. Thirdly, using a properly shaped active medium channel in the transverse direction, we should be able to replenish energy loss to diffraction and refraction, thereby optically guiding and effectively focusing the laser pulse.

Three conditions must be met to accelerate the pulse envelope to the design speed  $v_{\text{env}}$  and retain a stationary structure. First is the resonance condition: the laser photon energy should approximately match that of the transition energy in the active medium. Here we consider the case of exact resonance, but small detuning might be both possible and desirable to minimize unwanted nonlinear optical effects. Secondly the laser pulse duration must match the time scale of energy exchange between the active medium and laser pulse (reciprocal of the average Rabi frequency). Thirdly a certain energy density in the active medium is necessary for the acceleration of the pulse envelope.

Starting with the wave equation

$$\left(\nabla^2 - \frac{\eta^2}{c^2} \frac{\partial^2}{\partial t^2}\right) \mathbf{A} + c\nabla \frac{\partial \phi}{\partial t} = -\frac{4\pi}{c} \mathbf{J} - \frac{4\pi}{c} \frac{\partial \mathbf{P}}{\partial t}, \quad (1)$$

where  $\mathbf{A}$  is the vector potential of the laser pulse,  $\phi$  is the potential for the plasma electric field, and the transverse component of polarization vector  $\mathbf{P}$  contains only the active material dependent (atomic) response. None of the plasma effects are included in  $\mathbf{P}$ , they enter through  $\phi$  and  $J$ . The index of refraction  $\eta$  is for the nonactive portion of the material response (atomic). The form of the fields in one dimension for a laser of frequency  $\omega_0$  and wavenumber  $k_0$  are

$$P = [U(z, t) + iV(z, t)]e^{i[k_0 z - \omega_0 t + \psi(z, t)]}, \quad (2)$$

$$A = a(z, t)e^{i[k_0 z - \omega_0 t + \psi(z, t)]}, \quad (3)$$

$$J = -\frac{e^2 n A}{\gamma m c}, \quad (4)$$

where  $\gamma = \frac{1}{\sqrt{1-(v/c)^2}}$ ,  $U(z, t)$  and  $V(z, t)$  are the slowly varying real (electric dipole dispersion) and imaginary (absorption) components of the material polarization vector,<sup>1</sup>  $\psi(z, t)$  and  $a(z, t)$  are the slowly varying phase and envelope of the laser pulse. The transverse current  $J$  is obtained from the conservation of canonical momentum and initially the plasma is stationary. With the assumption that the laser oscillation time and length scales are much shorter than those for  $a(z, t)$ ,  $\psi(z, t)$  and the plasma ( $\omega_p$ ), we multiply equation (1) by  $A^*$  and average over the fast laser scales.<sup>1</sup>

Our purpose here is to determine the form of a laser pulse envelope which travels in the medium with a design velocity  $v_{env}$  and retain its shape without pump depletion. In order to avoid phase slippage for the purpose of an application to an accelerator, we hereafter set  $v_{env} = c$ . We make a change of variables to  $\lambda = z - ct$ ,  $\tau = t$  and since the purpose is to find stationary structures the time derivative is set to zero ( $\frac{\partial}{\partial \tau} = 0$ ) for the present Letter. Assuming the real part of the dispersion  $U(z, t) = 0$  (which can be included in  $\eta$ ) and substituting (2)–(4) into (1) yields from the real and imaginary parts

$$(\eta^2 - 1) \frac{\partial^2 a}{\partial \lambda^2} = 2a \left( \frac{\eta^2 \omega_0}{c} - k_0 \right) \frac{\partial \psi}{\partial \lambda} + (\eta^2 - 1)a \left( \frac{\partial \psi}{\partial \lambda} \right)^2 - k_p^2 \frac{na}{n_0 \gamma} - 4\pi \frac{\partial V}{\partial \lambda}, \quad (5)$$

$$(\eta^2 - 1) \frac{\partial}{\partial \lambda} \left( a^2 \frac{\partial \psi}{\partial \lambda} \right) = - \left( \frac{\eta^2 \omega_0}{c} - k_0 \right) \frac{\partial a^2}{\partial \lambda} - \frac{4\pi}{c} V \left( \omega_0 + c \frac{\partial \psi}{\partial \lambda} \right) a, \quad (6)$$

where  $k_p = \frac{\omega_p^2}{c}$ . Laser medium equations for a two state system with dipole transitions at exact resonance ( $\Delta E = \hbar \omega_0$ ) without relaxation gives<sup>1</sup>

$$\frac{\partial V}{\partial \lambda} = - \frac{\kappa^2}{c^2} aW, \quad (7)$$

$$\frac{\partial W}{\partial \lambda} = \frac{\omega_0^2}{c^2} aV, \quad (8)$$

where  $\Delta E$  is the atomic transition energy between the two states under consideration,  $e\hbar\kappa$  is the specific dipole moment for the active state and the time constants for incoherent damping effects and energy damping of the active system are long compared to the interaction time.

The energy density of the active medium  $W$  is defined with respect to the ground state  $W_0 = -N_a \frac{\hbar\omega_0}{2}$  where  $N_a$  is the density with all possible states active.

The longitudinal laser-plasma interaction is modeled through the ponderomotive force in the electron momentum equation and the ions are assumed immobile. The form for Poisson's equation and the plasma term in previous equations becomes<sup>6</sup>

$$\frac{\partial^2 \phi}{\partial \lambda^2} \frac{k_p^2}{2} \frac{mc^2}{e} \left( \frac{1 + \left(\frac{ea}{mc^2}\right)^2}{\left(1 + \frac{e\phi}{mc^2}\right)^2} - 1 \right), \quad (9)$$

$$-\frac{4\pi}{c} \mathbf{J} = k_p^2 \frac{amc^2}{mc^2 + e\phi}. \quad (10)$$

The third condition states that there be enough energy  $\Gamma$  stored in the active medium prior to the pulse arrival to amplify the leading edge of the pulse to the peak value in the distance  $L_v$  ( $L_v = l_{\text{pulse}} v_{\text{env}} / (v_{\text{env}} - v_g)$ ) for the accelerated pulse envelope to outrun the otherwise nonaccelerated pulse over the pulse length  $l_{\text{pulse}}$ . That is, there must be energy equal to that of the pulse stored in the length  $L_v$  of the active medium. When the atomic effect dominates  $\frac{1}{\eta} \ll \sqrt{1 - \left(\frac{\omega_g}{\omega_0}\right)^2}$  with  $\eta \approx 1$  and  $\frac{\omega_0}{\omega_p} \gg 1$  (underdense plasma), this yields

$$W(-\infty) + |W_0| = \Gamma_v \approx \frac{l_{\text{pulse}}}{L_v} \frac{E^2}{4\pi} = \left(1 - \frac{c}{\eta v_{\text{env}}}\right) \frac{E^2}{4\pi}, \quad (11)$$

where  $W(-\infty)$  is the value of  $W$  prior to the arrival of the pulse,  $\Gamma_v$  energy density necessary to accelerate the stationary structure to the design velocity  $v_{\text{env}}$  and  $E$  is the electric field of the laser.

The interaction between the laser pulse and active medium is characterized by two time scales, the average inverse Rabi frequency<sup>7</sup>  $\Omega_R^{-1}$  and the laser pulse scale  $\Omega_l^{-1}$ . The frequency of energy exchange between the laser and active medium ( $\Omega_R$ ) is derived using Eqs. (7) and (8) along with the approximate average laser intensity  $\frac{a^2}{2}$  to yield

$$\frac{\partial^2 V}{\partial \lambda^2} = -\frac{\kappa^2 \omega_0^2 a^2}{2c^4} V. \quad (12)$$

This gives  $\Omega_R \approx \frac{\kappa\omega_0 a}{\sqrt{2}c}$ . Additionally the laser time scale comes from Eq. (6), keeping only leading order terms yields

$$\frac{\partial^2 a}{\partial \lambda^2} = \frac{4\pi\kappa^2 W a}{(\eta^2 - 1)c^2}. \quad (13)$$

Using Eq. (11) ( $v_{\text{env}} = c$ ) for the energy density gives  $\Omega_i \approx \frac{\kappa\omega_0 a}{\sqrt{2}c}$ . The second necessary condition  $\Omega_R = \Omega_i$  for a stationary superluminal structure is in fact demonstrated: these two time scales much match. This match is necessary since the energy must return to the active medium on the average Rabi time scale. If the Rabi time scale does not match the duration of the laser pulse, the energy return will be incomplete if the pulse is short and will again extract energy if the pulse is too long.

When the plasma effect dominates over the atomic effect  $\frac{1}{\eta} \gg \left(1 - \left(\frac{\omega_p}{\omega_0}\right)^2\right)$ , the stored energy for acceleration to the design velocity becomes,

$$W(-\infty) + |W_0| = \Gamma_v \approx \left(1 - \frac{c}{v_{\text{env}}} \left(1 - \frac{\omega_p^2}{2\omega_0^2}\right)\right) \frac{E^2}{4\pi}. \quad (14)$$

Setting the velocity of the laser pulse envelope  $v_{\text{env}} = c$  yields

$$W(-\infty) + |W_0| \approx \frac{\omega_p^2}{2\omega_0^2} \frac{E^2}{4\pi}. \quad (15)$$

The induced wakefield is approximately  $E_{\text{acc}} \approx \frac{1}{l_c} \frac{m\omega_p c}{e}$  where  $\frac{1}{l_c} = \left(\frac{eE}{m\omega_0 c}\right)^2$ . This gives the energy gain  $U$  of particles per unit length by the wakefield (the negative of the stopping power)

$$\left(\frac{\partial U}{\partial z}\right)_{\text{acc}} = 4\pi \frac{n_a}{n} \frac{\mathcal{E}_a}{\lambda_p}. \quad (16)$$

The energy for the wakefield excitation must be supplied by the active medium for the pulse to be stationary. For a laser pulse  $l_{\text{pulse}} \approx \lambda_p$  the energy density necessary to overcome pump depletion is  $\Gamma_{\text{pump}}(-\infty) \approx \left(\frac{\omega_p}{\omega_0}\right)^2 \left(\frac{eE}{m\omega_p c}\right)^2 \Gamma_c(-\infty)$ . Since  $\left(\frac{\omega_p}{\omega_0}\right)^2 \left(\frac{eE}{m\omega_p c}\right)^2 \ll 1$  the energy density necessary for group velocity acceleration to  $c$  is much larger than that to overcome pump depletion.

Equations (5), (6), (7), (8), and (9) were numerically integrated with initial conditions at  $\lambda = 0$ , yielding a stationary structure in the moving reference frame with velocity  $v_{\text{env}} = c$ . The initial conditions include material constant  $\kappa$ , polarization  $V_0$ , energy density  $W(0)$ ,  $\frac{\omega_0}{\omega_p}$  and the index of refraction  $\eta$ . If the structure is to be stationary for all time, the pulse must be of infinite extent. At  $\lambda = 0$  we give initial condition  $a_0 \neq 0$  since the pulse must extend to infinity. The  $\frac{1}{\lambda^2}$  singularity in equation (6) has been handled by the method of analytic continuation. To determine the initial condition  $V(0)$ , the conservation of action is used,<sup>7</sup> which gives

$$V = \pm N_a \hbar \kappa \sqrt{1 - \left(\frac{n_a}{N_a}\right)^2} = \frac{2W_N \kappa}{\omega_0} \sqrt{1 - \left(\frac{W}{W_N}\right)^2}, \quad (17)$$

where  $W = \frac{n_a \hbar \omega_0}{2}$ ,  $W_N$  is the value of  $W$  with all states active,  $n_a$  is the density of particles in the active states and  $n_a(-\infty)$  is the density prior to the pulse arrival. The simulations were initialized with all possible states active prior to the pulse arrival ( $n_a(-\infty) = N_a$ ). At  $\lambda = 0$  the intensity is not equal to zero (must be of infinite extent) but very small compared to its peak value, therefore  $1 - \left(\frac{n_a}{N_a}\right) \approx 0$ . The value of  $V(0)$  can not be determined exactly because the exact value of  $W(-\infty)$  can not be determined beforehand without knowledge of the solution. Therefore trial values for  $V(0)$  are attempted until energy conservation is achieved.

Figure 1 shows the stationary structure which is a short laser pulse ( $\approx \frac{c}{\omega_p}$ ) with a peak laser field  $a = 0.045 \frac{mc^2}{e}$  for an initial atomic energy density of  $W(0) = 0.001 n_0 mc^2$  inducing a wakefield of  $E_{\text{peak}} = 0.0014 \frac{m\omega_p c}{e}$ . Initial condition are arbitrarily chosen with no material in mind are  $\frac{\omega_0}{\omega_p} = 10$ ,  $\eta = 1.0045$ ,  $\kappa = 3.5 \frac{e}{mc}$  and  $V_0 = 2 \times 10^{-5} \frac{n_0 e c}{\omega_p}$ . During the first half cycle the energy is absorbed by the laser pulse, reducing the energy density stored in the material. The second half completes the cycle, returning laser energy back to the active material. The difference of the energy density contained in the laser material initially  $W(0)$  and the final is the energy used to produce the wakefield. This leaves the energy of the laser



unchanged and therefore eliminates pump depletion.

Figure 2 is a special case of the general example of Fig. 1. In this case the parameters were adjusted so that the laser pulse produced and then absorbed the plasma oscillations leaving no wake. We see the peak laser pulse amplitude is  $a = 0.046 \frac{mc^2}{e}$  with the initial atomic energy density  $W(0) = 0.001 n_0 mc^2$ . Initial conditions are  $\frac{\omega_0}{\omega_p} = 10$ ,  $\eta = 1.0045$ ,  $\kappa = 0.5 \frac{e}{mc}$  and  $V_0 = 7 \times 10^{-6} \frac{n_0 ec}{\omega_p}$ . Since there is no wakefield produced after the pulse passes, the atomic energy density returns to its original value at the tail of the laser pulse. Wakeless solutions have been discussed before,<sup>2, 3</sup> but without allowance for pump depletion effects and for the active medium.

The results of these two examples are slightly in the plasma regime  $\left( \left( 1 - \left( \frac{\omega_p}{\omega_0} \right)^2 \right) < \frac{1}{\eta} \right)$ , however, neither dominates. These examples demonstrate two of the necessary conditions previously described. Firstly the independence of the peak amplitude of the laser pulse on the pulse length, which is dependent on  $\kappa$ , but on the energy density  $W(-\infty)$  as shown in Eqs. (11) and (14). Also Eqs. (11) and (14) (contributions from both plasma and atomic effects) correctly predicts the energy density  $W(-\infty) \approx 0.001 \frac{1}{n_0 mc^2}$  for the laser peak amplitude of  $a \approx 0.045 \frac{mc^2}{e}$ . Secondly the relation of the pulse length Eq. (13) to that of the average Rabi frequency Eq. (12) is shown to hold, predicting a pulse length of approximately  $2.8 \frac{e}{\omega_p}$  for the first case (Fig. 1) and approximately  $20 \frac{e}{\omega_p}$  for the second case (Fig. 2).

The question of stability arises for pulse shapes that are only approximately stationary. The initial value problem is investigated with a newly developed PIC-fluid code using a more realistic gaussian shaped laser pulse. Results for the gaussian show acceleration and long term pulse shape stability. More details of our solutions will be reported in future publications.

A number of conditions must be met for a material to be used as the active medium-plasma source. The basic concept we suggest is to use the outer shell electrons to form a plasma and the inner shell electron resonant transitions as the active source, as in the

basic scheme used in x-ray lasers.<sup>8</sup> For applications using very high intensity laser pulses, the problems of ionization,<sup>9, 10, 11</sup> power broadening of the resonance and locating resonances in an intense electric field are to be addressed in future publications with more detail. The work was supported by the U.S. Department of Energy. We thank C.W. Siders and M.C. Downer for their illuminating discussions.

## References

- <sup>1</sup>S. McCall and E. Hahn, *Phys. Rev.* **183**, 457 (1969).
- <sup>2</sup>K. Mima et al., *Phys. Rev. Lett.* **57**, 1421 (1986).
- <sup>3</sup>C. McKinstrie and D. Dubois, *Phys. Rev. Lett* **57**, 2022 (1986).
- <sup>4</sup>T. Tajima and J. Dawson, *Phys. Rev. Lett.* **43**, 267 (1979).
- <sup>5</sup>W. Horton and T. Tajima, *Phys. Rev. A* **34**, 4110 (1986).
- <sup>6</sup>P. E. Esarey, and A. Ting, *Phys. Rev. A* **41**(8), 4463 (1990).
- <sup>7</sup>L. Allen and J.H. Eberly, *Optical Resonance and Two-level Atoms*, John Wiley and Sons, 1975.
- <sup>8</sup>R. Elton, *X-Ray Lasers*, Academic Press, Inc., 1990.
- <sup>9</sup>B.M. Penetrante and J.N. Bardsley, *Phys. Rev. A* **43**(6), 3100 (1991).
- <sup>10</sup>S. D. D. Strickland, and S. L. Chin, *J. Opt. Soc. Am. B* **8**, 858 (1991).
- <sup>11</sup>R.R. Freeman, P.H. Bucksbaum, H. Milchberg, S. Darack, D. Schumarcher, and M.E. Geusic, *Phys. Rev. Lett.* **59**(10), 1092 (1987).

## Figure Captions

1. Laser pulse profile ( $a^2$ ) (thick solid line), longitudinal wakefield ( $E$ ) (thin line) and energy density of the active medium ( $W$ ) (dashed line) for a general case with envelope speed  $v_{\text{env}} = c$ .
2. Laser pulse profile ( $a^2$ ) (thick solid line), longitudinal electric field ( $E$ ) (thick dashed line) and energy density of the active medium ( $W$ ) (dashed line) with initial conditions set for solitary structure with no wake. The wakefield is induced and absorbed within the laser pulse.

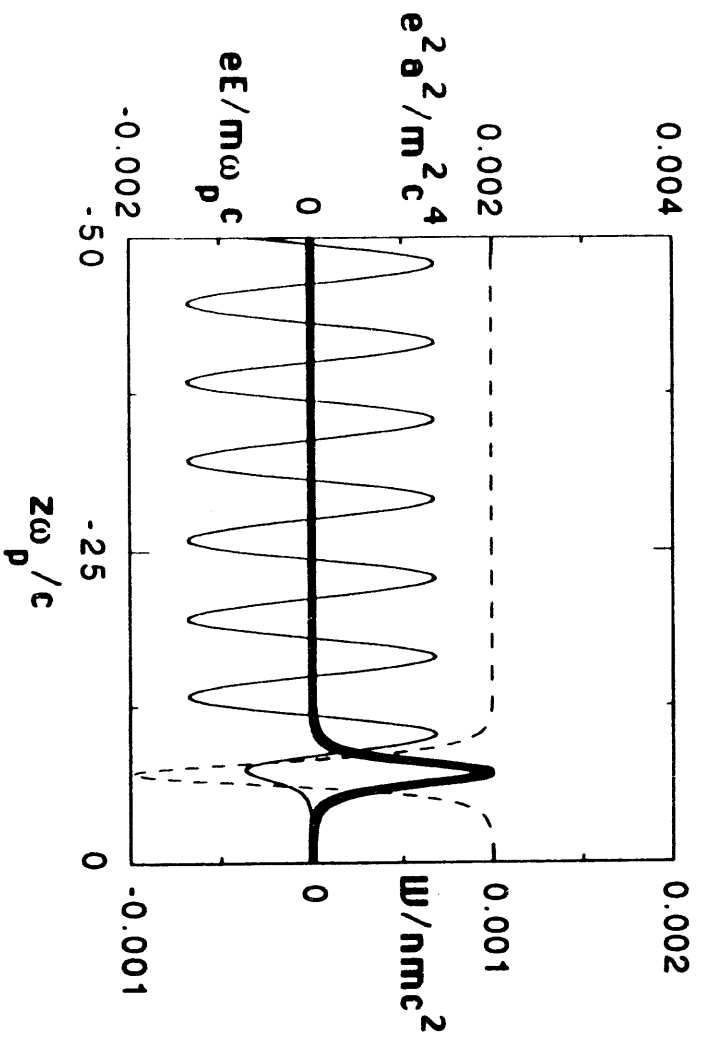


Fig. 1

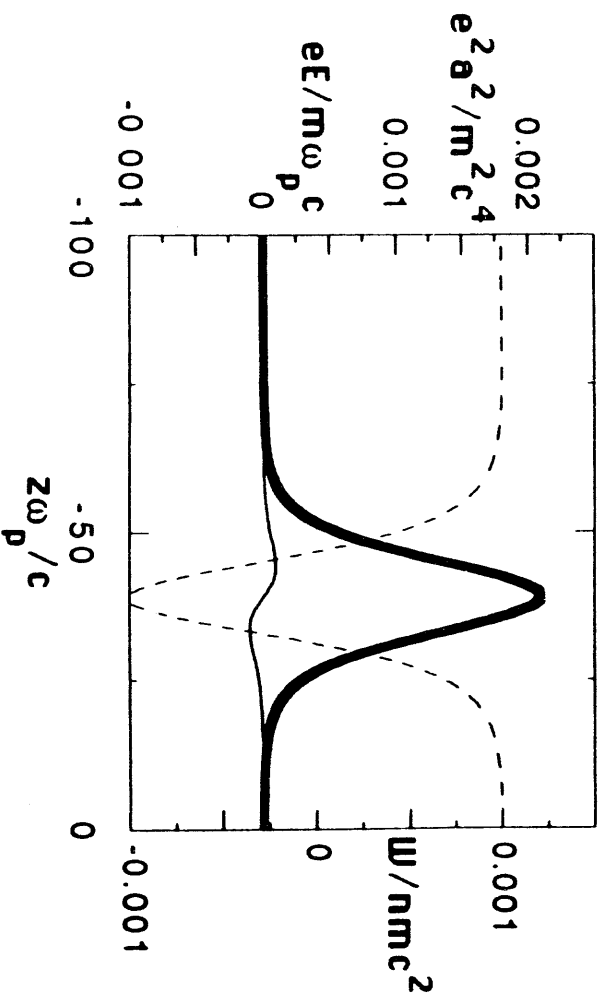


FIG. 2

**END**

**DATE**

**FILMED**

**3 / 30 / 94**

