

The Mathematical Modelling for Studying the Influence of the Initial Stresses and Relaxation Times on Reflection and Refraction Waves in Piezothermoelastic Half-Space

Fatimah A. Alshaikh

Department of Mathematics, Science College, Jazan University, Jazan, KSA

Email: dr.math999@hotmail.com

Received June 4, 2012; revised July 4, 2012; accepted July 11, 2012

ABSTRACT

The present paper concentrates on the study of reflection and refraction phenomena of waves in pyroelectric and piezoelectric media under initial stresses and two relaxation times influence by apply suitable conditions. The generalized theories of linear piezo-thermoelasticity have been employed to investigate the problem. In two-dimensional model of transversely isotropic piezothermoelastic medium, there are four types of plane waves quasi-longitudinal (qP), quasi-transverse (qSV), thermal wave (T -mode), and potential electric waves (φ -mode) The amplitude ratios of reflection and refraction waves have been obtained. Finally, the results in each case are presented graphically.

Keywords: Piezo-Thermoelasticity; Quasi Plane Longitudinal Waves; Reflection and Refraction Coefficients; Initial Stresses; Green and Lindsay Theory; Relaxation Time

1. Introduction

Piezoelectricity is the phenomenon of electricity produced by the squeezing or stretching of certain materials. The propagation of waves in piezoelectric materials is one of the richest fields for scientists because it has many applications in piezoelectric: filters, resonators, transducers, sensors and other devices. This kind of devices represent a great challenge in the industry, and as a result it has been an object of different investigations in the last decades, because these devices are to operate under various piezoelectric-thermo-mechanical conditions over a broad spectrum, in view of its importance to industry applications. The theory of thermo-piezoelectricity was first proposed by Mindlin [1]. The physical laws for the thermo-piezoelectric materials have been explored by Nowacki [2,3]. Chandrasekharaiah [4] developed the generalized theory of thermo-piezoelectricity by taking in account the finite speed of propagation of thermal disturbances. Sharma and Kumar [5] studied plane harmonic waves in piezothermoelastic materials. The propagation of Rayleigh waves in generalized piezothermoelastic half space is investigated by Sharma and Walia [6].

Deresiewicz [7] studied the reflection of plane waves from a plane stress free boundary in coupled theory of thermoelasticity and investigated the effect of boundaries on the waves. Generalized theories of thermoelasticity were introduced in order to eliminate the shortcomings of

the classical dynamic thermoelasticity. A flux rate term into Fourier law of heat conduction is incorporated by Lord and Shulman [8], which includes a hyperbolic heat transport equation admitting finite speed, though large for thermal signals. Green and Lindsay [9], by including temperature-rate among the constitutive variables, developed a temperature-rate-dependent thermo-elasticity that does not violate the classical Fourier law of heat conduction for bodies having center of symmetry. Many authors concentrate in studying the reflection and refraction waves in thermoelastic media, like Sinha and Sinha [10], Sharma [11], Sinha and Elsibai [12,13], Abd-Alla and Al-Dawy [14], Sharma *et al.* [15]. The reflection of piezothermoelastic waves from the stress free, thermally insulated or isothermal, open circuit boundary of transversely isotropic piezothermo-elastic half space under the influence of thermal relaxation have been discussed by Sharma *et al.* [16], they proved that the amplitude coefficients of waves are related to the positions on the interface. Kuang and Yuan [17] studied the reflection and transmission theories of homogeneous and inhomogeneous waves in pyroelectric and piezoelectric medium. Abd-alla *et al.* [18,19] studied the reflection and refraction phenomena in piezoelectric media under initial stresses. In this paper, the reflection and refraction problem from the interface of the piezothermoelastic materials under initial stresses influence in the context of Green and Lindsay theory are studied in details and numerical

results are given. In two dimensional reflection and refraction problem there is only one incident quasi-Longitudinal wave, so there are four modes of thermo elastic and potential waves.

2. Governing Equations of Generalized Piezothermoelastic of Hexagonal Type

Consider a homogeneous, anisotropic, generalized piezothermoelastic medium of hexagonal type. The origin is taken on the thermoelasticity and stress-free plane surface and z -axis is directed normally into the half-space which is represented by $z \geq 0$. Let the wave motion in this medium be characterized by: the displacement vector $\vec{u}(u, 0, w)$, the electric potential function φ , all these quantities being dependent only on the variables x, z, t . (see **Figure 1**).

The governing field equations of generalized hexagonal piezothermoelastic for two dimensional motion in the $x-z$ plane are [5]:

- The coupled constitutive relations can be written in the forms:

$$\left. \begin{aligned} \sigma_{ij} &= C_{ijkl} \varepsilon_{kl} - e_{kij} E_k - \gamma_{ij} (T + t_o \dot{T}), \\ D_i &= e_{ijk} \varepsilon_{jk} + \epsilon_{ij} E_i - d_i (T + t_o \dot{T}) \end{aligned} \right\} \quad (1)$$

- The strain-displacement relation and the electric field according to the quasi-static approximation have the forms as:

$$\varepsilon_{ij} = \left\{ (u_{i,j} + u_{j,i}) / 2, E_i = -\varphi_{,i} \right\} i, j = 1, 2, 3. \quad (2)$$

- The equations of motion under initial stress, Gauss's divergence equation, and heat conduction can be written as (3).

where $i, j, k, l = 1, 2, 3$; u_i , φ , and T are the mechanical displacement, electric potential and absolute temperature, respectively; ε_{ij} , σ_{ij} and γ_{ij} are the strain, stress and thermal elastic coupling tensors, respectively; E_i , D_i are the electric field and electric displacement, respectively; C_{ijkl} is the elastic parameters tensor; e_{ijk} , ϵ_{ij} and d_i are the piezoelectric, dielectric,

pyroelectric moduli, respectively; t_o is the relaxation time; σ_{kj}^o and ρ are the initial stress tensor and mass density, respectively; $K_{ij}, T_o, \delta_{ik}, C_e$ are the heat conduction tensor, reference temperature, Kronecker delta, specific heat at constant strain, respectively. The constitutive relations (1) of the hexagonal (6 mm) crystals symmetry given by

$$\left. \begin{aligned} \sigma_{xx} &= C_{11} \varepsilon_{xx} + C_{12} \varepsilon_{yy} + C_{13} \varepsilon_{zz} - e_{31} E_z - \gamma_1 (T + t_1 \dot{T}), \\ \sigma_{yy} &= C_{21} \varepsilon_{xx} + C_{11} \varepsilon_{yy} + C_{13} \varepsilon_{zz} - e_{31} E_z - \gamma_2 (T + t_1 \dot{T}), \\ \sigma_{zz} &= C_{13} \varepsilon_{xx} + C_{13} \varepsilon_{yy} + C_{33} \varepsilon_{zz} - e_{33} E_z - \gamma_3 (T + t_1 \dot{T}), \\ \sigma_{zy} &= 2C_{44} \varepsilon_{zy} - e_{15} E_y - \gamma_{23} (T + t_1 \dot{T}), \\ \sigma_{zx} &= 2C_{44} \varepsilon_{zx} - e_{15} E_x - \gamma_{13} (T + t_1 \dot{T}), \\ \sigma_{xy} &= (C_{11} - C_{12}) \varepsilon_{xy} - \gamma_{12} (T + t_1 \dot{T}) \end{aligned} \right\} \quad (4)$$

$$\left. \begin{aligned} D_x &= 2e_{15} \varepsilon_{zx} + P_{11} E_x + d_1 (T + t_1 \dot{T}), \\ D_y &= 2e_{15} \varepsilon_{zy} + P_{22} E_y + d_2 (T + t_1 \dot{T}), \\ D_z &= 2(e_{31} \varepsilon_{xx} + e_{31} \varepsilon_{yy} + e_{33} \varepsilon_{zz}) + P_{33} E_z + d_3 (T + t_1 \dot{T}) \end{aligned} \right\} \quad (5)$$

Substituting Equations (4)-(5) into Equation (3), we get (6).

3. Solution of the Problem for Incident qP -Wave

We will consider a transversely isotropic piezoelectric half space (see **Figure 1**). The lower medium and upper medium occupy the spaces $z \leq 0$ and $z \geq 0$ respectively. The x -axis is taken along the interface and the z -axis is directed vertically downwards. For the oblique incidence of the lower plane quasi-longitudinal (qP) wave from the piezothermoelastic medium at the interface $z = 0$, all kinds of scattered waves are depicted in **Figure 1**. The reflection and refraction wave fields consist of the reflected quasi-longitudinal (qP), quasi-transverse (qSV) waves and refracted (qP) and (qSV) waves, electric potential (φ), and heat (T) waves. For the pre-

$$\left. \begin{aligned} \sigma_{ij,j} + (u_{ik} \sigma_{kj}^o)_{,j} &= \rho \ddot{u}_i, D_{i,i} = 0, \\ K_{ij} T_{,ij} &= T_o \left[\gamma_{ij} (\dot{u}_{i,j} + t_o \delta_{ik} \ddot{u}_{i,j}) - d_{ij} (\dot{\varphi}_{,i} + t_o \delta_{ik} \ddot{\varphi}_{,j}) + \rho C_e (\dot{T} + t_o \delta_{ik} \ddot{T}) \right] \end{aligned} \right\} \quad (3)$$

$$\left. \begin{aligned} (C_{11} - \sigma_{xx}^o) u_{,xx} + (C_{44} + \sigma_{zz}^o) u_{,zz} + (C_{13} + C_{44}) w_{,xz} + (e_{13} + e_{15}) \varphi_{,xz} - \gamma_1 (T + t_1 \dot{T})_{,x} &= \rho \ddot{u}, \\ (C_{44} + C_{31}) u_{,xz} + (C_{44} + \sigma_{xx}^o) w_{,xx} + (C_{33} + \sigma_{zz}^o) w_{,zz} + e_{15} \varphi_{,xx} + e_{33} \varphi_{,zz} - \gamma_3 (T + t_1 \dot{T})_{,z} &= \rho \ddot{w}, \\ (e_{15} + e_{31}) u_{,xz} + e_{15} w_{,xx} + e_{33} w_{,zz} - P_{11} \varphi_{,xx} - P_{33} \varphi_{,zz} + d_3 (T + t_1 \dot{T})_{,z} &= 0 \\ K_1 T_{,xx} + K_3 T_{,zz} - \rho C_e (\dot{T} + t_o \ddot{T}) &= [T_o \gamma_1 (\dot{u}_{,x} + t_o \delta \ddot{u}_{,x})] + \gamma_3 (\dot{w}_{,z} + t_o \delta \ddot{w}_{,z}) - d_3 (\dot{\varphi}_{,z} + t_o \delta \ddot{\varphi}_{,z}) \end{aligned} \right\} \quad (6)$$

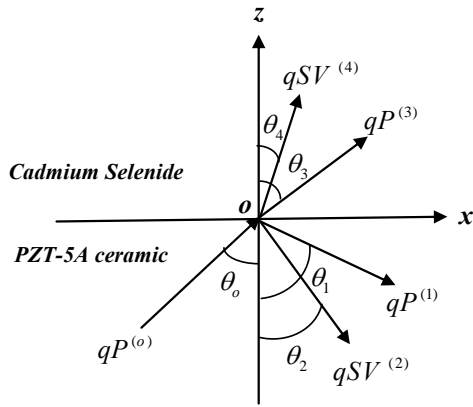


Figure 1. Incidence, reflected and refracted qP waves.

sent hexagonal crystals (transversely isotropic materials), we will consider the motion in the plane ($x-z$ plane). According to Achenbach [20] the solution of Equations (6) written as

$$u_r^{(n)} = A_n \Omega_r^{(n)} \exp[\xi_n t], \varphi^{(n)} = B_n \exp[\xi_n t], \quad (7)$$

$$T^{(n)} = C_n \exp[\xi_n t]$$

where $n = 0, 1, 2, 3, 4, r = 1, 3$

$$\begin{aligned} \xi_0 &= ik_o (x \sin \theta_o + z \cos \theta_o - C_{L_o} t), \\ \xi_1 &= ik_1 (x \sin \theta_1 - z \cos \theta_1 - C_{L_1} t), \\ \xi_2 &= ik_2 (x \sin \theta_2 - z \cos \theta_2 - C_{T_2} t), \\ \xi_3 &= ik_3 (x \sin \theta_3 + z \cos \theta_3 - C_{L_3} t), \\ \xi_4 &= ik_4 (x \sin \theta_4 + z \cos \theta_4 - C_{T_4} t), \\ C_{L_0} &= \omega/k_o, C_{L_1} = \omega/k_1, C_{T_2} = \omega/k_2, \\ C_{L_3} &= \omega/k_3, C_{T_4} = \omega/k_4 \\ \Omega_1^{(0)} &= \sin \theta_o, \Omega_3^{(0)} = \cos \theta_o, \Omega_1^{(1)} = \sin \theta_1, \\ \Omega_3^{(1)} &= -\cos \theta_1, \Omega_1^{(2)} = \cos \theta_2, \Omega_3^{(2)} = \sin \theta_2, \\ \Omega_1^{(3)} &= \sin \theta_3, \Omega_3^{(3)} = \cos \theta_3, \Omega_1^{(4)} = -\cos \theta_4, \Omega_3^{(4)} = \sin \theta_4 \end{aligned}$$

where $n = 0$ represent the incidence of qP wave, $n = 1, 2$, represent the reflected waves, $n = 3, 4$ represent the refracted waves.

4. Continuous Conditions on the Interface of Piezothermoelastic Materials

Consider the problem of two bounded semi-infinite piezothermoelastic materials with the interface $z = 0$ subjected to a harmonic incident wave of frequency ω with an incident angle θ_o as shown in **Figure 1**. The continuous conditions on the interface are:

1) The free mechanical boundary conditions:

$$\begin{aligned} \sigma_{zz}^{(0)} + \sigma_{zz}^{(1)} + \sigma_{zz}^{(2)} &= \sigma_{zz}^{(3)} + \sigma_{zz}^{(4)}, \\ \sigma_{zx}^{(0)} + \sigma_{zx}^{(1)} + \sigma_{zx}^{(2)} &= \sigma_{zx}^{(3)} + \sigma_{zx}^{(4)} \end{aligned} \quad (8)$$

2) The electrical condition:

$$\varphi^{(0)} + \varphi^{(1)} + \varphi^{(2)} = \varphi^{(3)} + \varphi^{(4)} \quad (9)$$

3) The thermal condition:

$$T^{(0)} + T^{(1)} + T^{(2)} = T^{(3)} + T^{(4)} \quad (10)$$

Substituting Equations (2), (4), and (7) into Equations (8)-(10), we obtain the following set of equations:

$$\begin{aligned} ik_o (b_{o1} + b_{o2}) \exp[\xi_0] + ik_1 (b_{11} - b_{12}) \exp[\xi_1] \\ + ik_2 (b_{21} - b_{22}) \exp[\xi_2] - ik_3 (b_{31} + b_{32}) \exp[\xi_3] \\ - ik_4 (b_{41} + b_{42}) \exp[\xi_4] = 0 \end{aligned} \quad (11)$$

$$\begin{aligned} k_o b_{51} \exp[\xi_0] - ik_1 b_{52} \exp[\xi_1] - ik_2 b_{53} \exp[\xi_2] \\ - ik_3 b_{54} \exp[\xi_3] + ik_4 b_{55} \exp[\xi_4] = 0 \end{aligned} \quad (12)$$

$$\begin{aligned} B_o \exp[\xi_0] + B_1 \exp[\xi_1] + B_2 \exp[\xi_2] \\ = B_3 \exp[\xi_3] + B_4 \exp[\xi_4] \end{aligned} \quad (13)$$

$$\begin{aligned} C_o \exp[\xi_0] + C_1 \exp[\xi_1] + C_2 \exp[\xi_2] \\ = C_3 \exp[\xi_3] + C_4 \exp[\xi_4] \end{aligned} \quad (14)$$

where

$$\begin{aligned} b_{o1} &= A_o (C_{13} \sin^2 \theta_o + C_{33} \cos^2 \theta_o), \\ b_{o2} &= e_{33} B_o \cos \theta_o - C_o \gamma_3 [(1/ik_o) - t_1 C_{L_o}], \\ b_{11} &= A_1 (C_{13} \sin^2 \theta_1 + C_{33} \cos^2 \theta_1), \\ b_{12} &= e_{33} B_1 \cos \theta_1 + C_1 \gamma_3 [(1/ik_1) - t_1 C_{L_1}], \\ b_{21} &= A_2 (C_{13} - C_{33}) \sin \theta_2 \cos \theta_2, \\ b_{22} &= e_{33} B_2 \cos \theta_2 + C_2 \gamma_3 [(1/ik_2) - t_1 C_{T_2}], \\ b_{31} &= A_o (C'_{13} \sin^2 \theta_3 + C'_{33} \cos^2 \theta_3), \\ b_{32} &= e'_{33} B_3 \cos \theta_3 - C_3 \gamma'_3 [(1/ik_3) - t_1 C_{L_3}], \\ b_{41} &= A_4 (C'_{33} - C'_{13}) \sin \theta_4 \cos \theta_4, \\ b_{42} &= e'_{33} B_4 \cos \theta_4 - C_4 \gamma'_3 [(1/ik_4) - t_1 C_{T_4}], \\ b_{51} &= C_{44} \sin 2\theta_o A_o + e_{15} \sin \theta_o B_o, \\ b_{52} &= C_{44} \sin 2\theta_1 A_1 - e_{15} \sin \theta_1 B_1, \\ b_{53} &= C_{44} \cos 2\theta_2 A_2 - e_{15} \sin \theta_2 B_2, \\ b_{54} &= C'_{44} \sin 2\theta_3 A_3 + e'_{15} \sin \theta_3 B_3, \\ b_{55} &= C'_{44} \cos 2\theta_4 A_4 - e'_{15} \sin \theta_4 B_4. \end{aligned}$$

Equations (11)-(14) must be valid for all values of t and x , hence

$$\begin{aligned} \xi_0 = \xi_1 = \xi_2 = \xi_3 = \xi_4 \\ k_o \sin \theta_o = k_1 \sin \theta_1 = k_2 \sin \theta_2 = k_3 \sin \theta_3 = k_4 \sin \theta_4 \\ k_o C_{L_o} = k_1 C_{L_1} = k_2 C_{T_2} = k_3 C_{L_3} = k_4 C_{T_4} = \omega \end{aligned} \quad (15)$$

From the above relations, we get

$$\begin{aligned} k_o &= k_1, \theta_o = \theta_1, C_{Lo} = C_{L1} \\ \tau_1 &= k_2/k_o, \tau_2 = k_3/k_o, \tau_3 = k_4/k_o, \\ \sin \theta_2 &= \sin \theta_o/\tau_1, \sin \theta_3 = \sin \theta_o/\tau_2, \\ \sin \theta_4 &= \sin \theta_o/\tau_3, \end{aligned} \tag{16}$$

Furthermore, we should now use the equations of motion of the media, *i.e.*, Equation (6)₁ which will give us additional relations between amplitudes.

$$\begin{aligned} (C_{11} + \sigma_{xx}^o)u_{,xx}^{(n)} + (C_{44} + \sigma_{zz}^o)u_{,zz}^{(n)} + (C_{13} + C_{44})w_{,xz}^{(n)} \\ + (e_{13} + e_{15})\phi_{,xz}^{(n)} - \gamma_1(T^{(n)} + t_1\dot{T}^{(n)})_{,x} = \rho\ddot{u}^{(n)} \end{aligned} \tag{17}$$

where $n = 0, 1, 2, 3, 4$.

So, substituting from Equation (7) (when $z = 0$) into Equation (17) for the incident (qP) wave, the reflected and refracted waves, we get

$$\begin{cases} \chi_o A_o + M_o B_o + \mu_o C_o = 0, \\ \chi_1 A_1 + M_1 B_1 + \mu_1 C_1 = 0, \\ \chi_2 A_2 + M_2 B_2 + \mu_2 C_2 = 0, \\ \chi_3 A_3 + M_3 B_3 + \mu_3 C_3 = 0, \\ \chi_4 A_4 + M_4 B_4 + \mu_4 C_4 = 0 \end{cases} \tag{18}$$

where

$$\begin{aligned} \chi_o &= -\sin \theta_o [\rho C_{Lo}^2 - (C_{11} + \sigma_{xx}^o) \sin^2 \theta_o \\ &\quad - (C_{13} + 2C_{44} + \sigma_{zz}^o) \cos^2 \theta_o], \\ M_o &= (e_{13} + e_{15}) \sin \theta_o \cos \theta_o, \\ \mu_o &= [i\gamma_1 (1 - ik_o t_1 C_{Lo}) \sin \theta_o] / k_o, \\ \chi_1 &= -\chi_o, M_1 = M_o, \mu_1 = -\mu_o, \\ \chi_2 &= \cos \theta_2 [\rho C_{T2}^2 - (C_{11} - C_{13} - C_{44} + \sigma_{xx}^o) \sin^2 \theta_2 \\ &\quad - (C_{44} + \sigma_{zz}^o) \cos^2 \theta_2], \\ M_2 &= (e_{13} + e_{15}) \sin \theta_2 \cos \theta_2, \\ \mu_2 &= -[i\gamma_1 (1 - ik_2 t_1 C_{T2}) \sin \theta_2] / k_2, \\ \chi_3 &= \sin \theta_3 [\rho' C_{L3}^2 - (C'_{11} + \sigma_{xx}^o) \sin^2 \theta_3 \\ &\quad - (C'_{44} + \sigma_{zz}^o) \cos^2 \theta_3 - (C'_{13} + C'_{44}) \cos^2 \theta_3], \\ M_3 &= -(e'_{13} + e'_{15}) \sin \theta_3 \cos \theta_3, \\ \mu_3 &= -[i\gamma'_1 (1 - ik_3 t_1 C_{L3}) \sin \theta_3] / k_3, \\ \chi_4 &= \cos \theta_4 [(C'_{11} - C'_{13} - C'_{44} + \sigma_{xx}^o) \sin^2 \theta_4 \\ &\quad + (C'_{44} + \sigma_{zz}^o) \cos^2 \theta_4 - \rho' C_{T4}^2] \\ M_4 &= -(e'_{13} + e'_{15}) \sin \theta_4 \cos \theta_4, \end{aligned}$$

$$\mu_4 = -[i\gamma'_1 (1 - ik_4 t_1 C_{T4}) \sin \theta_4] / k_4$$

By using Equation (7) into Equation (6)₃, we get

$$\begin{cases} L_o A_o + G_o B_o + S_o C_o = 0, \\ L_1 A_1 + G_1 B_1 + S_1 C_1 = 0, \\ L_2 A_2 + G_2 B_2 + S_2 C_2 = 0, \\ L_3 A_3 + G_3 B_3 + S_3 C_3 = 0, \\ L_4 A_4 + G_4 B_4 + S_4 C_4 = 0 \end{cases} \tag{19}$$

where

$$\begin{aligned} L_o &= -[(e_{13} + 2e_{15}) \sin^2 \theta_o \cos \theta_o + e_{33} \cos^3 \theta_o], \\ G_o &= P_{11} \sin^2 \theta_o + P_{33} \cos^2 \theta_o, \\ S_o &= [id_3 (1 - ik_o t_1 C_{Lo}) \cos \theta_o] / k_o, \\ L_1 &= -L_o, G_1 = G_o, S_1 = -S_o, \\ L_2 &= [(e_{13} + e_{15} - e_{33}) \sin \theta_2 \cos^2 \theta_2 - e_{15} \sin^3 \theta_2], \\ G_2 &= P_{11} \sin^2 \theta_2 + P_{33} \cos^2 \theta_2, \\ S_2 &= -[id_3 (1 - ik_2 t_1 C_{T2}) \cos \theta_2] / k_2, \\ L_3 &= -[(e'_{13} + e'_{15}) \sin^2 \theta_3 \cos \theta_3 + e'_{33} \cos^3 \theta_3], \\ G_3 &= P'_{11} \sin^2 \theta_3 + P'_{33} \cos^2 \theta_3, \\ S_3 &= [id'_3 (1 - ik_3 t_1 C_{L3}) \cos \theta_3] / k_3, \\ L_4 &= [(e'_{13} + e'_{15} - e'_{33}) \sin \theta_4 \cos^2 \theta_4 - e'_{15} \sin^3 \theta_4], \\ G_4 &= P'_{11} \sin^2 \theta_4 + P'_{33} \cos^2 \theta_4, \\ S_4 &= [id'_3 (1 - ik_4 t_1 C_{T4}) \cos \theta_4] / k_4. \end{aligned}$$

By using Equation (7) into Equation (6)₄, we get

$$\begin{cases} E_o A_o + D_o B_o + F_o C_o = 0, \\ E_1 A_1 + D_1 B_1 + F_1 C_1 = 0, \\ E_2 A_2 + D_2 B_2 + F_2 C_2 = 0, \\ E_3 A_3 + D_3 B_3 + F_3 C_3 = 0, \\ E_4 A_4 + D_4 B_4 + F_4 C_4 = 0 \end{cases} \tag{20}$$

where

$$\begin{aligned} E_o &= T_o (1 - ik_o t_o \delta C_{Lo}) (\gamma_1 \sin^2 \theta_o + \gamma_3 \cos^2 \theta_o), \\ D_o &= -T_o d_3 (1 - ik_o t_o \delta C_{Lo}) \cos \theta_o, \\ F_o &= [(K_1 \sin^2 \theta_o + K_3 \cos^2 \theta_o) / C_{Lo}] - \rho C' (1 - ik_o t_o C_{Lo}), \\ E_1 &= -E_o, D_1 = D_o, F_1 = -F_o, \\ E_2 &= -T_o (1 - ik_2 t_o \delta C_{T2}) (\gamma_1 - \gamma_3) \sin \theta_2 \cos \theta_2, \\ D_2 &= -T_o d_3 (1 - ik_2 t_o \delta C_{T2}) \cos \theta_2, \\ F_2 &= -[(K_1 \sin^2 \theta_2 + K_3 \cos^2 \theta_2) / C_{T2}] - \rho C' (1 - ik_2 t_o C_{T2}), \\ E_3 &= -T'_o (1 - ik_3 t_o \delta C_{L3}) (\gamma'_1 \sin^2 \theta_3 + \gamma'_3 \cos^2 \theta_3), \\ D_3 &= T'_o d'_3 (1 - ik_3 t_o \delta C_{L3}) \cos \theta_3, \end{aligned}$$

$$\begin{aligned}
F_3 &= -\left[(K'_1 \sin^2 \theta_3 + K'_3 \cos^2 \theta_3) / C_{L3} \right] - \rho' C' (1 - ik_3 t_o C_{L3}), \\
E_4 &= -T'_o (1 - ik_4 t_o \delta C_{T4}) (\gamma'_3 - \gamma'_1) \sin \theta_4 \cos \theta_4, \\
D_4 &= T'_o d'_3 (1 - ik_4 t_o \delta C_{T4}) \cos \theta_4, \\
F_4 &= -\left[(K'_1 \sin^2 \theta_4 + K'_3 \cos^2 \theta_4) / C_{T4} \right] - \rho' C' (1 - ik_4 t_o C_{T4}).
\end{aligned}$$

From Equations (11)-(14), it is easy to see that

$$\begin{aligned}
(a_{11}A_1 + a_{12}A_2 + a_{13}A_3 + a_{14}A_4) / A_o &= m_1, \\
(a_{21}A_1 + a_{22}A_2 + a_{23}A_3 + a_{24}A_4) / A_o &= m_2, \\
(a_{31}A_1 + a_{32}A_2 + a_{33}A_3 + a_{34}A_4) / A_o &= m_3, \\
(a_{41}A_1 + a_{42}A_2 + a_{43}A_3 + a_{44}A_4) / A_o &= m_4
\end{aligned} \quad (21)$$

where

$$\begin{aligned}
a_{11} &= 1, a_{12} = J_{11} / J_1, a_{13} = -J_{12} / J_1, \\
a_{14} &= -J_{13} / J_1, a_{21} = 1, a_{22} = J_{21} / J_2, a_{23} = J_{22} / J_2, \\
a_{24} &= -J_{23} / J_2, a_{31} = 1, a_{32} = -\alpha_2 / \alpha_o, a_{33} = \alpha_3 / \alpha_o, \\
a_{34} &= \alpha_4 / \alpha_o, a_{41} = 1, a_{42} = \beta_2 / \beta_o, a_{43} = -\beta_3 / \beta_o, \\
a_{44} &= -\beta_4 / \beta_o, m_1 = -1, m_2 = 1, m_3 = 1, m_4 = -1, \\
J_{11} &= \tau_1 [(C_{13} - C_{33}) \sin \theta_2 \cos \theta_2 \\
&\quad - \alpha_2 e_{33} \cos \theta_2 - \gamma_3 ((1/ik_2) - t_1 C_{T2}) \beta_2], \\
J_{12} &= \tau_2 [C'_{13} \sin^2 \theta_3 + C'_{33} \cos^2 \theta_3 \\
&\quad + \alpha_3 e'_{33} \cos \theta_3 - \gamma'_3 ((1/ik_3) - t_1 C_{L3}) \beta_3], \\
J_{13} &= \tau_3 [(C'_{33} - C_{33}) \sin \theta_4 \cos \theta_4 + \alpha_4 e'_{33} \cos \theta_4 \\
&\quad - \gamma'_3 ((1/ik_4) - t_1 C_{T4}) \beta_4], \\
J_1 &= (C_{13} \sin^2 \theta_o + C_{33} \cos^2 \theta_o) \\
&\quad + \alpha_o e_{33} \cos \theta_o - \gamma_3 ((1/ik_o) - t_1 C_{Lo}) \beta_o, \\
J_{21} &= \tau_1 (C_{44} \cos 2\theta_2 - \alpha_2 e_{15} \sin \theta_2), \\
J_{22} &= \tau_2 (C'_{44} \sin 2\theta_3 + \alpha_3 e'_{15} \sin \theta_3), \\
J_{23} &= \tau_3 (C'_{44} \cos 2\theta_4 - \alpha_4 e'_{15} \sin \theta_4), \\
J_2 &= (C_{44} \sin 2\theta_o + \alpha_o e_{15} \sin \theta_o), \\
\alpha_o &= (E_o \mu_o - F_o \chi_o) / (F_o M_o - D_o \mu_o), \\
\alpha_1 &= (E_1 \mu_1 - F_1 \chi_1) / (F_1 M_1 - D_1 \mu_1), \\
\alpha_2 &= (E_2 \mu_2 - F_2 \chi_2) / (F_2 M_2 - D_2 \mu_2), \\
\alpha_3 &= (E_3 \mu_3 - F_3 \chi_3) / (F_3 M_3 - D_3 \mu_3), \\
\alpha_4 &= (E_4 \mu_4 - F_4 \chi_4) / (F_4 M_4 - D_4 \mu_4), \\
\beta_o &= (M_o E_o - D_o \chi_o) / (D_o \mu_o - F_o M_o), \\
\beta_1 &= (M_1 E_1 - D_1 \chi_1) / (D_1 \mu_1 - F_1 M_1), \\
\beta_2 &= (M_2 E_2 - D_2 \chi_2) / (D_2 \mu_2 - F_2 M_2), \\
\beta_3 &= (M_3 E_3 - D_3 \chi_3) / (D_3 \mu_3 - F_3 M_3),
\end{aligned}$$

$$\beta_4 = (M_4 E_4 - D_4 \chi_4) / (D_4 \mu_4 - F_4 M_4)$$

Solving Equation (21), we can determine the reflection and refraction coefficients as:

$$\begin{aligned}
A_1 / A_o &= D_1 / D_o, A_2 / A_o = D_2 / D_o, \\
A_3 / A_o &= D_3 / D_o, A_4 / A_o = D_4 / D_o.
\end{aligned} \quad (22)$$

where

$$\begin{aligned}
D &= \begin{vmatrix} a_{11} & a_{12} & a_{13} & a_{14} \\ a_{21} & a_{22} & a_{23} & a_{24} \\ a_{31} & a_{32} & a_{33} & a_{34} \\ a_{41} & a_{42} & a_{43} & a_{44} \end{vmatrix}, D_1 = \begin{vmatrix} m_1 & a_{12} & a_{13} & a_{14} \\ m_2 & a_{22} & a_{23} & a_{24} \\ m_3 & a_{32} & a_{33} & a_{34} \\ m_4 & a_{42} & a_{43} & a_{44} \end{vmatrix}, \\
D_2 &= \begin{vmatrix} a_{11} & m_1 & a_{13} & a_{14} \\ a_{21} & m_2 & a_{23} & a_{24} \\ a_{31} & m_3 & a_{33} & a_{34} \\ a_{41} & m_4 & a_{43} & a_{44} \end{vmatrix}, D_3 = \begin{vmatrix} a_{11} & a_{12} & m_1 & a_{14} \\ a_{21} & a_{22} & m_2 & a_{24} \\ a_{31} & a_{32} & m_3 & a_{34} \\ a_{41} & a_{42} & m_4 & a_{44} \end{vmatrix}, \\
D_4 &= \begin{vmatrix} a_{11} & a_{12} & a_{13} & m_1 \\ a_{21} & a_{22} & a_{23} & m_2 \\ a_{31} & a_{32} & a_{33} & m_3 \\ a_{41} & a_{42} & a_{43} & m_4 \end{vmatrix}.
\end{aligned}$$

By using Equations (18)-(20) we get:

$$\begin{aligned}
B_1 / B_o &= -A_1 / A_o, B_2 / B_o = \alpha_2 A_2 / \alpha_o A_o, \\
B_3 / B_o &= \alpha_3 A_3 / \alpha_o A_o, B_4 / B_o = \alpha_4 A_4 / \alpha_o A_o, \\
C_1 / C_o &= A_1 / A_o, C_2 / C_o = \beta_2 A_2 / \beta_o A_o, \\
C_3 / C_o &= \beta_3 C_3 / \beta_o C_o, C_4 / C_o = \beta_4 C_4 / \beta_o A_o.
\end{aligned} \quad (23)$$

5. Numerical Results and Discussion

The material chosen for the purpose of numerical calculations is (6 mm class) Cadmium Selenide (CdSe) for upper medium and Lead Zirconate Titanate ceramics (PZT-5A) for lower medium, which are transversely isotropic materials. The physical data for a single crystal of CdSe material and PZT-5A ceramics are given as [6,21]:

$$\begin{aligned}
C'_{11} &= 7.41 \times 10^{10} \text{ Nm}^{-2}, C'_{12} = 4.52 \times 10^{10} \text{ Nm}^{-2}, \\
C'_{13} &= 3.93 \times 10^{10} \text{ Nm}^{-2}, C'_{33} = 8.36 \times 10^{10} \text{ Nm}^{-2}, \\
C'_{44} &= 1.32 \times 10^{10} \text{ Nm}^{-2}, T'_o = 298 \text{ K}, \\
\rho' &= 5504 \text{ K} \cdot \text{gm}^{-3}, e'_{13} = -0.160 \text{ Cm}^{-2}, \\
e'_{33} &= 0.347 \text{ Cm}^{-2}, e'_{15} = -0.138 \text{ Cm}^{-2}, \\
\gamma'_1 &= 0.621 \times 10^6 \text{ NK}^{-1} \cdot \text{m}^{-2}, \gamma'_3 = 0.551 \times 10^6 \text{ NK}^{-1} \cdot \text{m}^{-2}, \\
d'_3 &= -2.94 \times 10^{-6} \text{ CK}^{-1} \cdot \text{m}^{-2}, K'_{11} = K'_{33} = 9 \text{ Wm}^{-1} \cdot \text{K}^{-1}, \\
\epsilon'_{11} &= 8.26 \times 10^{-11} \text{ C}^2 \text{N}^{-1} \cdot \text{m}^{-2}, \epsilon'_{33} = 9.03 \times 10^{-11} \text{ C}^2 \text{N}^{-1} \cdot \text{m}^{-2}, \\
C'_e &= 260 \text{ J} \cdot \text{Kg}^{-1} \text{K}^{-1}, \omega' = 2.14 \times 10^{13} \text{ s}^{-1}, \\
C_{11} &= 13.9 \times 10^{10} \text{ Nm}^{-2}, C_{12} = 7.78 \times 10^{10} \text{ Nm}^{-2},
\end{aligned}$$

$$\begin{aligned}
 C_{13} &= 7.54 \times 10^{10} \text{ Nm}^{-2}, C_{33} = 11.3 \times 10^{10} \text{ Nm}^{-2}, \\
 C_{44} &= 2.56 \times 10^{10} \text{ Nm}^{-2}, T_o = 298 \text{ K}, \\
 \rho &= 7750 \text{ Kg m}^{-3}, e_{13} = -6.98 \text{ Cm}^{-2}, \\
 e_{33} &= 13.8 \text{ Cm}^{-2}, e_{15} = 13.4 \text{ Cm}^{-2}, \\
 \gamma_1 &= 1.52 \times 10^6 \text{ NK}^{-1} \text{ m}^{-2}, \gamma_3 = 1.53 \times 10^6 \text{ NK}^{-1} \cdot \text{m}^{-2}, \\
 d_3 &= -452 \times 10^{-6} \text{ CK}^{-1} \cdot \text{m}^{-2}, K_{11} = K_{33} = 1.5 \text{ Wm}^{-1} \cdot \text{K}^{-1}, \\
 \epsilon_{11} &= 60.0 \times 10^{-10} \text{ C}^2 \text{ N}^{-1} \cdot \text{m}^{-2}, \\
 \epsilon_{33} &= 54.7 \times 10^{-10} \text{ C}^2 \text{ N}^{-1} \cdot \text{m}^{-2}, \\
 C_e &= 420 \text{ J} \cdot \text{Kg}^{-1} \text{ K}^{-1}, \omega = 2.14 \times 10^{13} \text{ s}^{-1}
 \end{aligned}$$

Here the thermal relaxation time t_o is estimated its value about $t_o = 10^{-12} = 1$ pico-sec. and t_1 is taken proportional to t_o . The variations of phase velocities computed from

$$\begin{aligned}
 c_{Lo} &= c_{L1} = \sqrt{C_{44} + C_{11} \sin^2 \alpha + C_{33} \cos^2 \alpha + v_1} / \sqrt{2\rho}, \\
 c_{T2} &= \sqrt{C_{44} + C_{11} \sin^2 \alpha + C_{33} \cos^2 \alpha - v_1} / \sqrt{2\rho}, \\
 c_{L3} &= \sqrt{C'_{44} + C'_{11} \sin^2 \beta + C'_{33} \cos^2 \beta + v_2} / \sqrt{2\rho'}. \\
 c_{T4} &= \sqrt{C'_{44} + C'_{11} \sin^2 \beta + C'_{33} \cos^2 \beta - v_2} / \sqrt{2\rho'},
 \end{aligned}$$

where $v_1 = \sqrt{v_{11} + v_{12}}, v_2 = \sqrt{v_{21} + v_{22}}$

$$\begin{aligned}
 v_{11} &= [(C_{11} - C_{44}) \sin^2 \alpha + (C_{44} - C_{33}) \cos^2 \alpha]^2 \\
 v_{12} &= (C_{13} + C_{44})^2 \sin^2 2\alpha, v_{22} = (C'_{13} + C'_{44})^2 \sin^2 2\beta \\
 v_{21} &= [(C'_{11} - C'_{44}) \sin^2 \beta + (C'_{44} - C'_{33}) \cos^2 \beta]^2.
 \end{aligned}$$

The real and imaginary values of the amplitude ratios $A_i/A_o, C_i/C_o, B_i/B_o (i=1,2,3,4)$ corresponds to qP, qSV, T, φ -mode for incident qP wave are computed for various angle of incidence (in degrees) under various

of initial stresses ($\sigma_{zz}^o = (5,6,7,8) \times 10^{11}$), in the context of Green and Lindsay theory (G-L) of generalized thermoelasticity [9] where

$$\delta = 0, t_o = 10^{-12}, t_1 = nt_1, (n = 1, 2, 3, 4), \sigma_{zz}^o = 5 \times 10^{11}.$$

The reflection and refraction coefficients have been presented on curves in **Figures 2-21** which have the following observations:

- **Figure 2** represents the relation between the imaginary and real parts of reflection coefficient A_1/A_o and angle of incidence θ_o , we also observe that the relaxation time t_1 effect appears only in the range ($\theta_o = 70^\circ \rightarrow 90^\circ$).
- **Figure 3** represents the relation between the imaginary and real part of the reflection coefficient A_2/A_o with the angle of incidence θ_o , as well as the relaxation time t_1 effect.
- **Figure 4** represents the relation between the imaginary and real of refraction coefficient A_3/A_o with the angle of incidence θ_o , as well as the relaxation time t_1 effect, in those Figures we noted the A_3/A_o values decreases with θ_o increase gradually until it reaches the minimum value when $\theta_o = 90^\circ$, also the relaxation time t_1 related by inverse relation with, and the positive relation with $Im(A_3/A_o)$.
- **Figure 5** represents the relation between the imaginary and real of refraction coefficient A_4/A_o with θ_o , as well as the relaxation time t_1 effect, in those figures we noted $Im(A_4/A_o)$ increases with the value of θ_o increase gradually until it reaches the maximum value when ($\theta_o = 35^\circ$), and then decreasing Its value in the following period, while decreasing Its value in $Re(A_4/A_o)$, with increasing θ_o until it reaches the minimum value when $\theta_o = 90^\circ$ It is clear

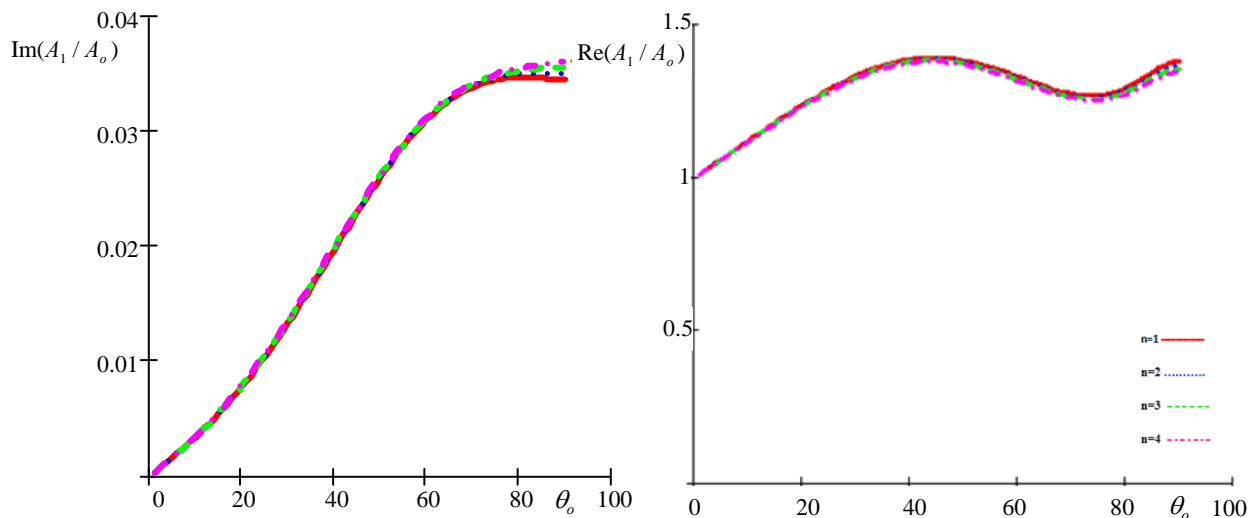


Figure 2. Imaginary and real parts of reflection coefficient A_1/A_o as a function of incidence angle θ_o for different values of the relaxation times for (G-L) model.

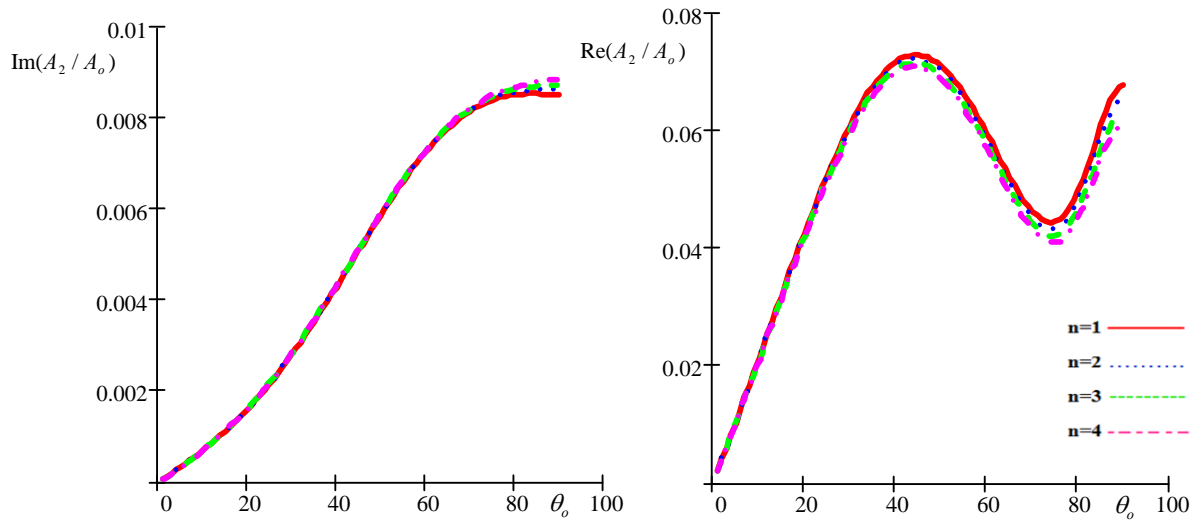


Figure 3. Imaginary and real parts of reflection coefficient A_2/A_0 as a function of incidence angle θ_0 for different values of the relaxation times for (G-L) model.

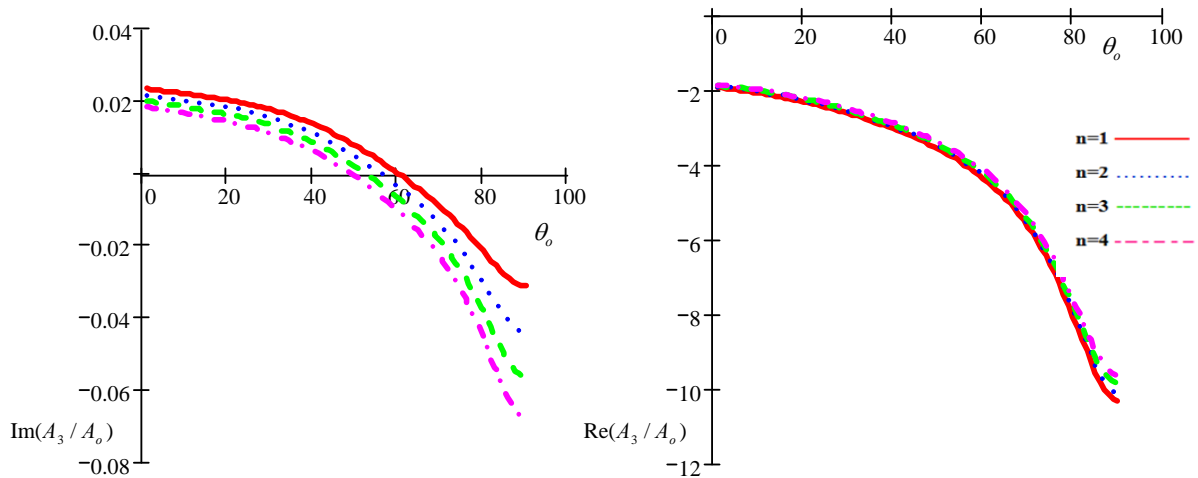


Figure 4. Imaginary and real parts of reflection coefficient A_3/A_0 as a function of incidence angle θ_0 for different values of the relaxation times for (G-L) model.

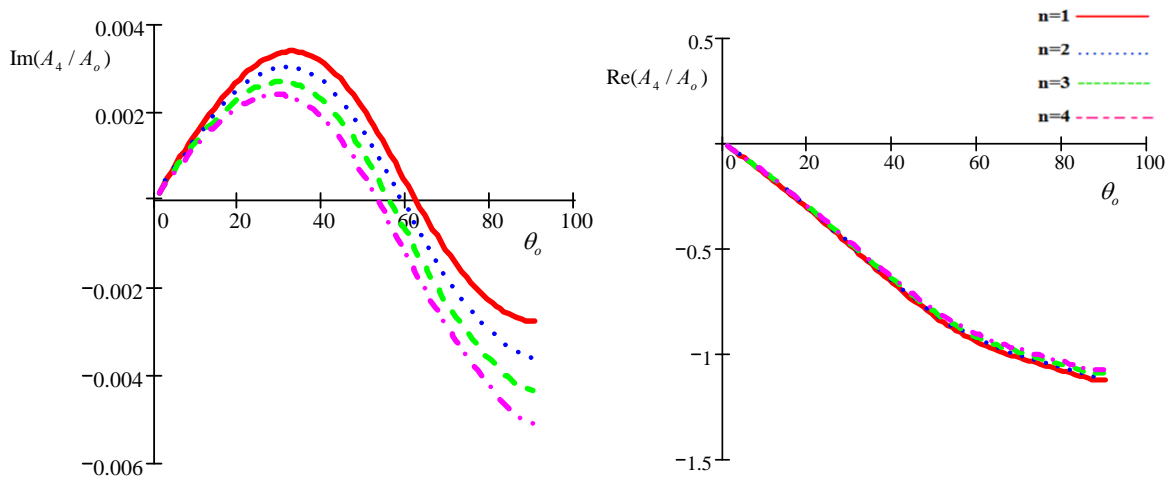


Figure 5. Imaginary and real parts of reflection coefficient A_4/A_0 as a function of incidence angle θ_0 for different values of the relaxation times for (G-L) model.

from the figures that the effect caused by the relaxation time t_1 on A_4/A_o is very slight.

- **Figures 6-8** represent the relation between the electric potential coefficients B_i/B_o , ($i=1,2,3,4$) with the angle of incidence θ_o , as well as the relaxation time t_1 effect.
- **Figures 9-11** represent the relation between the thermal coefficients C_i/C_o , ($i=1,2,3,4$) with the angle of incidence θ_o , as well as the relaxation time t_1 effect.
- **Figures 12-21** show the initial stress effect ($\sigma_{zz}^o = (5, 6, 7, 8) \times 10^{11}$) on relative reflection and refraction, thermal, and electric potential coefficients

when $t_o = 10^{-12}, t_1 = 3t_o$, In the period that shows the initial stress effect, we note that inverse relationship between the initial stress and reflection coefficients (A_1/A_o and A_2/A_o) and the opposite what happens with the relative refraction coefficients (A_3/A_o and A_4/A_o).

- Equations (22)-(23) show the existence proportionality relations between the reflection coefficients of the quasi-longitudinal wave falling and reflection coefficients at the fall of the other two types of waves (T -mode), (φ -mode). The constants of proportionality for these relations are functions of angle of incidence, relaxation times, and piezoelectric.

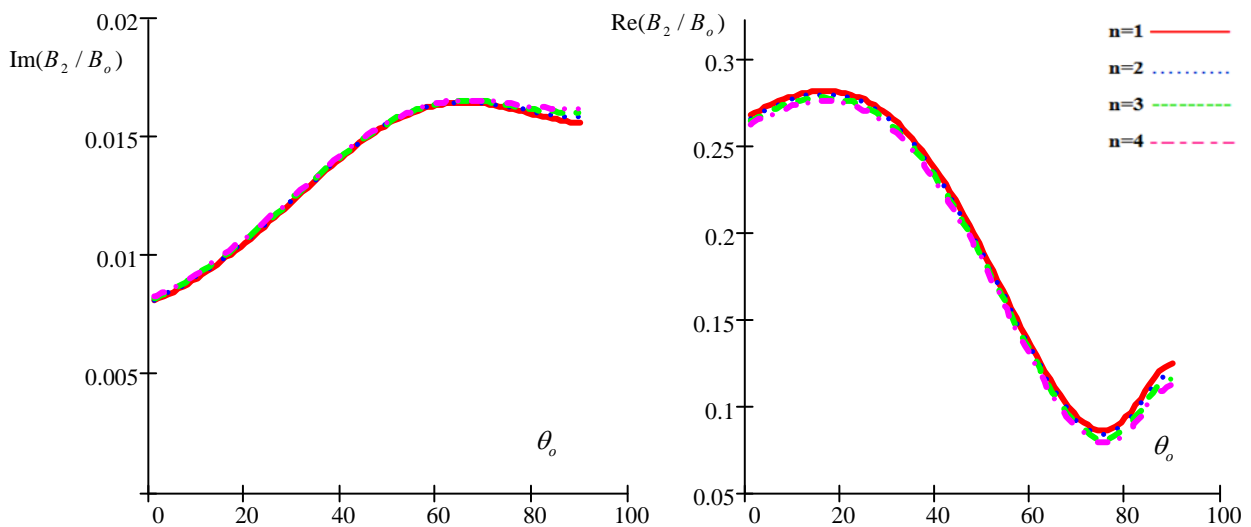


Figure 6. Imaginary and real parts of reflection coefficient B_2/B_o as a function of incidence angle θ_o for different values of the relaxation times for (G-L) model.

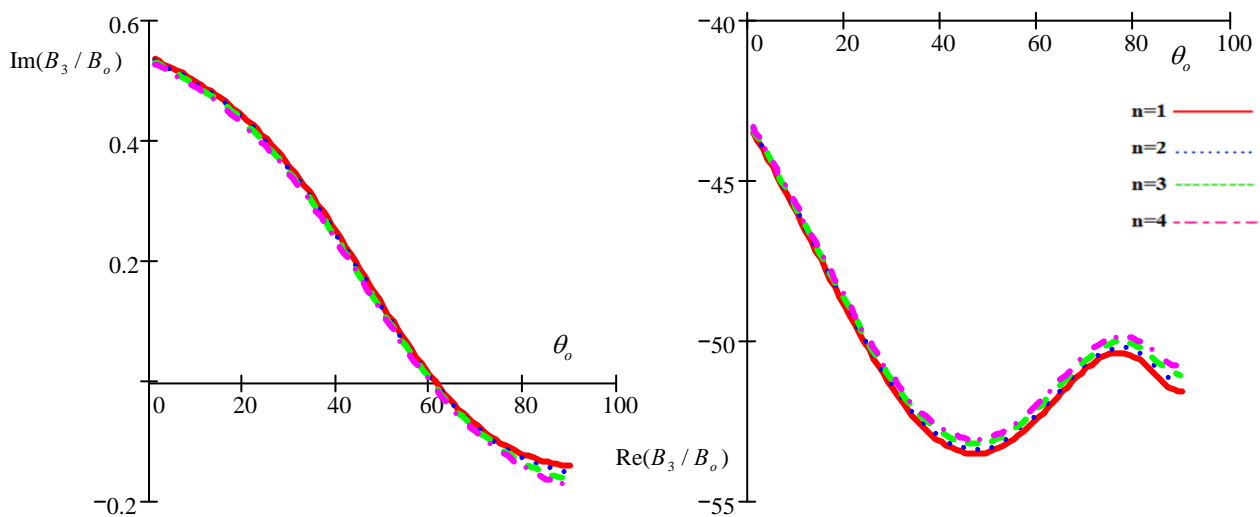


Figure 7. Imaginary and real parts of refraction coefficient B_3/B_o as a function of incidence angle θ_o for different values of the relaxation times for (G-L) model.

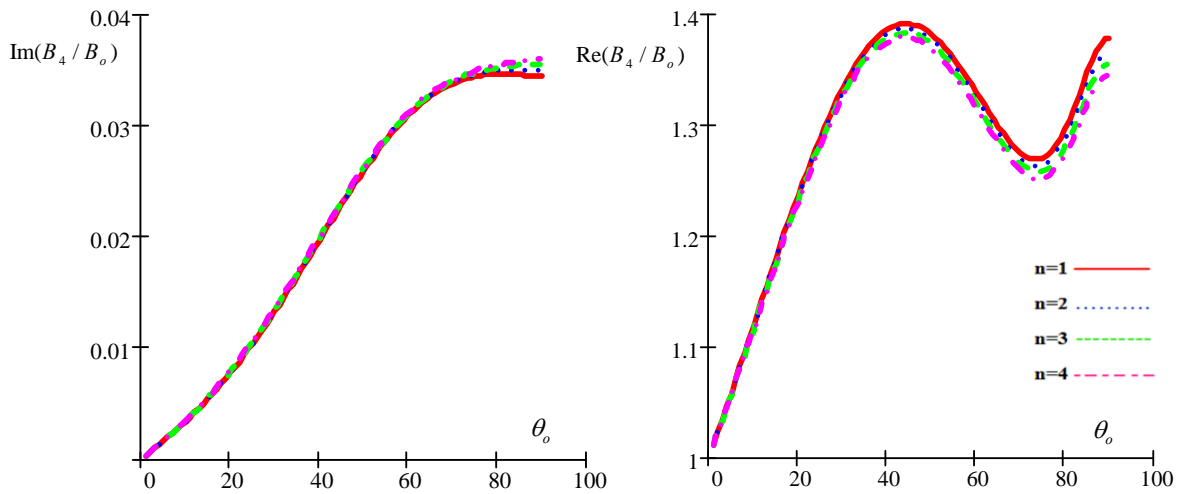


Figure 8. Imaginary and real parts of reflection coefficient B_4/B_o as a function of incidence angle θ_o for different values of the relaxation times for (G-L) model.

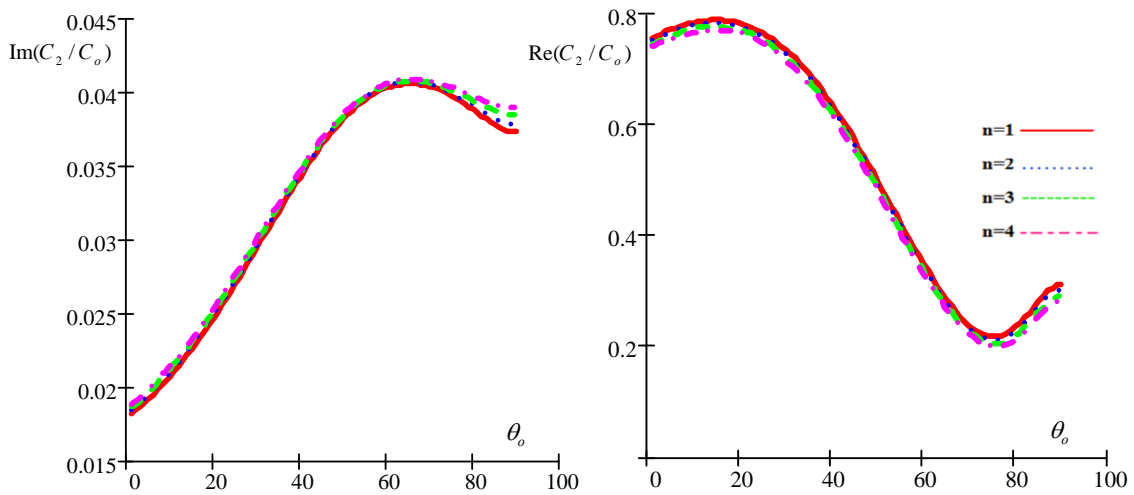


Figure 9. Imaginary and real parts of reflection coefficient C_2/C_o as a function of incidence angle θ_o for different values of the relaxation times for (G-L) model.

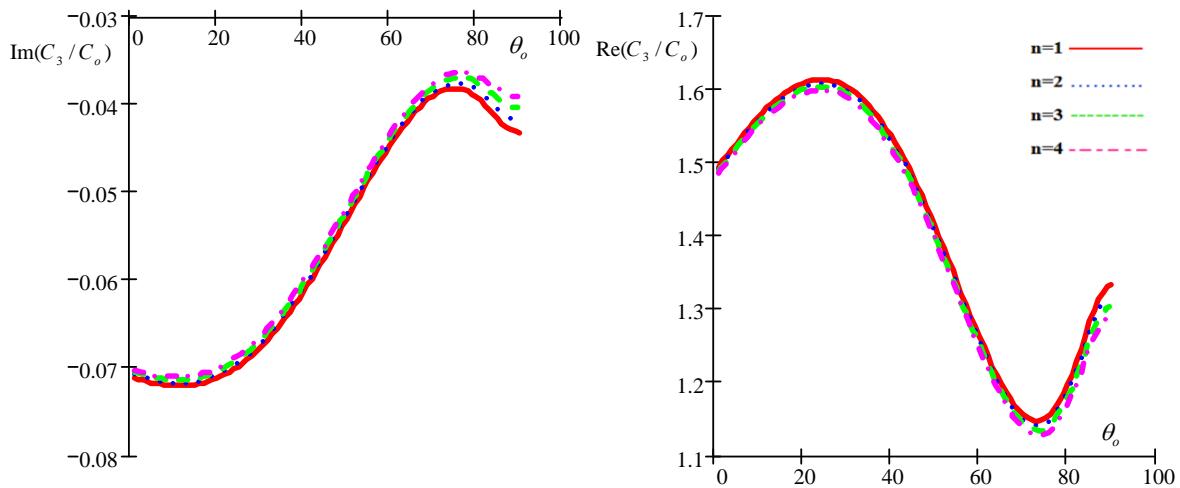


Figure 10. Imaginary and real parts of reflection coefficient C_3/C_o as a function of incidence angle θ_o for different values of the relaxation times for (G-L) model.

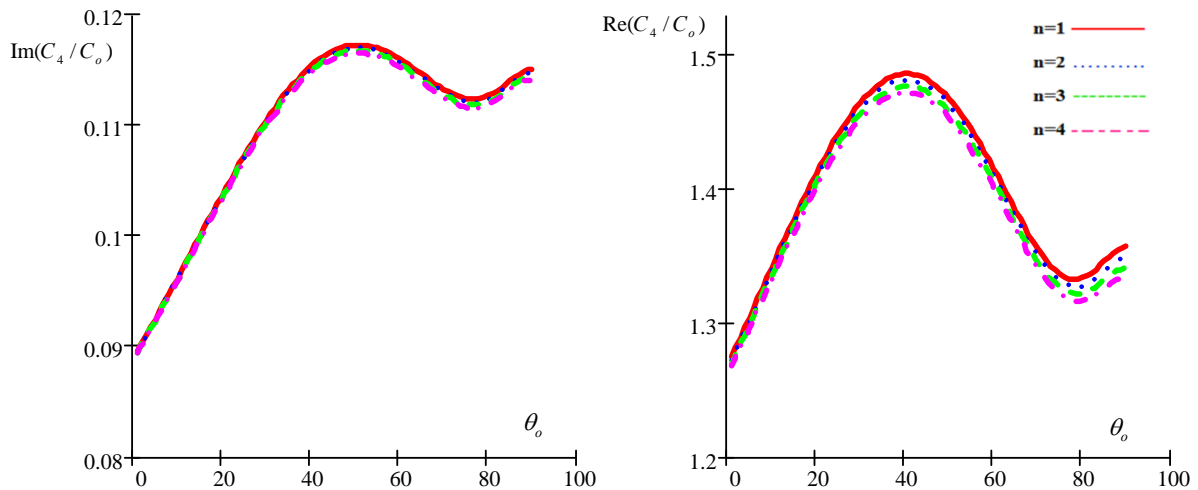


Figure 11. Imaginary and real parts of reflection coefficient C_4/C_0 as a function of incidence angle θ_0 for different values of the relaxation times for (G-L) model.

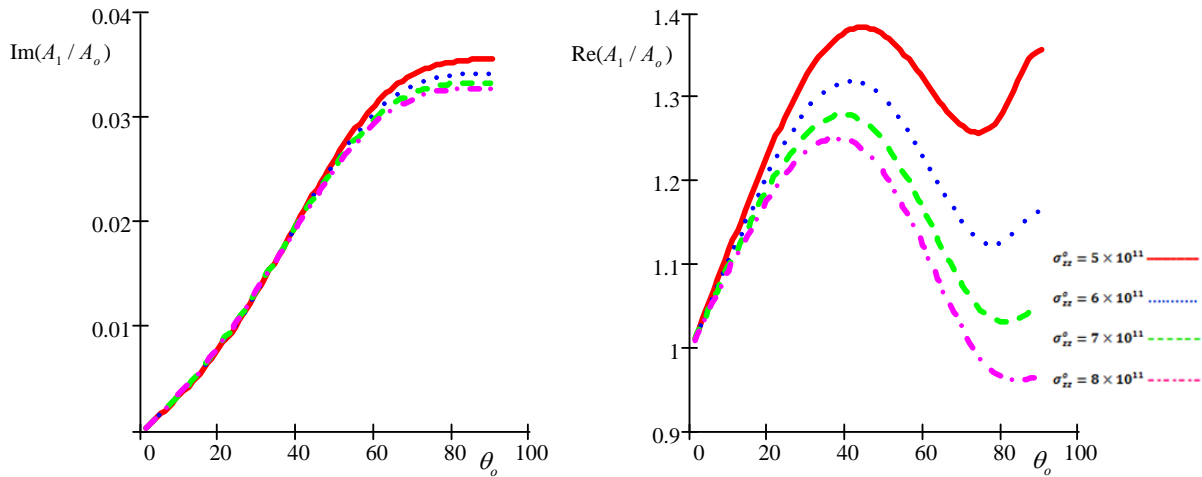


Figure 12. Imaginary and real parts of reflection coefficient A_1/A_0 as a function of incidence angle θ_0 under influence of different values of the initial stress for (G-L) model.

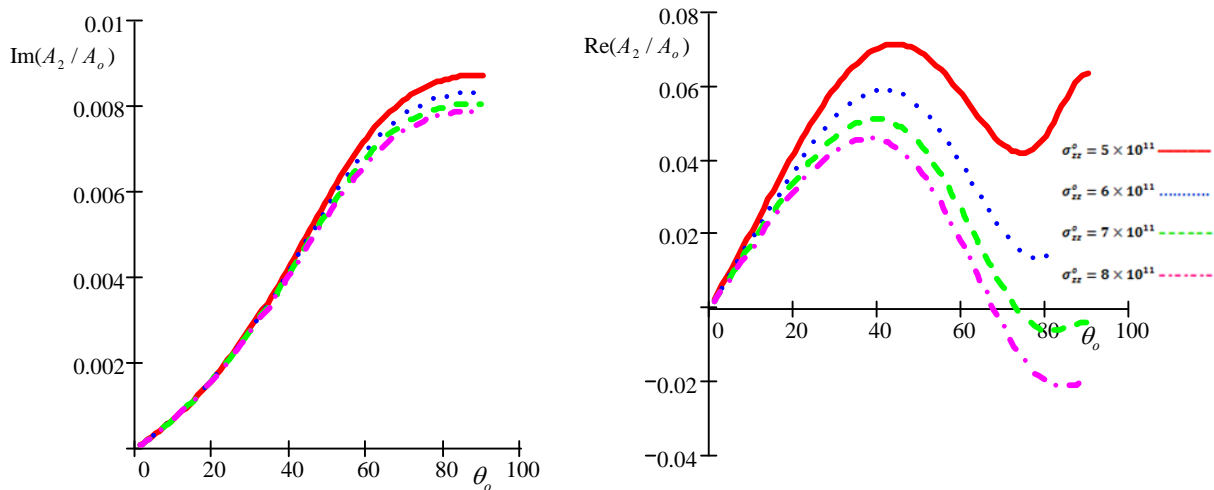


Figure 13. Imaginary and real parts of reflection coefficient A_2/A_0 as a function of incidence angle θ_0 under influence of different values of the initial stress for (G-L) model.

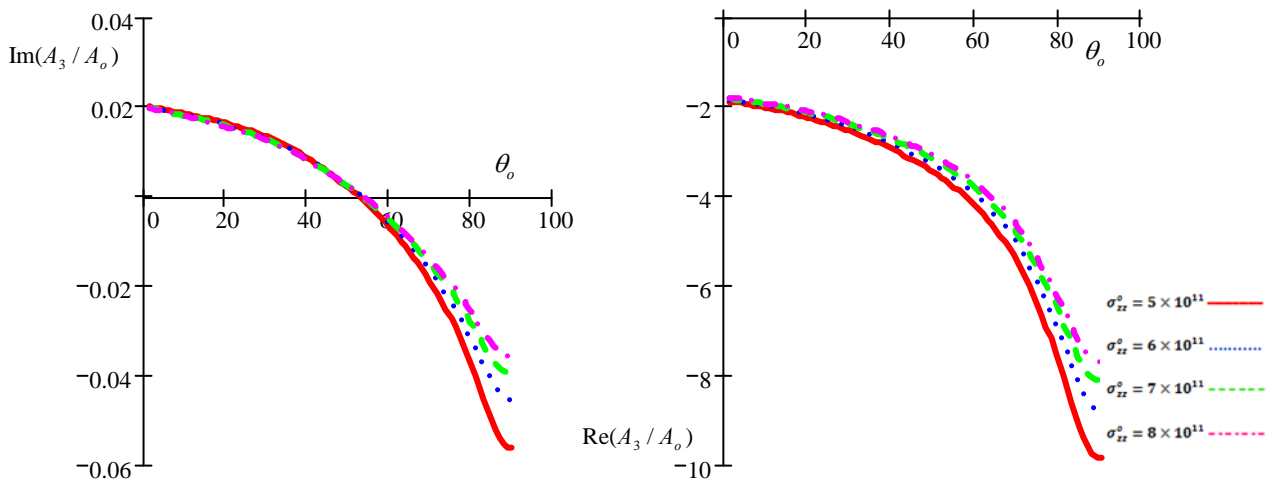


Figure 14. Imaginary and real parts of refraction coefficient A_3/A_0 as a function of incidence angle θ_0 under influence of different values of the initial stress for (G-L) model.

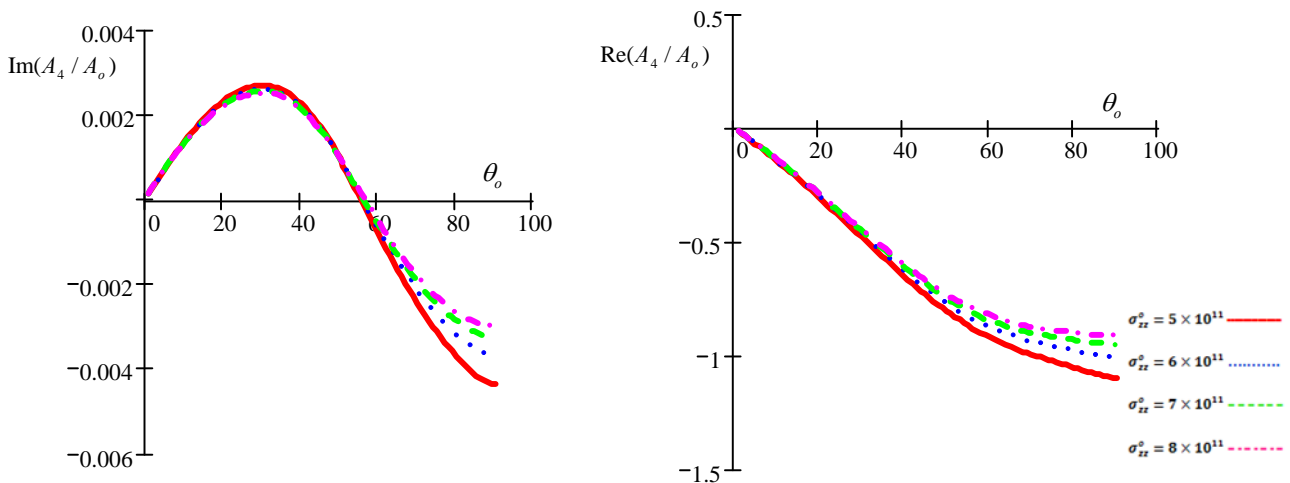


Figure 15. Imaginary and real parts of refraction coefficient A_4/A_0 as a function of incidence angle θ_0 under influence of different values of the initial stress for (G-L) model.

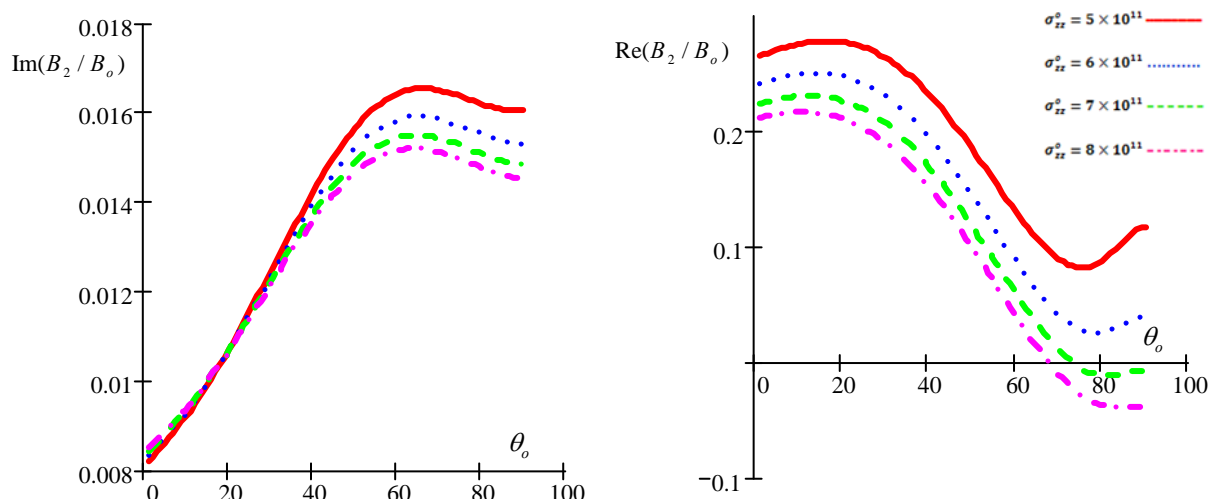


Figure 16. Imaginary and real parts of reflection coefficient B_2/B_0 as a function of incidence angle θ_0 under influence of different values of the initial stress for (G-L) model.

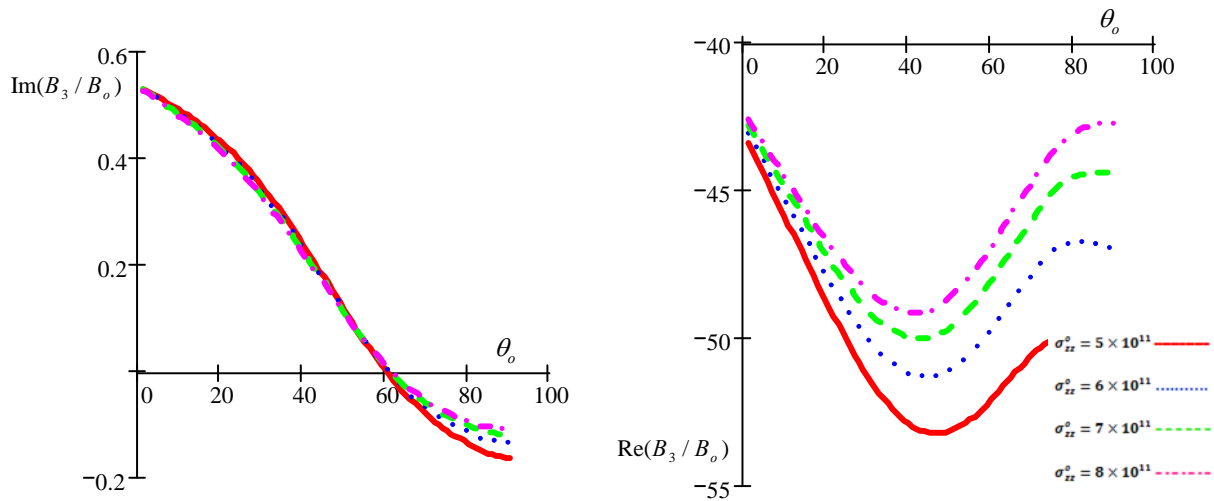


Figure 17. Imaginary and real parts of reflection coefficient B_3/B_0 as a function of incidence angle θ_0 under influence of different values of the initial stress for (G-L) model.

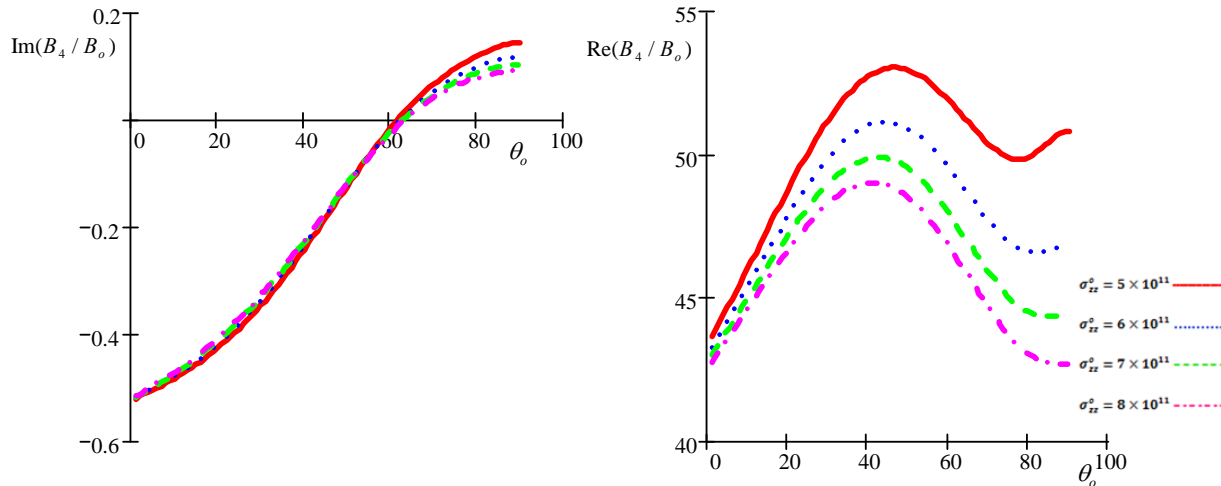


Figure 18. Imaginary and real parts of reflection coefficient B_4/B_0 as a function of incidence angle θ_0 under influence of different values of the initial stress for (G-L) model.

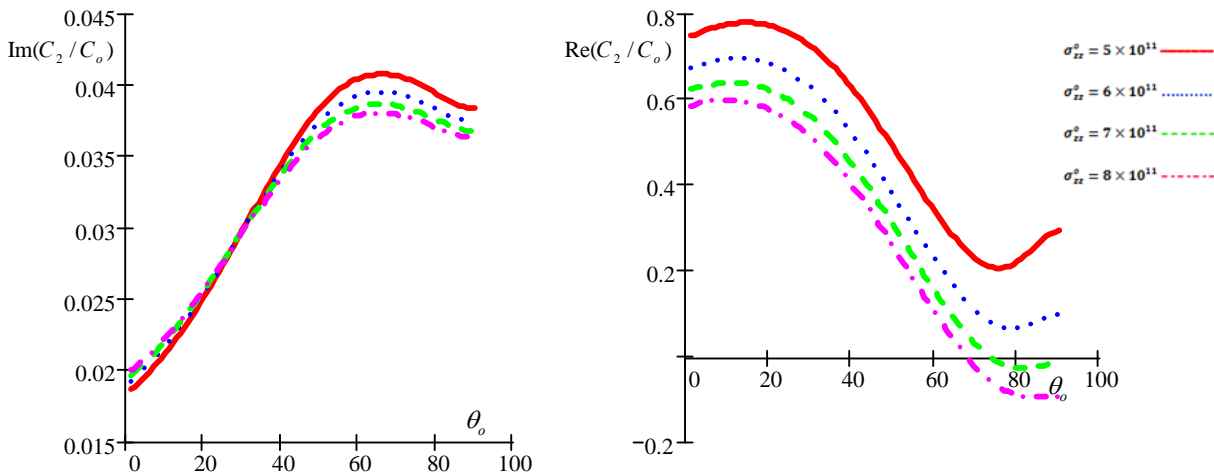


Figure 19. Imaginary and real parts of reflection coefficient C_2/C_0 as a function of incidence angle θ_0 under influence of different values of the initial stress for (G-L) model.

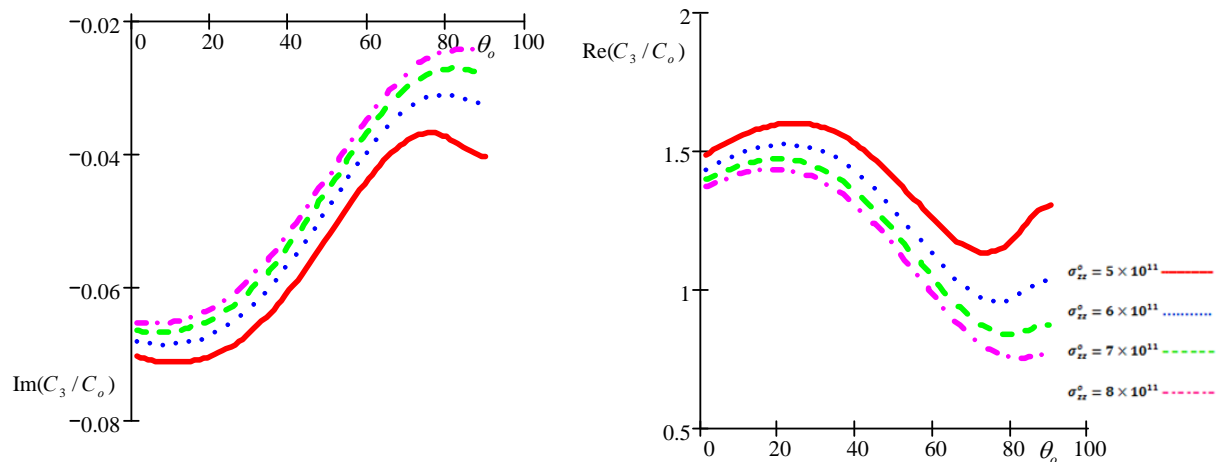


Figure 20. Imaginary and real parts of refraction coefficient C_3/C_0 as a function of incidence angle θ_0 under influence of different values of the initial stress for (G-L) model.

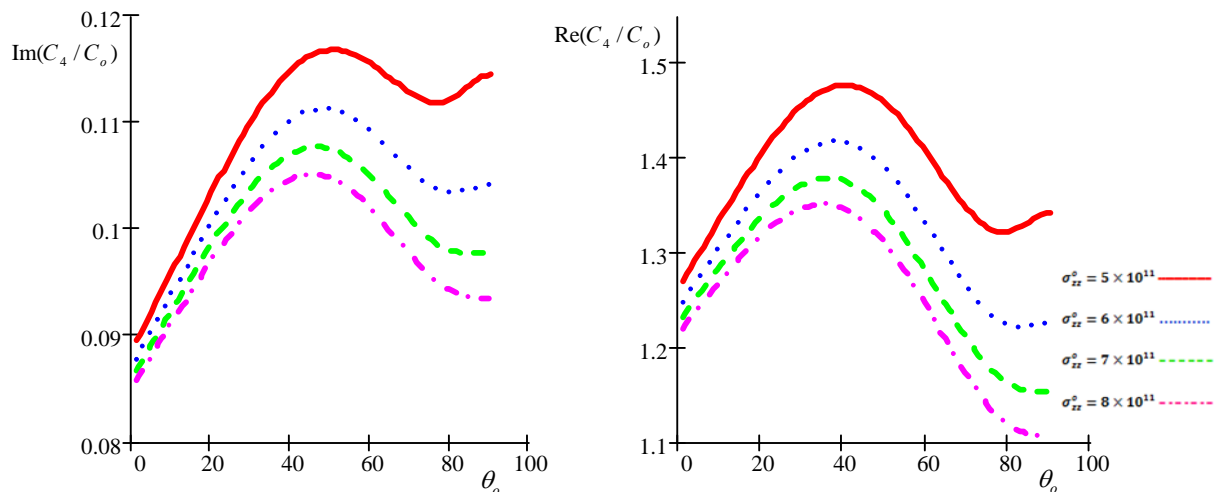


Figure 21. Imaginary and real parts of refraction coefficient C_4/C_0 as a function of incidence angle θ_0 under influence of different values of the initial stress for (G-L) model.

- It can get some previous studies as a special case through neglect the thermal effects and the relaxation times as [18].

REFERENCES

- [1] R. D. Mindlin, "On the Equations of Motion of Piezoelectric Crystals," In: N. I. Muskhilishvili, Ed., *Problems of Continuum Mechanics*, 70th Birthday Volume, SIAM, Philadelphia, 1961, pp. 282-290.
- [2] W. Nowacki, "Some General Theorems of Thermo-Piezoelectricity," *Journal of Thermal Stresses*, Vol. 1, No. 2, 1978, pp. 171-182. [doi:10.1080/01495737808926940](https://doi.org/10.1080/01495737808926940)
- [3] W. Nowacki, "Foundation of Linear Piezoelectricity," In: H. Parkus, Ed., *Interactions in Elastic Solids*, Springer, Wein, 1979.
- [4] D. S. Chandrasekharaiah, "A Generalized Thermoelastic Wave Propagation in a Semi-Infinite Piezoelectric Rod," *Acta Mechanica*, Vol. 71, No. 1-4, 1988, pp. 39-49. [doi:10.1007/BF01173936](https://doi.org/10.1007/BF01173936)
- [5] J. N. Sharma and M. Kumar, "Plane Harmonic Waves in Piezo-Thermoelastic Materials," *Indian Journal of Engineering and Material Science*, Vol. 7, 2000, pp. 434-442.
- [6] J. N. Sharma and V. Walia, "Further Investigations on Rayleigh Waves in Piezothermoelastic Materials," *Journal of Sound and Vibration*, Vol. 301, No. 1-2, 2007, pp. 189-206. [doi:10.1016/j.jsv.2006.09.018](https://doi.org/10.1016/j.jsv.2006.09.018)
- [7] H. Deresiewicz, "Effect of Boundaries on Waves in a Thermoelastic Solid: Reflexion of Plane Waves from Plane Boundary," *Journal of the Mechanics Physics of Solids*, Vol. 8, No. 3, 1960, pp. 164-172. [doi:10.1016/0022-5096\(60\)90035-1](https://doi.org/10.1016/0022-5096(60)90035-1)
- [8] H. Lord and Y. Shulman, "A Generalized Dynamical Theory of Thermoelasticity," *Journal of the Mechanics and Physics of Solid*, Vol. 15, No. 5, 1967, pp. 299-309. [doi:10.1016/0022-5096\(67\)90024-5](https://doi.org/10.1016/0022-5096(67)90024-5)

- [9] A. E. Green and K. A. Lindsay, "Thermoelasticity," *Journal of Elasticity*, Vol. 2, No. 1, 1972, pp. 1-7. [doi:10.1007/BF00045689](https://doi.org/10.1007/BF00045689)
- [10] A. N. Sinha and S. B. Sinha, "Reflection of Thermoelastic Waves at a Solid Half-Space with Thermal Relaxation," *Journal of Physics of the Earth*, Vol. 22, No. 2, 1974, pp. 237-244. [doi:10.4294/jpe1952.22.237](https://doi.org/10.4294/jpe1952.22.237)
- [11] J. N. Sharma, "Reflection of Thermoelastic Waves from the Stress-Free Insulated Boundary of an Anisotropic Half-Space," *Indian Journal of Pure and Applied Mathematics*, Vol. 19, 1988, pp. 294-304.
- [12] S. B. Sinha and K. A. Elsibai, "Reflection of Thermoelastic Waves at a Solid Half-Space with Two Thermal Relaxation Times," *Journal of Thermal Stresses*, Vol. 19, 1996, pp. 763-777. [doi:10.1080/01495739608946205](https://doi.org/10.1080/01495739608946205)
- [13] S. B. Sinha and K. A. Elsibai, "Reflection and Refraction of Thermoelastic Waves at an Interface of Two Semi-Infinite Media with Two Thermal Relaxation Times," *Journal of Thermal Stresses*, Vol. 20, No. 2, 1997, pp. 129-146. [doi:10.1080/01495739708956095](https://doi.org/10.1080/01495739708956095)
- [14] A. N. Abd-Alla and A. A. S. Al-Dawy, "The Reflection Phenomena of SV Waves in a Generalized Thermoelastic Medium," *International Journal of Mathematics and Mathematical Sciences*, Vol. 23, No. 8, 2000, pp. 529-546. [doi:10.1155/S0161171200004221](https://doi.org/10.1155/S0161171200004221)
- [15] J. N. Sharma, V. Kumar and D. Chand, "Reflection of Generalized Thermoelastic Waves from the Boundary of a Half-Space," *Journal of Thermal Stresses*, Vol. 26, No. 10, 2003, pp. 925-942. [doi:10.1080/01495730306342](https://doi.org/10.1080/01495730306342)
- [16] J. N. Sharma, V. Walia and S. K. Gupta, "Reflection of Piezo-Thermoelastic Waves from the Charge and Stress Free Boundary of a Transversely Isotropic Half Space," *International Journal of Engineering Science*, Vol. 46, No. 2, 2008, pp. 131-146. [doi:10.1016/j.ijengsci.2007.10.003](https://doi.org/10.1016/j.ijengsci.2007.10.003)
- [17] Z.-B. Kuang and X.-G. Yuan, "Reflection and Transmission of Waves in Pyroelectric and Piezoelectric Materials," *Journal of Sound and Vibration*, Vol. 330, No. 6, 2011, pp. 1111-1120. [doi:10.1016/j.jsv.2010.09.026](https://doi.org/10.1016/j.jsv.2010.09.026)
- [18] A. N. Abd-Alla and F. A. Alsheikh, "Reflection and Refraction of Plane Quasi-Longitudinal Waves at an Interface of Two Piezoelectric Media under Initial Stresses," *Archive of Applied Mechanics*, Vol. 79, No. 9, 2009, pp. 843-857. [doi:10.1007/s00419-008-0257-y](https://doi.org/10.1007/s00419-008-0257-y)
- [19] A. N. Abd-Alla, F. A. Alsheikh and A. Y. Al-Hossain, "The Reflection Phenomena of Quasi-Vertical Transverse Waves in Piezoelectric Medium under Initial Stresses," *Meccanica*, Vol. 47, No. 3, 2012, pp. 731-744. [doi:10.1007/s11012-011-9485-2](https://doi.org/10.1007/s11012-011-9485-2)
- [20] J. D. Achenbach, "Wave Propagation in Elastic Solids," North-Holland Publishing Company, Amsterdam, 1973.
- [21] J. N. Sharma, M. Pal and D. Chand, "Three-Dimensional Vibration Analysis of a Piezothermoelastic Cylindrical Panel," *International Journal of Engineering Science*, Vol. 42, No. 15-16, 2005, pp. 1655-1673. [doi:10.1016/j.ijengsci.2004.01.006](https://doi.org/10.1016/j.ijengsci.2004.01.006)