

51  
8-11-92 J.S. (2)

PREPARED FOR THE U.S. DEPARTMENT OF ENERGY,  
UNDER CONTRACT DE-AC02-76-CHO-3073

PPPL-2853  
UC-426

PPPL-2853


THE MULTICHANNEL MOTIONAL STARK EFFECT DIAGNOSTIC ON TFTR

BY

F.M. LEVINTON

July, 1992

**PPPL** PRINCETON  
PLASMA PHYSICS  
LABORATORY

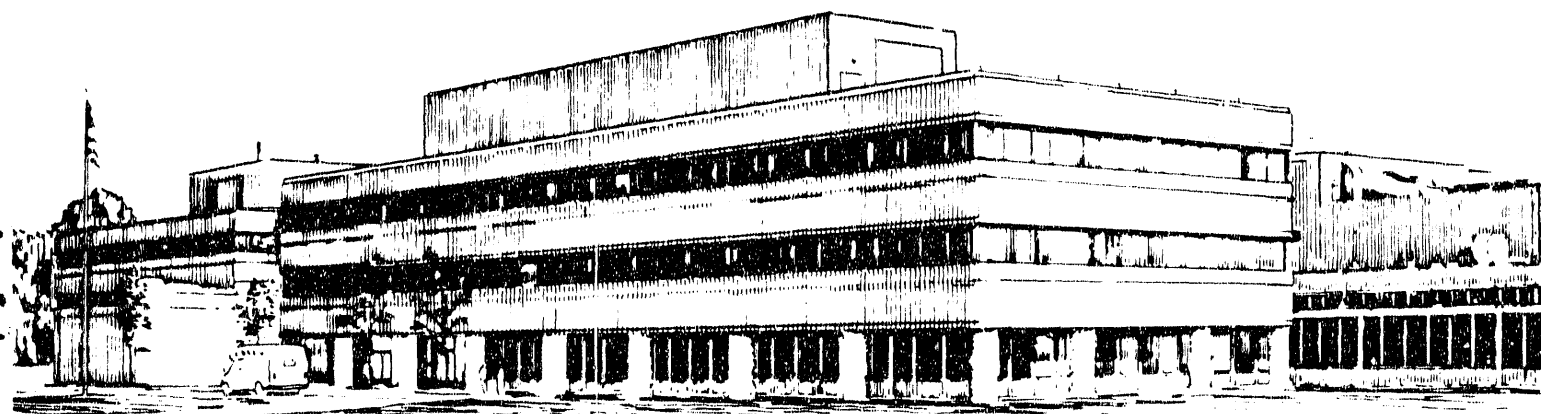

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

PRINCETON UNIVERSITY, PRINCETON, NEW JERSEY

## NOTICE

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial produce, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

## NOTICE

This report has been reproduced directly from the best available copy.

Available to DOE and DOE contractors from the:

Office of Scientific and Technical Information  
P.O. Box 62  
Oak Ridge, TN 37831;  
Prices available from (615) 576-8401.

Available to the public from the:

National Technical Information Service  
U.S. Department of Commerce  
5285 Port Royal Road  
Springfield, Virginia 22161  
703-487-4650

# The Multichannel Motional Stark Effect Diagnostic on TFTR

F. M. Levinton<sup>1</sup>, Princeton Plasma Physics Laboratory, PPPL--2853

Princeton University, Princeton, NJ 08543

DE92 018435

## Abstract

Although the  $q$  profile plays a key role in theories of instabilities and plasma equilibrium, it has been quite difficult to measure until the recent development of the motional Stark effect (MSE) diagnostic. A multichannel motional Stark effect polarimeter system has recently been installed on the Tokamak Fusion Test Reactor (TFTR). The diagnostic can measure the magnetic field pitch angle ( $\gamma_p = \tan^{-1}(\frac{B_p}{B_T})$ ) at ten radial locations. The doppler shifted  $D_\alpha$  radiation from a TFTR heating beam is viewed near tangential to the toroidal magnetic field via a re-entrant front surface reflecting mirror. The field of view covers from inboard of the magnetic axis to near the outboard edge of the plasma with a radial spatial resolution of 3-5 cm. A high throughput  $f/2$  optics system results in an uncertainty for  $\gamma_p$  of  $\sim 0.1^\circ - 0.2^\circ$  with a time resolution of  $\sim 5-10$  ms. Initial pitch angle profiles from TFTR have been obtained. The MSE data is consistent with the estimated magnetic axis position from external magnetic measurements and the  $q=1$  radius is in good agreement with the inversion radius from the electron cyclotron emission temperature measurements.

---

<sup>1</sup>Permanent address: Fusion Physics & Technology, Inc. 3547 Voyager Street, Torrance, California 90503

**MASTER**

## I. Introduction

The current density profile and the safety factor  $q(R)$  are essential in the theoretical modeling of plasma equilibrium, stability, and transport. Many phenomena, such as sawteeth, are not well understood due to the lack of consistent and detailed experimental data for  $q(R)$ . Also, with internal magnetic field data, a quantitative analysis can be made of the plasma equilibrium. This is particularly important for experiments where active control of the current profile, using rf, neutral beams, or bootstrap current is being pursued or planned for the future. To understand the effects of modifying the current density profile on stability, confinement, and transport, a credible means of determining the equilibrium is required. The MSE technique, developed on the PBX-M tokamak,<sup>1</sup> has been shown to provide the information necessary to determine the equilibrium. Important measurements of equilibrium<sup>2,3</sup> and stability<sup>4</sup> have been demonstrated with this technique on PBX-M and other devices using a scannable single channel diagnostic. With a multichannel system, such as on TFTR now,  $q(R)$  profiles are more reliable and readily available to help in understanding the plasma behavior and provide feedback for operation of the tokamak.

The motional Stark effect,<sup>5</sup> which arises from the electric field induced in the atom's rest frame due to its motion across the magnetic field ( $\mathbf{E} = \mathbf{V}_{\text{beam}} \times \mathbf{B}$ ) is used to measure the local magnetic field pitch angle. This is possible because the Stark effect causes both a wavelength splitting of several angstroms and polarization of the emitted radiation. When viewed transverse to the field the  $\Delta m = 0$  transitions, or  $\pi$  components, are linearly polarized parallel to the electric field and the  $\Delta m = \pm 1$  transitions, or  $\sigma$  components, are linearly polarized perpendicular to the electric field, and parallel to the magnetic field. It is the measure of the direction of the linearly

polarized  $\sigma$  components that provides the basis of this magnetic field pitch angle diagnostic.

## II. Apparatus

The diagnostic on TFTR views one of the deuterium neutral beams that is used for heating the plasma. The beam energy can be varied from 85 to 120 keV. Generally data has been taken at 95 keV. The deuterium Balmer-alpha transition,  $n = 3 \rightarrow 2$ , which is at 656.1 nm, is Doppler shifted about 4.0 nm towards the red with the viewing geometry on TFTR. A plan view of the layout is shown in Fig. 1. The collection optics and polarimeter view the plasma via a front surface reflecting aluminium mirror. The re-entrant mirror was necessary to provide a field of view of the plasma from inboard of the magnetic axis to near the outboard edge of the plasma. The optics material is fused silica to minimize radiation darkening and keep the system compatible with D-T operation which is planned for TFTR in the future. All the optics, including the polarimeter, are  $f/2$  or better with a 10 cm clear aperture to maintain a high throughput for maximum light gathering capability. This allows for a time resolution of  $\sim 5$  ns while still maintaining good statistics for measurement of the magnetic field pitch angle. The light collected by the lens combination is imaged through the polarimeter onto a fiber optic array. The fiber holder consists of 27 slots or sight lines arranged on a curved focal plane. The curve has been calculated to bring the fibers to a focus at the intersection of each sight line with the neutral beam. Each slot contains six fibers, arranged with three vertical by two horizontal fibers. The fibers are 1000 micron core diameter and 1100 micron cladding diameter. The image size at the focus in the plasma is about 3 cm in the radial direction. Due to the view

being near tangential to the toroidal field the radial resolution remains 3-5 cm in the plasma even though the neutral beam has a width of 20 cm. At present there are enough fiber and detectors for ten sight lines.

The fiber-optic bundle runs from the machine area through a penetration in the shielding wall to the "hot cell," which is an area that is accessible during machine operation. Here the fibers are separated into ten channels of six fibers each corresponding to ten spatial locations in the plasma. The optics/detector layout is shown in Fig. 2. The light from a group of fibers is collimated through a 0.6 nm FWHM interference filter before being focused onto the photocathode of a photomultiplier (PMT) detector. The filters are individually set for each channel corresponding to its Doppler shifted wavelength. Since the beam energy, and hence the Doppler shift, can be varied, the filter needs to be tunable. Also the measured polarization fraction is very sensitive to wavelength and needs to be set to the central  $\sigma$ -components. The filter is tuned by heating between 25°C to 60°C which shifts the passband of the filter. The shift is about 0.017 nm/°C. This allows a change of  $\sim 0.6$  nm which can cover a beam energy range of 90 – 115 keV. The detectors are Hamamatsu R943-02 with GaAs photocathodes that have a quantum efficiency of  $\sim 13\%$  at the relevant wavelength. The PMT output is then amplified before the signal is split into a 1 kHz low pass filter for measurement of the unmodulated part of the signal and three lock-in amplifiers for demodulation at the three reference frequencies from the photoelastic modulators (PEM). Finally the lock-in amplifier outputs are recorded with a waveform digitizer for computer analysis. The complete control and data acquisition of the diagnostic is done by a Micro-Vax II computer. This permits remote control and monitoring of the mirror shutter, voltage for detectors, and filter heaters.

The polarimeter used here is basically the same as that described in Levinton et al.<sup>6</sup> The size of the clear aperture on the PEM's has been increased to 10 cm with a corresponding decrease in the resonant frequency of the modulators from  $\sim 40$  kHz to  $\sim 20$  kHz. Another important difference in the polarimeter used here is the use of three reference frequencies instead of two in the previous design. This is because the mirror introduces a phase difference between the s-polarized light and p-polarized light which results in the conversion of linearly polarized light to elliptically polarized light. The polarimeter effect on the collected light can be calculated using Mueller matrices.<sup>7</sup> If the phase difference and reflectivity ratio between the s and p polarization from the mirror is  $\delta$  and  $r_s$  respectively, the polarization fraction is  $p_f$ , the frequency of the modulators are  $\omega_1$  and  $\omega_2$ , the drive amplitude on the modulators is  $A_1$  and  $A_2$  and assuming the mirror axis is horizontal then the resultant intensity, to highest order from the polarimeter is,

$$\begin{aligned}
I_o = & I_i \left\{ \frac{1}{4} [(1 + r_s^2) + p_f(r_s^2 - 1) \cos(2\gamma_p)] \right. \\
& - \frac{J_2(A_2)}{2\sqrt{2}} \cos(2\omega_2 t) [(r_s^2 - 1) + p_f(r_s^2 + 1) \cos(2\gamma_p)] \\
& - \frac{J_2(A_1)}{\sqrt{2}} \cos(2\omega_1 t) [p_f r_s \sin(2\gamma_p) \cos(\delta)] \\
& + \frac{J_1(A_2)}{\sqrt{2}} \cos(\omega_2 t) [p_f r_s \sin(2\gamma_p) \sin(\delta)] \\
& + \dots \text{higher harmonics} \left. \right\}. \tag{1}
\end{aligned}$$

The last two terms in Eq. (1) determine the phase difference from the mirror and together with the  $J_2(A_2)$  term determines the magnetic field pitch angle.

Calibration of the diagnostic is a very important element to the successful implementation of this technique. The principle method for calibration consists of injection of a neutral beam into a gas filled torus. With known currents in the toroidal and equilibrium field (EF) coils the fields in the torus can be calculated to determine the

local magnetic field pitch angle. The EF current can produce a variation in pitch angle comparable to that obtained from a plasma discharge. The calibration obtained this way includes all the effects that are present during normal operation such as Faraday rotation from the optics and window, the polarization projection factor,<sup>6</sup> and the polarization fraction.

### III. Results

The multichannel MSE system on TFTR began operation during the fall 1991 run period. Initial shakedown and preliminary data has been obtained. The signal-to-noise of the data is very good with typical calculated pitch angles for several channels shown in Fig. 3. The relative uncertainty of the pitch angle is  $\sim 0.1^\circ$  with a time resolution of 50 ms in this example. The absolute error is somewhat larger due to systematic errors caused by coating of the mirror by the plasma, which caused the calibration results to vary with time as the deposited coating varied. This should be corrected for the next run period. The time evolution of the magnetic axis location and the axial safety factor  $q(0)$  are shown as a function of time in Fig. 4. The outward motion of the axis position between 1.5 and 2.0 s is due to the increasing major radius of the plasma from the preprogrammed formation. Also, the neutral beam heating of the plasma, which started at 1.5 s, increased  $\beta_\theta$  and hence caused an increase of the Shafranov shift of the magnetic axis. Also shown in Fig. 4 is the calculated magnetic axis location from the external magnetics measurements which is in very good agreement with the MSE measurements. Both measurements have the same temporal behavior, but are offset by a couple of centimeters, which is near the absolute uncertainty of both measurements. The external magnetic measurement



of the magnetic axis position is approximate due to profile effects that are not taken into account. While the plasma current is increasing between 1.5 and 2.0 s, the pitch angle profile is changing along with the  $q(R)$  profile. Profiles are shown in Fig. 5 at three times during the plasma evolution. At 1.55 s  $q(0)$  is just below 1 and is rapidly decreasing to a steady state value of 0.73. Over this time interval comparisons have been made with the electron cyclotron emission (ECE) measurements of the electron temperature. The ECE data shows sawteeth during the entire interval. The inversion radii at 1.55, 1.70, and 2.5 s are 2.63, 2.75, 2.86 m which is in good agreement with the  $q(R)=1$  radii from the MSE data.

Systematic errors in the data have not been fully evaluated yet. However the preliminary data from the MSE diagnostic is showing good consistency with other measurements. The system has demonstrated both temporal resolution and relative uncertainties which will make the MSE measurements on TFTR very effective at investigating many important equilibrium, stability, and transport questions.

#### IV. Acknowledgments


I wish to acknowledge the support of the many people at PPPL who made the diagnostic possible. A special thanks goes to M. Capone, M. Vocaturo, D. Cylinder, P. Roney, J. Felt, T. Gibney, J. Faunce, D. Long, and G. Renda for their extraordinary efforts. Also the TFTR neutral beam group for their capable operation and K. Young for his strong support of the project. Analysis of the ECE data was done by Y. Nagayama and M. Yamada. This work was supported by DoE contract Nos. DE-FG03-90ER54089 and DE-AC02-76-CHO-3073.

## References

- <sup>1</sup>F. M. Levinton et al., Phys. Rev. Lett. **63**, 2060 (1989).
- <sup>2</sup>S. M. Kaye et al., Phys. Fluids B **4**, 651 (1992).
- <sup>3</sup>D. Wróblewski and L. L. Lao, Phys. Fluids B **3**, 2877 (1991).
- <sup>4</sup>D. W. Roberts, R. Kaita, F. M. Levinton, et. al., Submitted for publication to Phys. Rev. Lett. (1991) (1992).
- <sup>5</sup>E. U. Condon and G. H. Shortley, *The Theory of Atomic Spectra*, Cambridge University Press, 1963.
- <sup>6</sup>F. M. Levinton, G. M. Gammel, R. Kaita, H. W. Kugel, and D. W. Roberts, Rev. Sci. Instrum. **61**, 2914 (1990).
- <sup>7</sup>D. S. Kliger, J. W. Lewis, and C. E. Randall, *Polarized Light in Optics and Spectroscopy*, Academic Press, Inc., 1250 Sixth Ave. San Diego, CA 92101, 1990.

## List of Figures

- [1] Schematic layout of the MSE diagnostic on TFTR showing the location of the optics and photoelastic modulators (PEM 1 and PEM 2).
- [2] Electronics and detector setup in the "hot cell."  
A reference waveform from the PEMs is used for the lock-in amplifiers to demodulate the detector signal.
- [3] Pitch angle evolution at several radial locations.
- [4] Temporal evolution of (a) magnetic axis from MSE and external magnetics measurements and (b)  $q(0)$ .
- [5] (a) Pitch angle and (b)  $q(R)$  profiles at three times during the discharge evolution.

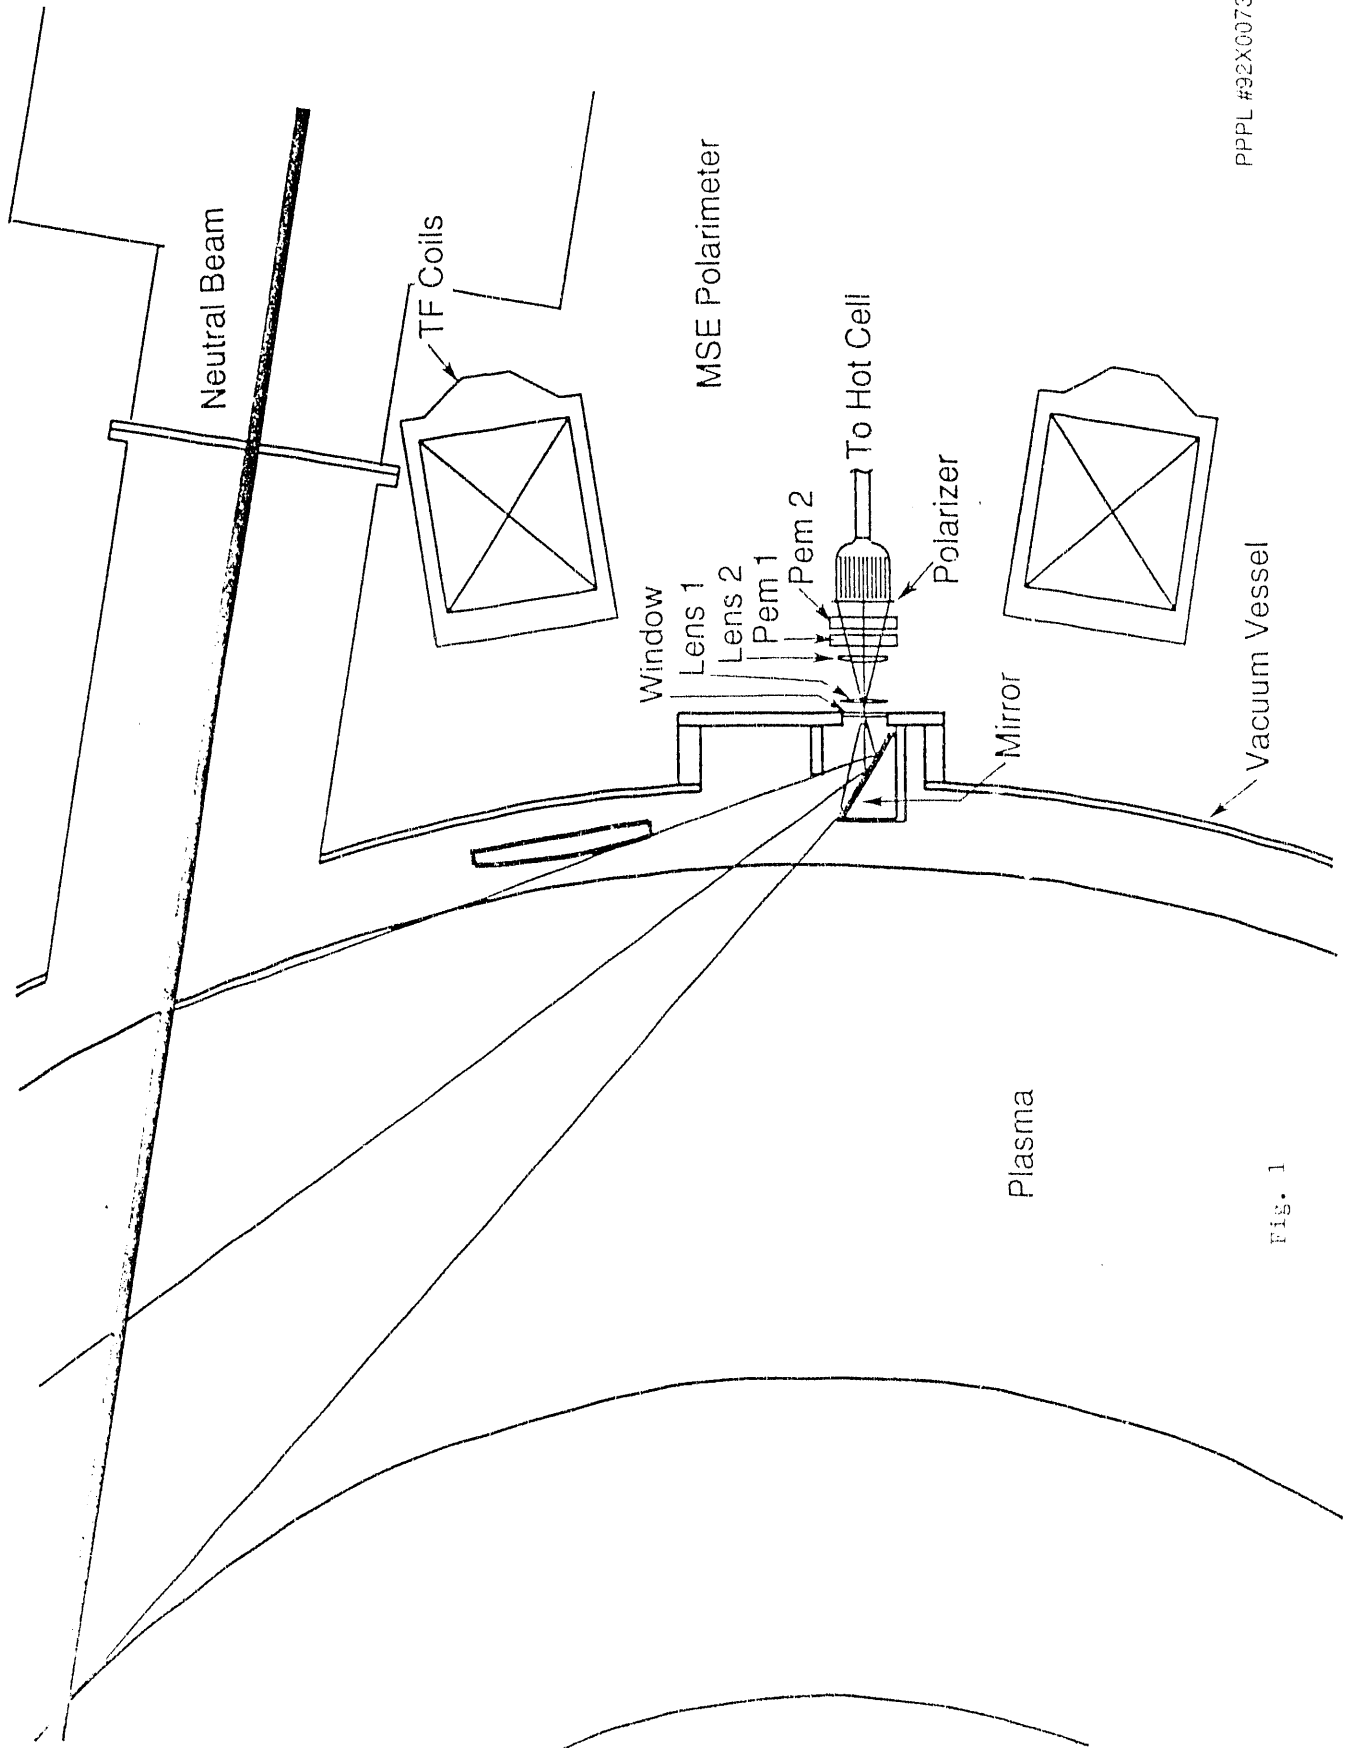

PPPL #92X0073

FIG. 1

# MSE Detector/Electronics Layout (1 of 10 channels)

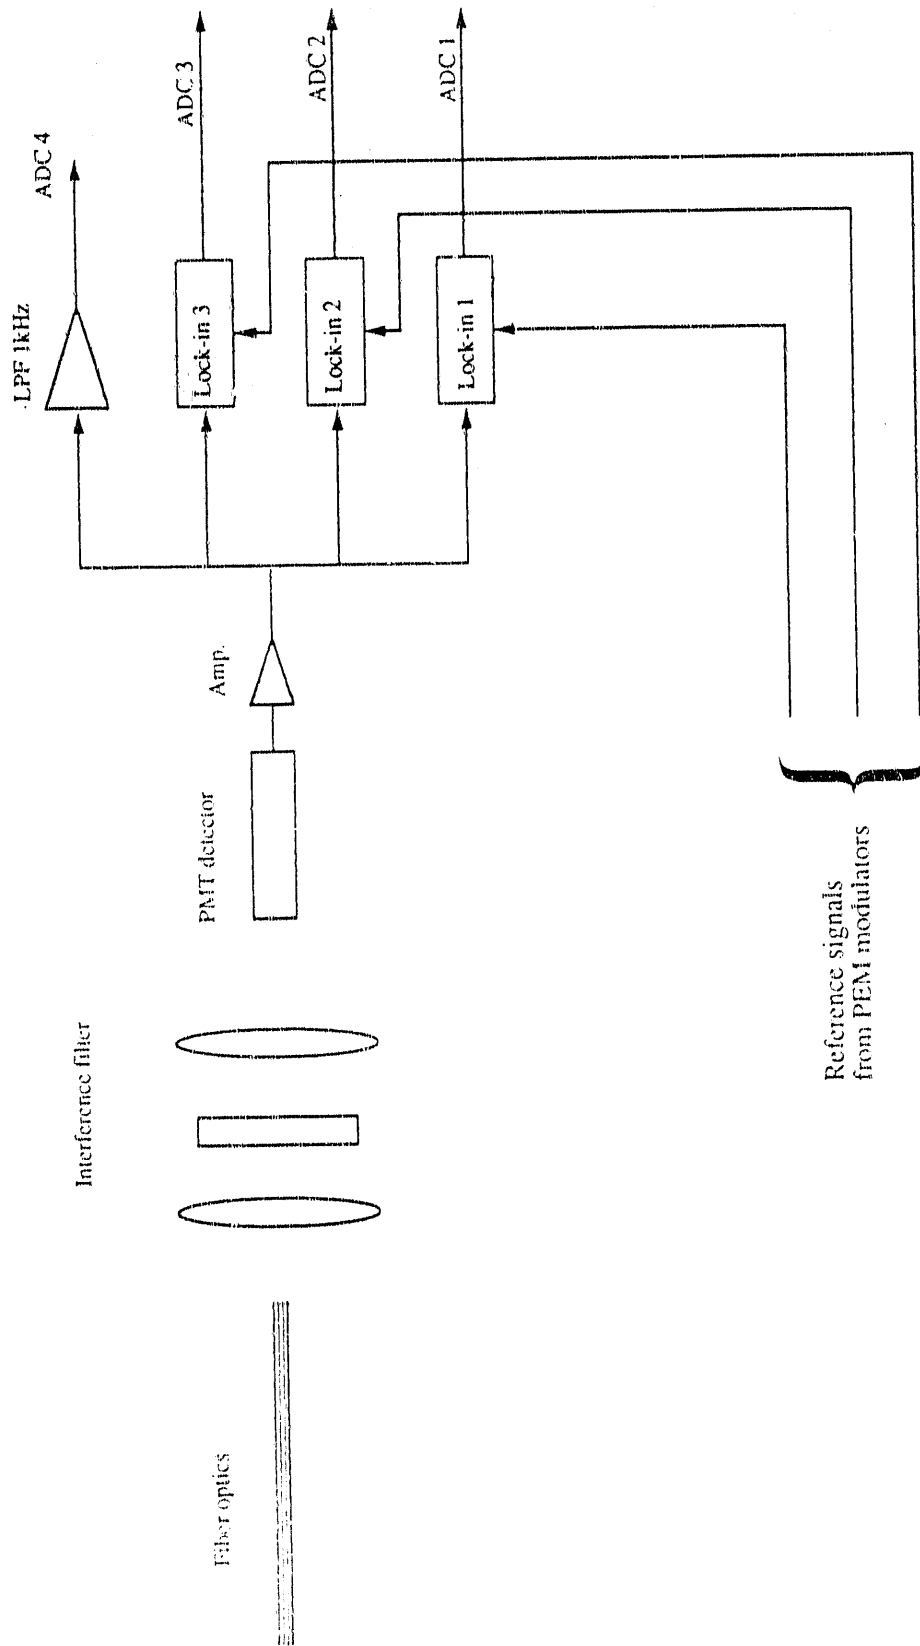


Fig. 2

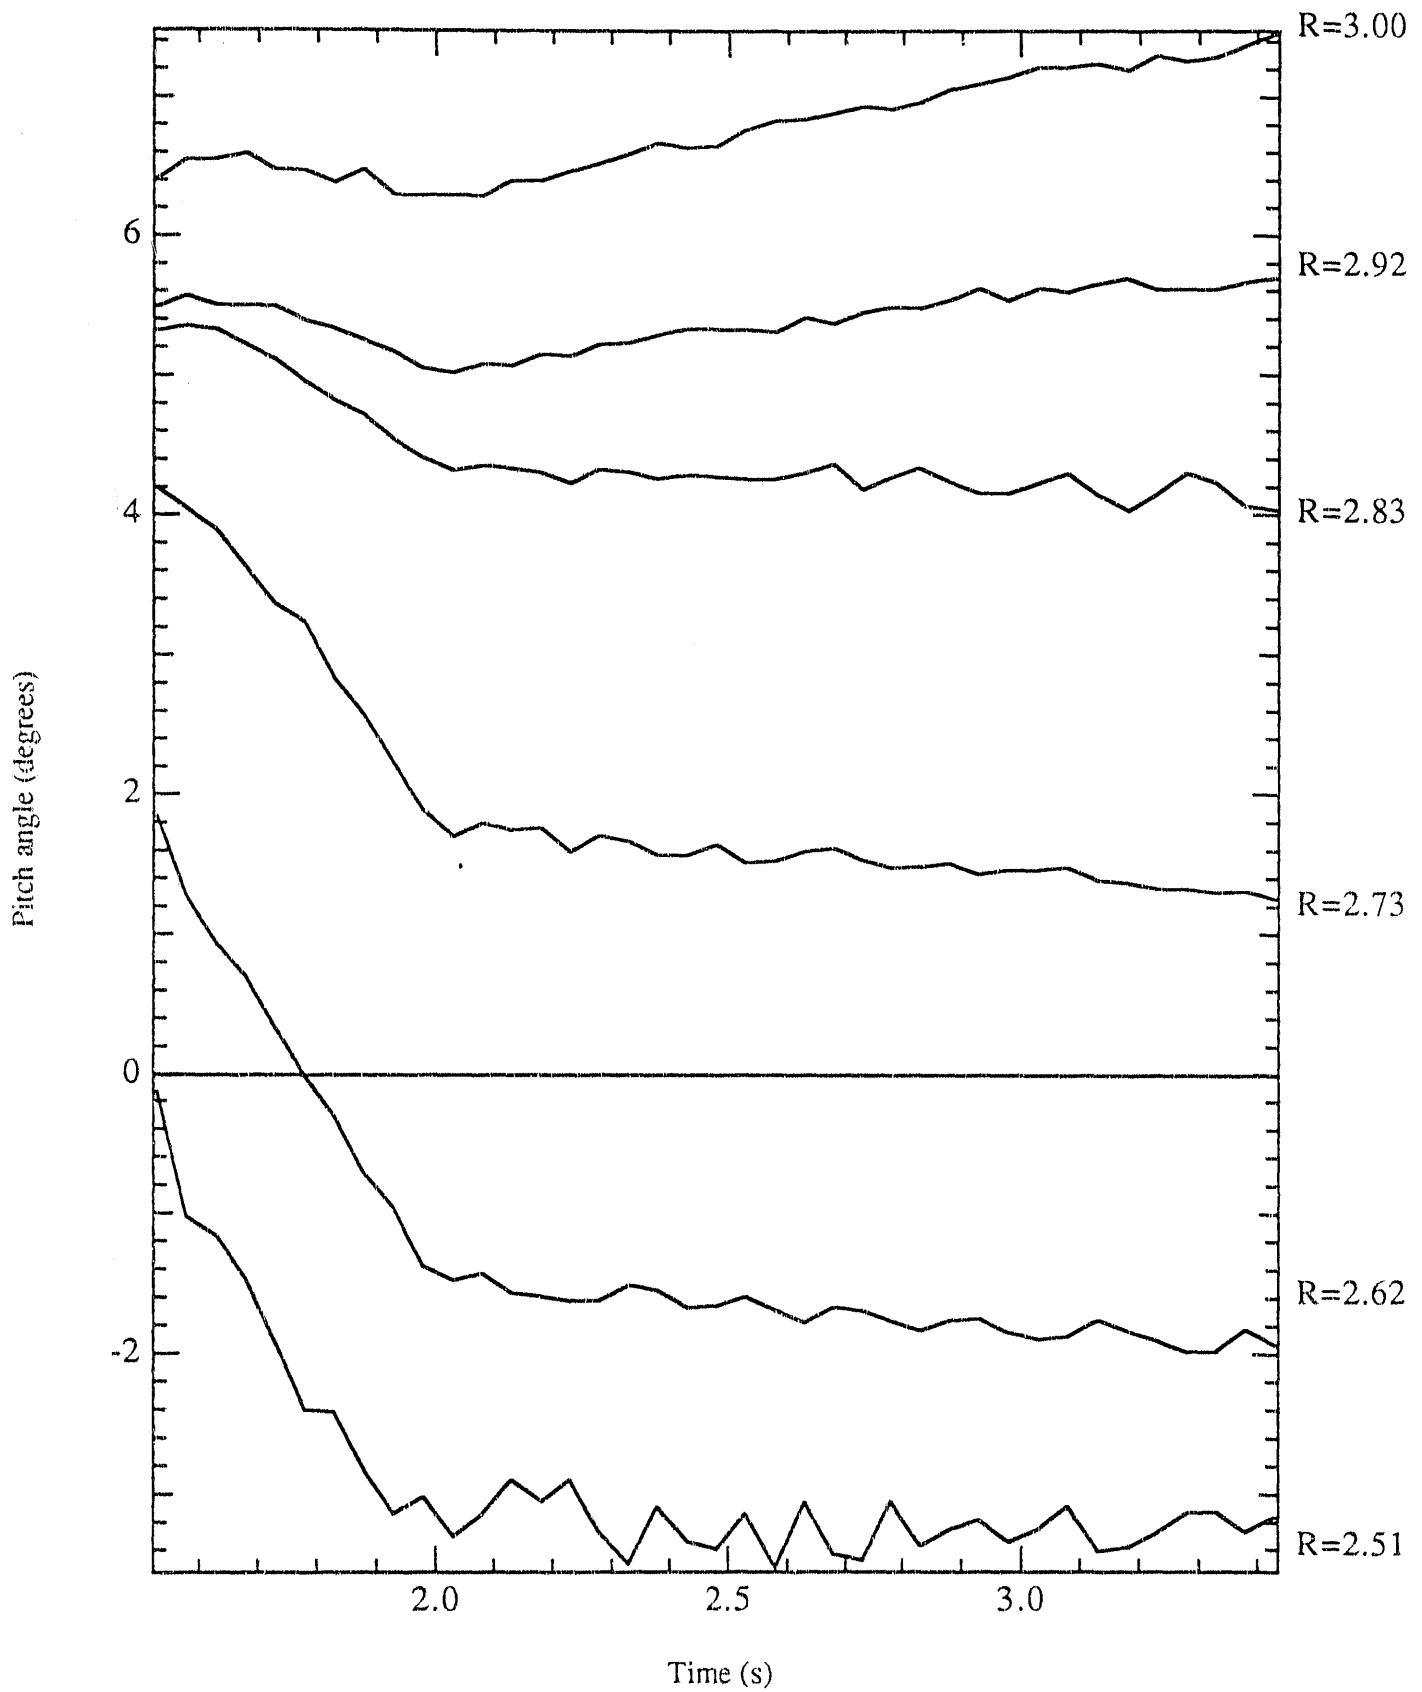


Fig. 3

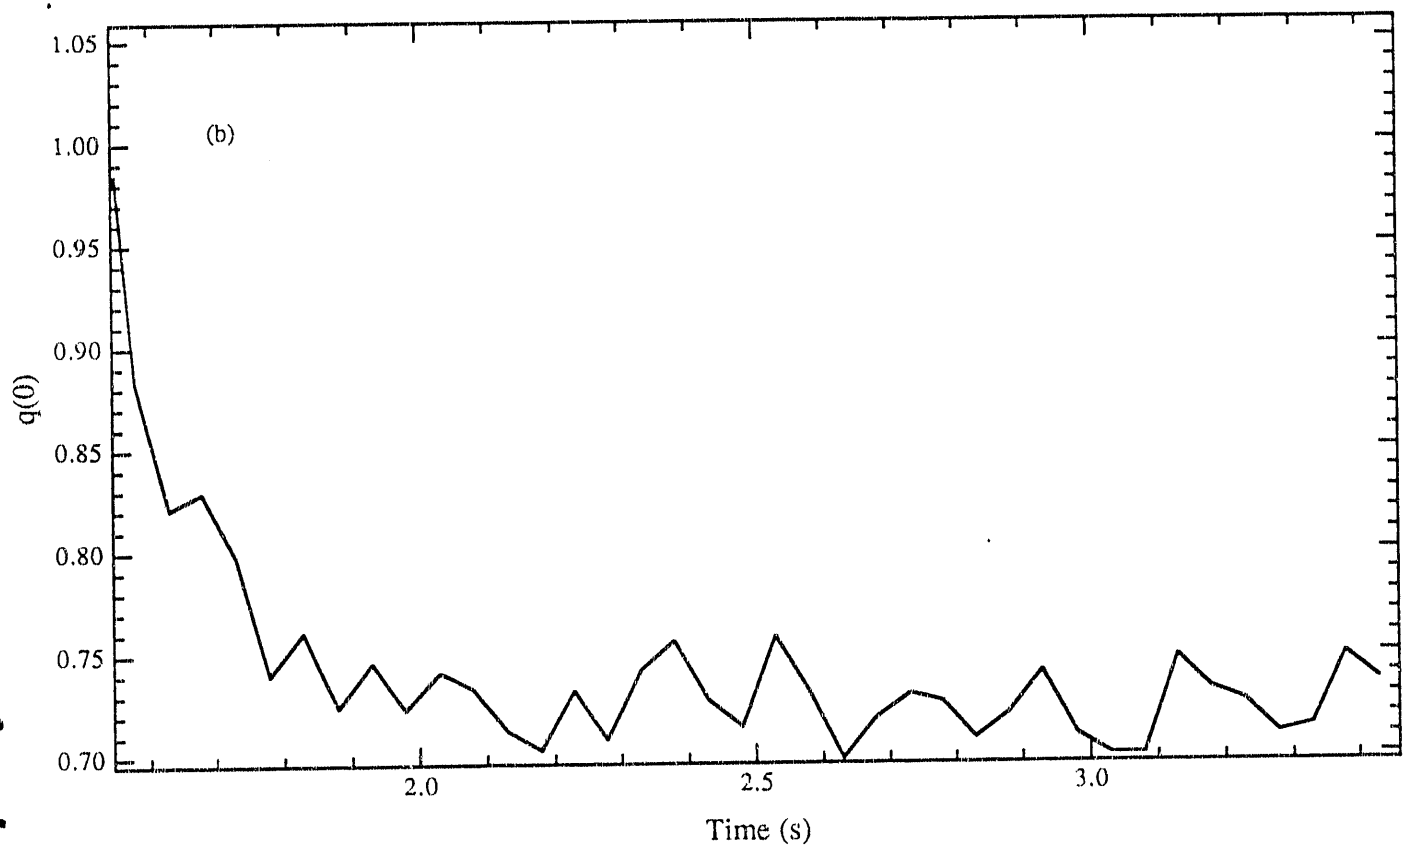
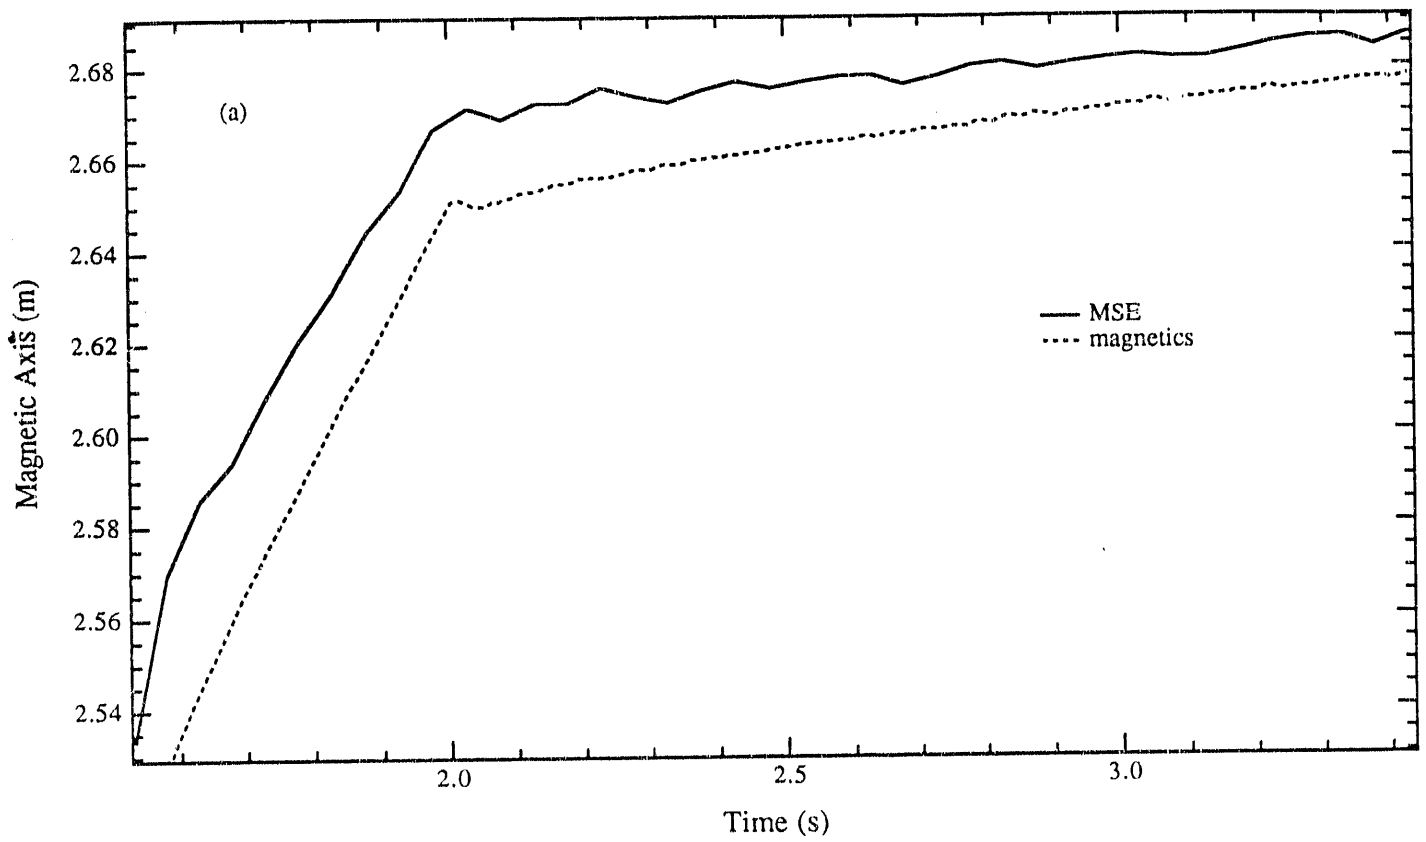


Fig. 4


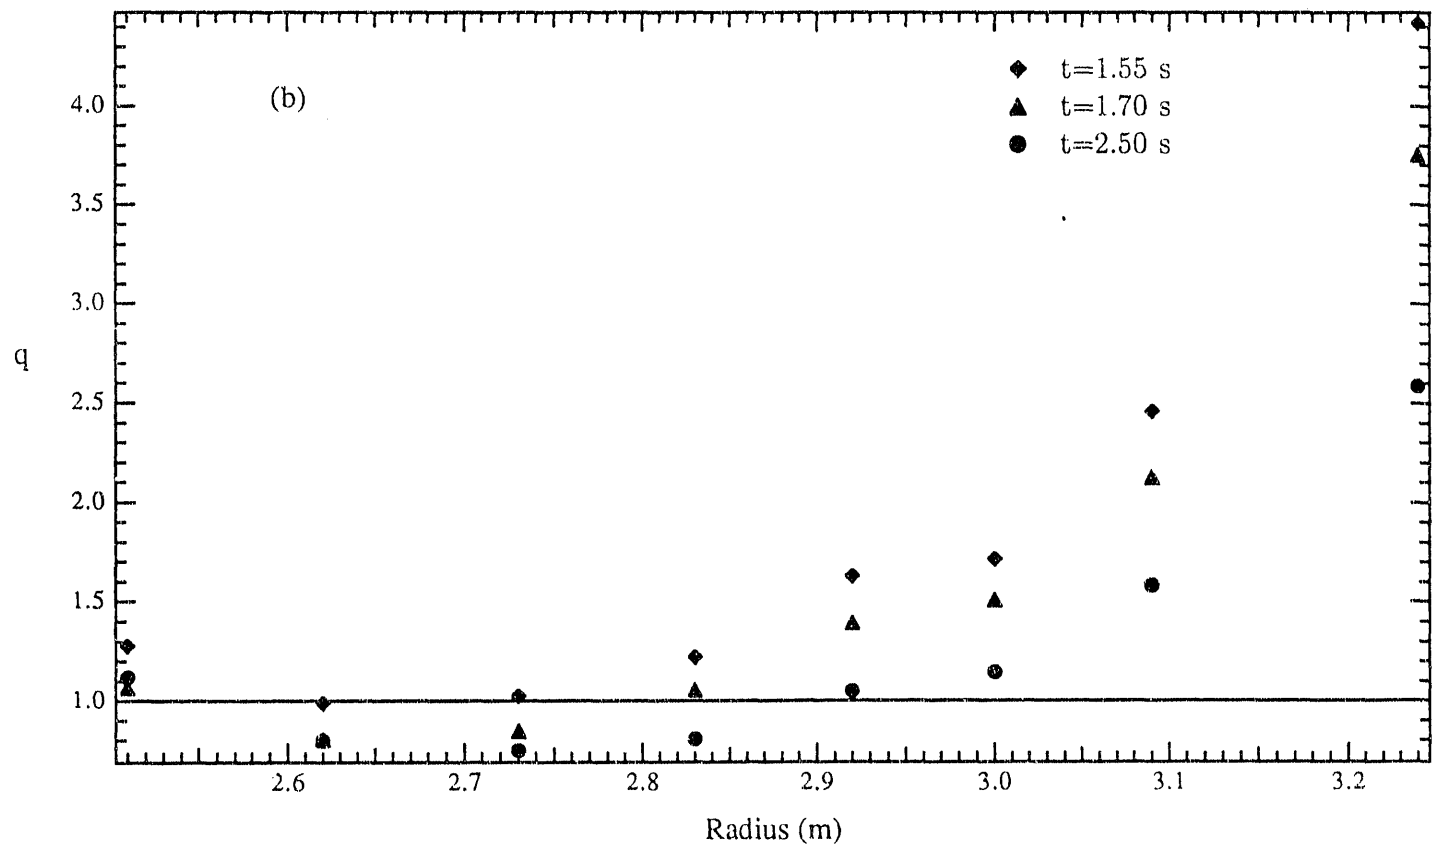


Fig. 5

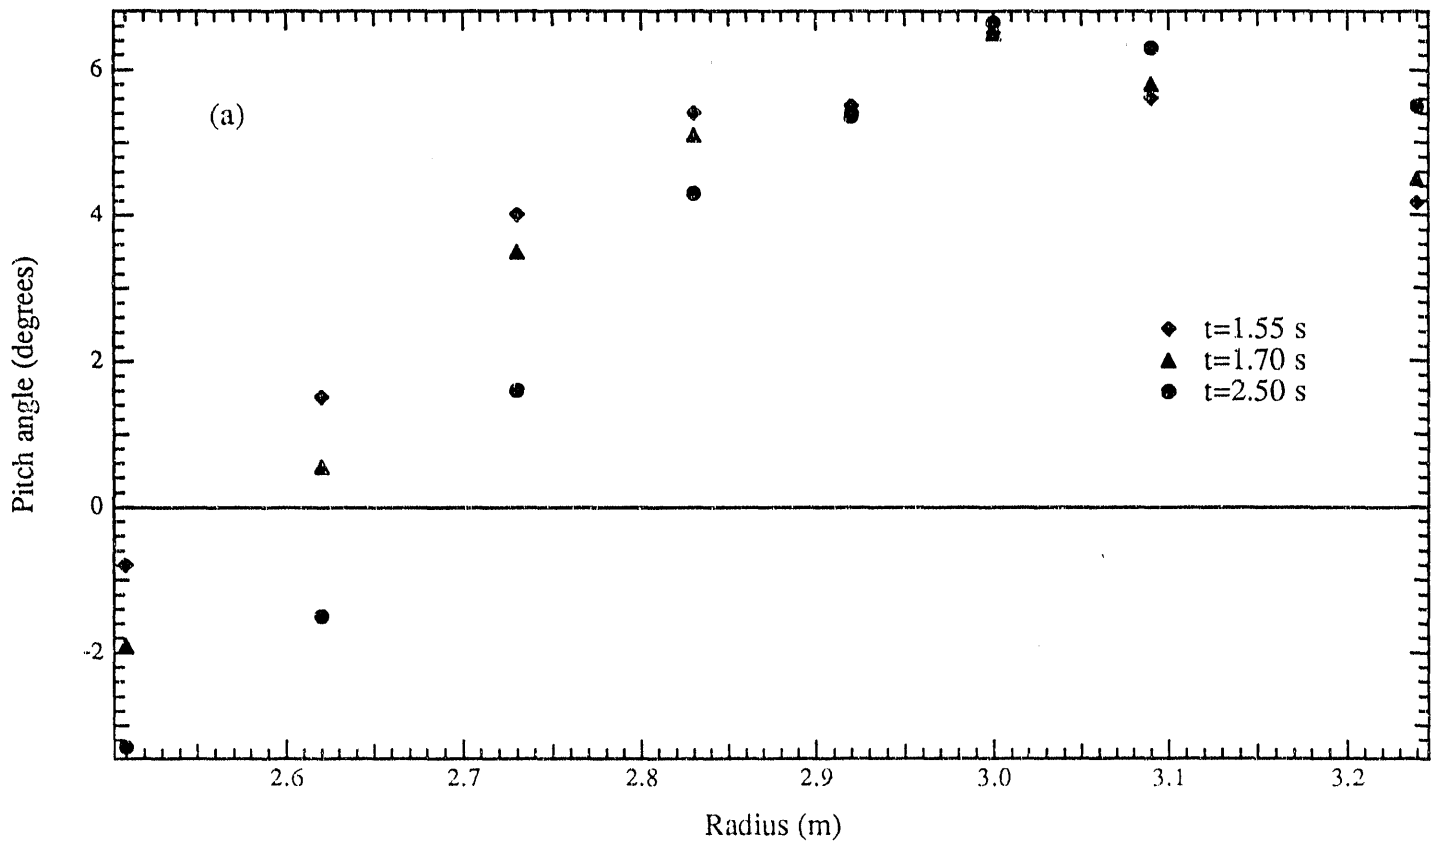

EXTERNAL DISTRIBUTION IN ADDITION TO UC-420

Dr. F. Paoloni, Univ. of Wollongong, AUSTRALIA  
 Prof. M.H. Brennan, Univ. of Sydney, AUSTRALIA  
 Plasma Research Lab., Australian Nat. Univ., AUSTRALIA  
 Prof. I.R. Jones, Flinders Univ, AUSTRALIA  
 Prof. F. Cap, Inst. for Theoretical Physics, AUSTRIA  
 Prof. M. Heindler, Institut für Theoretische Physik, AUSTRIA  
 Prof. M. Goossens, Astronomisch Instituut, BELGIUM  
 Ecole Royale Militaire, Lab. de Phy. Plasmas, BELGIUM  
 Commission-European, DG. XII-Fusion Prog., BELGIUM  
 Prof. R. Bouciqué, Rijksuniversiteit Gent, BELGIUM  
 Dr. P.H. Sakanaka, Instituto Fisica, BRAZIL  
 Instituto Nacional De Pesquisas Especiais-INPE, BRAZIL  
 Documents Office, Atomic Energy of Canada Ltd., CANADA  
 Dr. M.P. Bachynski, MPB Technologies, Inc., CANADA  
 Dr. H.M. Skarsgard, Univ. of Saskatchewan, CANADA  
 Prof. J. Teichmann, Univ. of Montreal, CANADA  
 Prof. S.R. Sreenivasan, Univ. of Calgary, CANADA  
 Prof. T.W. Johnston, INRS-Energie, CANADA  
 Dr. R. Bolton, Centre canadien de fusion magnétique, CANADA  
 Dr. C.R. James,, Univ. of Alberta, CANADA  
 Dr. P. Lukác, Komenského Univerzita, CZECHO-SLOVAKIA  
 The Librarian, Culham Laboratory, ENGLAND  
 Library, R61, Rutherford Appleton Laboratory, ENGLAND  
 Mrs. S.A. Hutchinson, JET Library, ENGLAND  
 Dr. S.C. Sharma, Univ. of South Pacific, FIJI ISLANDS  
 P. Mähönen, Univ. of Helsinki, FINLAND  
 Prof. M.N. Bussac, Ecole Polytechnique,, FRANCE  
 C. Mouttet, Lab. de Physique des Milieux Ionisés, FRANCE  
 J. Radet, CEN/CADARACHE - Bat 506, FRANCE  
 Prof. E. Economou, Univ. of Crete, GREECE  
 Ms. C. Rinni, Univ. of Ioannina, GREECE  
 Dr. T. Muel, Academy Bibliographic Ser., HONG KONG  
 Preprint Library, Hungarian Academy of Sci., HUNGARY  
 Dr. B. DasGupta, Saha Inst. of Nuclear Physics, INDIA  
 Dr. P. Kaw, Inst. for Plasma Research, INDIA  
 Dr. P. Rosenau, Israel Inst. of Technology, ISRAEL  
 Librarian, International Center for Theo Physics, ITALY  
 Miss C. De Palo, Associazione EURATOM-ENEA , ITALY  
 Dr. G. Grosso, Istituto di Fisica del Plasma, ITALY  
 Prof. G. Rostangni, Istituto Gas Ionizzati Del Cnr, ITALY  
 Dr. H. Yamato, Toshiba Res & Devel Center, JAPAN  
 Prof. I. Kawakami, Hiroshima Univ., JAPAN  
 Prof. K. Nishikawa, Hiroshima Univ., JAPAN  
 Director, Japan Atomic Energy Research Inst., JAPAN  
 Prof. S. Itoh, Kyushu Univ., JAPAN  
 Research Info. Ctr., National Inst. for Fusion Science, JAPAN  
 Prof. S. Tanaka, Kyoto Univ., JAPAN  
 Library, Kyoto Univ., JAPAN  
 Prof. N. Inoue, Univ. of Tokyo, JAPAN  
 Secretary, Plasma Section, Electrotechnical Lab., JAPAN  
 S. Mori, Technical Advisor, JAERI, JAPAN  
 Dr. O. Mitarai, Kumamoto Inst. of Technology, JAPAN  
 J. Hyeon-Sook, Korea Atomic Energy Research Inst, KOREA  
 D.I. Choi, The Korea Adv. Inst. of Sci. & Tech., KOREA  
 Prof. B.S. Liley, Univ. of Waikato, NEW ZEALAND  
 Inst of Physics, Chinese Acad Sci PEOPLE'S REP. OF CHINA  
 Library, Inst. of Plasma Physics, PEOPLE'S REP. OF CHINA  
 Tsinghua Univ. Library, PEOPLE'S REPUBLIC OF CHINA  
 Z. Li, S.W. Inst Physics, PEOPLE'S REPUBLIC OF CHINA  
 Prof. J.A.C. Cabral, Instituto Superior Tecnico, PORTUGAL  
 Dr. O. Petrus, AL I CUZA Univ., ROMANIA  
 Dr. J. de Villiers, Fusion Studies, AEC, S. AFRICA  
 Prof. M.A. Hellberg, Univ. of Natal, S. AFRICA  
 Prof. D.E. Kim, Pohang Inst. of Sci. & Tech., SO. KOREA  
 Prof. C.I.E.M.A.T, Fusion Division Library, SPAIN  
 Dr. L. Stenflo, Univ. of UMEA, SWEDEN  
 Library, Royal Inst. of Technology, SWEDEN  
 Prof. H. Wilhelmson, Chalmers Univ. of Tech., SWEDEN  
 Centre Phys. Des Plasmas, Ecole Polytech, SWITZERLAND  
 Bibliothek, Inst. Voor Plasma-Fysica, THE NETHERLANDS  
 Asst. Prof. Dr. S. Cakir, Middle East Tech. Univ., TURKEY  
 Dr. V.A. Glukhikh, Sci. Res. Inst. Electrophys. Apparatus, USSR  
 Dr. D.D. Ryutov, Siberian Branch of Academy of Sci., USSR  
 Dr. G.A. Eliseev, I.V. Kurchatov Inst., USSR  
 Librarian, The Ukr.SSR Academy of Sciences, USSR  
 Dr. L.M. Kovrizhnykh, Inst. of General Physics, USSR  
 Kernforschungsanlage GmbH, Zentralbibliothek, W. GERMANY  
 Bibliothek, Inst. Für Plasmaforschung, W. GERMANY  
 Prof. K. Schindler, Ruhr-Universität Bochum, W. GERMANY  
 Dr. F. Wagner, (ASDEX), Max-Planck-Institut, W. GERMANY  
 Librarian, Max-Planck-Institut, W. GERMANY  
 Prof. R.K. Janev, Inst. of Physics, YUGOSLAVIA

**END**

**DATE  
FILMED  
9/01/92**

The first part of the document discusses the importance of maintaining accurate records of all transactions. This includes not only sales and purchases but also any other financial activities that may occur during the course of the business. It is essential to ensure that all entries are properly documented and supported by appropriate evidence.

In addition, it is important to regularly review and reconcile the accounts to ensure that they are up-to-date and accurate. This will help to identify any discrepancies or errors early on, allowing them to be corrected before they become a problem.

Finally, it is important to keep all records for a sufficient period of time to allow for any future audits or investigations. This will ensure that all necessary information is available and that the business can demonstrate its compliance with applicable laws and regulations.

The second part of the document discusses the importance of maintaining accurate records of all transactions. This includes not only sales and purchases but also any other financial activities that may occur during the course of the business. It is essential to ensure that all entries are properly documented and supported by appropriate evidence.