

The pollutant emissions from diesel-engine vehicles and exhaust aftertreatment systems

İbrahim Aslan Reşitoğlu · Kemal Altinişik · Ali Keskin

Received: 28 March 2014 / Accepted: 21 May 2014 / Published online: 11 June 2014
© The Author(s) 2014. This article is published with open access at Springerlink.com

Abstract Diesel engines have high efficiency, durability, and reliability together with their low-operating cost. These important features make them the most preferred engines especially for heavy-duty vehicles. The interest in diesel engines has risen substantially day by day. In addition to the widespread use of these engines with many advantages, they play an important role in environmental pollution problems worldwide. Diesel engines are considered as one of the largest contributors to environmental pollution caused by exhaust emissions, and they are responsible for several health problems as well. Many policies have been imposed worldwide in recent years to reduce negative effects of diesel engine emissions on human health and environment. Many researches have been carried out on both diesel exhaust pollutant emissions and aftertreatment emission control technologies. In this paper, the emissions from diesel engines and their control systems are reviewed. The four main pollutant emissions from diesel engines (carbon monoxide-CO, hydrocarbons-HC, particulate matter-PM and nitrogen oxides-NO_x) and control systems for these emissions (diesel oxidation catalyst, diesel particulate filter and selective catalytic reduction) are discussed. Each type of emissions and control systems is comprehensively examined. At the same time, the legal restrictions on exhaust-gas emissions around the world and the effects of exhaust-gas emissions on human health and environment are explained in this study.

Keywords Diesel engine · Emission · Emission control system · SCR · DOC · DPF

Introduction

Climate change is being counted as a global environmental threat caused by people. It is seen as the second most serious issue that the world faces and has brought about results that affect life adversely (European Commission 2011). The major ones of these effects are average 0.8 °C global warming above pre-industrial levels, 0.09 °C warming and acidifying of ocean since 1950s, 3.2 cm sea-levels rising per decade, an exceptional number of extreme heat waves in last decade, and drought affecting food crop growing areas (Levitus et al. 2012; Meyssignac and Cazenave 2012; McKechnie and Wolf 2010; Li et al. 2009; Heyder et al. 2011; Dai 2011). Unless the current mitigation, commitments, and pledges are fully implemented, the negative effects of climate change will go on. It is expected that a warming of 4 °C and sea-level rise of 0.5–1 m can occur as early as 2060s (Huddleston 2012).

The greenhouse effect is a natural process that plays a major role in shaping the earth's climate. Human activities, especially burning fossil fuels, have contributed to the enhancement of the natural greenhouse effect. This enhanced greenhouse effect stems from an increase in the atmospheric concentrations called greenhouse gases (Jain 1993; Saxena 2009). Greenhouse gases in the atmosphere lead to climate change. The major greenhouse gases emitted into the atmosphere through human activities are carbon dioxide, methane, nitrous oxide, and fluorinated gases (hydrofluorocarbons, perfluorocarbons, and sulfur hexafluoride) (Venkataraman et al. 2012; Wei et al. 2008; Lindley and McCulloch 2005).

İ. A. Reşitoğlu (✉) · A. Keskin
Tarsus Technology Faculty, Mersin University, 33500 Mersin,
Turkey
e-mail: aslanresitoglu@gmail.com

K. Altinişik
Department of Mechanical Engineering, Selcuk University,
42003 Konya, Turkey

Carbon dioxide (CO₂) has the largest rate among the greenhouse gases, and it is the main reason of global warming. The global emission of carbon dioxide has reached 34 billion tons with an increase of 3 % in 2011 (Olivier et al. 2012). Throughout the world, CO₂ emissions are currently about 35,000 million metric tons per year. Unless the urgent policies are put in action, CO₂ emissions will be projected to rise up 41,000 million metric tons per year in 2020s. In addition to warming in climate systems, the rising of CO₂ concentration in the atmosphere leads ocean acidification as a result of dissolutions (The Potsdam Institute for Climate Impact Research and Climate 2012).

The Intergovernmental Panel on Climate Change (IPCC) stated in the *Synthesis Report* that, “*In the absence of additional climate policies, an increase of baseline global greenhouse gas emissions from human sources would have become by a range from 25 to 90 % between 2000 and 2030*” (IPCC 2007). In the *Fourth Assessment Report*, IPCC has forecasted a global temperature rising between 1.1 and 6.4 °C, and a global sea level rising between 7 and 23 inches by 2100. According to the IPCC, global greenhouse gas emissions must be reduced to 50–85 % below year 2000 levels by 2050 to limit warming to 2–2.4 °C. To be able to reach this target, greenhouse gas emissions from all sectors must be reduced through a multi-generational effort (IPCC 2007).

Transport is a main sector which causes the environmental pollution and climate change. Emissions from transport, and especially motor vehicles, add considerably to the levels of greenhouse gases in the atmosphere (OECD 2002). Transport is the second-largest sector in producing global CO₂ emissions with a range of 22 % (International Energy Agency 2012). Owing to the rapid increase of motor vehicles and very limited use of emission control technologies, transport emerges as the largest source of urban air pollution, which is an important public health problem in most cities of the developing world. Air pollution in developing countries accounts for tens of thousands of excess deaths and billions of dollars in medical costs and loses productivity every year (Faiz et al. 1996; Sivaloganathan 1998). The World Health Organization estimated that around 2.4 million people die every year due to air pollution (WHO 2007).

In today's world, environmental protection, climate change, and air pollution have become subjects of central concern. Many agencies, organizations (EPA, OECD, IPCC, IEA, EEA, etc.) worldwide were established and have been working to prevent air pollution and climate change caused by pollutant emissions. In their works, they have reported that approximately the 20–30 % of pollutant emissions originates from transport and these emissions have an important impact upon global warming and climate change. To prevent the effects of these pollutant emissions,

they have emphasized on such issues as making several legal arrangements, advancing the technological developments, creating several model structures, developing control systems, and organizing the structure of traffic (OECD 2011; EPA 2012; IEA 2012; IPCC 2007; OECD 2002; EEA 2012).

Diesel engines have extensive usage compared to gasoline engines on account of their low-operating costs, energy efficiency, high durability, and reliability. They are the power source of commercial transport, being employed in trucks, buses, trains, and ships as well as off-road industrial vehicles such as excavation machinery and mining equipment. Although they have many advantages, they have a significant impact upon environmental pollution problems worldwide. Especially, diesel exhaust gas contains higher amount of particulate matter and NO_x emissions that are responsible of severe environmental and health problems (Prasad and Bella 2010). Health experts have concluded that pollutants emitted by diesel engines affect human health adversely and cause acid rains, ground-level ozone, and reduce visibility. Studies have shown that exposure to diesel exhaust gas causes lung damage and respiratory problems, and there are concrete evidences that diesel emissions may cause cancer in humans (Sydbom et al. 2001; Lloyd and Cackette 2001; Whichmann 2006; Lewtas 2007; Burr and Gregory 2011).

This article presents a review on the pollutant emissions from diesel-engine vehicles and their control systems. In this context, four main pollutant emissions (CO, HC, NO_x, and PM) from diesel engines are explained individually. Worldwide emission control legislation is clarified and trends in emission control systems especially for heavy-duty diesel engine vehicles are explained. Three different emission control systems are examined as diesel oxidation catalyst (DOC) to control CO, and HC emissions, diesel particulate filter (DPF) to control PM emissions and selective catalytic reduction (SCR) to control NO_x emissions.

The emissions from diesel engines

The diesel engine is an auto-ignition engine in which fuel and air are mixed inside the engine. The air required for combustion is highly compressed inside the combustion chamber. This generates high temperatures which are sufficient for the diesel fuel to ignite spontaneously when it is injected into the cylinder. Thus, the diesel engine uses heat to release the chemical energy contained in the diesel fuel and to convert it into mechanical force (Bosch 2005).

Carbon and hydrogen construct the origin of diesel fuel like most fossil fuels. For ideal thermodynamic equilibrium, the complete combustion of diesel fuel would only

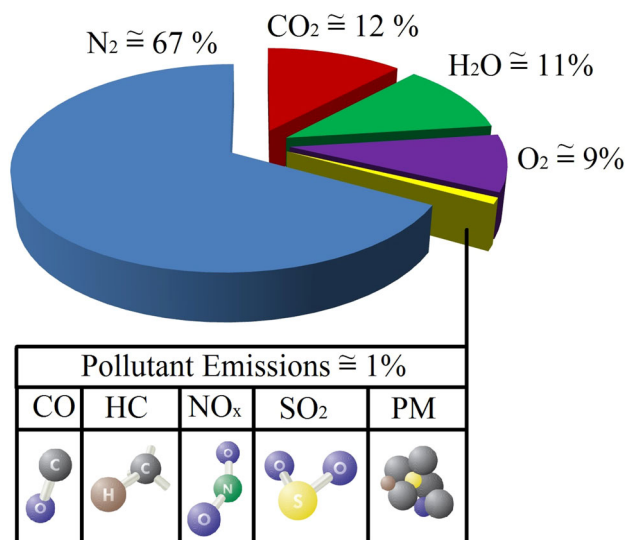


Fig. 1 The compositions of diesel exhaust gas

generate CO_2 and H_2O in combustion chambers of engine (Prasad and Bella 2010). However, many reasons (the air–fuel ratio, ignition timing, turbulence in the combustion chamber, combustion form, air–fuel concentration, combustion temperature, etc.) make this out of question, and a number of harmful products are generated during combustion. The most significant harmful products are CO, HC, NO_x , and PM.

Figure 1 shows the approximate composition of diesel exhaust gas (Khair and Majewski 2006). Pollutant emissions have a rate of less than 1 % in the diesel exhaust gas. NO_x has the highest proportion of diesel pollutant emissions with a rate of more than 50 %. After NO_x emissions, PM has the second highest proportion in pollutant emissions. Because diesel engines are lean combustion engines, and the concentration of CO and HC is minimal. Besides, pollutant emissions include a modicum of SO_2 depending the specifications and quality of fuel. It is produced by the sulfates contained in diesel fuel. For the present, there is not any aftertreatment system like a catalytic converter to eliminate SO_2 . Nowadays, most of oil distributors and customers prefer ultra low sulfur diesel (ULSD) for diesel engines to prevent harmful effect of SO_2 .

In this section, the four main pollutant emissions (CO, HC, PM, and NO_x) from diesel engine are explained. Each type of emission is investigated individually and the impacts of each emission on environmental and health problems are also revealed.

Carbon monoxide (CO)

Carbon monoxide results from the incomplete combustion where the oxidation process does not occur completely.

This concentration is largely dependent on air/fuel mixture and it is highest where the excess-air factor (λ) is less than 1.0 that is classified as rich mixture (Wu et al. 2004). It can be caused especially at the time of starting and instantaneous acceleration of engine where the rich mixtures are required. In the rich mixtures, due to air deficiency and reactant concentration, all the carbon cannot convert to CO_2 and be formed CO concentration. Although CO is produced during operation in rich mixtures, a small portion of CO is also emitted under lean conditions because of chemical kinetic effects (Faiz et al. 1996).

Diesel engines are lean combustion engines which have a consistently high air–fuel ratio ($\lambda > 1$). So, the formation of CO is minimal in diesel engines. Nevertheless, CO is produced if the droplets in a diesel engine are too large or if insufficient turbulence or swirl is created in the combustion chamber (Demers and Walters 1999).

Carbon monoxide is an odorless and colorless gas. In humans, CO in the air is inhaled by the lungs and transmitted into the bloodstream. It binds to hemoglobin and inhibits its capacity to transfer oxygen. Depending on CO concentration in the air, as thus leading to asphyxiation, this can affect the function of different organs, resulting in impaired concentration, slow reflexes, and confusion (Raub 1999; Kampa and Castanas 2008; Walsh 2011; Strauss et al. 2004).

Hydrocarbons (HC)

Hydrocarbon emissions are composed of unburned fuels as a result of insufficient temperature which occurs near the cylinder wall. At this point, the air–fuel mixture temperature is significantly less than the center of the cylinder (Demers and Walters 1999; Correa and Arbilla 2008). Hydrocarbons consist of thousands of species, such as alkanes, alkenes, and aromatics. They are normally stated in terms of equivalent CH_4 content (Hiroyuki et al. 2011).

Diesel engines normally emit low levels of hydrocarbons. Diesel hydrocarbon emissions occur principally at light loads. The major source of light-load hydrocarbon emissions is lean air–fuel mixing. In lean mixtures, flame speeds may be too low for combustion to be completed during the power stroke, or combustion may not occur, and these conditions cause high hydrocarbon emissions (Zheng et al. 2008).

In Diesel engines, the fuel type, engine adjustment, and design affect the content of hydrocarbons. Besides, HC emissions in the exhaust gas depend on irregular operating conditions. High levels of instantaneous change in engine speed, untidy injection, excessive nozzle cavity volumes, and injector needle bounce can cause significant quantities of unburned fuel to pass into the exhaust (Payri et al. 2009).

Unburned hydrocarbons continue to react in the exhaust if the temperature is above 600 °C and oxygen present, so hydrocarbon emissions from the tailpipe may be significantly lower than the hydrocarbons leaving the cylinder (Faiz et al. 1996).

Hydrocarbon emissions occur not only in the vehicle exhaust, but also in the engine crankcase, the fuel system, and from atmospheric venting of vapors during fuel distribution and dispensing (Faiz et al. 1996). Crankcase hydrocarbon emissions and evaporative losses of hydrocarbon emissions have, respectively, 20–35 and 15–25 % while tailpipe hydrocarbon emissions have 50–60 % of total hydrocarbon emissions (Dhariwal 1997).

Hydrocarbons have harmful effects on environment and human health. With other pollutant emissions, they play a significant role in the formation of ground-level ozone. Vehicles are responsible for about 50 % of the emissions that form ozone. Hydrocarbons are toxic with the potential to respiratory tract irritation and cause cancer (Diaz-Sanchez 1997; Krzyzanowski et al. 2005).

Particulate matter (PM)

Particulate matter emissions in the exhaust gas are resulted from combustion process. They may be originated from the agglomeration of very small particles of partly burned fuel, partly burned lube oil, ash content of fuel oil, and cylinder lube oil or sulfates and water (Demers and Walters 1999; Maricq 2007). Most particulate matters are resulted from incomplete combustion of the hydrocarbons in the fuel and lube oil. In an experimental study, typical particle composition of a heavy-duty diesel engine is classified as 41 % carbon, 7 % unburned fuel, 25 % unburned oil, 14 % sulfate and water, 13 % ash and other components (Kittelson 1998). In another study, It is reported that PM consists of elemental carbon ($\cong 31$ %), sulfates and moisture ($\cong 14$ %), unburnt fuel ($\cong 7$ %), unburnt lubricating oil ($\cong 40$ %) and remaining may be metals and others substances (Agarwal 2007).

Diesel particulate matters are typically spheres about 15–40 nm in diameter, and approximately more than 90 % of PM is smaller than 1 μm in diameter. The formation process of PM emissions is dependant on many factors as the combustion and expansion process, fuel quality (sulfur and ash content), lubrication oil quality, and consumption, combustion temperature, exhaust gas cooling (Burtscher 2005).

Particulate matter emissions from diesel engines are considerably higher (six to ten times) than from gasoline engines. Diesel particle emissions can be divided into three main components: soot, soluble organic fraction (SOF), and inorganic fraction (IF). More than 50 % of the total PM emissions are soot that is seen as black smoke. SOF

consists of heavy hydrocarbons adsorbed or condensed on the soot. It is derived partly from the lubricating oil, partly from unburned fuel, and partly from compounds formed during combustion. SOF values are too high at light engine loads when exhaust temperatures are low (Sarvi et al. 2011; Tighe et al. 2012; Metts et al. 2005; Stanmore et al. 2001; Sharma et al. 2005).

Many researches are performed to detect the impact of PM emissions on environment and human health. In these researches, It is documented that inhaling of these particles may cause to important health problems such as premature death, asthma, lung cancer, and other cardiovascular issues. These emissions contribute to pollution of air, water, and soil; soiling of buildings; reductions in visibility; impact agriculture productivity; global climate change (Englert 2004; OECD 2002; Michael and Kleinman 2000).

Nitrogen oxides (NO_x)

Diesel engines use highly compressed hot air to ignite the fuel. Air, mainly composed of oxygen and nitrogen, is initially drawn into the combustion chamber. Then, it is compressed, and the fuel is injected directly into this compressed air at about the top of the compression stroke in the combustion chamber. The fuel is burned, and the heat is released. Normally in this process, the nitrogen in the air does not react with oxygen in the combustion chamber and it is emitted identically out of the engine. However, high temperatures above 1,600 °C in the cylinders cause the nitrogen to react with oxygen and generate NO_x emissions. So, it will not be wrong to say that the major influences of the formation of NO_x are the temperature and concentration of oxygen in the combustion.

The amount of produced NO_x is a function of the maximum temperature in the cylinder, oxygen concentrations, and residence time. Most of the emitted NO_x is formed early in the combustion process, when the piston is still near the top of its stroke. This is when the flame temperature is the highest. Increasing the temperature of combustion increases the amount of NO_x by as much as threefold for every 100 °C increase (Lee et al. 2013; Bosch 2005).

Nitrogen oxides are referred as nitrogen oxide (NO) and nitrogen dioxide (NO_2). NO constitutes 85–95 % of NO_x . It is gradually converted to NO_2 in atmospheric air. While NO and NO_2 are lumped together as NO_x , there are some distinctive differences between these two pollutants. NO is a colorless and odorless gas, while NO_2 is a reddish brown gas with pungent odor (Chong et al. 2010; Hoekman and Robbins 2012).

Road transport is the most important cause of urban NO_x emissions worldwide contributing to 40–70 % of the NO_x . Among various types of vehicles, diesel vehicles are the

Table 1 Euro standards of European Union for heavy-duty vehicles (Delphi et al. 2012)

	CO (g/kWh)	HC (g/kWh)	NO _x (g/kWh)	PM (g/kWh)
Euro I	4.5	1.1	8.0	0.61
Euro II	4	1.1	7.0	0.15
Euro III	2.1	0.66	5.0	0.13
Euro IV	1.5	0.46	3.5	0.02
Euro V	1.5	0.46	2.0	0.02
Euro VI	1.5	0.13	0.4	0.01

most important contributors to NO_x emissions. Compared with gasoline engines, they need higher temperatures because they are compression-ignition engines. Diesel engines are responsible for about 85 % of all the NO_x emissions from mobile sources, primarily in the form of NO (Lee et al. 2013; Wang et al. 2012).

Nitrogen oxides emissions from vehicles are responsible for a large amount of environmental and health hazard. NO_x emissions contribute to acidification, formation of ozone, nutrient enrichment, and smog formation, which have become considerable problems in most major cities worldwide (Grewe et al. 2012). In the atmosphere, NO_x emissions react chemically with other pollutants to form tropospheric ozone (the primary component of photochemical smog) and other toxic pollutants.

NO and NO₂ are considered as toxic; but NO₂ has a level of toxicity five times greater than that of NO and it is also a direct concern of human lung disease. Nitrogen dioxide can irritate the lungs and lower resistance to respiratory infection (such as influenza). NO_x emissions are important precursors to acid rain that may affect both terrestrial and aquatic ecosystems. Nitrogen dioxide and airborne nitrate also contribute to pollutant haze, which impairs visibility (Kagawa 2002; Hoefft et al. 2012).

Emission control systems for diesel engine vehicles

In today's world, environmental protection has advanced to become a topic of central concern. Many agencies and organizations are tried to prevent the damage on environment and human health caused by greenhouse gases and pollutant emissions. Due to the adverse effects of diesel emissions on health and environment, governments put forward to the requirements for permissible exhaust emission standards. Europe has developed Euro standards which have continuously been lowered since 1993 with the Euro I to Euro VI, respectively.

Table 1 shows Euro standards for M1 and M2, N1 and N2 vehicles as defined in Directive 70/156/EC with reference mass $\leq 2,610$ kg. The limits are defined in mass per

energy (g/kWh) in this table. Regulations in Euro standards become progressively more stringent in the ensuing years. Compared to Euro I standard, Euro VI standard for CO, HC, NO_x, and PM emissions was decreased, respectively, 66, 76, 95, and 98 %. The implementation date of Euro VI standard for heavy-duty vehicles was 1st of September 2014 (Delphi et al. 2012).

The emission values which have been more stringent day by day obliged the vehicle manufacturers to work on reducing pollutant emission from vehicles. In the studies that have been carried out for decades, engine modifications, electronic controlled fuel injections systems, and improvement fuel properties have been focused on. However, these measures have failed to achieve emission reduction determined by standards. The desired emission levels can be achieved only by means of aftertreatment emission control systems. Vehicles are equipped with emission control systems to meet the actual emissions standards and requirements. With emission control systems, pollutants from the exhaust can be eliminated after it leaves the engine, just before it is emitted into the air (Prasad and Bella 2010; Bosch 2005).

Among the emission control systems of diesel engines, most researches and studies have been carried out on reduction of NO_x emissions because NO_x content in exhaust of diesel engine has the highest percentage among the pollutant emissions. Of the researches so far, exhaust gas recirculation (EGR), lean NO_x trap (LNT), and SCR are the most focused technologies to substantially eliminate the NO_x emissions.

In EGR systems, to reduce NO_x emissions, exhaust gas is recirculated back into the combustion chamber and mixed with fresh air at intake stroke. Consequently, the efficiency of combustion is worsened leading to the decrease of combustion temperature which means a reducing in NO_x formations. EGR has a widely used range in diesel vehicles. However; it can not achieve singly high NO_x conversion efficiency and reduction which meets current emission standards for especially heavy-duty vehicles. Also, due to the reduction of temperature in cylinder, this technology generates an increase of HC and CO emissions. (Bauner et al. 2009).

LNT technology, also called NO_x-storage-reduction (NSR) or NO_x adsorber catalyst (NAC), has been developed to reduce NO_x emission especially under lean conditions. During lean engine conditions, LNT stores NO_x on the catalyst washcoat. Then, under the fuel-rich engine conditions it releases and reacts the NO_x by the usual three-way type reactions. LNT catalyst mainly consists of three key components. These components are an oxidation catalyst (Pt), a NO_x storage ambience (barium (Ba) and/or other oxides), and a reduction catalyst (Rh). In LNT technology, Platinum-based catalysts are the most used

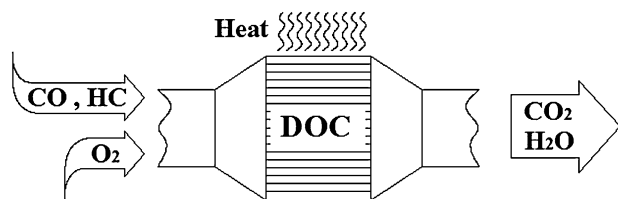


Fig. 2 Diesel oxidation catalyst


catalysts because of their NO_x reduction at low temperature and stability in water and sulfur.

Like EGR technology, LNT technologies are insufficient to provide desired NO_x emissions reduction. Apart from EGR and LNT technologies, it is possible to meet the current emissions standards with SCR technology. So, SCR technology is a respectable recent technology that many researchers are interested in.

In this section, emission control systems for diesel engines are explained particularly. Because of their extensive usage; DOC, DPF, and SCR systems especially for heavy-duty diesel engines are considered separately.

Diesel oxidation catalyst (DOC)

The main function of DOCs is to oxidize HC and CO emissions. Besides, DOCs play a role in decreasing the mass of diesel particulate emissions by oxidizing some of the hydrocarbons that are adsorbed onto the carbon particles (Chen and Schirmer 2003; Wang et al. 2008). DOCs may also be used in conjunction with SCR catalysts to oxidize NO into NO_2 and increase the NO_2/NO_x ratio. There are three main reactions which occur in DOCs (Zheng and Banerjee 2009).



CO and HC are oxidized to form CO_2 and H_2O [Eqs. (1), (2)] in the DOC (Fig. 2). Diesel exhaust gases generally contain O_2 , ranging from 2 to 17 % by volume, which does not react with the fuel in the combustion chamber. This O_2 is steadily consumed in DOC (Yu and Kim 2013).

Another chemical reaction that occurs in DOCs is the oxidizing of NO to form NO_2 as seen in Eq. (3). NO_2 concentration in the NO_x is vital for downstream components like DPF and SCR. A high NO_2 concentration in the NO_x generates to increase efficiency of DPF and SCR. In the untreated engine exhaust gas, the NO_2 component in the NO_x is only about 10 % at most operating points. With the function of the DOC, NO_2/NO rate is increased by inducing thermodynamic equilibrium (Lee et al. 2008; Sampara et al. 2007).

Temperature is an effective function on DOC efficiency. The effectiveness of the DOC in oxidizing CO and HC can be observed at temperatures above “light-off” for the catalytic activity. Light-off temperature is defined as the temperature where the reaction starts in catalyst and varies depending on exhaust composition, flow velocity, and catalyst composition.

DOC can also be used as a catalytic heater. The oxidation of CO and HC emissions generates to release heat. This heat is used to raise the exhaust-gas temperature downstream of DOC. The rising in the exhaust temperature supports DPF regeneration. In DOC, the temperature of the exhaust gas rises approximately above 90 °C for every 1 % volume of CO oxidation. Since the temperature rise is very rapid, a steep temperature gradient becomes set in DOC. The resulting stress in the ceramic carrier and catalytic converter is limited to the permitted temperature hike of about 200–250 °C (Bosch 2005).

DOC is commonly a monolith honeycomb structure made of ceramic or metal. Besides this carrier structure, it consists of an oxide mixture (washcoat) composed of aluminum oxide (Al_2O_3), cerium oxide (CeO_2), zirconium oxide (ZrO_2), and active catalytic noble metals such as platinum (Pt), palladium (Pd), and rhodium (Rh). The primary function of the washcoat is to provide a large surface area for the noble metal, and to slow down catalyst sintering that occurs at high temperatures, leading to an irreversible drop in catalyst activity. The quantity of noble metals used for the coating, which often referred to as the loading, is specified in g/ft^3 . The loading is approximately 50–90 g/ft^3 . Currently, DOC containing Pt and Pd is most commonly used for oxidation and many studies conducted by researchers focused on these precious metal-based catalysts (Kolli et al. 2010; Kim et al. 2003; Wiebenga et al. 2012; Wang et al. 2008; Haneda et al. 2011).

The major properties in choice of DOCs are light-off temperature, conversion efficiency, temperature stability, and tolerance to poisoning and manufacturing costs. However, parameters as channel density (specified in cpsi (channels per square inch)), wall thickness of the individual channels, and the external dimensions of converter (cross-sectional area and length) have a significant role on properties of DOCs. Channel density and wall thickness determine heat up response, exhaust-gas backpressure, and mechanical stability of the catalytic converter (Zervas 2008).

The volume of DOC (V_c) is defined as a factor of exhaust-gas volumetric flow, which is itself proportional to the swept volume (V_s) of the engine. Typical design figures for a DOC are $V_c/V_s = 0.6\text{--}0.8$. The ratio of exhaust-gas volumetric flow [V_f (m^3/h)] to catalyst volume [V_c (m^3)] is termed space velocity [SV (h^{-1})]. Typical figures of SV for an oxidation catalyst are 150,000–250,000 h^{-1} (Bosch 2005).

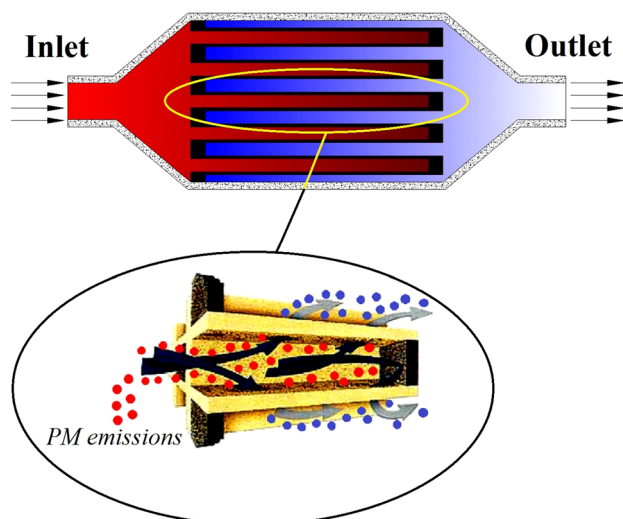


Fig. 3 Filtration of DPF

Since first introduction in 1970s, DOCs remain a key technology for diesel engines until nowadays (Wang et al. 2008). All new diesel engines mounted in passenger cars, light-duty and heavy-duty diesel vehicles are now equipped with DOCs. Reductions in emission from DOC use are estimated to be around 60–90 % for HCs and CO.

DOCs are extensively preferred emission control systems not only for heavy-duty vehicles but also light-duty vehicles, in many countries such as Europe, USA, and Japan. The oxidation catalysts containing Pt and Pd are the most popular catalysts in world market. One of the major problems of these precious catalysts is that they carry reaction of SO_2 to SO_3 which consequently react with water and generates forms of sulfates and sulfuric acid. These forms have quite harmful effects like damaging the aftertreatment emission control systems as well as causing several environmental and health problems. There is no technology to prevent and eliminate these forms. Although ULSD is used in many countries worldwide, the problem could not be solved completely. Using alternative fuels as biodiesel, methyl alcohol etc., can completely reduce or eliminate this pollutant. Besides, it is possible to increase the conversion efficiency of DOC using of alternative fuels (Zhu et al. 2013).

Diesel particulate filter (DPF)

DPFs have been applied in the production of vehicles since 2000. They are used to remove PM emissions from the exhaust gas by physical filtration and usually made of either cordierite ($2\text{MgO}-2\text{Al}_2\text{O}_3-5\text{SiO}_2$) or silicon carbide (SiC) honeycomb structure monolith with the channels blocked at alternate ends. The plugged channels at each

end force the diesel particulates matters through the porous substrate walls, which act as a mechanical filter (Fig. 3). As soot particles pass through the walls, they are transported into the pore walls by diffusion where they adhere. This filter has a large of parallel mostly square channels. The thickness of the channel walls is typically 300–400 μm . Channel size is specified by their cell density (Typical value: 100–300 cpsi) (Kuki et al. 2004; Ohno et al. 2002; Tsuneyoshi and Yamamoto 2012).

The filter walls are designed to have an optimum porosity, enabling the exhaust gases to pass through their walls without much hindrance, whilst being sufficiently impervious to collect the particulate species. As the filter becomes increasingly saturated with soot, a layer of soot is formed on the surface of the channel walls. This provides highly efficient surface filtration for the following operating phase. However, excessive saturation must be prevented. As the filters accumulate PM, it builds up backpressure that has many negative effects such as increased fuel consumption, engine failure, and stress in the filter. To prevent these negative effects, the DPF has to be regenerated by burning trapped PM.

There are subsequently two types of regeneration processes of DPFs commonly referred as active regeneration and passive regeneration. Active regeneration can be periodically applied to DPFs in which trapped soot is removed through a controlled oxidation with O_2 at 550 $^\circ\text{C}$ or higher temperatures (Jeguirim et al. 2005). In an active regeneration of DPF, PM is oxidized periodically by heat supplied from outside sources, such as an electric heater or a flame-based burner. The burning of PMs, captured in the filter, takes place as soon as the soot loading in the filter reaches a set limit (about 45 %) indicated by pressure drop across the DPF.

The higher regeneration temperature and large amount of energy for heat supply are serious problems for active regeneration. While the temperatures as high as melting point of filter generates to failure of DPF, the necessity of energy for heating increases the production cost of system due to complex supplements. These negative effects regard the active regeneration as being out of preference.

Unlike in the active regeneration, in passive regeneration of DPF, the oxidation of PMs occurs at the exhaust gas temperature by catalytic combustion promoted by depositing suitable catalysts within the trap itself. PM is oxidized by an ongoing catalytic reaction process that uses no additional fuel. Under a temperature range between 200 and 450 $^\circ\text{C}$, small amounts of NO_2 will promote the continuous oxidation of the deposited carbon particles. This is the basis of the continuously regenerating trap (CRT) which uses NO_2 continuously to oxidize soot within relatively low temperatures over a DPF (York et al. 2007, Allansson et al. 2002).

In passive regeneration, the entire process is very simple, quiet, and effective and fuel efficient, that is, neither the vehicle operator nor the vehicle's engine management system has to do anything to induce the regeneration of the DPF. In this process generally, a wall flow silicon carbide filter is used with DOC, sophisticated engine management system and sensors. DOC upstream of DPF increases the ratio of NO₂ to NO in the exhaust and lowers the burning temperature of PMs. NO₂ provides a more effective oxidant than oxygen and so provides optimum passive regeneration efficiency (Johansen et al. 2007).

The wall flow SiC filter is one of the most widely used filters as DPF worldwide. Since the regeneration occurs at high exhaust temperatures, DOC has to be used upstream this filter. Catalyzed DPFs (CDPF) housing the DOC formulation on the DPF itself can eliminate this obligation. In this system, there is not any DOC or any aftertreatment systems upstream DPF and all reactions take place in the CDPF. CDPF in which Pt is used as catalyst has the same conversion efficiency compared to wall flow SiC filter. With CDPFs, the oxidation temperature of soot can be decreased. In addition to the oxidation occurring in DPF may be realized at lower temperatures, the conversion rate can be further increased using biodiesel or fuel additives (Lamharess et al. 2011). Although the regeneration is one of major problem for DPFs, nowadays many studies and researches have been carried out for solving this problem and decreasing the oxidation temperatures of soots.

Selective catalytic reduction (SCR)


SCR is another technology to reduce NO_x emissions and especially improved for high-duty vehicles. Because of low exhaust temperature, it has not been used widely for light-duty vehicles. But nowadays, it is being developed for light-duty passenger vehicles and a few light-duty vehicle manufacturers like Audi have been using this technology in their automobile. SCR is used to minimize NO_x emissions in the exhaust gas to utilize ammonia (NH₃) as the reductant (Biswas et al. 2009). Water and N₂ are released as a result of catalytically conversion of NO_x in the exhaust gas. Due to the toxic effects of NH₃ and to prevent burning of NH₃ in the warm atmosphere before the reaction, NH₃ is provided from an aqueous solution of urea (Moreno-Tost et al. 2008; Hamada and Haneda 2012). This solution is obtained from mixing of 33 % urea (NH₂)₂CO and 67 % pure water by mass.

In order to get high efficiency, the amount of NH₃ stored on the SCR catalyst should be controlled as high as possible. However, high NH₃ storage can lead to undesired ammonia. Ammonia slip is generally avoided or minimized by the precise injection of urea based on the required ammonia (Majewski and Khair 2006). By spraying solution




on exhaust gas, as a result of the pure water vaporization, solid urea particles begin to melt and thermolysis takes place as seen in Eq. (4) (Koebel et al. 2000; Yim et al. 2004).



NH₃ and isocyanic acid are formed in thermolysis reaction. NH₃ takes part in the reactions of SCR catalyst, while the isocyanic acid is converted with water in a hydrolysis reaction (Koebel et al. 2000). Further NH₃ is produced by this hydrolysis [Eq. (5)].




Thermolysis and hydrolysis reactions occur more rapidly than SCR reactions. Two molecules of ammonia are produced in a molecular urea by reactions of thermolysis and hydrolysis (Chi and DaCosta 2005). The efficiency of reactions to produce NH₃ from urea depends largely on exhaust gas temperature. While the temperature of urea melting is 133 °C, it is indicated in different researches that thermolysis starts at 143, 152, 160 °C (Linde 2007; Oh et al. 2004; Sun et al. 2001; Schaber et al. 2004; Calabrese et al. 2000). Although the conversion of aqueous urea solution to NH₃ is started at the time of injector spraying, full conversion is not completed by the entrance of the catalyst. Half of the total amount of decomposition of urea to NH₃ is obtained up to entrance of catalyst. Thus, conversion efficiency is theoretically 50 % to the catalyst entrance. However, the implementation of the hydrolysis reaction in the gas phase before the entrance of catalyst increases conversion efficiency due to exhaust temperature (Koebel et al. 2000; Chi and DaCosta 2005). After the thermolysis and hydrolysis, the chemical reactions which occur in SCR catalyst are shown below.



The rate of SCR reactions may be listed as “7 > 6 > 8”. The rate of reaction in Eq. (7) is higher than the other reactions. The reaction of Eq. (6) is realized in the absence of any oxidation catalyst before the SCR catalyst, namely NO_x emissions in the form of NO. In the case of using a DOC with a high size and capacity before SCR catalyst, NO_x emissions become in the form of NO and the reaction of Eq. (8) takes place. Therefore, the reaction rate decreases and a decline in conversion efficiency of NO_x emissions are realized. The reaction of Eq. (7) will take place if the size and loading amount of the oxidation catalyst is optimized. Due to high rate of reaction, conversion of NO_x emissions is actualized effectively. 1:1 of NO:NO₂ ratio shows the maximum performance of SCR. For this

Fig. 4 Typical SCR system with DOC

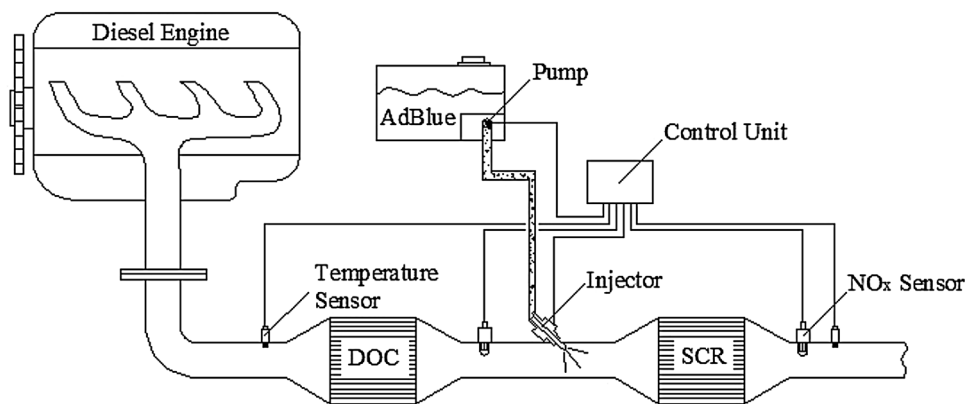

reason, it is necessary to set a NO:NO₂ ratio of about 1:1 (Sluder et al. 2005; Devarakonda et al. 2008; Shost et al. 2008).

Figure 4 shows a typical SCR system with DOC. Zeolite- and vanadium-based catalysts are used in SCR systems. Temperature has a characteristic role in choosing catalyst. While copper-zeolites have the best low temperature performance, iron-zeolites have the best high temperature performance (Hamada and Haneda 2012).

SCR system can run in the temperature between 200 and 600 °C. Reactions start generally at 200 °C, and the maximum conversion efficiency is obtained at 350 °C (Way et al. 2009). The temperatures below 200 °C cause cyanide acid, biurea, melamine, amelide, and ameline due to decomposition reactions of urea solution. These components can accumulate in the exhaust pipe wall and lead to undesired results (Schaber et al. 2004). To prevent these formations, the spraying of urea solution starts at the exhaust gas temperature above 200 °C. Besides, the temperatures above 600 °C cause NH₃ to burn before reacting with the NO_x emissions.

The researches on SCR systems have been intensified for system design, urea delivery system, catalyst, injection solution, injection pressure, and times.

V₂O₅-WO₃/TiO₂, Fe-ZSM5, Cu-ZSM5, and Ag/Al₂O₃ are the most commonly used catalyst and many researches are focused on these catalyst types. Cu-PPHs, CeO₂-TiO₂, Cu/Al₂O₃, NbCe, and Fe-MFI are the other catalyst types that become a current issue. In many of the researches which were conducted on these catalysts, conversion efficiency of NO_x emissions have been obtained more than 90 % rates (Shan et al. 2012; Casapu et al. 2011; Oliveira et al. 2011). The catalysts based on TiO₂ doped by Tungsten using Vanadium as active component are the most applied catalysts for SCR because of their high activity even at low temperature and high selectivity for NO₂ as product. Zeolite is another base that may be used instead of TiO₂, and has some differences at efficiency of NO_x

conversion. Unlike these bases, Ag-Al₂O₃ catalysts have relatively low activity under the low exhaust temperature.

Urea injection quality and mixing are complex and critically important. Many studies have been carried out to determine the effect of urea droplet quality on conversion efficiency. It shows that urea injection is a significant parameter on conversion efficiency. It can affect conversion efficiency up to 10 %.

Although many amines (Methylamine, ethylamine, propylamine, and butylamine) have been tested as injection solution, no one could achieve the efficiency of urea solution named as AdBlue in markets worldwide (Stanculescu et al. 2010). Other reductants, also, have been screened to substitute ammonia.

In SCR applications, hydrocarbons (HC) can be used as the reductant instead of ammonia or urea. This method is known as hydrocarbon SCR (HC-SCR), and many researches have been carried out on this method. Due to the existence of hydrocarbon in the exhaust gas (passive mode) or in the injected fuel itself (active mode), it is a relatively simple to apply it to the passenger vehicles. In diesel engines, the primary HC is diesel fuel, but other HCs such as ethanol, acetone, and propanol can be injected into the exhaust stream to aid in the reduction of NO_x. Ag-Al₂O₃ catalyst is the most promising catalyst for HC-SCR.

Compared with the emission control solutions (EGR, LNT, and SCR) to reduce NO_x emissions, it has generally shown that SCR has the high efficiency in NO_x conversion. Unlike LNT technology, SCR removes NO_x continuously through the active reductant on the catalyst surface. Otherwise, LNT has a wide operating temperature window and lower desulfurization temperature. Because it leads to an increase in HC and CO emissions and low NO_x conversion efficiency compared to SCR and LNT, EGR lags behind. In many applications, these technologies can be used as combination to increase NO_x conversion efficiency (Xu and McCabe 2012; Lopez et al. 2009).

With all other advanced aftertreatment devices, sulfur content in the combustion fuel is an important problem for SCR catalyst. The aftertreatment technologies are so sensitive to the sulfur content in the fuel. Sulfur content of the diesel fuel is included within the catalysts and begins to accumulate in the active sites of the catalyst, which lowers the catalytic activity. Although sulfates can be thermally decomposed, high temperatures (>600 °C) are required to desulfurization under rich conditions. Alternative fuels and fuel additives have been used to prevent the effect of sulfurs on aftertreatment devices. It is possible to increase the emission reduction efficiencies of aftertreatment systems with fuels containing no sulfur. Especially biodiesel is the most used alternative fuel to prevent the sulfur damage, and many researches have been carried out on the use of biodiesel as an alternative fuel to diesel (Ng et al. 2010).

Conclusion

This article reviews the characteristics of main pollutant emissions (CO, HC, PM, and NO_x) from diesel engines and control technologies of these pollutant emissions with standards and regulations. Among these pollutant emission, CO and HC are emitted because of incomplete combustion and unburned fuel while NO_x emissions are caused because of high combustion temperatures above 1,600 °C. As for PM emissions, the reasons of PM emissions are agglomeration of very small particles of partly burned fuel, partly burned lube oil, ash content of fuel oil and cylinder lube oil or sulfates and water. These pollutant emissions have harmful effects on environment and human health. Even though many applications have been implemented on diesel engines to prevent harmful effects of these pollutant emissions and to meet stringent emission regulations, only aftertreatment emission control systems are of the potential to eliminate the pollutant emissions from diesel exhaust gas. To control these pollutant emissions as desired is only possible with aftertreatment systems. Diesel exhaust aftertreatment systems include DOC, DPF, and SCR. These systems are the most requested components especially for heavy-duty diesel engines and usually a combination of DOC, DPF, and SCR has been respectively used for the simultaneous removal of main pollutant emissions from diesel engine exhaust.

DOCs are used not only to reduce CO and HC emissions, but also to exert a considerable influence on the performance of downstream DPF and SCR. DOCs increase the exhaust temperature for DPF regeneration and convert NO to NO_2 for increasing conversion efficiency of SCR systems. DPFs are used generally with DOC to eliminate PM emissions from diesel exhaust gas. They are typically constructed from cordierite SiC . This structure acts as a

mechanical filter and eliminates PM emissions from diesel exhaust gas by %100. SCR systems are highly effective to reduce NO_x emissions. NH_3 is used as a reductant and injects on exhaust gas to convert NO_x emissions to N_2 form. NH_3 is obtained from a urea solution known as AdBlue in the market. Pt- and Pd-based catalysts are the most commonly used catalyst for DOC and SCR. The temperature of diesel exhaust gas has an important effect on reducing pollutant emissions. Besides catalyst type, space velocity of exhaust gas, and emission form are the other parameters affecting the efficiency.

With the aftertreatment emission control systems, it is possible to reduce the damage of the pollutant emissions on air pollution, to meet emission standards and requirements, and to prevent the harmful effects of pollutant emissions on environment and human health. Due to these missions, emission control systems are utmost importance worldwide. For the complete destruction of polluting emissions from diesel engines, further studies and researches on the aftertreatment emission control systems should be intensified and continued.

Open Access This article is distributed under the terms of the Creative Commons Attribution License which permits any use, distribution, and reproduction in any medium, provided the original author(s) and the source are credited.

References

- Agarwal AK (2007) Biofuels (alcohols and biodiesel) applications as fuels for internal combustion engines. *Prog Energy Combust Sci* 33:233–271
- Allansson R, Blakeman PG, Cooper BJ, Phillips PR, Thoss JE, Walker AP (2002) The use of the continuously regenerating trap (CRTM) to control particulate emissions: minimising the impact of sulfur poisoning. *Society of Automotive Engineers*, 2002-01-1271
- Bauner D, Laestadius S, Iida N (2009) Evolving technological systems for diesel engine emission control: balancing GHG and local emissions. *Clean Technol Environ Policy* 11:339–365
- Biswas S, Verma V, Schauer JJ, Sioutas C (2009) Chemical speciation of PM emissions from heavy-duty diesel vehicles equipped with diesel particulate filter (DPF) and selective catalytic reduction (SCR) retrofits. *Atmos Environ* 43: 1917–1925
- Bosch (2005) Emissions-control technology for diesel engines. Robert Bosch GmbH, Germany
- Burr M, Gregory C (2011) Vehicular exhaust. *Encyclopedia Environ Health* 49:645–563
- Burtscher H (2005) Physical characterization of particulate emissions from diesel engines: a review. *Aerosol Sci* 36:896–932
- Calabrese JL, Patchett JA, Grimston K, Rice GW, Davis GW (2000) The influence of injector operating conditions on the performance of a urea–water selective catalytic reduction (SCR) system. *SAE technical paper*, 2000-01-2814
- Casapu M, Bernhard A, Peitz D, Mehring M, Elsener M, Kröcher O (2011) A Niobia-Ceria based multi-purpose catalyst for selective catalytic reduction of NO_x , urea hydrolysis and soot oxidation in diesel exhaust. *Appl Catal B* 103:79–84

- Chen M, Schirmer K (2003) A modelling approach to the design optimization of catalytic converters of I. C. engines. In: Proceedings of ICEF03: 2003 fall technical conference of the ASME internal combustion engine division, ICEF2003-729
- Chi JN, DaCosta HFM (2005) Modelling and control of a urea-SCR aftertreatment system. SAE technical paper, 2005-01-0969
- Chong JJ, Tsolakis A, Gill SS, Theinnoi K, Golunski SE (2010) Enhancing the NO₂/NO_x ratio in compression ignition engines by hydrogen and reformat combustion, for improved aftertreatment performance. *Int J Hydrog Energy* 35:8723–8732
- Correa SM, Arbilla G (2008) Carbonly emissions in diesel and biodiesel exhausts. *Atmos Environ* 42:769–775
- Dai A (2011) Drought under global warming: a review. *Wiley Interdiscip Rev Clim Chang* 2(1):45–65
- Delphi (2012) Worldwide emissions standards—heavy duty and off-highway vehicles. Delphi, Michigan
- Demers D, Walters G (1999) Guide to exhaust emission control options. BAeSAME, Bristol
- Devarakonda M, Parker G, Johnson JH, Strots V, Santhanam S (2008) Model-based estimation and control system development in an urea-SCR aftertreatment system. SAE-Worldcongress, 01-1324
- Dhariwal HC (1997) Control of blowby emissions and lubricating oil consumption in I.C. engines. *Energy Convers Manag* 38:1267–1274
- Diaz-Sanchez D (1997) The role of diesel exhaust particles and their associated polyaromatic hydrocarbons in the induction of allergic airway disease. *Allergy* 52:52–56
- Englert N (2004) Fine particles and human health—a review of epidemiological studies. *Toxicol Lett* 149:235–242
- Environmental Protection Agency (EPA) (2012) Climate change indicators in the United States. EPA, Washington
- European Commission (2011) Climate change: report. Europe: Directorate-General for Communication, Brussels
- European Environment Agency (EEA) (2012) Annual European Union greenhouse gas inventory 1990–2000 and inventory report 2012. Copenhagen
- Faiz A, Weaver CS, Walsh PW (1996) Air pollution from motor vehicles: standards and technologies for controlling emissions. The World Bank, Washington
- Grewe V, Dahlmann K, Matthes S, Steinbrecht W (2012) Attributing ozone to NO_x emissions: implications for climate mitigation measures. *Atmos Environ* 59:102–107
- Hamada H, Haneda M (2012) A review of selective catalytic reduction of nitrogen oxides with hydrogen and carbon monoxide. *Appl Catal A* 421–422:1–13
- Haneda M, Sasaki M, Hamada H, Ozawa M (2011) Platinum-based catalyst for diesel hydrocarbon oxidation. *Chin J Catal* 32:777–781
- Heyder U, Schaphoff S, Gerten D, Lucht W (2011) Risk of severe climate change impact on the terrestrial biosphere. *Environ Res Lett* 6:034036
- Hiroiyuki Y, Misawa K, Suzuki D, Tanaka K, Matsumoto J, Fujii M, Tanaka K (2011) Detailed analysis of diesel vehicle exhaust emissions: nitrogen oxides, hydrocarbons and particulate size distributions. *Proc Combust Inst* 33:2895–2902
- Hoefl I, Steude K, Wrage N, Veldkamp E (2012) Response of nitrogen oxide emissions to grazer species and plant species composition in temperate agricultural grassland. *Agric Ecosyst Environ* 151:34–43
- Hoekman SK, Robbins C (2012) Review of the effects of biodiesel on NO_x emissions. *Fuel Process Technol* 96:237–249
- Huddleston N (2012) Climate change: evidence, impacts and choices. National Research Council
- Intergovernmental Panel on Climate Change (IPCC) (2007) Climate change 2007: synthesis report. Valencia, Spain
- International Energy Agency (IEA), 2012. CO₂ Emissions From Fuel Combustion Highlights. France
- Jain PC (1993) Greenhouse effect and climate change: scientific basis and overview. *Renew Energy* 3:403–420
- Jeguirim M, Tschamber V, Brilhac JF, Ehrburger P (2005) Oxidation mechanism of carbon black by NO₂: effect of water vapour. *Fuel* 84:1949–1956
- Johansen K, Dahl S, Mogensen G, Pehrson S, Schramm J, Ivarsson A (2007) Novel base metal-palladium catalytic diesel filter coating with NO₂ reducing properties. Society of Automotive Engineers, 2007-01-1921
- Kagawa J (2002) Health effects of diesel exhaust emissions—a mixture of air pollutants of worldwide concern. *Toxicology* 181–182:349–353
- Kampa M, Castanas E (2008) Human health effects of air pollution. *Environ Pollut* 151:362–367
- Khair MK, Majewski WA (2006) Diesel emissions and their control. SAE International. ISBN: 978-0-7680-0674-2
- Kim MR, Kim DH, Woo SI (2003) Effect of V₂O₅ on the catalytic activity of Pt-based diesel oxidation catalyst. *Appl Catal B* 45:269–279
- Kittelson DB (1998) Engines and nanoparticles: a review. *J Aerosol Sci* 29(5–6):575–588
- Koebel M, Elsener M, Kleemann M (2000) Urea-SCR: a promising technique to reduce NO_x emissions from automotive diesel engines. *Catalyst Today* 59:335–345
- Kolli T, Kanerva T, Huuhtanen M, Vippola M, Kallinen K, Kinnunen T, Lepisto T, Lahtinen J, Keiski R (2010) The activity of Pt/Al₂O₃ diesel oxidation catalyst after sulphur and calcium treatments. *Catal Today* 154:303–307
- Krzyzanowski M, Kuna-Dibbert B, Schneider J (2005) Health effects of transport-related air pollution. WHO, Denmark
- Kuki T, Miyairi Y, Kasai Y, Miyazaki M, Miwa S (2004) Study on reliability of wall-flow-type diesel particulate filter. SAE, 2004-01-0959
- Lamharess N, Millet CN, Starck L, Jeudy E, Lavy J, Costa PD (2011) Catalysed diesel particulate filter: study of the reactivity of soot arising from biodiesel combustion. *Catal Today* 176:219–224
- Lee SJ, Jeong SJ, Kim WS, Lee CB (2008) Computational study on the effects of volume ratio of DOC/DPF and catalyst loading on the PM and NO_x emission control for heavy-duty diesel engines. *Int J Automot Technol* 9:0–11
- Lee T, Park J, Kwon S, Lee J, Kim J (2013) Variability in operation-based NO_x emission factors with different test routes, and its effects on the real-driving emissions of light diesel vehicles. *Sci Total Environ* 461–462:377–385
- Levitus S, Antonov JI, Boyer TP, Baranova OK, Garcia HE, Locarnini RA, Mishonov AV, Reagan JR, Seidov D, Yarosh ES, Zweng MM (2012) World ocean heat content and thermohaline sea level change (0–2000 m), 1955–2010. *Geophys Res Lett* 39:110603
- Lewtas J (2007) Air pollution combustion emissions: characterization of causative agents and mechanisms associated with cancer, reproductive, and cardiovascular effects. *Mutat Res Rev Mutat Res* 636:95–133
- Li Y, Ye W, Wang M, Yan X (2009) Climate change and drought: a risk assessment of crop-yield impacts. *Clim Res* 39:31–46
- Linde DR (2007) CRC handbook of chemistry and physics, 87th edn. Taylor & Francis, Boca Rato
- Lindley AA, McCulloch A (2005) Regulating to reduce emissions of fluorinated greenhouse gases. *J Fluorine Chem* 126:1457–1462
- Lloyd AC, Cackette TA (2001) Diesel engines: environmental impact and control. *J Air Waste Manag Assoc* 51:809–847
- Lopez JM, Jimenez F, Aparicio F (2009) On-road emissions from urban buses with SCR + Urea and EGR + DPF systems using diesel and biodiesel. *Transp Res Part D* 14:1–5
- Majewski WA, Khair MK (2006) Diesel emissions and their control. SAE International, Warrendale. ISBN 10: 0-7680-0674-0

- Maricq MM (2007) Chemical characterization of particulate emissions from diesel engines: a review. *Aerosol Sci* 38:1079–1118
- McKechnie AE, Wolf BO (2010) Climate change increases the likelihood of catastrophic avian mortality events during extreme heat waves. *Biol Lett* 6:253–256
- Metts TA, Batterman SA, Fernandes GI, Kalliokosi P (2005) Ozone removal by diesel particulate matter. *Atmos Environ* 39:3343–3354
- Meyssignac B, Cazenave A (2012) Sea level: a review of present-day and recent-past changes and variability. *J Geodyn* 58:96–109
- Michael RA, Kleinman MT (2000) Incidence and apparent health significance of brief airborne particle excursions. *Aerosol Sci Technol* 32:93–105
- Moreno-Tost R, Oliveira MS, Eliche-Quesada D, Jiménez-Jiménez J, Jiménez-López A, Rodríguez-Castellón E (2008) Evaluation of Cu-PPHs as active catalysts for the SCR process to control NO_x emissions from heavy duty diesel vehicles. *Chemosphere* 72:608–615
- Ng JH, Ng HK, Gan S (2010) Advances in biodiesel fuel for application in compression ignition engines. *Clean Technol Environ Policy* 12:459–493
- Oh TY, Ko JH, Seong HJ, Min BS (2004) Design optimization of the mixing chamber in SCR system for marine diesel engine. In: 6th international symposium on diagnostics and modeling of combustion in internal combustion engines 6, pp 87–92
- Ohno K, Taoka N, Furuta T, Kudo A, Komori T (2002) Characterization of high porosity SiC-DPF. *SAE*, 2002-01-0325
- Oliveira MLM, Silva CM, Moreno-Test R, Farias TL, Jimenez-Lopez A, Rodriguez-Castellon E (2011) Modelling of NO_x emission factors from heavy and light-duty vehicles equipped with advanced aftertreatment systems. *Energy Convers Manag* 52:2945–2951
- Olivier JGJ, Maenhout GJ, Peters JAHW (2012) Trends in global CO₂ emissions-2012 report. Netherlands Environmental Assessment Agency, Hague
- Organisation for Economic Co-Operation and Development (OECD) (2002) Strategies to reduce greenhouse gas emissions from road transport: analytical methods. OECD, Paris
- Organisation for Economic Co-Operation and Development (OECD) (2011) Environmental outlook to 2050—climate change chapter
- Payri F, Bermudez VR, Tormos B, Linares WG (2009) Hydrocarbon emissions speciation in diesel and biodiesel exhausts. *Atmos Environ* 43:1273–1279
- Prasad R, Bella VR (2010) A review on diesel soot emission, its effect and control. *Bull Chem React Eng Catal* 5(2):69–86
- Raub JA (1999) Health effects of exposure to ambient carbon monoxide. *Chemosphere: global change. Science* 1:331–351
- Sampara CS, Bissett EJ, Chmielewski M, Assanis D (2007) Global kinetics for platinum diesel oxidation catalysts. *Ind Eng Chem Res* 46:7993–8003
- Sarvi A, Lyyranen J, Jokiniemi J, Zevenhoven R (2011) Particulate emissions from large-scale medium-speed diesel engines: 1. Particle size distribution. *Fuel Process Technol* 92:1855–1861
- Saxena AK (2009) Greenhouse gas emissions—estimation and reduction. Asian Productivity Organization, India
- Schaber P, Colson J, Higgins S, Thielen D, Anspach B, Brauer J (2004) Thermal decomposition (pyrolysis) of urea in an open reaction vessel. *Thermochim Acta* 424:131–142
- Shan W, Liu F, He H, Shi X, Zhang C (2012) An environmentally-benign CeO₂-TiO₂ catalyst for the selective catalytic reduction of NO_x with NH₃ in simulated diesel exhaust. *Catal Today* 184:160–165
- Sharma M, Agarwal AK, Bharathi KV (2005) Characterization of exhaust particulates from diesel engine. *Atmos Environ* 39:3023–3028
- Shost M, Noetzel J, Wu M-C, Sugiarto T, Bordewyk T, Fulks G, Fisher GB (2008) Monitoring, feedback and control of urea SCR dosing systems for NO_x reduction: utilizing an embedded model and ammonia sensing. *SAE World Congress*, 2008-01-1325
- Sivaloganathan S (1998) Case report: death from diesel fumes. *J Clin Forensic Med* 5:138–139
- Sluder SC, Storey J, Lewis S, Lewis L (2005) Low temperature urea decomposition and SCR performance. *SAE technical paper*, 2005-01-1858
- Stanculescu M, Charland JP, Kelly JF (2010) Effect of primary amine hydrocarbon chain length for the selective catalytic reduction of NO_x from diesel engine exhaust. *Fuel* 89:2292–2298
- Stanmore BR, Brilhac JF, Gilot P (2001) The oxidation of soot: a review of experiments, mechanisms and models. *Carbon* 39:2247–2268
- Strauss S, Wasil JR, Earnest GS (2004) Carbon monoxide emissions from marine outboard engines. Society of Automotive Engineers, 2004-32-0011
- Sun WH, Boyle JM, Carmignani PG, Sassenrath JM (2001) Small scale test results from new selective catalytic NO_x reduction process using urea. MEGA Symposium, Chicago
- Sydbom A, Blomberg A, Parnia S, Stenfors N, Sandstrom T, Dahlen SE (2001) Health effects of diesel exhaust emissions. *Eur Respir J* 17:733–746
- The Potsdam Institute for Climate Impact Research and Climate (2012) Turn down the heat: Why a 4°C warmer world must be avoided. The World Bank, Washington
- Tighe CJ, Twigg MV, Hayhurst AN, Dennis JS (2012) The kinetics of oxidation of diesel soots by NO₂. *Combust Flame* 159:77–90
- Tsuneyoshi K, Yamamoto K (2012) A study on the cell structure and the performances of wall-flow diesel particulate filter. *Energy* 48:492–499
- Venkataraman SV, Iniyar S, Goic R (2012) A review of climate change, mitigation and adaptation. *Renew Sustain Energy Rev* 16:878–897
- Walsh MP (2011) Mobile source related air pollution: effects on health and the environment. *Encyclopedia of Environ Health* 3:803–809
- Wang TJ, Baek SW, Lee JH (2008) Kinetic parameter estimation of a diesel oxidation catalyst under actual vehicle operating conditions. *Ind Eng Chem Res* 47:2528–2537
- Wang X, Wasterdahl D, Jingnan H, Wu Y, Yin H, Pan X, Zhang KM (2012) On-road diesel vehicle emission factors for nitrogen oxides and black carbon in two Chinese cities. *Atmos Environ* 46:45–55
- Way P, Viswanathan K, Preethi P, Gilb A, Zambon N, Blaisdell J (2009) SCR performance optimization through advancements in aftertreatment packaging. *SAE-Worldcongress*, 01-0633
- Wei Z, Jiangming M, Yunting F, Xiankai L, Hui W (2008) Effects of nitrogen deposition on the greenhouse gas fluxes from forest soils. *Acta Ecol Sin* 28(5):2309–2319
- Whichmann HE (2006) Environmental pollutants: diesel exhaust particles. *Encyclopedia Respir Med* 1:96–100
- Wiebenga MH, Kim CH, Schmiege SJ, Oh SH, Brown DB, Kim DH, Lee JH, Peden CHF (2012) Deactivation mechanisms of Pt/Pd-based diesel oxidation catalysts. *Catal Today* 184:197–204
- World Health Organization (2007) Estimated deaths & DALYs attributable to selected environmental risk factors, by WHO member state. Department of Public Health & Environment
- Wu CW, Chen RH, Pu JY, Lin TH (2004) The influence of air–fuel ratio on engine performance and pollutant emission of an SI engine using ethanol–gasoline-blended fuels. *Atmos Environ* 38:7093–7100
- Xu L, McCabe RW (2012) LNT + in situ SCR catalyst system for diesel emissions control. *Catal Today* 184:83–94
- Yim SD, Kim SJ, Baik JH, Nam IS, Mok YS, Lee JH, Cho BK, Oh SH (2004) Decomposition of urea into NH₃ for the SCR Process. *Ind Eng Chem Res* 43:4856–4863

- York APE, Ahmadinejad M, Watling TC, Walker AP, Cox JP, Gast J, Blakeman PG, Allansson R (2007) Modeling of the catalyzed continuously regenerating diesel particulate filter (CCR-DPF) system: model development and passive regeneration studies. Society of Automotive Engineers, 2007-01-0043
- Yu BK, Kim MY (2013) Modeling the selective catalytic reduction of NO_x by ammonia over a Vanadia-based catalyst from heavy duty diesel exhaust gases. *Appl Therm Eng* 50:152–158
- Zervas E (2008) Impact of different configurations of a diesel oxidation catalyst on the CO and HC tail-pipe emissions of a Euro 4 passenger car. *Appl Therm Eng* 28:962–966
- Zheng M, Banerjee S (2009) Diesel oxidation catalyst and particulate filter modeling in active-flow configurations. *Appl Therm Eng* 29:3021–3035
- Zheng M, Mulenga MC, Reader GT, Wang M, Ting DS, Tjong J (2008) Biodiesel engine performance and emissions in low temperature combustion. *Fuel* 87:714–722
- Zhu L, Cheung CS, Zhang WG, Fang JH, Huang Z (2013) Effects of ethanol-biodiesel blends and diesel oxidation catalyst (DOC) on particulate and unregulated emissions. *Fuel* 113:690–696