

1
2
3
4
5
6
7
8
9
10
11
12

This is the first revision of an original submission that lead to the journal article

The Role of In-Use Stocks in the Social Metabolism and in Climate Change Mitigation

by

Stefan Pauliuk

and Daniel B. Müller

published in Global Environmental Change

The published version of the article including its correct citation can be found under

<http://dx.doi.org/10.1016/j.gloenvcha.2013.11.006>

13
14 First revision for *Global Environmental Change*
15

16
17 **The Role of In-Use Stocks in the Social Metabolism and in Climate Change Mitigation**
18

19
20
21 Word count: 8167 (without references). Word limit: 8000.
22

23 **Abstract**

24 In-use stocks in form of buildings, infrastructure, and products play a central role in the
25 social metabolism as they link service provision to energy and material throughput. The
26 transition to a low-carbon energy future requires substantial transformation of existing in-
27 use stocks over time. In-use stocks and their dynamics are not consistently considered in the
28 major assessment tools life cycle assessment, input-output analysis, and integrated
29 assessment modeling.

30 We included direct and indirect energy demand and greenhouse gas emissions into state-of-
31 the-art dynamic stock models, and applied the new modeling framework to three case
32 studies in the major sectors transportation (passenger cars in China), buildings (dwellings in
33 Norway), and industry (the global steel cycle). We investigated how substantial greenhouse
34 gas emissions reductions could be achieved by decoupling the service provided by in-use
35 stocks from energy and material throughput. We considered energy efficiency, material
36 efficiency, and moderate lifestyle changes.

37 In the case of steel and dwellings, the emissions reduction potential was so large that the
38 sectoral and national benchmarks developed for the 2°C climate target could be reached by
39 decoupling only. The combined emissions reduction potential of supply side measures and
40 stock decoupling may be higher than what is needed to reach the 2°C target, which makes it
41 easier to consider other objectives than mere emissions reduction. Decoupling may
42 therefore revitalize the debate about sustainable development because it allows us to
43 loosen the focus on climate change mitigation and put more weight on the economic, social,
44 cultural, and other environmental aspects of sustainability.

45
46
47 **Keywords:** Climate change mitigation; Decoupling; In-use stocks; Social metabolism;
48 Sufficiency; Material flow analysis;
49
50
51
52
53
54
55

56 1) Introduction

57 1.1) The transition to a new metabolic regime

58 Man dominates Earth, human activities reach the physical boundaries set by our planet, and
59 human impacts started transforming the global environment (Barnosky et al., 2012; IPCC,
60 2007a; Rockström et al., 2009). Examples reported in the above-cited papers include species
61 extinction; desertification; land transformation; human interference with the nitrogen cycle;
62 and climate change. Global physical constraints require a new paradigm for resource use and
63 emissions; the transition from the ‘cowboy economy’ to the ‘spaceman economy’ is a
64 prominent example (Boulding, 1966). Other stakeholders call for an ‘energy technology
65 revolution’, which aims at incorporating a new paradigm into energy supply but not the rest
66 of the economy (OECD/IEA, 2008), or ‘sustainable development’ (World Commission on
67 Environment and Development, 1987).

68 To anticipate future challenges related to global physical boundaries and to design
69 mitigation and adaptation strategies, one requires a model framework to study the
70 interactions between human activities, the associated energy and material requirements,
71 and the planetary boundary layer from a systems perspective. This framework is called the
72 *anthropogenic, socio-economic, or social metabolism*, and based on previous work (Ayres
73 and Simonis, 1994; Baccini and Brunner, 1991; Fischer-Kowalski and Huttler, 1999; Fischer-
74 Kowalski, 1999; Fischer-Kowalski, 1997), it can be defined as *the set of all anthropogenic*
75 *flows, stocks, and transformations of physical resources and their respective dynamics*
76 *assembled in a systems context*. Climate change mitigation and other global environmental
77 challenges may require modern societies to transform their social metabolism as radically as
78 during the shift from agrarian to fossil-fuel based industrialized societies. Such
79 transformation is called *socio-metabolic transition or shift between socio-metabolic regimes*
80 (Fischer-Kowalski, 2011; Haberl et al., 2011; Krausmann, 2011; Krausmann et al., 2008).

81

82 1.2) The role of in-use stocks in the social metabolism

83 Increasing human well-being by alleviating global poverty is a central pillar of development
84 policy (UN, 2013). Human well-being includes use of physical services such as food, shelter,
85 and transport, whose provision relies on products, industries, and infrastructure, which can
86 be described in the framework of social metabolism. The latter allows us to understand the
87 link between the provision of physical services and resource use and environmental impacts.
88 Many physical services within society are provided by *in-use stocks* in form of products,
89 buildings, factories, or infrastructure. These stocks are actively used by households,
90 governments, the public, or industries, over a certain time span to satisfy service demand
91 and to facilitate industrial production (Baccini and Brunner, 1991; Boulding, 1966). In-use
92 stocks as we conceive them are a subset of fixed assets as defined in the European Standard
93 Accounts (OECD, 2003). They comprise the “built environment (infrastructure and buildings)
94 and artifacts (machinery and durable consumer goods)” (Fischer-Kowalski, 2011). Together
95 with humans, livestock, and other domestic animals, in-use stocks form the totality of stocks
96 in the social metabolism (Fischer-Kowalski and Weisz, 1999; Fischer-Kowalski, 2011). In-use
97 stocks can be split by product type (cars, buildings, roads, furnaces, etc.) or by end-use
98 sector (private, governmental, public, and industrial). In-use stocks in industrial sectors are

99 usually termed fixed capital (monetary units) or fixed assets (physical units) (European
100 Commission, 2008). The role of in-use stocks in the social metabolism is manifold, and the
101 following list provides a first overview, which is neither comprehensive nor definitive.

102

103 • **‘Service Suppliers’: In-use stocks provide service to end-users and industries:** Major
104 human activities such as residing, working, transportation, and communication
105 require in-use stocks such as buildings, cars, factories, and machines for their
106 function. In-use stocks can serve as measure of physical service (e.g., car ownership
107 and living space per person), and the stock level in industrialized countries can serve
108 as *benchmark* for future development in other regions (Müller et al., 2011).

109 • **‘Capital Containers’ and ‘Resource Repositories’: In-use stocks represent large
110 monetary investments and material stocks.** A substantial fraction of economic
111 output is devoted to building up and maintaining in-use stocks. Stocks link services
112 such as shelter or mobility to economic activity.

113 • **‘Dynamics Determiners’: In-use stocks determine the long-term dynamics of the
114 social metabolism:** Stocks have a slow turnover in many sectors. For example, blast
115 furnaces in the steel industry can reach a lifetime of up to 100 years (Riden and
116 Owen, 1995). This poses constraints to how quick new technologies can replace old
117 ones. The availability of post-consumer scrap for recycling is to a large extent
118 determined by the retirement rate of in-use stocks (Van der Voet et al., 2002).

119 • **‘Wealth Watchers’: The size of in-use stocks represents a different perspective on
120 human wealth that may complement flow-based affluence measures such as GDP.**
121 The suitability of economic throughput indicators such as GDP as measure of human
122 well-being was criticized by several authors (Goossens et al., 2007; Jackson, 2009;
123 UNDP, 2010). In a physically constrained economy, throughput is precious and should
124 be minimized rather than maximized, and maintenance of stocks becomes the
125 central purpose of economic activity (Boulding, 1966). The stock level measures how
126 much physical capital a society has built up; information that is complementary to
127 throughput measures such as GDP.

128 • **‘Consumption Couplers’: The physical properties of in-use stocks link the provision
129 of service to energy and material throughput.** In the example of a passenger vehicle,
130 the product parameters engine efficiency, mass, area cross-section, and drag
131 coefficient determine the coupling between kilometers travelled and fuel
132 consumption.

133 • **‘City Shapers’: The spatial arrangement of built environment stocks in human
134 settlements has strong influence on urban density, accessibility, transport distance,
135 and choice of transport mode.** Urban stocks as constituents of the urban fabric have
136 been an object of research for some time (Brunner and Rechberger, 2004; Kennedy
137 et al., 2007) and determining the location and function of stocks is an integral part of
138 urban design.

139

140

141

142 **1.3) How in-use stocks are reflected in current models of the social metabolism**

143 Material and substance flow analysis (MFA and SFA) as well as material flow accounting
144 recognize in-use stocks as important element of the social metabolism. Additions to in-use
145 stocks enter the mass balance of a process and therefore they have to be considered in
146 mass-balanced systems. Static MFA studies, typically with a sampling period of one year,
147 have been published for more than 20 years, e.g., (Baccini and Brunner, 1991; Baccini and
148 Bader, 1996; Graedel et al., 2004; Rechberger and Graedel, 2002). Some studies contain
149 more than one layer, e.g., the material and the economic layer (Kytzia et al., 2004; Nathani,
150 2009). Dynamic stock models (Baccini and Bader, 1996; Müller, 2006; van der Voet et al.,
151 2002) are central in dynamic MFA, and models that calculate entire material cycles from
152 exogenous assumptions on population, the size of in-use stocks, and lifetime were applied to
153 the building sector (Bergsdal et al., 2007; Müller, 2006; Pauliuk et al., 2013b), passenger
154 vehicles (Pauliuk et al., 2012), and the steel sector (Hatayama et al., 2010; Pauliuk et al.,
155 2013a). A systematic discussion about how to assess indirect impacts and emissions of MFA
156 systems with dynamic stocks is lacking, however.

157 In process-based life cycle assessment (LCA) the reference flow includes the products
158 required to realize a given functional unit, and physical process inventories are used to
159 determine the inputs and outputs required to build up, operate, maintain, and dispose of
160 the products contained in the reference flow (EU JRC, 2010). An LCA provides a detailed and
161 specific assessment of individual products, which are part of the in-use stock while being
162 used. Due to their small-scale scope, LCA studies yield no information on total resource use
163 and emerging system-wide properties such as the potential for material recycling and the
164 total service level required.

165 Static input-output modeling does not consider in-use stocks with the end-users as drivers of
166 energy and material demand, the dynamics and requirements of stocks are reflected only
167 indirectly in the final demand vector (Miller and Blair, 2009). The addition to capital stock,
168 the so-called gross fixed capital formation, comprises investment flows to industrial assets
169 and residential buildings and is part of the final demand (European Commission, 2008). Only
170 the technical coefficients of industrial in-use stocks are modeled in form of the A-matrix, but
171 not their dynamics and material content. Both static and dynamic IO models can be closed
172 for capital demand and service (Duchin and Szyld, 1985; Lenzen and Treloar, 2005), which
173 allows for feeding back the product demand from capacity expansion into the model. These
174 models only consider additions to capital stocks as part of in-use stocks, but not the stocks
175 or their properties and dynamics themselves.

176 Integrated assessment modeling (IAM) and general equilibrium modeling (GCE) both contain
177 detailed models of productive capital stocks (Burfisher, 2011; Loulou et al., 2005). This is
178 necessary as these models endogenously determine supply curves using a detailed list of
179 different types and in some cases vintages of production facilities within each economic
180 sector. Especially technology-rich IAMs such as the TIMES-model (Loulou et al., 2005)
181 consider vintages and ageing of production assets and detailed process inventories. Material
182 stocks, however, are covered only inconsistently, if at all. The relation between material and

183 energy throughput, in-use stocks, and service provided to end-users is treated inconsistently
184 and cursory. An example is the steel industry extension of the POLES model, where
185 availability of post-consumer scrap is not limited by the dynamics of in-use stocks, but is
186 taken for granted (Hidalgo et al., 2003).

187 There is a lack of understanding of how the different roles of in-use stocks influence the
188 transition to a new metabolic regime. This is to a large extent a consequence of the cursory
189 treatment of in-use stocks and their dynamics in the different assessment models. A more
190 consistent and realistic treatment of in-use stocks in the different models of the social
191 metabolism would enable us to better understand the coupling between different human
192 activities, service provision, in-use stocks, and energy and material throughput. Ultimately,
193 this understanding would allow us to quantify the connection between human well-being
194 and resource use, recycling opportunities, waste generation and greenhouse gas emissions.

195 **Scope and research questions:**

196 To assess the long-term effect of specific emissions mitigation strategies related to in-use
197 stocks, one needs detailed models of product and material supply chains, account for
198 technological change on the process level, and track products through their useful life. We
199 chose to extend the framework of cohort-lifetime-based dynamic material flow analysis
200 (Baccini and Bader, 1996; Müller, 2006) to assess the direct and indirect resource demand
201 and emissions associated with building up, maintaining, disposing of, and recycling in-use
202 stocks (Pauliuk, 2013). Here the term 'direct' refers to emissions directly emitted by in-use
203 stocks, such as direct emissions from passenger cars, and 'indirect' refers to emissions that
204 occur elsewhere in the system. This modeling framework allows for much more detailed
205 representation of the social metabolism than the standard system definition of material flow
206 *accounting* (Fischer-Kowalski, 2011), and is in our opinion the natural choice for the
207 questions we worked on. We applied the model in a set of case studies on climate change
208 mitigation on the country- and sectoral level. We chose to focus on climate change
209 mitigation because of the significance and the high level of scientific understanding of
210 climate change (IPCC, 2007b; Rockström et al., 2009), that includes a quantitative correlation
211 between greenhouse gas emissions and temperature stabilization levels (Fisher et al., 2007),
212 and the sustained and unperturbed growth of anthropogenic greenhouse gas emissions
213 further into the unsustainable regime (Peters et al., 2012).

214 To demonstrate the importance of understanding in-use stock dynamics we focused our
215 assessment on strategies that reduce energy and material throughput while keeping the
216 service provided by in-use stocks constant. We call these *stock decoupling strategies*. These
217 include energy efficiency, material efficiency, moderate lifestyle changes, and combinations
218 thereof. We focused on three specific cases of emissions abatement in the major sectors
219 buildings, transportation, and industry.

220

221

222

223

224 We formulated the following research questions:

225

226 1) How can existing dynamic stock models be modified and extended to assess climate
227 change mitigation strategies that decouple the physical service provided by in-use
228 stocks from energy and material throughput?

229

230 2) Are the emissions reductions from decoupling energy and material from physical
231 service provided by in-use stocks sufficient to limit global warming to 2°C in the
232 transport sector (focus on passenger vehicles in China), the dwelling sector (focus on
233 dwellings in Norway), and the global steel industry?

234

235 3) What are the consequences of such transition scenarios for the industrial
236 metabolism of the sectors and countries involved?

237 In section 2 we provide an overview of our choice of methodology, a systematic allocation of
238 different impact mitigation options in the framework of the socio-economic metabolism, and
239 an approach for benchmarking emissions reductions in a particular country and sector
240 against global emissions reduction targets (question 1). We introduce the three case studies.
241 In section 3 we present and assess the case-study specific strategies for emissions mitigation
242 by decoupling provision of physical services from throughput (questions 2 and 3). In section
243 4 we discuss how better modeling of the properties and dynamics of in-use stocks would
244 enhance our understanding of greenhouse gas emissions reduction in particular and the
245 potential next social-metabolic transition in general.

246

247 **2) Methodology**


248 **2.1) Model framework**

249 The system definition of our modeling framework is shown in Figure 1. We use the size of in-
250 use stocks, such as dwelling area, and the physical flows they enable, such as kilometers
251 driven, as proxy for the physical service that in-use stocks provide to humans. To reflect the
252 central role of in-use stocks in the socio-economic metabolism we chose a dynamic stock
253 model to be at the model core (Part A in Figure 1). Unlike flow-driven dynamic stock models
254 that do not quantify the link between stocks and service (Baccini and Bader, 1996; Brattebø
255 et al., 2009; van der Voet et al., 2002), the model as it is used here is stock-driven, which
256 means that we used the exogenous *stock* drivers population, stock per capita, and lifetime,
257 to determine the *flows* of final demand and supply of end-of-life products (Elshkaki, 2005;
258 Müller, 2006; Müller et al., 2004, Müller et al., 1998; Pauliuk, 2013; Sandberg and Brattebø,
259 2012). Different *vintages* or *cohorts* are tracked over time and according to the level of detail
260 required, the cohorts can be sub-divided into different product types or technologies such as
261 passenger cars of different segments or drive technologies. The dynamic stock model tracks
262 the material content and the specific use phase energy demand for each product type and

263 cohort. Total energy and material throughput is determined by multiplying the specific
264 requirements by utilization parameters such as the number of kilometers driven every year.

265 The material flow system (Part B in Figure 1) contains the industrial processes required to
266 supply products and materials to the end-user and to process post-consumer waste flows. It
267 is driven by final demand and waste supply determined by the dynamic stock model. Main
268 features of the model include the mass balance for all processes and the product balance for
269 the use phase, the inclusion of material recycling loops, and a linear response of industry
270 output to final demand and scrap supply. The different processes are described by technical
271 parameters, which may change over time. Model parts A and B together form a material
272 flow analysis (MFA) model of the anthropogenic cycles of the products or materials studied,
273 similar to previous MFA work (Mao et al., 2008; Müller et al., 2006).

274 The different industrial processes in the MFA system rely on the supply of energy and
275 ancillary inputs for their operation, which are supplied by processes beyond the boundary of
276 the material and product foreground (Part C in Figure 1). A systematic assessment of the
277 impact of flows from the industry background is a common task in life cycle assessment (EU
278 JRC, 2010) and environmentally extended input-output analysis (Leontief, 1970; Miller and
279 Blair, 2009), and both techniques are suitable to complement the estimation of direct
280 impacts from the use phase (system A) and the system for manufacturing of goods, material
281 production, and recycling (B). For the case studies presented below we compiled energy
282 demand and case-study-specific ancillary supply from systems A and B into a final demand
283 vector Y and scaled up existing impact assessment studies (LCAs) to meet the demand of
284 each item listed in Y . Special care regarding the choice of system boundaries and allocation
285 assumptions has to be taken when referring to existing impact assessments. This applies to
286 the appropriate choice of regional specification, potential double-counting between the sub-
287 systems A, B and C, and a harmonized allocation of impacts from by-products and recycling
288 between systems B and C. These issues and the corresponding choices are specific for each
289 case study and are discussed in Pauliuk (2013).

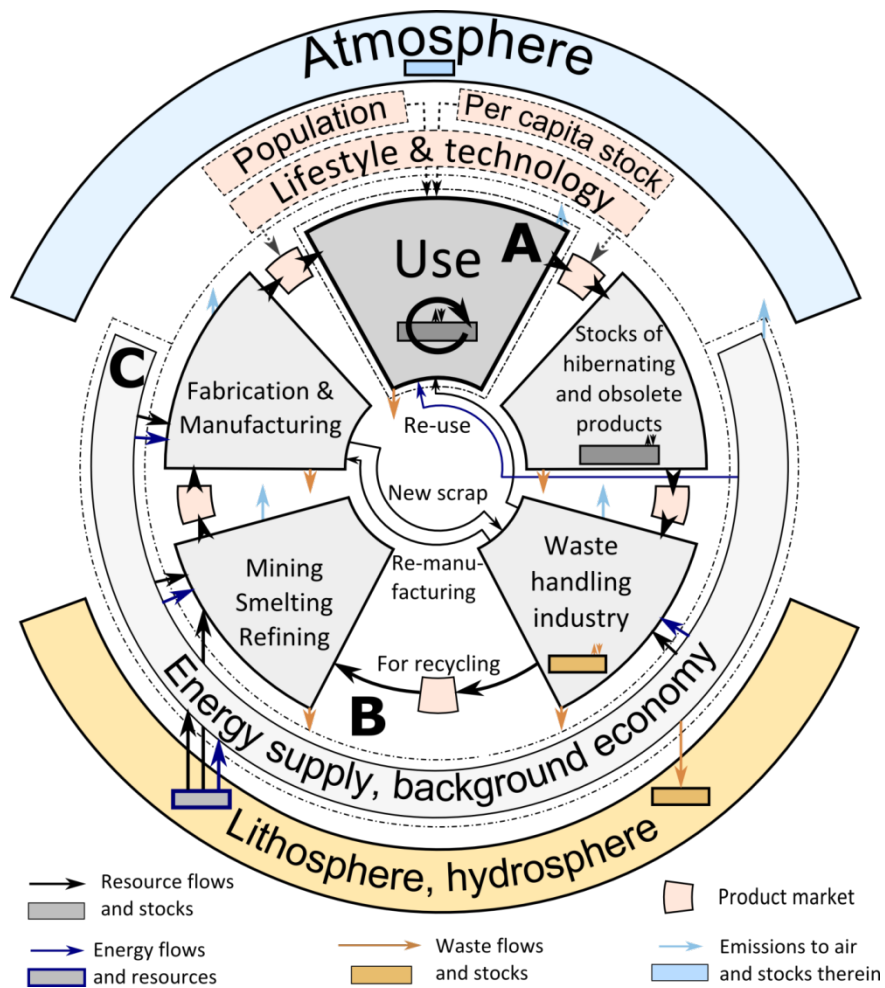

290
291

292 **Figure 1.** System definition with key exogenous drivers of the socio-economic metabolism
 293 (light red, dashed). System parts: A: dynamic model of in-use stock; B: material and product
 294 foreground system; C: energy supply and ancillary inputs to material production.
 295

296 The system in Figure 1 allows us to systematically locate the different emissions mitigation
 297 options in the socio-economic metabolism. Table 1 contains a list starting with reduction
 298 measures for the external drivers population (1) and service level (2), including more intense
 299 use of existing stocks, e.g., through a higher occupancy rate of passenger cars. The list
 300 continues with so-called *hybrid strategies* that combine technological solutions with
 301 alternate products and different user behavior and expectations ((3), examples shown in
 302 Table 1), energy efficiency in the use phase (4) and industry (5), material efficiency in the
 303 industry (6), lower carbon intensity of energy supply (7), and geo-engineering strategies (8).

304
305
306

307 **Table 1:** Classification of different GHG emission abatement measures based on the system
 308 in Figure 1 and mitigation strategies used for scenario development in the three case
 309 studies. The abbreviations in brackets are used in Figure 2.

No.	Measure, reference, location in system (Fig. 1)	Passenger cars in China	Dwellings in Norway	The global steel cycle
1	Reduce population (Hardin, 1968; Malthus, 1798), Exogenous driver	Not considered	Not considered	Not considered
2	Reduce service levels or intensify use of existing stocks and keep service level, exogenous driver and use phase (A)	Fewer cars per capita (C) Lower annual kilometrage (K)	More persons per dwelling Lower heated floor area per dwelling	More intense use
3	Decouple affluence from material and energy throughput via technology and lifestyle (' <i>hybrid strategies</i> ') (keep service level), Use phase (A)	Share of micro cars (T)	Share of passive houses in new construction Share of passive renovation in total renovation Energy consumption for domestic hot water generation Energy consumption by appliances Renovation rate Demolition rate	Light-weighting of products Lifetime extension of products Re-use of products
4	Decouple affluence from material and energy throughput via technology (keep service level), Use phase (A)	Fuel consumption per 100 km (F)	Heating energy demand Share of different heating systems	Considered under hybrid strategies
5	Decouple: Energy efficiency industry, Upstream processes (B, C)	Not considered	Not considered	Energy efficiency industry
6	Decouple: Material efficiency industry (Allwood et al., 2011), Upstream processes (B, C)	Not considered	Not considered	Fabrication yield improvement Fabrication scrap diversion
7	Decouple energy supply from carbon, Upstream processes (B, C)	Not considered	Not considered	Not considered
8	Geo-engineering: CO ₂ removal Upstream processes (B, C), partly beyond system boundary	Not considered	Not considered	Not considered

310

311 2.2) Introduction of case studies

312 To demonstrate how the size, the lifetime, and the physical properties of in-use stocks
 313 determine energy and material throughput in different sectors we conducted three case
 314 studies for the sectors transport, buildings, and industry, which accounted for 23%, 33%, and
 315 36% of global energy- and process-related greenhouse gas emissions in 2006, respectively
 316 (Allwood et al., 2010). To understand the mitigation options associated with a growing car
 317 stock, we studied direct emissions from passenger cars in China (Pauliuk et al., 2012). We
 318 then focused on direct and indirect emissions from building, operating, and demolishing
 319 residential buildings in Norway (Pauliuk et al., 2013b) to quantify the energy savings
 320 potential in a country where passive house standard may soon become mandatory for new
 321 buildings (Arnstad, 2010). Here a dynamic stock foreground model was combined with LCA
 322 studies on energy and material supply. Finally, we studied direct emissions and emissions
 323 from coking and electricity generation associated with the global steel industry (Milford et
 324 al., 2013; Pauliuk et al., 2013a), which is the largest industrial source of greenhouse gas

325 emissions and accounts for 25% of industrial carbon emissions (Allwood et al., 2010). Here
326 we combined a dynamic stock model for steel with an MFA model of the steel industry, and
327 LCA studies for energy supply. The complete model approaches, including all equations, data
328 sources, and data processing, documentation of assumptions, are reported in the respective
329 journal papers and their supplementary materials.

330 In the case studies we examined how the service provided by in-use stocks can be decoupled
331 from material and energy throughput (options (2)-(6) in Table 1). Hence, not all options in
332 Table 1 were considered. This shall demonstrate to what extent emissions can be reduced by
333 using in-use stocks more efficiently. Lower carbon emissions are only one environmental
334 benefit of these strategies; throughput reduction leads to lower industrial emissions in all
335 impact categories as well as lower use of mineral resources.

336 **2.3) Parameter choice and scenario definition:**

337 To assess the emissions reduction potential of the different strategies we developed a set of
338 scenarios for each case study. For each model parameter we investigated plausible
339 development under business-as-usual conditions and alternative development under the
340 assumption that industry and society aim at effective emissions mitigation in line with 2°C
341 target, as laid out by the IPCC Fourth Assessment report (Fisher et al., 2007). The parameter
342 choices for the mitigation scenarios are based on the comparison of stock levels between
343 different industrialized countries, case studies, prototypes, or best available technology.
344 They are documented in the respective journal articles. Here, we compare selected scenarios
345 and present them in wedge form: First, we considered energy and material efficiency
346 (categories (4)-(6) in Table 1), then hybrid strategies (3) *in addition*, and finally, service
347 reduction or more intense use (2) *in addition* to the previous measures. For passenger cars in
348 China (Pauliuk et al., 2012), next to the baseline, we included higher fuel efficiency, a change
349 to a fleet of mostly micro cars as hybrid strategy, and lower annual kilometrage and car
350 ownership as service level reduction strategies. The latter can be compensated for by
351 increasing the vehicles' occupancy rate. For dwellings in Norway (Pauliuk et al., 2013b), we
352 selected from the publication the baseline (scenario 1), scenario 16 as efficiency strategy
353 (renovating the entire existing building stock to present energy standards by 2050),
354 scenarios 17 (renovating the entire existing building stock to passive house standard by
355 2050) and 25 (scenario 17 plus substantial energy savings for hot water generation, lighting,
356 and appliances) as hybrid strategies, and the bottom line (scenario 26, which is scenario 25
357 plus a lower dwelling area per person) for lifestyle changes. From the case study on steel
358 (Milford et al., 2013; Pauliuk et al., 2013a), we selected medium improvements in industrial
359 energy efficiency and material efficiency for the industry implemented by 2050 as efficiency
360 strategies, light-weighting, lifetime extension, and re-use as hybrid strategies, and more
361 intense use as lifestyle change. All parameter values were taken from the 'Energy Efficiency
362 – medium / Energy & Material Efficiency 2050' scenario in the original study, except that
363 here, we did not consider changes in the carbon intensity of the electricity supply, since this
364 strategy does not belong to the class of measures that decouple stocks from energy and
365 material throughput. Specific choices for energy mix, electricity mix, and carbon emissions

366 intensity of fuels were made for each case study and are documented in the respective
367 articles.

368 **2.4) Benchmarking of emissions reductions:**

369 To assess the sectoral and regional mitigation pathways and the resulting carbon footprint of
370 the system in Fig. 1 with respect to global warming targets, a benchmarking routine was
371 developed as till this day, there is no established international guideline for breaking down
372 emissions targets. We assessed sectoral emissions under the assumption that (i) the
373 correspondence between GHG emissions levels in 2050 and temperature stabilization levels
374 is as reported in Figure 3.38 in the IPCC Fourth Assessment Report (Fisher et al., 2007), (ii) in
375 2050, each individual is allocated the same share of global GHG emissions, and (iii) all sectors
376 are expected to reduce GHG emissions by the same percentage over the period 2010-2050.
377 We derived a set of emissions benchmarks for each temperature stabilization level, sector,
378 and country, by multiplying global energy- and process-related emissions of 2000 of 23.6
379 gigatonnes per year (UN Statistics Division, 2012) with the temperature-correlated changes
380 reported in Figure 3.38 in Fisher et al. (2007), the expected share of the country's population
381 in the 2050 world population (United Nations, 2011), and the 2006 sectoral split reported by
382 Allwood et al. (2010). We considered this assessment to be a purely technical step, as the
383 comparison with an average represents an unbiased performance measure. The assumption
384 of global contraction and convergence by 2050 (GCI, 2012) and a perspective of global equity
385 (UNFCCC, 1992) also leads to assumption (ii), which can therefore be seen as manifestation
386 of these two principles.

387 **2.5) Validity of scenario analysis**

388 The scenarios do not contain any predictions or forecasts of future development; they are
389 if-then stories that combine a set of parameter assumptions with a stock-driven model of
390 the social metabolism to assess the carbon footprint of a given sector. The scenarios were
391 intended to be realistic, however: Whenever possible, we referred to reference cases when
392 estimating the model parameters: This includes population scenarios from UN or IIASA (Lutz
393 et al., 2007; United Nations, 2011), data from industrialized countries with lower car
394 utilization (Pauliuk et al., 2012), case studies on light-weighting and re-use (Allwood et al.,
395 2012), building codes for passive and standard houses (Standards Norway, 2007), or case
396 studies on refurbishment to passive standard (Dokka and Klinski, 2009). The main
397 assumption behind the mitigation scenarios is that small scale and local strategies such as
398 the ones mentioned here can be scaled up to affect a significant share of final demand over
399 the next decades. Trade-offs between different strategies or rebound effects are difficult to
400 model, and only for the study on the global steel cycle, some corrections were made, as, for
401 example, lifetime extension impedes re-use due to increased wear and tear. For case studies
402 on dwellings and passenger cars, no such corrections were made.

403

404

405 3) Results

406 We first present the baseline emissions and then the mitigation wedges associated with
407 energy and material efficiency, hybrid solutions, and lifestyle changes for each case study
408 (question 2, Fig. 2), and then the throughput of passenger cars, dwelling space, and steel, to
409 build up and maintain the respective in-use stocks (question 3, Fig. 3).


410 3.1) Emissions reduction by stock decoupling (question 2)

411 Emissions from the Chinese passenger vehicle fleet can be expected to rise substantially as
412 car utilization continues to grow. For 2050, the baseline scenario reflects the typical car
413 ownership and use of industrialized countries at present. Large emissions reductions of
414 about one third of baseline emissions can be achieved by improved car design and engine
415 efficiency (from 6l/100km to 4 l/100km), as several case studies showed (blue wedge in Fig.
416 2a),(Volkswagen AG, 2010). A shift to a fleet of 67% micro cars would represent a trend
417 reversal, and could reduce baseline emissions by another 17% in 2050 (green wedge in Fig.
418 2a). The potential impact of lower car ownership (from 450/1000 to 300/1000) and
419 kilometrage (from 15000 km/yr to 12000 km/yr), as observed in some industrialized
420 countries, bears a reduction potential of about 25% of baseline emissions or about 50% of
421 the emissions corresponding to the bottom of the green wedge. The bottom line represents
422 a car fleet with the highest presently marketable fuel efficiency, a micro car share of 67%,
423 and a size and annual kilometrage that correspond to the lower present levels in South
424 Korea or Greece. If these emissions reductions represented the global average in 2050, the
425 corresponding level of global warming would be about 3°C. Less successful implementation
426 of the stock decoupling strategies would lead to even higher temperature benchmarks, and
427 a regime lower than 3°C could only be reached by accepting lower service levels or taking
428 additional supply-side measures such as a fuel shift or potentially bio-fuels.

429 Despite an anticipated growth of the Norwegian population of about one third between
430 2010 and 2050, the sectoral carbon footprint will decline slightly if the current building codes
431 are implemented for new and demolished buildings according to the current demolishing
432 rate of the dwelling stock of 0.6%/yr (Baseline in Fig. 2b),(Pauliuk et al., 2013b). We studied a
433 hypothetical refurbishment of the entire existing dwelling stock to either the current
434 building code (blue wedge) or passive house standard (blue + dark green wedge), and found
435 that for the latter scenario, ca. 30% of baseline emissions could be saved by 2050. The effect
436 of such a substantial intervention yielded surprisingly low emissions reductions. The reasons
437 for this are the growing population and the fact that the building code only includes targets
438 for reducing energy demand for space heating, and not for domestic hot water generation,
439 appliances and lighting. For passive houses, the share of space heating in total direct energy
440 consumption lies between 10 and 25% (Pauliuk et al., 2013b). The 2°C benchmark could only
441 be reached after reducing the energy footprint of hot water generation, appliances, and
442 lighting, and reducing the dwelling area per person by either reducing dwelling size or
443 increasing the number of persons per dwelling. This is illustrated by the light green wedge
444 and the red wedge in Figure 2b, respectively. The assumptions behind these two wedges are
445 not based on cases studies, however. Some of the wedges in Figure 2b exceed baseline

446 emissions before 2020 because upstream emissions from construction and construction
447 material production rise significantly during the transformation of the building stock. Policies
448 that focus on short-term reductions of sectoral emissions may therefore hinder the adoption
449 of strategies where a short-term increase in emissions is a necessary investment for
450 achieving long-term emissions savings. In Fig. 2b, the width of the red wedge is zero around
451 2043. This is because in the model, the turnover of the stock is proportional to the stock size.
452 Since the bottom line scenario includes lifestyle changes and hence a smaller stock than all
453 other scenarios, it takes a few years more to complete the transformation of the buildings of
454 the pre-2010 cohorts, and indirect emissions remain on a high level for these few years.

455 For the baseline scenario of the global steel industry, emissions will remain within the range
456 of 3-3.5 gigatonnes per year (Fig. 2c). Energy efficiency in the steel industry is already on a
457 high level, and the expected improvements over time would lead to a relatively small
458 reduction of about 14%. Material efficiency in the manufacturing sector bears an additional
459 reduction potential of 8%, but to achieve substantial emissions reductions from stock
460 decoupling, one would have to rely on light-weighting and more intense use of steel-
461 containing products. Combined with lifetime extension and re-use, material efficiency has
462 the potential to lower the carbon footprint of the sector to the 2°C benchmark even before
463 2040 (Fig. 2c). The rise in bottom line emissions after ca. 2035 is a result of the expected
464 growing steel demand in Africa, India, and developing Asia.

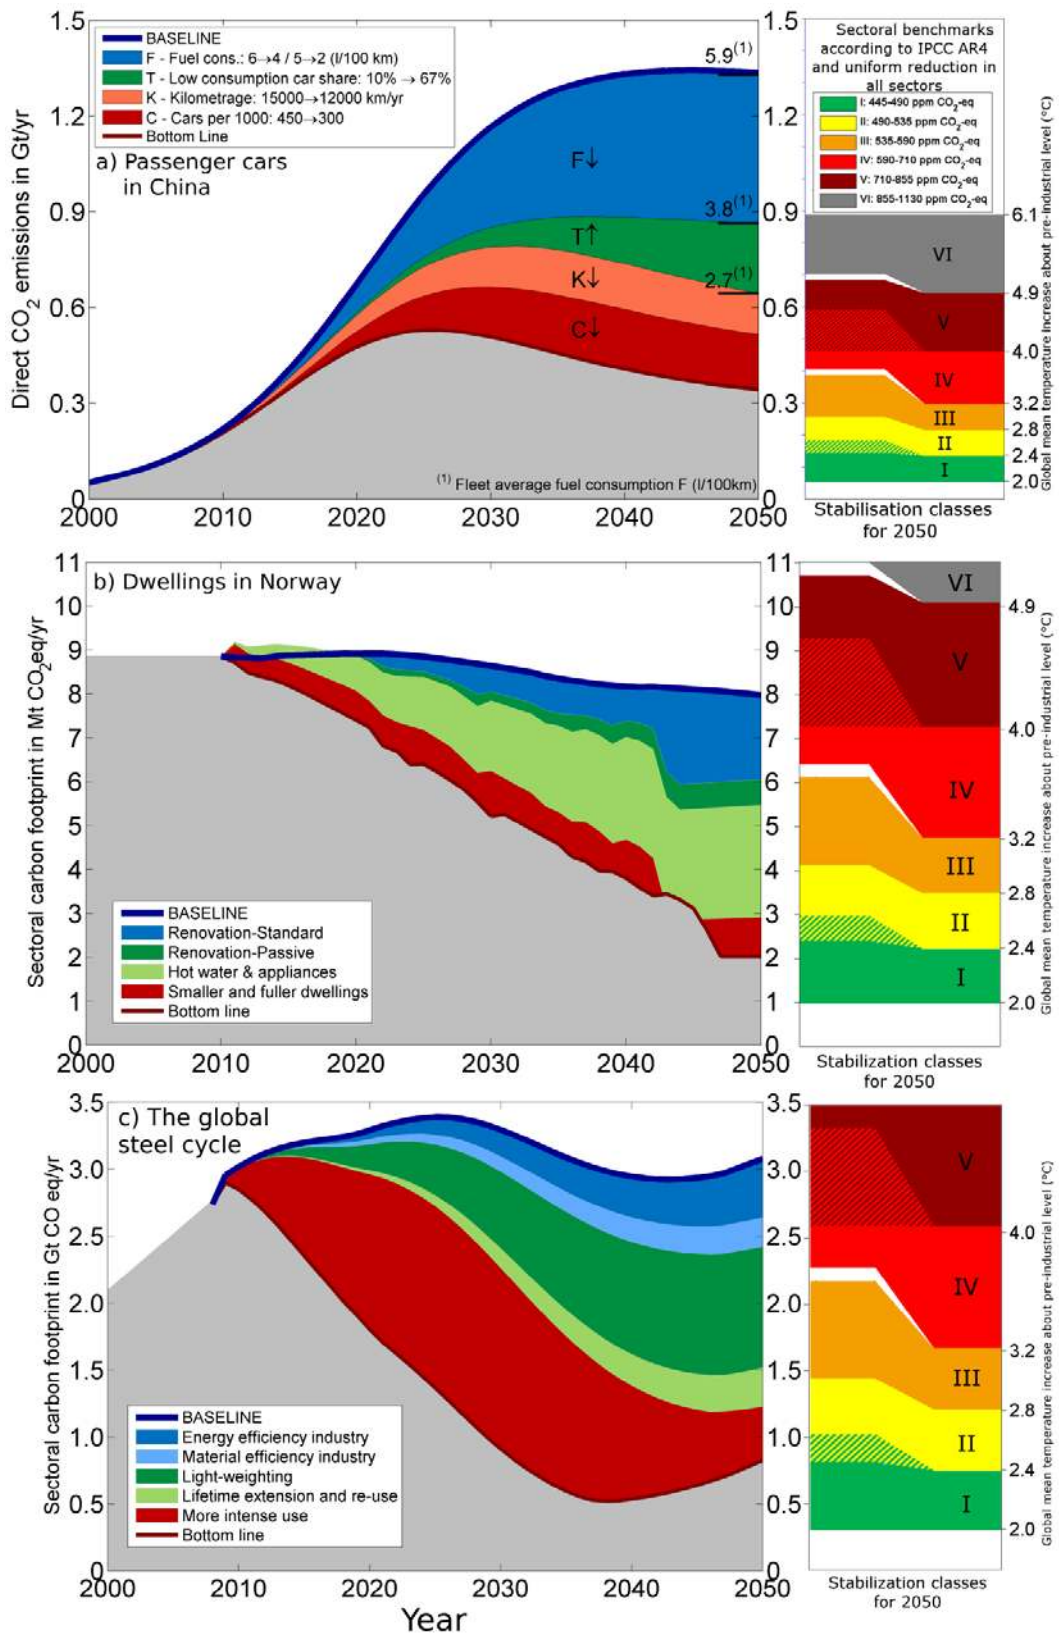

465


466 **Figure 2.** Emissions reduction scenarios by sector. Left side: blue wedges: efficiency, green
 467 wedges: hybrid solutions, red wedges: lifestyle changes. Right side: Correspondence
 468 between sectoral emissions and temperature stabilization benchmarks according to Figure
 469 3.38 in the IPCC Fourth Assessment Report (Fisher et al., 2007), assuming even per capita
 470 distribution of global emissions and a split between sectors as in 2006 (Allwood et al., 2010).
 471

472 3.2) Consequences of throughput reduction on industry production (question 3)

473 Next to the assessment of the carbon footprint in Figure 2, we studied the impact of the
474 stock decoupling strategies on throughput of passenger cars, building space, and steel (Fig.
475 3). Under business as usual assumptions, passenger car registration in China will rise from
476 the present 10 million units per year to about 40 million units per year (Fig 3a). Increased
477 fuel efficiency, a higher share of micro cars and lower annual kilometrage do not impact the
478 consumption of new vehicles (all represented by the blue lines in Fig. 3a), only a lower car
479 ownership (red lines in Fig. 3a) would reduce the need for new cars by about one third. The
480 flow of end-of-life vehicles follows the inflow with a delay of about 15 years, which is the
481 average lifetime of passenger cars.

482 For dwellings in Norway (Fig. 3b) the new construction will decrease by about 30% by 2050 if
483 one assumes that population growth slows down (Statistics Norway, 2011) and the dwelling
484 area per person levels out (Bergsdal et al., 2007) (solid blue line in Fig 3b). If people reduced
485 their living space by about 25% the demand for new dwellings could fall to zero by 2050
486 (solid red line in Fig. 3b). Under business-as-usual assumptions, the renovation showed a
487 slight, but steady increase due to the growing size of the dwelling stock (dashed blue line in
488 Fig. 3b). In the transformation scenarios, however, renovation activity would increase by a
489 factor of 3-4 over the next decades to allow for complete transformation of the stock
490 (dashed green and red lines in Fig. 3b). Once transformation is complete, no more
491 renovation to reducing energy demand would be necessary, and the activity levels would
492 drop to zero.

493 For the baseline and the efficiency scenarios, global primary steel production will peak
494 around 2025 at a level that is 20-25% higher than the present output, and will settle at about
495 present levels by 2050 (solid blue lines in Fig. 3c). Implementing hybrid strategies and more
496 intense use will cause primary production to peak earlier and the subsequent decline to be
497 larger. For the hybrid strategies, primary output in 2050 will be similar to 2000 levels, and
498 implementing more intense use in addition may cause primary production to drop to levels
499 below 250 Mt/yr. For the baseline and energy efficiency scenarios, secondary production will
500 continue to rise at about the present speed. Implementing industrial material efficiency
501 diverts new scrap away from re-melting and leads to lower future secondary steel
502 production. In the use phase, lifetime extension and re-use delay and reduce the supply of
503 old scrap with the consequence that in the bottom line scenario, secondary steel production
504 would remain at present levels for the next decades.

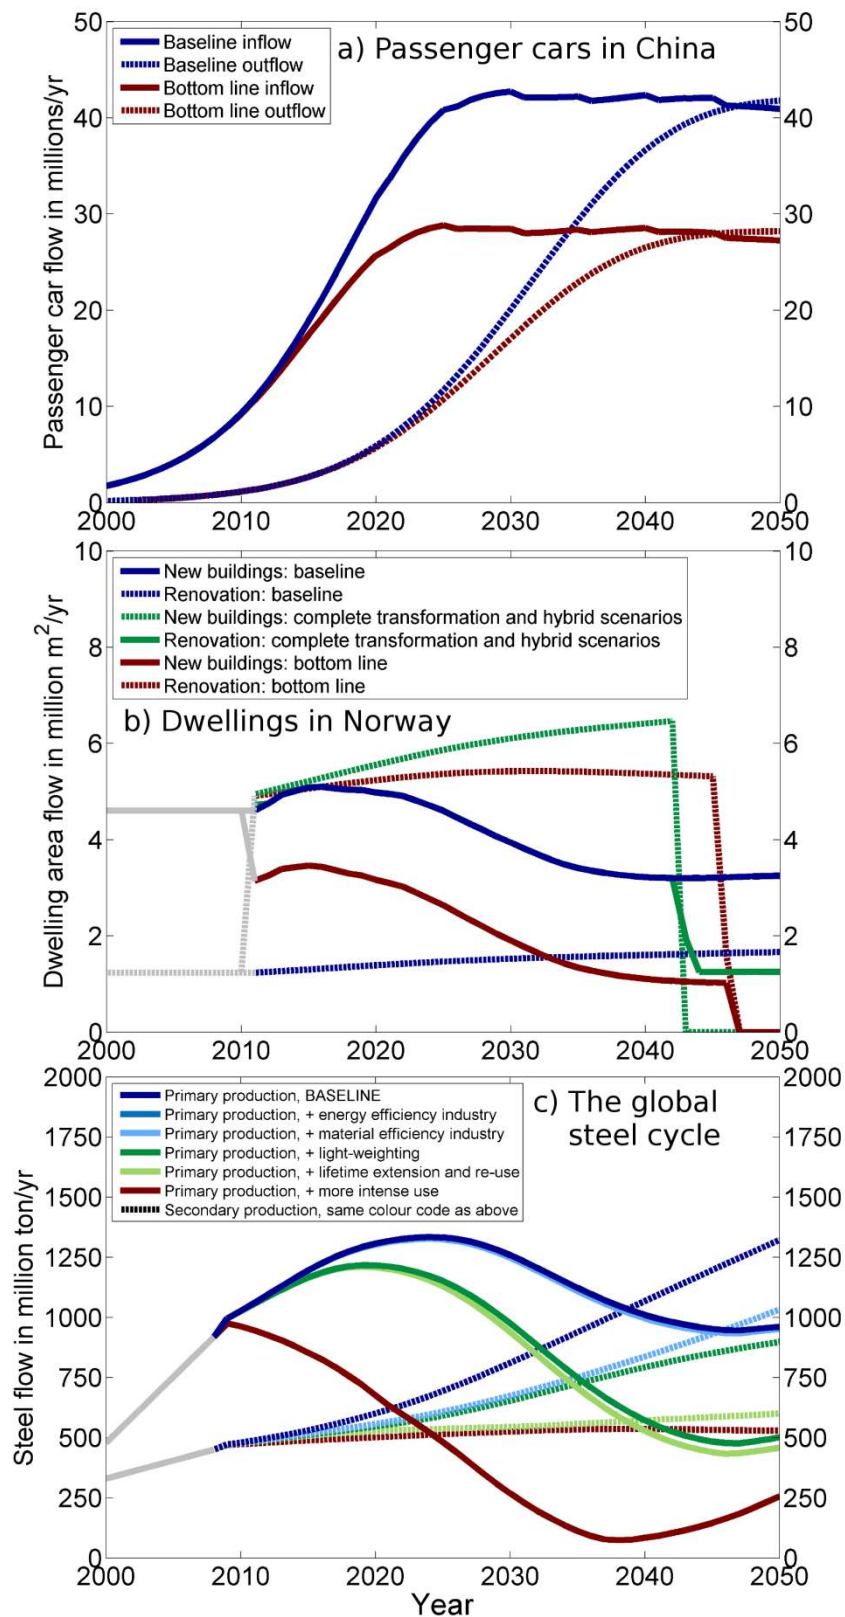

505

506 **Figure 3.** Industry output by sector. Passenger cars in China (a), dwellings in Norway (b), and
 507 the global steel cycle (c). The scenarios presented include cumulative parameter changes;
 508 each scenario includes all changes made in the scenarios higher up in the legend.

509

510

511

512 4) Discussion

513 4.1) Climate change and the role of stocks in climate change mitigation

514 More intense use of existing stocks, a wide spectrum of material and energy efficiency
515 strategies in manufacturing and final consumption, and service lifetime changes, may extend
516 our toolbox of emissions mitigation strategies, which may make climate change mitigation
517 less dependent on contentious technological choices on the supply side such as an up-scaling
518 of nuclear power or large-scale deployment of carbon capture and storage. The specific
519 challenges of implementing the different strategies are discussed in the papers on the case
520 studies (Milford et al., 2013; Pauliuk et al., 2013b, Pauliuk et al., 2012). Here we discuss
521 policy-relevant conclusions on how to achieve substantial emissions cuts across countries
522 and sectors, connect the case studies to the theme of stocks in the social metabolism, and
523 point out future research options.

524 4.1.1) What changes if we take the supply side into account?

525 Supply-side measures including new energy technologies are expected to bear a large
526 potential for emissions reductions (GEA, 2012; OECD/IEA, 2008). There is some concern,
527 however, about counter-trends such as increasing energy demand to extract industrial
528 minerals (Norgate, 2010) and fossil fuels, especially from marginal reserves and tar sands
529 (Unnasch and Pont, 2007), demand from new sectors as technology and culture develops
530 (Arvesen et al., 2011), and rebound effects (Barker et al., 2009; Hertwich 2005; Madlener
531 and Alcott, 2009). Decoupling stocks from service provision complements supply-side
532 measures, which are at the focus of emissions mitigation today. The combined emissions
533 reduction potential of supply side measures and stock decoupling may be higher than what
534 is needed to reach the 2°C target, which makes it easier to consider other objectives than
535 mere emissions reduction. Decoupling may therefore revitalize the debate about sustainable
536 development because it allows us to loosen the focus on climate change mitigation and put
537 more weight on the economic, social, cultural, and other environmental aspects of
538 sustainability. Relying on only one of these four criteria, as for example in the abatement
539 cost curve (McKinsey&Company, 2009) may oversimplify the challenge that climate change
540 mitigation represents, as such assessment may not consider adverse environmental impacts
541 of different mitigation measures, the material resources needed to implement the different
542 strategies, or behavioral change required by some strategies. Stock decoupling provides new
543 leverages to policy makers to reduce emissions and other impacts while keeping a high
544 service level.

545 4.1.2) Sectoral approaches as one way to break down global targets

546 As of today, there is no international treaty on climate change mitigation based on country-
547 level quotas that are in line with the 2°C target. Emissions embodied in international trade
548 change the footprint of many countries by 30% or more (Hertwich and Peters, 2009), and
549 building up infrastructure stocks causes large emissions in developing countries (Müller et
550 al., 2013). That casts into doubts whether national boundaries are the best criterion for

551 breaking down a global reduction target. A global, sectoral approach, as demonstrated in the
 552 case study on steel, may represent a complementary approach for certain industries because
 553 it allows us to design portfolios of specific mitigation strategies and map them to the
 554 respective actors within each sector (Bodansky, 2007; Schmidt et al., 2008). On the
 555 downside, a focus on a certain industry makes it difficult to take into account innovation in
 556 materials and services and substitution of service provision between sectors, e.g., a
 557 potentially environmentally desirable substitution between steel, concrete, aluminum,
 558 carbon fibers, or timber. Sectoral break-downs of global emissions targets may give new
 559 impulses to the international negotiations on a global climate treaty.

560 **4.1.3) Contraction and convergence**

561 Central in the benchmarking process was the assumption that per capita greenhouse gas
 562 emissions in all parts of the world will converge by 2050. If some world regions develop
 563 slower, emissions in the remaining parts of the world could be higher while the entire world
 564 would still be in line with the overall target.

565 The case study on the steel cycle showed a novel example of how the concept of contraction
 566 and convergence (GCI, 2012) could be realized for a specific material. More intense use and
 567 light-weighting could decouple service provision from steel stocks and eventually, this could
 568 lead to lower in-use stocks in developed countries. The amount of steel needed to provide
 569 the present service levels in many developed countries would *contract*, and global stock
 570 levels could *converge* by redistributing part of the already existing in-use stocks between the
 571 different world regions. Large amounts of steel scrap would become available in
 572 industrialized countries and could be shipped to the developing world, where the scrap
 573 could be recycled and used mainly in construction, which is the dominant application for
 574 secondary steel (Cullen et al., 2012). In this scenario the global primary steel production
 575 would be much lower than under business-as-usual assumptions (Milford et al., 2013), and
 576 so would be the carbon emissions. Material efficiency may be a central strategy to facilitate
 577 contraction of in-use stocks. Combined with suitable strategies on product lifetime and end-
 578 of-life recovery, material efficiency would lead to lower material throughput and associated
 579 carbon emissions.

580 **4.1.4) The role of stocks in the case studies**

581 **Table 2:** The roles of stocks considered in the case studies

	Passenger Cars	Residential Buildings	The global steel cycle
'Service Suppliers'	X	X	X
'Capital Containers'	-	-	-
'Resource Repositories'	-	-	X
'Dynamics Determiners'	X	X	X
'Wealth Watchers'	X	X	X
'Consumption Couplers'	X	X	-
'City Shapers'	-	-	-

582

583 The case studies consider only some aspects of in-use stocks listed above, which leaves
584 much room for future improvement of the models (Table 2). All three case studies quantified
585 the service supplied by in-use stocks, use the stock level as development indicator, and
586 explicitly model stock dynamics. Coupling between the product and material layers,
587 consideration of the monetary layer, and the arrangement of in-use stocks to the urban
588 fabric were beyond the scope of the case studies. For future modeling efforts we refer to
589 section 4.2.1.

590 **4.1.5) Deliberate design of in-use stocks to bridge the gap between techno-sphere and** 591 **user sphere**

592 Dividing emissions mitigation into technological and behavior- or lifestyle related aspects has
593 a long tradition. Examples include the IPAT framework (Chertow, 2001; Ehrlich and Holdren,
594 1971; Graedel and Allenby 1995), and the statement of the role of technology in climate
595 change mitigation in the 4th IPCC assessment report and IEA's Energy Technology
596 Perspectives cited above (IPCC, 2007c; OECD/IEA, 2008). Our work showed that by retaining
597 this divide one may overlook a large spectrum of what we called hybrid strategies that
598 combine technological and behavioral change and that could account for 20% of the
599 potential throughput reductions on the demand side for the passenger vehicle fleet (via a
600 shift to smaller cars) and as much as 50% of the emissions reductions from the Norwegian
601 dwelling stock (via passive houses and reduced energy consumption for hot water
602 generation and appliances) and from the global steel industry (via light-weighting, lifetime
603 extension, and re-use). In order to realize the full potential of these strategies, one will have
604 to take an integrated perspective considering the interplay between human agents and
605 technology (Owens and Driffill, 2008). A technologically optimal product may yield lower net
606 emissions reductions than a solution designed to yield maximal emissions savings in a
607 system that comprises both the functionality of the product and the user behavior. The case
608 studies showed the importance of stock dynamics and the coupling between stocks and
609 service provision for emissions mitigation. Full utilization of the emissions reduction
610 potential of hybrid strategies requires not only deliberate product design but also careful
611 long-term planning of entire stocks including their dynamics and spatial arrangement. Policy
612 makers would have to consider systems that not only comprise the supply chain and use
613 phase of the product but also the users and the linkages to other sectors and in-use stocks.

614 **4.2) The role of in-use stocks in the social metabolism (continued)**

615 **4.2.1) Stocks as couplers between different sectors:**

616 The systems defined in the case studies are not independent of each other; there is some
617 overlap in form of stocks. Steel, for example, is contained in buildings and vehicles, and more
618 intense use and lifetime extension of steel-containing product stocks directly translates into
619 changing parameters in the building and transportation sectors (stocks as 'consumption
620 couplers'). Other links are more indirect, for example does the location of buildings and

621 industries determine transportation distances and with it the service demanded from the
622 passenger vehicle fleet (stocks as 'city shapers'). To allow for an integrated assessment of
623 material cycles across different end-use sectors and to determine the impact of location on
624 transportation demand, we envision a global, multi-regional, dynamic stock model of all
625 major product categories with high spatial resolution. Combined with the assessment of
626 indirect impacts as shown in the case studies, this framework would allow for assessing the
627 consequences of different environmental policies and impact mitigation strategies on the
628 different material cycles, on regional distribution of production capacities, and on
629 settlement structures. Such a model could provide complementary insights to integrated
630 assessment or general equilibrium models, which have comprehensive market modeling
631 capacity but limited coverage of material and spatial aspects. Careful and sophisticated
632 modeling of in-use stocks is necessary to understand the linkages between different end-use
633 sectors and to determine the impact of these linkages on emissions mitigation strategies.

634 **4.2.2.) Physical and capital stocks**

635 Our model does not contain a monetary dimension; it is purely physical. This was sufficient
636 for a macro level analysis of in-use stocks, where only the total future service level and
637 emissions reductions, but not their distribution within society, were quantified. Most stock
638 decoupling strategies have substantial impact on material and commodity production (cf.
639 Fig. 3), which would require certain sectors to reduce their output. To reconcile economic
640 development with throughput reduction researches developed visions and business models
641 that shift away the focus from throughput maximization to maintenance of in-use stocks
642 (Boulding, 1966; Stahel, 2006). A first step towards better understanding the economic
643 consequences of decoupling in-use stocks from material and energy throughput is to build a
644 common framework for modeling the physical *and* monetary aspects of in-use stocks in
645 general and fixed capital stocks in particular (stocks as 'Capital Containers', 'Resource
646 Repositories', and 'Consumption Couplers'). This framework would allow modelers to
647 explicitly consider the different roles of in-use stocks pointed out here in economic models.
648 This refers to model families that contain detailed models of capital stocks, such as
649 integrated assessment or general equilibrium models and those that consider capital
650 formation only, such as multi-regional input-output models. With a combined economic and
651 physical representation of in-use stocks at the core, such integration would enable
652 researchers and practitioners to address both environmental and economic aspects of
653 sustainability within a harmonized and integrated model framework, which could help to
654 fully embed the physical layer into currently prevailing economic principles.

655 **4.2.3) In-use stocks and the metabolic transition to sustainability**

656 The transition to a sustainable anthropogenic metabolism can be perceived as metabolic
657 state shift or transition between different socio-metabolic regimes (Marina Fischer-Kowalski,
658 2011). A central aspect of this transition is the transformation of current in-use stocks and
659 the surrounding industrial system into a new state with higher energy and material
660 efficiency, deployment of alternative technologies, and potentially different spatial
661 arrangement (stocks as 'Service Suppliers', 'Consumption Couplers', 'Dynamics Determiners',

662 and ‘City Shapers’). Such transformation is a necessary, but not sufficient condition for the
 663 next metabolic transition to happen. Not sufficient, because the drivers behind stock
 664 dynamics, such as the paradigm of perpetuated economic growth, may have to change as
 665 well.

666 4.3) Conclusion

667 In-use stocks supply services to people and their dynamics determine the speed at which
 668 technological change can be implemented on the large scale. In-use stocks couple physical
 669 services with demand for energy and materials. We showed that decoupling service from
 670 stocks and stocks from throughput bears a substantial emissions mitigation potential, which
 671 demonstrates that adequate long-term planning and management of in-use stocks may be
 672 essential to reaching ambitious climate targets. The combined emissions reduction potential
 673 of supply side measures and stock decoupling may be higher than what is needed to reach
 674 the 2°C target, which makes it easier to consider other objectives than mere emissions
 675 reduction. Decoupling may therefore revitalize the debate about sustainable development
 676 because it allows us to loosen the focus on climate change mitigation and put more weight
 677 on the economic, social, cultural, and other environmental aspects of sustainability.

678 References

- 679 Allwood, J.M., Ashby, M.F., Gutowski, T.G., Worrell, E., 2011. Material efficiency: A white paper. *Resources, Conservation*
 680 *and Recycling* 55, 362–381.
- 681 Allwood, J.M., Cullen, J.M., Carruth, M.A., Cooper, D.R., McBrien, M., Milford, R.L., Moynihan, M., Patel, A.C.H., 2012.
 682 *Sustainable Materials: with both eyes open*. UIT Cambridge, UK, Cambridge, UK.
- 683 Allwood, J.M., Cullen, J.M., Milford, R.L., 2010. Options for achieving a 50% cut in industrial carbon emissions by 2050.
 684 *Environmental Science & Technology* 44, 1888–94.
- 685 Arnstad, E., 2010. Making buildings energy-efficient. An ambitious and realistic plan for 2040 (Original title:
 686 *Energieeffektivisering av bygg. En ambisiøs og realistisk plan mot 2040*). Task force under the Norwegian Ministry of
 687 *Local Government and Regional Development*, Oslo, Norway.
- 688 Arvesen, A., Bright, R.M., Hertwich, E G, 2011. Considering only first-order effects? How simplifications lead to unrealistic
 689 technology optimism in climate change mitigation. *Energy Policy* 39, 7448–7454.
- 690 Ayres, R.U., Simonis, U.E., 1994. *Industrial Metabolism: Restructuring for Sustainable Development*. United Nations
 691 University Press, Tokyo.
- 692 Baccini, P., Brunner, P H, 1991. *Metabolism of the Anthroposphere*. Springer-Verlag, Berlin.
- 693 Baccini, Peter, Bader, Hans-Peter, 1996. *Regionaler Stoffhaushalt. Erfassung, Bewertung und Steuerung*. Spektrum,
 694 Heidelberg.
- 695 Barker, T., Dagoumas, A., Rubin, J., 2009. The macroeconomic rebound effect and the world economy. *Energy Efficiency* 2,
 696 411–427.
- 697 Barnosky, A.D., Hadly, E. a, Bascompte, J., Berlow, E.L., Brown, J.H., Fortelius, M., Getz, W.M., Harte, J., Hastings, A.,
 698 Marquet, P. a, Martinez, N.D., Mooers, A., Roopnarine, P., Vermeij, G., Williams, J.W., Gillespie, R., Kitzes, J.,
 699 Marshall, C., Matzke, N., Mindell, D.P., Revilla, E., Smith, A.B., 2012. Approaching a state shift in Earth’s biosphere.
 700 *Nature* 486, 52–8.
- 701 Bergsdal, H., Brattebø, H, Bohne, R.A., Müller, D B, 2007. Dynamic material flow analysis for Norway’s dwelling stock.
 702 *Building Research and Information* 35, 557–570.
- 703 Bodansky, D., 2007. *International Sectoral Agreements in a Post-2012 Climate Framework*, SSRN Electronic Journal.
 704 Arlington, VA.
- 705 Boulding, K.E., 1966. *The Economics of the Coming Spaceship Earth*, in: Jarret, H. (Ed.), *Environmental Quality in a Growing*
 706 *Economy*. Johns Hopkins University Press, Baltimore.
- 707 Brattebø, Helge, Bergsdal, H., Sandberg, Nina Holck, Hammervold, J., Müller, Daniel B., 2009. Exploring built environment
 708 stock metabolism and sustainability by systems analysis approaches. *Building Research & Information* 37, 569–582.
- 709 Brunner, Paul H, Rechberger, Helmut, 2004. *Practical Handbook of Material Flow Analysis*. CRC/Lewis, Boca Raton, FL.
- 710 Burfisher, M.E., 2011. *Introduction to Computable General Equilibrium Models*. Cambridge University Press, New York.
- 711 Chertow, M.R., 2001. The IPAT Equation and Its Variants: Changing Views of Technology and Environmental Impact. *Journal*
 712 *of Industrial Ecology* 4, 13–29.
- 713 Cullen, J.M., Allwood, J.M., Bambach, M.D., 2012. Mapping the global flow of steel: from steel making to end-use goods.
 714 *Environmental Science & Technology* 46, 13048–55.

- 715 Dokka, T.H., Klinski, M., 2009. Myhrerenga housing cooperation: Ambitious renovation of blocks from the 60ies with passive
716 house components (Myhrerenga borettslag: Ambisiøs rehabilitering av 1960-talls blokker med
717 passivhuskomponenter), Passivhus Norden 2009. Oslo, Norway.
- 718 Duchin, F., Szyld, D.B., 1985. A Dynamic Input Output Model With Assured Positive Output. *Metroeconomica* 14.
- 719 Ehrlich, P.R., Holdren, J.P., 1971. Impact of population growth. *Science* 171, 1212–1217.
- 720 Elshkaki, a, 2005. Dynamic stock modelling: A method for the identification and estimation of future waste streams and
721 emissions based on past production and product stock characteristics. *Energy* 30, 1353–1363.
- 722 EU JRC, 2010. International Reference Life Cycle Data System (ILCD) Handbook - General guide for Life Cycle Assessment.
723 European Union, Luxembourg.
- 724 European Commission, 2008. Eurostat Manual of Supply, Use and Input-Output Tables, 2008 edition. Eurostat, Luxembourg.
- 725 Fischer-Kowalski, M, Huttler, W., 1999. Society's Metabolism: The Intellectual History of Materials Flow Analysis, Part II,
726 1970-1 998. *Journal of Industrial Ecology* 2, 107–136.
- 727 Fischer-Kowalski, M., 1997. Basic methodological questions (Methodische Grundsatzfragen), in: Fischer-Kowalski, M. (Ed.),
728 *Gesellschaftlicher Stoffwechsel Und Kolonisierung Von Natur*. Gordon and Breach Fakultas, Amsterdam, pp. 57–66.
- 729 Fischer-Kowalski, M., Krausmann, F., Giljum, S., Lutter, S., Mayer, a., Bringezu, S., Moriguchi, Y., Schütz, H., Schandl, H.,
730 Weisz, H., 2011. Methodology and Indicators of Economy-wide Material Flow Accounting. *Journal of Industrial*
731 *Ecology* 15, 855–876.
- 732 Fischer-Kowalski, M., Weisz, H., 1999. Society as Hybrid between Material and Symbolic Realms: Toward a Theoretical
733 Framework of Society-Nature Interaction. *Advances in Human Ecology* 8, 215–251.
- 734 Fischer-Kowalski, Marina, 2011. Analyzing sustainability transitions as a shift between socio-metabolic regimes.
735 *Environmental Innovation and Societal Transitions* 1, 152–159.
- 736 Fisher, B.S., Nakicenovic, N., Alfsen, K., Corfee Morlot, J., De la Chesnaye, F., Hourcade, J.-C., Jiang, K., Kainuma, M., La
737 Rovere, E., Matysek, A., Rana, A., Riahi, K., Richels, R., Rose, S., Van Vuuren, D., Warren, R., 2007. Issues related to
738 mitigation in the long-term context., in: B. Metz P.R. Bosch, R. Dave, L.A. Meyer, O.R.D. (Ed.), *Climate Change 2007:*
739 *Mitigation. Contribution of Working Group III to the Fourth Assessment Report of the Inter-governmental*; Cambridge
740 University Press., Cambridge, United Kingdom and New York, NY, USA.
- 741 GCI, 2012. Contraction and Convergence (C&C) - Climate Justice without vengeance [WWW Document]. URL
742 <http://www.gci.org.uk/endorsements.html> (accessed 3.10.13).
- 743 GEA, 2012. Global Energy Assessment - Toward a Sustainable Future. Cambridge University Press, Cambridge, UK and the
744 International Institute for Applied Systems Analysis, Laxenburg, Austria.
- 745 Goossens, Y., Mäkipää, A., Schepelmann, P., Van de Sand, I., Kuhndtand, M., Herrndorf, M., 2007. Alternative progress
746 indicators to Gross Domestic Product (GDP) as a means towards sustainable development. EU Parliament, Policy
747 Department, Economic and Scientific Policy, Strassbourg, France.
- 748 Graedel, T E, Allenby, B.R., 1995. *Industrial Ecology*. Prentice Hall, Upper Saddle River, NJ.
- 749 Graedel, T E, Van Beers, D., Bertram, M., Fuse, K., Gordon, R.B., Gritsinin, A., Kapur, A., Klee, R.J., Lifset, R.J., Memon, L.,
750 Rechberger, H, Spatari, S., Vexler, D., 2004. Multilevel cycle of anthropogenic copper. *Environmental Science &*
751 *Technology* 38, 1242–1252.
- 752 Haberl, H., Fischer-Kowalsky, M., Krausmann, Fridolin, Martinez-Alier, J., Winiwarter, V., 2011. A Socio-metabolic Transition
753 towards Sustainability? Challenges for Another Great Transformation. *Sustainable Development* 19, 1–14.
- 754 Hardin, G., 1968. Tragedy of Commons. *Science* 162, 1243–&.
- 755 Hatayama, H., Daigo, I., Matsuno, Y., Adachi, Y., 2010. Outlook of the world steel cycle based on the stock and flow
756 dynamics. *Environmental Science & Technology* 44, 6457–63.
- 757 Hertwich, E G, 2005. Consumption and the Rebound Effect: An Industrial Ecology Perspective. *Journal of Industrial Ecology*
758 9, 85–98.
- 759 Hertwich, Edgar G, Peters, G.P., 2009. Carbon footprint of nations: a global, trade-linked analysis. *Environmental Science &*
760 *Technology* 43, 6414–20.
- 761 Hidalgo, I., Szabo, L., Calleja, I., Císcar, J.C., Russ, P., Soria, A., 2003. Energy consumption and CO2 emissions from the world
762 iron and steel industry, Technical Report Series. European Comission - Joint Reasearch Centre / IPTS, Report EUR
763 20686 EN, Seville, Spain.
- 764 IPCC, 2007a. Summary for Policymakers., in: B. Metz P.R. Bosch, R. Dave, L.A. Meyer, O.R.D. (Ed.), *Climate Change 2007:*
765 *Mitigation. Contribution of Working Group III to the Fourth Assessment Report of the Intergovernmental Panel on*
766 *Climate Change*. Cambridge University Press., Cambridge, UK.
- 767 IPCC, 2007b. *Climate Change 2007: Synthesis Report, Summary for Policymakers*. Cambridge University Press., Cambridge,
768 UK.
- 769 IPCC, 2007c. *Climate Change 2007: Mitigation, Contribution of Working Group III to the Fourth Assessment Report of the*
770 *Intergovernmental Panel on Climate Change*. Cambridge University Press, Cambridge, UK.
- 771 Jackson, T., 2009. *Prosperity without growth*. Routledge, London.
- 772 Kennedy, C., Cuddihy, J., Engel-Yan, J., Univ Toronto, D.C.E.T.O.N.M.S.A.C., 2007. The changing metabolism of cities. *Journal*
773 *of Industrial Ecology* 11, 43–59.
- 774 Krausmann, Fridolin, 2011. The socio-metabolic transition . Long term historical trends and patterns in global material and
775 energy use. Institute of Social Ecology, Vienna.
- 776 Krausmann, Fridolin, Fischer-Kowalski, Marina, Schandl, Heinz, Eisenmenger, N., 2008. The Global Sociometabolic
777 Transition. *Journal of Industrial Ecology* 12, 637–656.
- 778 Kytzia, S., Faist, M., Baccini, Peter, 2004. Economically extended—MFA: a material flow approach for a better understanding
779 of food production chain. *Journal of Cleaner Production* 12, 877–889.

- 780 Lenzen, M., Treloar, G.J., 2005. Endogenising Capital: A comparison of Two Methods. *Journal of Applied Input-Output*
781 *Analysis* 10, 1–11.
- 782 Leontief, W., 1970. Environmental repercussions and the economic structure: An input-output approach. *The Review of*
783 *Economics and Statistics* 52, 262–271.
- 784 Loulou, R., Remne, U., Kanudia, A., Lehtila, A., Goldstein, G., 2005. Documentation for the TIMES Model. Paris, France.
- 785 Lutz, W., Sanderson, W., Scherbov, S., 2007. IIASA's 2007 Probabilistic World Population Projections, IIASA World
786 Population Program Online Data Base of Results 2008. IIASA, Laxenburg, Austria.
- 787 Madlener, R., Alcott, B., 2009. Energy rebound and economic growth: A review of the main issues and research needs.
788 *Energy* 34, 370–376.
- 789 Malthus, T.R., 1798. *An Essay on the Principle of Population*. J. Johnson, London.
- 790 Mao, J.S., Dong, J., Graedel, T.E., 2008. The multilevel cycle of anthropogenic lead. *Resources, Conservation and Recycling*
791 52, 1058–1064.
- 792 McKinsey&Company, 2009. *Pathways to a Low-Carbon Economy - Version 2 of the Global Greenhouse Gas Abatement Cost*
793 *Curve*. McKinsey&Company, New York.
- 794 Milford, R.L., Pauliuk, S., Allwood, J.M., Müller, D B, 2013. The Roles of Energy and Material Efficiency in Meeting Steel
795 Industry CO₂ Targets. *Environmental Science & Technology* 47, 3455–3462.
- 796 Miller, R.E., Blair, P.D., 2009. *Input-Output Analysis Foundations and Extensions*. Cambridge University Press, New York.
- 797 Müller, D B, 2006. Stock dynamics for forecasting material flows - Case study for housing in The Netherlands. *Ecological*
798 *Economics* 59, 142–156.
- 799 Müller, D B, Baccini, P, Heinemann, H.R., Bader, H.P., 1998. *Modellierung, Simulation und Bewertung des regionalen*
800 *Holzhaushaltes*. D-BAUG. ETH, Zurich.
- 801 Müller, D B, Bader, H-P, Baccini, P, 2004. Long-term Coordination of Timber Production and Consumption Using a Dynamic
802 Material and Energy Flow Analysis. *Journal of Industrial Ecology* 8, 65–87.
- 803 Müller, D B, Liu, G., Løvik, A.N., Modaresi, R., Pauliuk, S., Steinhoff, F., Brattebø, H, 2013. Carbon Emissions of Infrastructure
804 Development. *Environ. Sci. Technol.*, <http://dx.doi.org/10.1021/es402618m>.
- 805 Müller, D B, Wang, T, Duval, B, 2011. Patterns of iron use in societal evolution. *Environmental Science & Technology* 45,
806 182–188.
- 807 Müller, Daniel B, Wang, Tao, Duval, Benjamin, Graedel, T E, 2006. Exploring the engine of anthropogenic iron cycles.
808 *Proceedings of the National Academy of Sciences of the United States of America* 103, 16111–6.
- 809 Nathani, C., 2009. Analysing the Economic Impacts of a Material Efficiency Strategy, in: Suh, S. (Ed.), *Handbook of Input-*
810 *Output Economics in Industrial Ecology*. Springer, Dordrecht.
- 811 Norgate, T., 2010. Deteriorating ore resources. Energy and water impacts., in: Graedel, T.E., van der Voet, E. (Eds.), *Linkages*
812 *of Sustainability*. The MIT Press, Cambridge, Mass.
- 813 OECD, 2003. Glossary of statistical terms [WWW Document]. URL <http://stats.oecd.org/glossary/detail.asp?ID=998>
814 (accessed 3.10.13).
- 815 OECD/IEA, 2008. *Energy Technology Perspectives: Scenarios and Strategies to 2050*. Paris, France.
- 816 Owens, S., Driffill, L., 2008. How to change attitudes and behaviours in the context of energy. *Energy Policy* 36, 4412–4418.
- 817 Pauliuk, S., 2013. *The Role of Stock Dynamics in Climate Change Mitigation*. PhD Thesis, NTNU, Trondheim, Norway.
- 818 Pauliuk, S., Dhaniati, N.M.A., Müller, D B, 2012. Reconciling sectoral abatement strategies with global climate targets: the
819 case of the Chinese passenger vehicle fleet. *Environmental Science & Technology* 46, 140–7.
- 820 Pauliuk, S., Milford, R.L., Müller, D B, Allwood, J.M., 2013a. The Steel Scrap Age. *Environmental Science & Technology* 47,
821 3448–3454.
- 822 Pauliuk, S., Sjöstrand, K., Müller, D B, 2013b. Transforming the Norwegian Dwelling Stock to Reach the 2 Degrees Celsius
823 Climate Target. *Journal of Industrial Ecology* 17, 542–554.
- 824 Peters, G.P., Andrew, R.M., Boden, T., Canadell, J.G., Ciais, P., Le Quééré, C., Marland, G., Raupach, M.R., Wilson, C., 2012.
825 The challenge to keep global warming below 2 °C. *Nature Climate Change* 3, 4–6.
- 826 Rechberger, H, Graedel, T E, 2002. The contemporary European copper cycle: statistical entropy analysis. *Ecol. Econ.* 42, 59–
827 72.
- 828 Riden, P., Owen, J.G., 1995. *British Blast Furnace Statistics 1790-1980*. Merton Priory Press, Cardiff.
- 829 Rockström, J., Steffen, W., Noone, S., Persson, Å., 2009. A safe operating space for humanity. *Nature* 461, 472–475.
- 830 Sandberg, N H, Brattebø, H, 2012. Analysis of energy and carbon flows in the future Norwegian dwelling stock. *Building*
831 *Research and Information* 40, 123–139.
- 832 Schmidt, J., Helme, N., Lee, J., Houdashelt, M., 2008. Sector-based approach to the post-2012 climate change policy
833 architecture. *Climate Policy* 8, 494–515.
- 834 Stahel, W., 2006. *The Performance Economy*. Palgrave Macmillan, London.
- 835 Standards Norway, 2007. Determination of the energy performance of buildings, methods and data (Beregning av
836 bygningers energiytelse Metode og data). Standard Norge, Lysaker, Norway.
- 837 Statistics Norway, 2011. Population projections. National and regional figures, 2011-2060. Statistics Norway, Kongsvinger,
838 Norway.
- 839 UN, 2013. *The Millennium Development Goals Report 2013*. New York.
- 840 UN Statistics Division, 2012. Millenium Development Goals Indicators - Carbon dioxide emissions [WWW Document]. URL
841 <http://mdgs.un.org/unsd/mdg/> (accessed 3.10.13).
- 842 UNDP, 2010. *Human Development Report 2010, 20th Anniversary Edition*. UN Human Development Report Office, New
843 York.
- 844 UNFCCC, 1992. *United Nations Framework Convention on Climate Change, Article 3: Principles*. Geneva, Switzerland.

- 845 United Nations, 2011. World Urbanization Prospects, the 2011 Revision [WWW Document]. URL
846 <http://esa.un.org/unup/CD-ROM/Urban-Rural-Population.htm> (accessed 3.10.13).
847 Unnasch, S., Pont, J., 2007. Full Fuel Cycle Assessment, Well to Tank Energy Inputs, Emissions, and Water Impacts.
848 Cupertino, CA.
849 Van der Voet, E., Kleijn, R., Huele, R., Ishikawa, M., Verkuijden, E., 2002. Predicting future emissions based on characteristics
850 of stocks. *Ecological Economics* 41, 223–234.
851 Volkswagen AG, 2010. Technical data of the new XL1. Wolfsburg, Germany.
852 World Commission on Environment and Development, 1987. *Our Common Future*. UN, Oxford.
853