

Thermal Conductivity Measurement of Zr-ZrO₂ Simulated Inert Matrix Nuclear Fuel Pellet

Dong-Joo Kim, Young Woo Rhee, Jong Hun Kim, Jang Soo Oh, Keon Sik Kim, Jae Ho Yang

LWR Fuel Technology Division, Korea Atomic Energy Research Institute, Daejeon, South Korea
Email: djkim@kaeri.re.kr

Received February 4, 2013; revised March 12, 2013; accepted March 25, 2013

Copyright © 2013 Dong-Joo Kim *et al.* This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

ABSTRACT

For an evaluation of a thermal conductivity of Zr + 30 vol% ZrO₂ simulated inert matrix nuclear fuel pellet, a simulated fuel pellet was fabricated using a hot-pressing method at 800°C in a vacuum and at a 20 MPa load. And several thermophysical properties of the simulated inert matrix fuel pellet were measured and calculated. The thermal diffusivity and linear thermal expansion as a function of temperature of the simulated fuel pellet were measured using a laser flash method and a dilatometry, respectively. Finally, based on the experimental data, the thermal conductivity of the simulated inert matrix fuel pellet was calculated and evaluated.

Keywords: Inert Matrix Nuclear Fuel; Dispersion Fuel; Thermal Conductivity; Thermal Expansion; Specific Heat

1. Introduction

For the transmutation of plutonium and minor actinide elements, various nuclear fuel concepts have been proposed. Uranium-free inert matrix fuel (IMF) is one of the nuclear fuel concepts for plutonium transmutation, so-called “plutonium burning”. Under nuclear reactor operation using uranium-free inert matrix fuel, plutonium will be not newly produced. Also, added fissile plutonium will be almost incinerated [1-5].

An inert matrix nuclear fuel is composed by forming a single or mixed phase. The concept of single phase fuel is based on a fissile material (e.g. plutonium) embedded in the matrix by a solid solution formation. The concept of mixed phase fuel is constituted in the form of CER-CER (ceramics embedded in another ceramics, e.g. Y_yPu_xZr_{1-y}O_{2-y/2}-MgAl₂O₄), CERMET (ceramics embedded in metal, e.g. PuO₂-Zr) and METMET (metal phase in a metal matrix, e.g. PuAl₄-Al).

Materials for the matrix must satisfy several requirements of the physical properties: high melting point, good thermal conductivity, low solubility in the coolant, good compatibility with the fuel cladding, low neutron cross-section, high density, etc. Various candidates for an inert matrix material have been reviewed [6-10].

Zirconium is one of the elements that satisfy the requirements for inert matrix material [11]. Thus, zirconium has been employed as the inert matrix material, by means of forming a metal [12-14] or oxide [8-10] phase.

In particular, zirconium metal matrix based inert matrix fuels can offer a novel approach to fulfill the requirements for “plutonium burning” fuel. In ceramic matrix based IMF fuels, the thermal conductivity is a major concern. In this regard, the thermal conductivity of a zirconium metal matrix is much higher than most ceramic materials.

The thermal conductivity of a material is one of the most important physical properties of the nuclear fuel. In particular, the in-reactor performance, integrity, and safety of inert matrix nuclear fuel are directly affected by the thermal conductivity [15-20]. If the thermal conductivity of nuclear fuel can be improved, the fuel performance will be enhanced in various ways. The lower centerline temperature of a fuel pellet affects the enhancement of fuel safety as well as fuel pellet integrity during nuclear reactor operation. In addition, the nuclear reactor power can be uprated due to a higher safety margin. Therefore, the evaluation of thermal conductivity of inert matrix nuclear fuel is very important as a nuclear fuel.

In the investigation of the zirconium-based inert matrix fuel with plutonium (PuO₂-Zr), it has been usually simulated using ZrO₂ as a surrogate of PuO₂, that is to say, zirconium oxide (ZrO₂) ceramic particles were dispersed in a zirconium metal matrix for the safety and convenience in the experiment. In this work, a Zr-ZrO₂ simulated inert matrix fuel pellet was fabricated using a hot-pressing method, and several thermophysical proper-

ties of the fabricated inert matrix fuel pellet were measured and evaluated.

2. Experimental

Zirconium oxide ceramic particles were used as a surrogate of a plutonium oxide fuel particle. The crystal structures of ZrO_2 and PuO_2 are the same (a cubic fluorite structure), and similar parameters (milling, sintering, etc.) for both materials can be applied to the fabrication process of fuel pellets containing ZrO_2 or PuO_2 . Therefore, ZrO_2 is profitable as a surrogate material for the evaluation of thermal properties.

The physical properties of the surrogated fuel particle (Nikkato, ZrO_2) used in this experiment were measured (**Table 1**). The density and size of the fuel particle were measured using a gas pycnometer (Micromeritics, AccuPyc II) and a particle size and shape analyzer (Sympatec, QICPIC), respectively.

Zirconia particle powder was simply mixed with zirconium metal powder (Sejong materials co., $\sim 30 \mu m$ Zr) using a Turbula mixer. Zr- ZrO_2 powder mixture was compacted and sintered using a hot pressing method at $800^\circ C$ in vacuum and 20 MPa load.

The measured density of the fabricated simulated fuel pellet was 6.008 ± 0.006 g/cc (94.2% of theoretical density). In spite of a low reaction temperature, a highly dense sample could be obtained. **Figure 1** shows the zirconia particles homogeneously dispersed in a zirconium metal matrix. It is thought that the thermophysical property of the simulated fuel pellet could be affected by the

Table 1. The measured physical properties of ZrO_2 simulated fuel particle which was used as a surrogate.

Density (g/cc)	6.056 ± 0.002
Particle size (mm)	0.341 ± 0.045
Particle aspect ratio	0.97

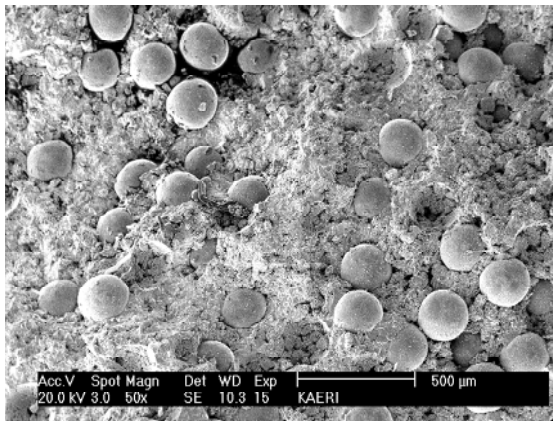


Figure 1. SEM (Scanning Electron Microscope) image of fracture surface of fabricated fuel pellet.

homogeneity of the particles.

For an evaluation of the thermal conductivity of a simulated inert matrix fuel, several thermophysical properties of simulated fuel pellet were measured. The thermal expansion of simulated fuel was measured using a dilatometer (Netzsch, DIL 402C), and thermal diffusivity of simulated fuel was measured using a laser flash apparatus (Netzsch, LFA-427). **Figure 2** shows the simulated inert matrix fuel specimen, which was prepared for thermal diffusivity (about 8 mm diameter) and thermal expansion (about 15 mm length) measurements.

3. Results and Discussion

To evaluate the thermal conductivity of a simulated inert matrix fuel, first of all, the thermal diffusivity of the simulated fuel was measured using a laser flash method. The measured thermal diffusivity of a simulated fuel as a function of temperature is shown in **Figure 3**. The thermal diffusivity increased with increasing temperature, as a typical tendency of the thermal diffusivity of metal.

The linear thermal expansion as a function of temperature of the simulated fuel was measured using a dilatometry (**Figure 4**). The measured data was fitted as a function of temperature using a cubic polynomial regression ($\Delta L/L(\%) = a + bT + cT^2 + dT^3$), where T is an absolute temperature (K) and T_0 is 298 K.

$$\begin{aligned} \Delta L/L(\%) &= -2.706 \times 10^{-1} + 1.05 \times 10^{-3} T \\ &\quad - 4.57 \times 10^{-7} T^2 + 3.243 \times 10^{-10} T^3 \end{aligned}$$

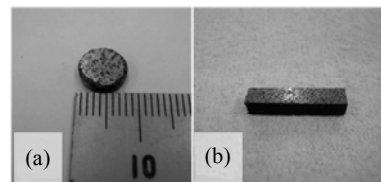


Figure 2. Simulated inert matrix fuel specimen for (a) thermal diffusivity and (b) thermal expansion measurement.

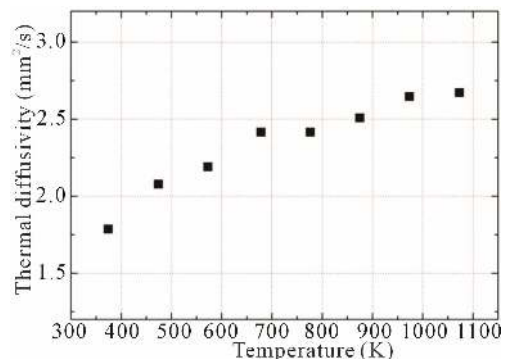


Figure 3. Measured thermal diffusivity as a function of temperature of simulated inert matrix fuel.

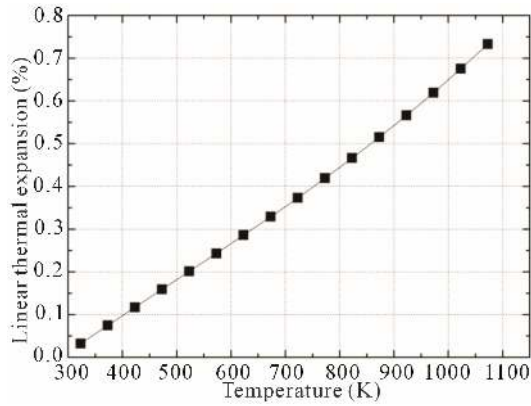


Figure 4. Measured linear thermal expansion as a function of temperature of simulated fuel.

The mean coefficients of linear thermal expansion, $\alpha_p(l)$, were calculated using the following equation, where L and L_{298} are the lengths at temperatures of T (K) and 273 K. Also, the calculated linear thermal expansion coefficient of the simulated fuel is shown in **Table 2**. For comparison, linear thermal expansion coefficients of Zr and ZrO_2 were also shown, which were obtained from literature data [21].

$$\alpha_p(l) = \frac{1}{L_{298}} \left(\frac{dL}{dT} \right)_p$$

Also, based on the literature data and Neumann-Kopp's rule [22,23], the specific heat of the simulated inert matrix fuel was calculated. **Figure 5** shows the calculated specific heat of the simulated fuel.

Finally, the thermal conductivity (k_M) of the simulated inert matrix fuel was calculated using the following equation, where D_M is the thermal diffusivity, c_p is the specific heat, and ρ_M is the density of the sample as a function of temperature.

$$k_M = D_M c_p \rho_M$$

For a comparison of thermal conductivity of zirconium and uranium dioxide with the simulated inert matrix fuel, the thermal conductivity of the simulated fuel was normalized to 95% of theoretical density using the following modified-Loeb equation [24],

$$k_M = k_{th} (1 - P\eta)$$

$$\eta = 2.6 - 5 \times 10^{-4} (T - 273.15)$$

where k_{th} is the thermal conductivity of sample with a density of 100% TD, P is the porosity, and η is the experimental parameter. Also, a thermal conductivity normalized to 95% TD, k_{95} could be expressed by the following equation.

$$k_{95} = \frac{k_M (1 - 0.05\eta)}{(1 - P\eta)}$$

Table 2. The linear thermal expansion coefficient of simulated fuel, based on the measured data.

Composition	Thermal expansion coefficient (K ⁻¹)
Zr	5.70×10^{-6}
Zr + 30 vol% ZrO_2	8.93×10^{-6} (R.T. ~1073 K)
ZrO_2	10.30×10^{-6}

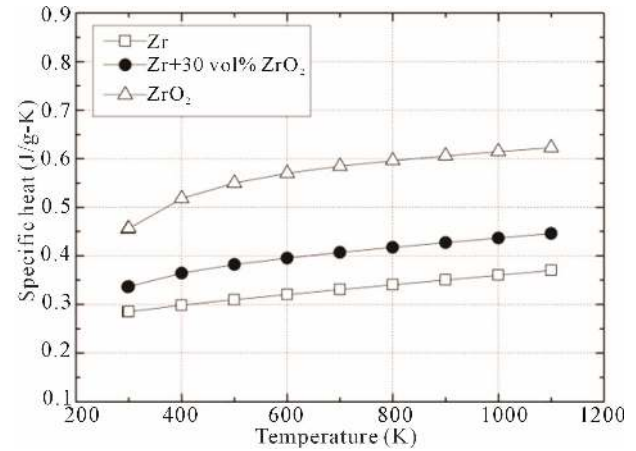


Figure 5. Calculated specific heat of simulated fuel.

The calculated thermal conductivity of the simulated inert matrix fuel based on the thermal diffusivity and thermal expansion data is shown in **Figure 6**. The thermal conductivity of the fuel increased with an increasing temperature. These results are similar with the typical tendency of the thermal conductivity of Zr metal.

The measured data was fitted as a function of temperature. It was also expressed by the following equation, for $298 \text{ K} \leq T \leq 1073 \text{ K}$.

$$k = \frac{1}{0.254 - 1.184 \times 10^{-4} T} + 1.357 \times 10^2 T \exp\left(-\frac{3.583 \times 10^6}{T}\right)$$

From the fitted equation, it could be thought that the thermal conductivity of ZrO_2 -Zr inert matrix fuel was mainly affected by the high thermal conductivity of Zr metal, *i.e.* an effect of the free electron conduction on the thermal conductivity of the inert matrix fuel was more dominant than that of the phonon conduction.

Figure 7 shows the imperfection of microstructure in the interface between Zr matrix and ZrO_2 . If the microstructure imperfection in the interface can be entirely improved, the thermal conductivity of ZrO_2 -Zr inert matrix fuel pellet can be measured more higher.

In the operating temperature (above 700 K) of a LWR (Light Water Reactor) fuel, the thermal conductivity of the inert matrix fuel is higher than that of UO_2 (**Figure 8**).

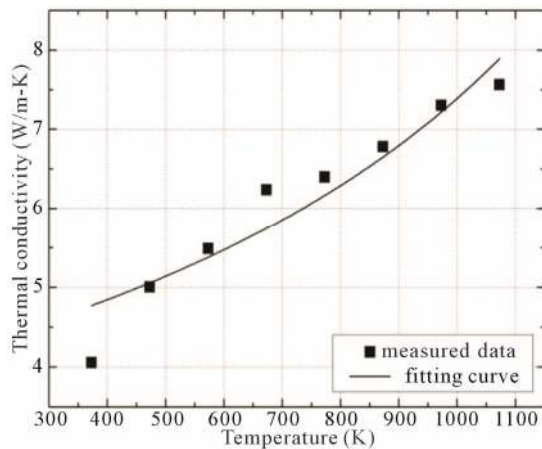


Figure 6. Thermal conductivity as a function of temperature of simulated inert matrix fuel based on the measured and calculated data.

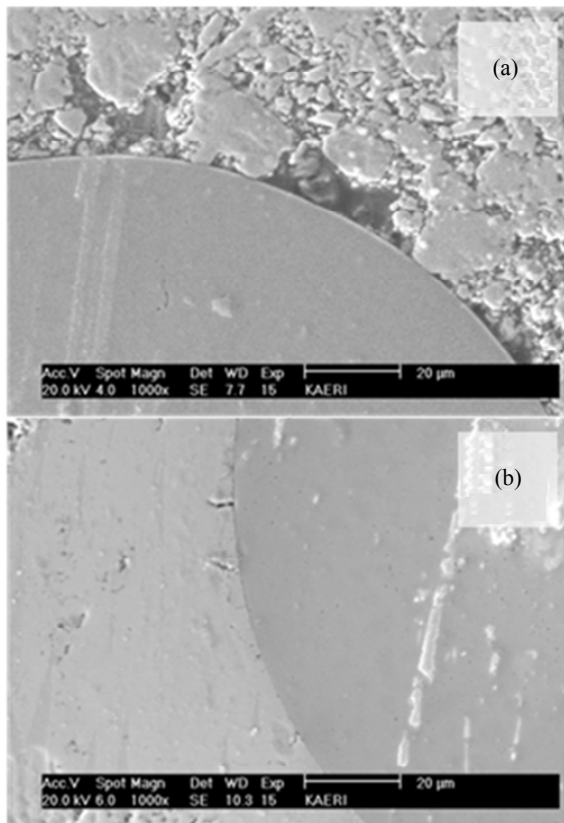


Figure 7. (a) Imperfect and (b) perfect microstructure in the interface between Zr matrix and ZrO_2 . SEM image of polished surface.

Therefore, if the inert matrix fuel is used as LWR fuel, it can be thought that the inert matrix fuel is more effective and safe than UO_2 as LWR fuel.

4. Conclusions

To evaluate the thermal conductivity of an inert matrix

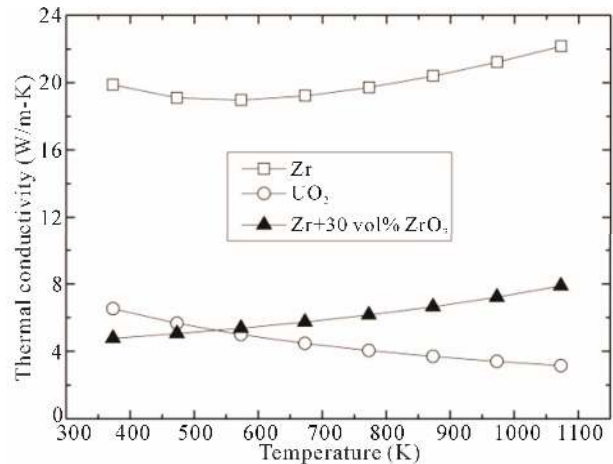


Figure 8. Comparison of thermal conductivity of Zr, UO_2 and ZrO_2 -Zr simulated inert matrix fuel.

fuel, a Zr- ZrO_2 simulated inert matrix fuel was fabricated using a hot pressing method, and its thermophysical properties were measured and calculated. The thermal diffusivity and linear thermal expansion of the simulated inert matrix fuel as a function of temperature were measured using a laser flash method and dilatometry, respectively, from room temperature to 1073 K. Also, the specific heat of the simulated fuel was calculated using literature data and Neumann-Kopp's rule.

In the results, the thermal conductivity of the Zr + 30 vol% ZrO_2 simulated inert matrix fuel was 5.75 W/m-K (averaged at temperature range of measurement). It can be thought that the thermal conductivity of Zr-based inert matrix fuel would be dominantly affected by the thermal conductivity of the metal matrix materials.

Also, if metal-based inert matrix fuel is applied to the LWRs as a nuclear fuel, it is expected that the fuel performance and safety can be enhanced, because the high thermal conductivity of metal-based inert matrix fuel leads to the low centerline temperature of fuel.

5. Acknowledgements

This work was supported by the National Research Foundation of Korea (NRF) grant funded by the Korea government (MEST).

REFERENCES

- [1] IAEA-TECDOC-1516, "Viability of Inert Matrix Fuel in Reducing Plutonium Amounts in Reactors," IAEA, VIENNA, 2006.
- [2] G. Ledergerber, C. Degueldre, P. Heimgartner, M. A. Pouchon and U. Kasemeyer, "Inert Matrix Fuel for the Utilization of Plutonium," *Progress in Nuclear Energy*, Vol. 38, No. 3, 2001, pp. 301-308. [doi:10.1016/S0149-1970\(00\)00122-0](https://doi.org/10.1016/S0149-1970(00)00122-0)
- [3] R. Fielding, M. Meyer, J. Jue and J. Gan, "Gas-Cooled

- Fast Reactor Fuel Fabrication,” *Journal of Nuclear Materials*, Vol. 371, No. 1, 2007, pp. 243-249.
[doi:10.1016/j.jnucmat.2007.05.011](https://doi.org/10.1016/j.jnucmat.2007.05.011)
- [4] M. K. Meyer, R. Fielding and J. Gan, “Fuel Development for Gas-Cooled Fast Reactors,” *Journal of Nuclear Materials*, Vol. 371, No. 1-3, 2007, pp. 281-287.
[doi:10.1016/j.jnucmat.2007.05.013](https://doi.org/10.1016/j.jnucmat.2007.05.013)
- [5] D. E. Burkes, R. S. Fielding, D. L. Porter, M. K. Meyer and B. J. Makenas, “A US Perspective on Fast Reactor Fuel Fabrication Technology and Experience. Part II: Ceramic Fuels,” *Journal of Nuclear Materials*, Vol. 393, No. 1, 2009, pp. 1-11. [doi:10.1016/j.jnucmat.2009.04.023](https://doi.org/10.1016/j.jnucmat.2009.04.023)
- [6] M. Burghartz, H. J. Matzke, C. Léger, G. Vambenepe and M. Rome, “Inert Matrices for the Transmutation of actinides: Fabrication, Thermal Properties and Radiation Stability of Ceramic Materials,” *Journal of Alloy and Compound*, Vol. 271-273, 1998, pp. 544-548.
[doi:10.1016/S0925-8388\(98\)00149-2](https://doi.org/10.1016/S0925-8388(98)00149-2)
- [7] H. Kleykamp, “Selection of Materials as Diluents for Burning of Plutonium Fuels in Nuclear Reactors,” *Journal of Nuclear Materials*, Vol. 275, No. 1, 1999, pp. 1-11.
[doi:10.1016/S0022-3115\(99\)00144-0](https://doi.org/10.1016/S0022-3115(99)00144-0)
- [8] M. A. Pouchon, C. Degueldre and P. Tissot, “Determination of the Thermal Conductivity in Zirconia Based Inert Matrix Nuclear Fuel by Oscillating Differential Scanning Calorimetry and Laser Flash,” *Thermochimica Acta*, Vol. 323, No. 1-2, 1998, pp. 109-121.
[doi:10.1016/S0040-6031\(98\)00504-8](https://doi.org/10.1016/S0040-6031(98)00504-8)
- [9] Y.-W. Lee, H. S. Kim, S. H. Kim, C. Y. Joung, S. H. Na, G. Ledergerber, P. Heimgartner, M. Pouchon and M. Burghartz, “Preparation of Simulated Inert Matrix Fuel with Different Powders by Dry Milling Method,” *Journal of Nuclear Materials*, Vol. 274, No. 1-2, 1999, pp. 7-14.
[doi:10.1016/S0022-3115\(99\)00094-X](https://doi.org/10.1016/S0022-3115(99)00094-X)
- [10] K. S. Kumar, T. Mathews and N. P. Bhat, “Study on Thermal Decomposition and Sintering Behaviour of Internally Gelated Simulated Inert Matrix Fuel,” *Thermochimica Acta*, Vol. 427, No. 1-2, 2005, pp. 27-30.
[doi:10.1016/j.tca.2004.08.008](https://doi.org/10.1016/j.tca.2004.08.008)
- [11] S. Baldi, J. Porta, Y. Peneleau, S. Pelloni, J.-M. Paratte and R. Chawla, “Importance of Zirconium Cross Sections in Calculating Reactivity Effects for Inert Matrix Fuels,” *Progress in Nuclear Energy*, Vol. 38, No. 3-4, 2001, pp. 351-354. [doi:10.1016/S0149-1970\(00\)00133-5](https://doi.org/10.1016/S0149-1970(00)00133-5)
- [12] A. Savchenko, I. Konovalov, S. Ershov, A. Laushkin, G. Kulakov, S. Maranchak, Y. Konovalov and E. Malamanova, “Zirconium Matrix Alloys for High Uranium Content Dispersion Type Fuel,” *International Meeting on LWR Fuel Performance*, Salamanca, 2006.
- [13] L. V. Duyn, “Evaluation of the Mechanical Behavior of a Metal Matrix Dispersion Fuel for Plutonium Burning,” Georgia Institute of Technology, 2003.
- [14] R. Fielding, J. F. Jue and J. Stuart, “Zirconium Metal Inert Matrix Fuel Fabrication,” *Transactions of American Nuclear Society*, Vol. 94, 2006, pp. 742-743.
- [15] B. H. Lee, Y. H. Koo and D. S. Sohn, “Modelling of Thermal Conductivity for High Burnup UO₂ Fuel Retaining Rim Region,” *Journal of Korean Nuclear Society*, Vol. 29, No. 3, 1997, p. 201.
- [16] B. H. Lee, Y. H. Koo, J. S. Cheon, J. Y. Oh, H. K. Joo and D. S. Sohn, “A Thermal Conductivity Model for LWR MOX Fuel and Its Verification Using In-Pile Data,” *Journal of Korean Nuclear Society*, Vol. 34, No. 5, 2002, p. 482.
- [17] K. W. Song, Y. H. Jeong, K. S. Kim, J. G. Bang, T. H. Chun, H. K. Kim and K. N. Song, “High Burnup Fuel Technology in Korea,” *Journal of Korean Nuclear Society*, Vol. 40, No. 1, 2008, pp. 21-36.
- [18] P. G. Lucuta, H. J. Matzke and I. J. Hastings, “A Pragmatic Approach to Modelling Thermal Conductivity of Irradiated UO₂ Fuel: Review and Recommendations,” *Journal of Nuclear Materials*, Vol. 232, No. 2-3, 1996, pp. 166-180. [doi:10.1016/S0022-3115\(96\)00404-7](https://doi.org/10.1016/S0022-3115(96)00404-7)
- [19] C. Ronchi, M. Sheindlin, D. Staicu and M. Kinoshita, “Effect of Burn-Up on the Thermal Conductivity of Uranium Dioxide up to 100,000 MWdt⁻¹,” *Journal of Nuclear Material*, Vol. 327, No. 1, 2004, pp. 58-76.
[doi:10.1016/j.jnucmat.2004.01.018](https://doi.org/10.1016/j.jnucmat.2004.01.018)
- [20] J. J. Carbajo, G. L. Yoder, S. G. Popov and V. K. Ivanov, “A Review of the Thermophysical Properties of MOX and UO₂ Fuels,” *Journal of Nuclear Materials*, Vol. 299, No. 3, 2001, pp. 181-198.
[doi:10.1016/S0022-3115\(01\)00692-4](https://doi.org/10.1016/S0022-3115(01)00692-4)
- [21] University of Sheffield and WebElements Ltd., “WebElements: The Periodic Table on the Web.”
<http://www.webelements.com/>
- [22] K. Minato, T. Shiratori, H. Serizawa, K. Hayashi, K. Une, K. Nogita, M. Hirai and M. Amaya, “Thermal Conductivities of Irradiated UO₂ and (U, Gd)O₂,” *Journal of Nuclear Materials*, Vol. 288, No. 1, 2001, pp. 57-65.
[doi:10.1016/S0022-3115\(00\)00578-X](https://doi.org/10.1016/S0022-3115(00)00578-X)
- [23] K. Kurosaki, R. Ohshima, M. Uno, S. Yamanaka, K. Yamamoto and T. Namekawa, “Thermal Conductivity of (U, Ce)O₂ with and without Nd or Zr,” *Journal of Nuclear Materials*, Vol. 294, 2001, pp. 193-197.
[doi:10.1016/S0022-3115\(01\)00458-5](https://doi.org/10.1016/S0022-3115(01)00458-5)
- [24] A. L. Loeb, “A Theory of Thermal Conductivity of Porous Materials,” *Journal of American Ceramic Society*, Vol. 37, No. 2, 1954, pp. 96-99.
[doi:10.1111/j.1551-2916.1954.tb20107.x](https://doi.org/10.1111/j.1551-2916.1954.tb20107.x)