

# UC Berkeley

## UC Berkeley Previously Published Works

### Title

Ultrafast fluorescent decay induced by metal-mediated dipole-dipole interaction in two-dimensional molecular aggregates.

### Permalink

<https://escholarship.org/uc/item/9fg7f44x>

### Journal

Proceedings of the National Academy of Sciences of the United States of America, 114(38)

### ISSN

0027-8424

### Authors

Hu, Qing  
Jin, Dafei  
Xiao, Jun  
et al.

### Publication Date

2017-09-01

### DOI

10.1073/pnas.1703000114

Peer reviewed



# Ultrafast fluorescent decay induced by metal-mediated dipole–dipole interaction in two-dimensional molecular aggregates

Qing Hu<sup>a</sup>, Dafei Jin<sup>a,1</sup>, Jun Xiao<sup>b</sup>, Sang Hoon Nam<sup>a</sup>, Xiaoze Liu<sup>b</sup>, Yongmin Liu<sup>c,d</sup>, Xiang Zhang<sup>b,e,f</sup>, and Nicholas X. Fang<sup>a,1</sup>

<sup>a</sup>Department of Mechanical Engineering, Massachusetts Institute of Technology, Cambridge, MA 02139; <sup>b</sup>Nanoscale Science and Engineering Center, University of California, Berkeley, CA 94720; <sup>c</sup>Department of Electrical and Computer Engineering, Northeastern University, Boston, MA 02115; <sup>d</sup>Department of Mechanical and Industrial Engineering, Northeastern University, Boston, MA 02115; <sup>e</sup>Material Sciences Division, Lawrence Berkeley National Laboratory, Berkeley, CA 94720; and <sup>f</sup>Department of Physics, King Abdulaziz University, Jeddah 21589, Saudi Arabia

Edited by Evelyn L. Hu, Harvard University, Cambridge, MA, and approved August 10, 2017 (received for review February 24, 2017)

**Two-dimensional molecular aggregate (2DMA), a thin sheet of strongly interacting dipole molecules self-assembled at close distance on an ordered lattice, is a fascinating fluorescent material. It is distinctively different from the conventional (single or colloidal) dye molecules and quantum dots. In this paper, we verify that when a 2DMA is placed at a nanometric distance from a metallic substrate, the strong and coherent interaction between the dipoles inside the 2DMA dominates its fluorescent decay at a picosecond timescale. Our streak-camera lifetime measurement and interacting lattice–dipole calculation reveal that the metal-mediated dipole–dipole interaction shortens the fluorescent lifetime to about one-half and increases the energy dissipation rate by 10 times that expected from the noninteracting single-dipole picture. Our finding can enrich our understanding of nanoscale energy transfer in molecular excitonic systems and may designate a unique direction for developing fast and efficient optoelectronic devices.**

molecular aggregate | fluorescence | nonradiative decay | dipole–dipole interaction | surface plasmon

How a fluorescent nanoemitter releases its energy to the environment is a longstanding research topic in nanoscale light-energy collection and conversion (1–4). In the past decades, there have been considerable investigations on the fluorescence enhancement and quenching of a nanoemitter influenced by a structured environment (5–8). It is known that in a lossless medium, the emitter can decay radiatively by emitting photons or nonradiatively by generating molecular vibrations (9–11). The typical fluorescence lifetime due to these two dissipation channels is of the order of nanoseconds (12, 13). By contrast, in the proximity of a lossy medium such as a metallic substrate, the emitter can also decay nonradiatively through transferring energy into collective electron oscillations. The strength of this dissipation channel usually dominates over that of the above two channels and results in a significantly shortened fluorescence lifetime down to tens of picoseconds (14, 15).

So far, most of the nanoemitters studied are single dye molecule (DM), single quantum dot (QD), or colloids of randomly dispersed DMs or QDs (5, 6, 16). In such systems, each emitter can be well described by a single dipole which interacts exclusively with the environment. Owing to the sparsity and randomness of the dipole distribution, interaction between different dipoles at different locations is considered negligible in earlier works (17). Strikingly, however, the so-called molecular aggregate (MA) belongs to a unique class of nanoemitters that behave rather distinctively from the above. Each MA can be envisioned as a collection of self-assembled dipoles arranged at a close distance (~1 nm) on an ordered molecular lattice (18–20). The primary interaction between the molecular dipoles within a MA is the Coulombic dipole–dipole interaction, as opposed to the photonic radiation–absorption interaction. The

Coulomb interaction is intrinsically coherent (no random processes are involved). As a consequence, the energy levels in the MA undergo an overall reorganization to form a blue-shifted H band or a red-shifted J band, producing the so-called H aggregate or J aggregate, respectively (21, 22). The fascinating MAs can exhibit strong exciton–photon coupling (23–28) and superradiance (29, 30) and have been used to demonstrate fundamentally important phenomena, such as Rabi splitting (31–33) and room-temperature Bose–Einstein condensation (34, 35). They have also been applied to design various devices, such as organic light-emitting diodes (36), solar cells (37), and light-harvesting organic antennas (38, 39).

In this work, we identify the dominant role of metal-mediated dipole–dipole interaction in controlling the ultrafast quenching and energy dissipation of a two-dimensional molecular aggregate (2DMA) placed near a metallic substrate. Through a series of delicate molecular-level fabrication and picosecond-timescale measurement, we have observed a greatly shortened fluorescence lifetime down to only 5 ps or less. This observation can be interpreted only by our interacting lattice–dipole model, as opposed to the conventional single-dipole model where the internal interaction is completely ignored. Based on the interacting-dipole model, we are able to demonstrate that the amplitude and phase of this interaction between the dipoles are strongly affected by a metallic substrate at a precisely controlled nanometric distance from the 2DMA. The metal-mediated dipole–dipole interaction in the 2DMA leads to at least 10 times greater

## Significance

**Quantitative understanding of the ultrafast energy transfer between fluorescent nanoemitters and the environment is essential in nanophotonics and optoelectronics and beneficial to many industrial applications. For nanoemitters like single or colloidal dye molecules or quantum dots, their fluorescence decay near a metallic substrate can be described by a noninteracting single-dipole picture. In this work, we find a dominant fluorescent decay channel in a 2D molecular aggregate as a result of the strong and coherent dipole–dipole interaction mediated by a metallic substrate. This unique mechanism leads to an ultrafast fluorescent decay and 10-times greater energy dissipation rate than expected. Our finding opens up a unique way to manipulate energy transfer and to develop light-energy devices on the molecular level.**


Author contributions: Q.H., D.J., X.Z., and N.X.F. designed research; Q.H. and D.J. performed research; J.X., S.H.N., and X.L. contributed to sample characterization and time-resolved measurement; Q.H., D.J., and Y.L. analyzed data; Q.H., D.J., and Y.L. wrote the paper; and N.X.F. led the project.

The authors declare no conflict of interest.

This article is a PNAS Direct Submission.

<sup>1</sup>To whom correspondence may be addressed. Email: nicfang@mit.edu or dafejin@mit.edu.



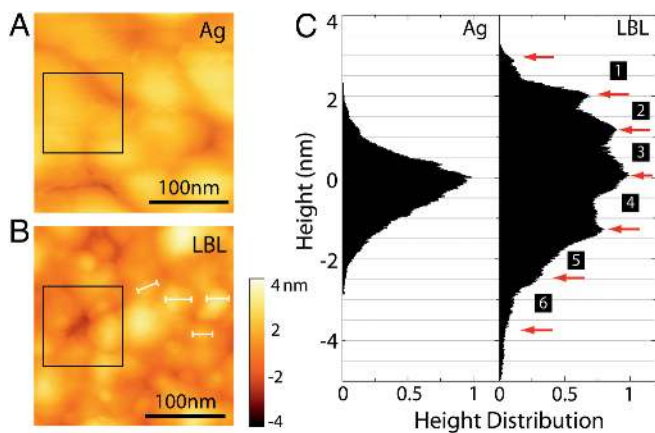

**Fig. 3.** Morphologic characterization of the LBL structure of MUA-(PDDA/PolyArc)-(PDDA/TDBC/PDDA). (A) AFM image for bare 100-nm Ag on quartz. (B) AFM image for a molecular multilayer on Ag. The size of the scanning area is  $0.25 \mu\text{m} \times 0.25 \mu\text{m}$ . The white bars indicate the typical size of molecular aggregate domains. (C) The statistical height distribution in the areas marked by the black boxes in A and B. The red arrows indicate the discrete steps labeled with numbers. Each number corresponds to a layer labeled in Fig. 2.

narrow, and redshifted J band with respect to the monomer band and is chemically compatible with various nanofabrication techniques. Bridging single molecules and large-size crystals, TDBC aggregate has been considered as an ideal mesoscopic material for making excitonic devices (45).

**Molecular Multilayer Growth.** Our experiment requires deposition of a well-ordered molecular monolayer on a high-quality metal surface and a precise control of the spacer thickness. We achieve this by molecular layer-by-layer (LBL) adsorption (45, 46) (schematically shown in Fig. 2). The LBL technique has been well known for its reliability in making molecular-level devices (36, 45, 47–49). Our substrate is prepared by evaporating 100-nm-thick Ag at a rate of  $0.8 \text{ \AA/s}$  on a well-cleaned ultraflat ( $<5 \text{ \AA}$  roughness) quartz plate. The fresh-made substrate is then immersed into a 0.1-M 11-mercaptoundecanoic (11-MUA) acid aqueous solution to conformally coat a monolayer of decanoic acid. The Ag with the decanoic acid group on top carries negative charges and is able to adsorb poly(diallyldimethylammonium) chloride (PDDA) (a cationic polyelectrolyte). The anionic polyelectrolyte sodium polyacrylate (PolyArc) is then adsorbed onto the positively charged surface of PDDA.  $n$  layers of PDDA and PolyArc, denoted by (PDDA/PolyArc) $_n$ , can be subsequently adsorbed. It provides a spacer of precisely controlled thickness  $n \times d_s$  at a molecular level (refer to the labeling “4” and “5” in Fig. 2). Finally, TDBC anionic cyanine


molecules can strongly adhere to the positively charged PDDA and form a J-aggregate monolayer. We thus make a (PDDA/TDBC/PDDA) assembly on top of the spacer with the thickness  $d_j$ . The overall molecular multilayer structure can be written as MUA-(PDDA/PolyArc) $_n$ -(PDDA/TDBC/PDDA) from the bottom to the top.

**Morphology Characterization.** The LBL thin films grown on the Ag surface possess a morphology as layered materials bearing nanometric thickness variation (45). The topography can be verified by atomic force microscopy (AFM), which also determines the thickness of each layer. Fig. 3 shows the AFM (CypherAFM) scanned surface morphology with and without coated molecules. The 100-nm Ag by electron-beam evaporation on quartz has about 50–100 nm grain size (Fig. 3A). The square-root roughness is around 1.9 nm. After completing the molecule deposition as shown in Fig. 2, the surface morphology changes. In Fig. 3B, we can observe the lumped regions with clear boundaries, which are J-aggregate domains (18, 19). The domain size (labeled with white lines) is about 20–30 nm. It is known that each TDBC monomer has the in-plane dimension of 1–3 nm (50), so the total number  $N$  of individual molecules in each J-aggregate domain is about 40–60, which is consistent with the literature (51). Histograms of height distribution on a bare-Ag sample (shown in the black box in Fig. 3A). The histogram (marked with “Ag” in Fig. 3C) shows a Gaussian-like distribution. To see the multilayer feature of the LBL sample, we select an area near the sample edge where the molecular layers are porous. In this area, different numbers of molecular layers are randomly exposed under the AFM tip. They cause statistically discrete height variation. A histogram of the AFM counts over this area then exhibits discrete steps (marked with numbers in Fig. 3C). The jump between every two peaks corresponds to the thickness of one molecular layer (45). According to this measurement we can obtain the thickness of each layer from the top to the bottom to be around 1.0 nm, 0.9 nm, 1.2 nm, 1.3 nm, 1.2 nm, and 1.5 nm, respectively. Hence one spacer layer ( $d_s$ ) is around 2.5 nm thick, the 11-MUA layer ( $d_{\text{MUA}}$ ) is around 1.5 nm thick, and the PDDA ( $d_{\text{PDDA}}$ ) is around 1.2 nm thick. To systematically study the effect of distance  $d$  between TDBC and Ag on the fluorescence behavior, we fabricate a series of samples with  $n$  numbers of spacer layers ( $n=1-6$ ). This provides a fine-tuned distance  $d = d_{\text{MUA}} + n \times d_s + d_{\text{PDDA}}$  from 5.2 nm to 17.7 nm.


Our LBL technique guarantees excellent conformity between Ag and PDDA/TDBC molecular layers throughout the major area of the sample. This ensured conformity is the most critical to the optical measurement. The about 2-nm roughness of Ag over 50–100 nm grain area merely induces a slow topography variation to the entire stack. It does not affect our observation of fluorescence lifetime and photoluminescence intensity of 2DMA.

## Results and Discussion

**Fluorescence Lifetime and Photoluminescence Measurement.** The fluorescence lifetime of the J aggregate is measured by a picosecond streak-camera setup as shown in Fig. 4A. The excitation light is carried out with an optical parametric oscillator (Spectra Physics; Inspire HF 100) pumped by a mode-locked Ti:sapphire

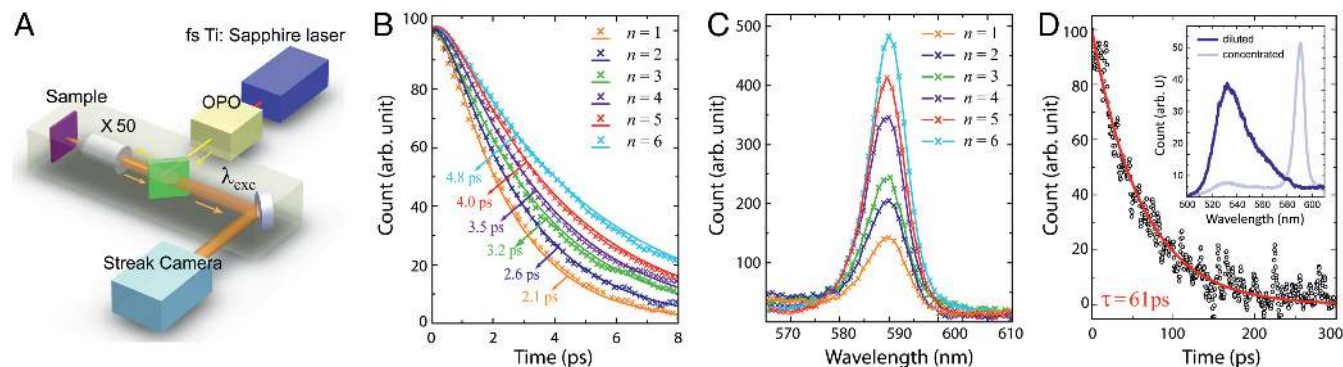

**Fig. 4.** Lifetime and photoluminescence measurement for the molecular multilayer structures of MUA-(PDDA/PolyArc) $_n$ -(PDDA/TDBC/PDDA) with  $n = 1, 2, \dots, 6$ , and sparsely distributed TDBC monomers. (A) Picosecond streak-camera setup for the fluorescence lifetime measurement. (B) Time-resolved photon counts (marks) and exponential-fitting curves (solid lines). (C) Measured photoluminescence intensity. The structures with different numbers of spacer layers from 1 to 6 are shown in different colors. (D) Time-resolved photon counts (circles) for sparse TDBC monomers on an Ag surface with 5 nm  $\text{SiO}_2$  spacer and the exponential fitting curve (solid line). Inset shows the measured photoluminescence intensity of diluted TDBC monomer solution, in comparison with that of concentrated TDBC J-aggregate solution.

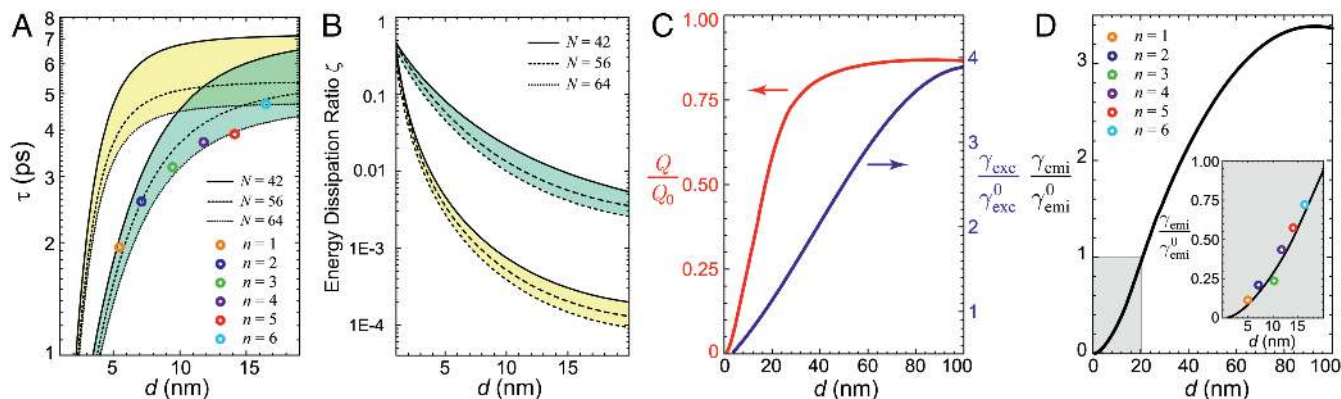

**Fig. 5.** Theoretical analysis of the fluorescence behavior of the J aggregate on the Ag surface with different numbers of spacer layers. (A) Calculated lifetime based on the single-dipole model (yellow region) and the lattice-dipole model (green region) as a function of distance  $d$  from the substrate. In the calculation, the total number of dipoles in the array is set to be 42, 56, and 64 for both models and is shown in the solid, dashed, and dotted lines, respectively. The measured lifetime from Fig. 4A is plotted with circles. Only the lattice-dipole model agrees with the measurement. (B) Calculated energy dissipation rate based on the single-dipole model (yellow region) and the lattice-dipole model (green region) as a function of distance  $d$  from the substrate. (C) Calculated normalized excitation rate (in red) and radiation rate (in blue) as a function of  $d$ . (D) Calculated emission rate as a function of  $d$ . Inset zooms in the near-surface region ( $d < 20$  nm). For comparison, the measured photoluminescence intensity imported from Fig. 4C is also displayed (circles).

oscillator. The laser pulse width is about 200 fs and the repetition rate is 80 MHz. The light is guided into a Zeiss inverted microscope (Axiovert 200) and focused onto the sample by a Zeiss 50 $\times$  objective. The emission signal is detected in the reflection configuration, and the signal passing through a bandpass filter with a bandwidth of 30 meV is collected by a synchroscan Hamamatsu streak camera (C10910-02), whose overall time resolution is 2 ps. The transmissivity of the optical system is carefully calibrated to evaluate the absolute power level at the focusing plane. The laser pulse width is measured by a home-built autocorrelator at the focus throughout the scanning range. The incident wavelength is chosen at 585 nm for on-resonance excitation of TDBC. For each sample, the measurement is repeated several times in different areas of samples and the final result is the average of multiple measurements. In Fig. 4B, the measured time-resolved fluorescent intensities of the molecular structures with one to six spacer layers are shown by the marks of different colors. The exponential fitting (solid lines in the same color) assisted with a convolution algorithm (52) indicates the increase of lifetime with the increasing distance  $d$ . The overall lifetime is extremely short and only several picoseconds.

We also measured the photoluminescence (PL) spectrum (Horiba Fluorolog-3) for different spacer thickness  $d$ , as shown in Fig. 4C. The result displays a trend that the fluorescence power increases with  $d$ . It agrees with our expectation that when the fluorescence material is brought away from a lossy medium, the nonradiative decay usually drops.

As an important reference, we performed the same measurement for sparsely distributed TDBC monomers near an Ag surface. In this situation, the monomer lifetime must be well described by the noninteracting single-dipole model following Eqs. 4 and 5. We use an extremely dilute TDBC solution with the concentration of 1.5  $\mu$ M so that only TDBC monomers exist. We drop cast only 1  $\mu$ L of such solution onto a sample, which has been precoated with 100 nm Ag and 5 nm SiO<sub>2</sub> as a spacer. The intermolecular distance can be estimated to be over 10 nm, at which the Coulombic dipole-dipole interaction can be completely ignored and the single-dipole model must be valid. The observed PL spectrum clearly shows the 530-nm monomer peak as opposed to the 590-nm J-aggregate peak (Fig. 4D, Inset).

The fluorescence lifetime measurement on the monomer sample follows the same scheme as in Fig. 4A. But the excitation wavelength is changed to 460 nm. To select the emitted photons around the monomer peak only, we use a bandpass filter

of  $530 \pm 10$  nm. We observe a long lifetime of about 61 ps, as exponentially fitted in Fig. 4D. This number is consistent with the single-dipole model calculation.


**Theoretical Analysis and Comparison with Experiment.** Our theoretical analysis for the fluorescent behaviors is based on our interacting lattice-dipole model. Each TDBC monomer is treated as a dipole with the Lorentzian polarizability (46),

$$4\pi\alpha(\omega) = 4\pi\alpha(\omega)\mathbf{e}_x\mathbf{e}_x = \frac{\omega_0^2 f_0}{\omega_0^2 - \omega^2 - i\omega\gamma_0} \mathbf{e}_x\mathbf{e}_x, \quad [6]$$

where  $\omega_0$  gives the experimentally observed monomer resonance wavelength around 530 nm, and  $\gamma_0$  gives its free-space fluorescence lifetime about 260 ps (53), which is strongly limited by the nonradiative vibration levels (19).  $f_0$  is the oscillator strength. With a brickstone pattern,  $f_0$  can be chosen such that the resonance wavelength of the J aggregate can be fitted to the experimentally observed value around 590 nm (18, 19). In the absence of an incident field, we can summarize Eqs. 1 and 2 into a matrix eigenvalue problem,

$$(\omega^2 + i\omega\gamma_0 - \omega_0^2) \mathbf{G} = \mathbf{G} \cdot \mathbf{P}, \quad [7]$$

where  $\mathbf{P}$  is a column vector  $(p_1, p_2, \dots, p_N)^T$  and  $\mathbf{G}$  is an  $N \times N$  matrix determined by Eq. 2. The eigenfrequencies solved from

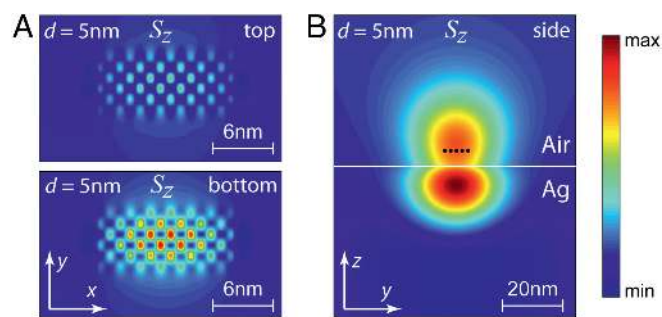

**Fig. 6.** Distribution of the energy flux density of the system. (A) Top view and Bottom view of the distribution on the dipole lattice. The viewing plane ( $xy$ ) is located at 5 nm above (Top) and below (Bottom) from the dipole plane. Here  $d$  is chosen as 5 nm. (B) Lateral views of the distribution on the dipole lattice. The viewing plane ( $yz$ ) is located 30 nm away from the edge of the dipole lattice.

Eq. 7 are generally complex valued,  $\tilde{\omega} = \omega_J - \frac{i}{2}\gamma$ . The imaginary part gives the lifetime of the mode  $\tau = \gamma^{-1}$  from the nonradiative decay. The lattice-dipole mode profile can be obtained by the eigenstates of  $\mathbf{P}$ . The majority of the solutions are the so-called dark modes, which cannot be excited by incoming light. We are interested only in the so-called bright mode. It can be easily identified, as it necessarily has the least phase variation over the J-aggregate domain.

The calculated lifetime of the bright mode as a function of the distance  $d$  is plotted in Fig. 5A. The three curves spanning the green region correspond to a variable total dipole number  $N$ . The colored circles are the experimental results from Fig. 4B. Our theoretical calculation matches the trend of the experimental results very well. For comparison, we plot in yellow the lifetime calculated from the conventional single-dipole model (refer to Eqs. 4 and 5). Apparently, the trend in yellow deviates significantly from the measurement. In other words, the actual lifetime of the J aggregate is much shorter than expected from the single-dipole picture. This means that the major dissipation channel lies in the metal-mediated dipole-dipole interaction.

We are also able to analyze the energy dissipation and fluorescent properties in great detail. At a close distance to the metal surface, the emissive energy of 2DMA mostly goes into the Drude loss (electron-phonon collision) inside the metal. We can define an energy dissipation ratio as the energy flux toward the metal vs. the total energy flux in all directions,  $\zeta = \frac{\text{Re}[\int_{\sigma^-} \mathbf{S} \cdot d\boldsymbol{\sigma}]}{\text{Re}[\int_{\sigma} \mathbf{S} \cdot d\boldsymbol{\sigma}]}$ , where  $\mathbf{S}$  is the energy flux density calculated using the retarded formula of dipole radiation (43),  $\sigma$  is a closed surface surrounding the dipole lattice, and  $\sigma^-$  is the integration area beneath the 2DMA but above the substrate. Fig. 5B shows  $\zeta$  as a function of  $d$  with our lattice-dipole model, in comparison with the conventional single-dipole model. The energy dissipation rate of the former is about 10 times greater than that of the latter. This means that in reality much more emissive energy from 2DMA than one would expect is transferred to the lossy metal.

The fluorescence process involves excitation and radiation (5–7). The abilities of excitation and radiation can be represented by the emission rate  $\gamma_{\text{emi}}$  and the quantum yield  $Q$  defined as  $Q = \frac{\gamma_{\text{rad}}}{\gamma}$ , where  $\gamma_{\text{rad}}$  and  $\gamma$  are the radiative decay rate and total decay rate, respectively. So the emission rate can be written as  $\gamma_{\text{emi}} = \gamma_{\text{exc}} Q = \gamma_{\text{exc}} (\frac{\gamma_{\text{rad}}}{\gamma})$ . The dipoles above a metallic substrate are excited by the addition of incident field  $\mathbf{E}_{\text{inc}}$  and reflected field from the substrate  $r\mathbf{E}_{\text{inc}}$ . The normalized excitation rate can be expressed as

$$\frac{\gamma_{\text{exc}}}{\gamma_{\text{exc}}^0} = \left| \frac{\mathbf{e}_x \cdot [\mathbf{E}_{\text{inc}} + r\mathbf{E}_{\text{inc}}]}{\mathbf{e}_x \cdot [\mathbf{E}_{\text{inc}} + r_0\mathbf{E}_{\text{inc}}]} \right|^2, \quad [8]$$

where  $r$  and  $r_0$  are the reflection coefficients of the silver substrate and a reference quartz substrate, respectively. The quantum yield can be calculated by the ratio of time-averaged energy flux toward the upper space vs. the total energy flux toward the whole space and so can be expressed as

$$Q = \frac{\gamma_{\text{rad}}}{\gamma} = \frac{\text{Re}[\int_{\sigma^+} \mathbf{S} \cdot d\boldsymbol{\sigma}]}{\text{Re}[\int_{\sigma} \mathbf{S} \cdot d\boldsymbol{\sigma}]}, \quad [9]$$

where  $\sigma^+$  is the part of  $\sigma$  facing the upper half-space. To normalize  $Q$ , we choose a bare quartz without Ag as the substrate to calculate  $Q_0$ .

Fig. 5C shows the normalized quantum yield  $Q/Q_0$  and excitation rate  $\gamma_{\text{exc}}/\gamma_{\text{exc}}^0$  as a function of  $d$ . We can see that  $Q$  increases with increasing  $d$ . It reaches a saturation value when  $d$  approaches about 50 nm. Fig. 5D shows the emission rate of the 2DMA. It is strongly suppressed as  $d$  is smaller than 20 nm. Fig. 5D, *Inset* gives a zoom-in of the curve for the short distance (the shaded region). The colored circles indicate the PL data from Fig. 4C after an appropriate normalization to quartz samples. Our theoretical calculation matches the experimental results reasonably well. This further proves that the interacting lattice-dipole model successfully describes the 2DMA near a metallic substrate. Moreover, we have calculated the energy flux density of a 6-by-7 dipole lattice, as an example. Fig. 6A shows the amplitude distribution of the forward and backward energy flux density along  $z$  viewed from the top and bottom, respectively. The backward energy flux density, which dissipates into the metal, is much stronger than the forward one. The color map clearly exhibits a brickstone lattice pattern, where the amplitude is stronger in the center and weaker on the edge. It displays detailed structures that cannot be obtained from an effective single dipole. Fig. 6B shows the distribution of  $S_z$  viewed from the side. It also suggests that the major portion of energy flows into the metal region.

## Conclusion

We have investigated the fluorescent behaviors of 2D molecular aggregates at different distances from a metallic substrate, by measuring the lifetime and photoluminescence intensity. Our study shows that when the molecular aggregates are close to the metal surface, the dipole-dipole interaction mediated by the metal plays a dominant role in the nonradiative decay. It leads to an ultrafast fluorescent decay and ultrastrong energy dissipation. The studies of coupled systems of molecular aggregate and metal can deepen our understanding of the interaction between nanoemitters and nanostructures. Our findings provide guidelines to design and optimize fast and efficient molecular optoelectronic devices.

**ACKNOWLEDGMENTS.** Q.H. thanks Tresback Jason in the Center for Nanoscale Systems at Harvard University for his help on AFM characterization. D.J. thanks Steven Kooi in the Institute for Soldier Nanotechnologies at Massachusetts Institute of Technology (MIT), Cambridge, MA for his help on photoluminescence measurement. N.X.F., Q.H., D.J., and S.H.N. acknowledge financial support by the National Science Foundation (NSF) (Grant CMMI-1120724) and Air Force Office of Scientific Research (AFOSR) Multidisciplinary Research Program of the University Research Initiative (MURI) (Award FA9550-12-1-0488). N.X.F. and S.H.N. are also supported by the Cooperative Agreement between the Masdar Institute of Science and Technology (Masdar Institute), Abu Dhabi, United Arab Emirates and MIT, Reference 2/MI/MI/CP/11/07633/GEN/G/00. X.Z., J.X., and X.L. acknowledge financial support from AFOSR MURI (Award FA9550-12-1-0488), "Light-Material Interactions in Energy Conversion" Energy Frontier Research Center funded by the US Department of Energy, Office of Science, Office of Basic Energy Sciences (Award DE-AC02-05CH11231) (for fluorescence lifetime measurement), and the King Abdullah University of Science and Technology Office of Sponsored Research (OSR) (Award OSR-2016-CRG5-2950-03). Y.L. acknowledges the financial support of the NSF under Grant DMR-1654192 and the support of the 3M Non-Tenured Faculty Award.

1. Andrew P, Barnes WL (2000) Forster energy transfer in an optical microcavity. *Science* 290:785–788.
2. Herek JL, Wohlleben W, Cogdell RJ, Zeidler D, Motzkus M (2002) Quantum control of energy flow in light harvesting. *Nature* 417:533–535.
3. Coles DM, et al. (2014) Polariton-mediated energy transfer between organic dyes in a strongly coupled optical microcavity. *Nat Mater* 13:712–719.
4. Rabouw FT, Hartog SA, Senden T, Meijerink A (2014) Photonic effects on the Forster resonance energy transfer efficiency. *Nat Commun* 5:1–6.
5. Dulkeith E, Morteaux AC, Niedereichholz T, Klar TA, Eeldmann J (2002) Fluorescence quenching of dye molecules near gold nanoparticles: Radiative and nonradiative effects. *Phys Rev Lett* 89:203002.

6. Anger P, Bharadwaj P, Novotny L (2006) Enhancement and quenching of single-molecule fluorescence. *Phys Rev Lett* 96:113002.
7. Kinkhabwala A (2009) Large single-molecule fluorescence enhancements produced by a bowtie nanoantenna. *Nat Photon* 3:654–657.
8. Alexander W, et al. (2014) Distinctive signature of indium gallium nitride quantum dot lasing in microdisk cavities. *Proc Natl Acad Sci USA* 111:14042–14046.
9. Chance RR, Prock A, Sibley R (1978) Molecular fluorescence and energy transfer near interfaces. *Advances in Chemical Physics*, eds Prigogine I, Rice SA (Wiley, Hoboken, NJ), Vol 37.
10. Novotny L (1996) Single molecule fluorescence in inhomogeneous environments. *Appl Phys Lett* 69:3806–3808.

