



Photo-assisted Electrochemical Degradation of Polychlorinated Biphenyls (PCBs) with Boron Doped Diamond Electrodes

Journal:	<i>Environmental Technology</i>
Manuscript ID	TENT-TENT-2017-0563.R1
Manuscript Type:	Original Article
Date Submitted by the Author:	n/a
Complete List of Authors:	Gutiérrez-Hernández, Rubén; Instituto Tecnológico de Tapachula, Ingeniería Química Bello-Mendoza, Ricardo; University of Canterbury, Department of Civil and Natural Resources Engineering Peralta-Hernández, Juan; Universidad de Guanajuato Division de Ciencias Naturales y Exactas, Departamento de Química Hernández-Ramírez, Aracely; Universidad Autónoma de Nuevo León, Facultad de Ciencias Químicas Malo, Edi; El Colegio de la Frontera Sur Nájera, Hugo; Universidad de Ciencias y Artes de Chiapas, Environmental Engineering
Keywords:	Advanced electrochemical oxidation processes, BDD electrodes, Persistent organic pollutants, Photoelectro-Fenton system, PCB209

SCHOLARONE™
Manuscripts

1
2
3 **Photo-assisted Electrochemical Degradation of Polychlorinated**
4
5 **Biphenyls (PCBs) with Boron Doped Diamond Electrodes**
6
7

8
9 Rubén F. Gutiérrez-Hernández^{a,b}, Ricardo Bello-Mendoza^{b,c}, Juan M.

10
11 Peralta-Hernández^d Aracely Ramírez-Hernández^e, Edi A. Malo^b, Hugo A.

12
13
14 Nájera-Aguilar^f
15

16
17 ^a*Departamento de Ingeniería Química y Bioquímica, Instituto Tecnológico de*
18
19 *Tapachula; Tapachula, Chiapas, Mexico*

20
21 ^b*El Colegio de la Frontera Sur, Unidad Tapachula; Tapachula, Chiapas, Mexico*
22

23
24 ^c*Department of Civil and Natural Resources Engineering, University of Canterbury;*
25
26 *Christchurch, New Zealand*

27
28 ^d*Departamento de Química, Universidad de Guanajuato; Guanajuato, Guanajuato,*
29
30 *Mexico*

31
32 ^e*Facultad de Ciencias Químicas, Universidad Autónoma de Nuevo León; Monterrey,*
33
34 *Nuevo León, Mexico*

35
36 ^f*Escuela de Ingeniería Ambiental, Universidad de Ciencias y Artes de Chiapas; Tuxtla*
37
38 *Gutiérrez, Chiapas, Mexico*
39
40
41
42

43 **Full contact details/ORCID**

44
45
46 Rubén Fernando Gutiérrez-Hernández; rgutierrez@ittapachula.edu.mx; Departamento
47
48 de Ingeniería Química y Bioquímica, Instituto Tecnológico de Tapachula; Km. 2

49
50 Carretera a Puerto Madero, Tapachula 30700, Chiapas, México; +52 (962) 62 529 00
51
52 ext. 222; <http://orcid.org/0000-0001-8642-9075>
53
54
55
56
57
58
59
60

1
2
3 Ricardo Bello-Mendoza; ricardo.bellomendoza@canterbury.ac.nz; Department of Civil
4 and Natural Resources Engineering, University of Canterbury; Private Bag 4800,
5
6 Christchurch 8140, New Zealand; +64 (03) 364 2987 ext. 6407; [http://orcid.org/0000-](http://orcid.org/0000-0002-4596-9363)
7
8 [0002-4596-9363](http://orcid.org/0000-0002-4596-9363); **corresponding author**

9
10
11
12
13
14 Juan Manuel Peralta-Hernández; juan.peralta@ugtomx.onmicrosoft.com;
15
16 Departamento de Química, Universidad de Guanajuato-DCNE; Cerro de la Venada
17
18 s/n, Pueblito de Rocha, Guanajuato 36040, Guanajuato, México; +52 (473) 732 7555
19
20 ext. 5416; <http://orcid.org/0000-0002-4211-5346>

21
22
23
24
25 Ma. Aracely Hernández-Ramírez; aracely.hernandezrm@uanl.edu.mx; Facultad de
26
27 Ciencias Químicas, Universidad Autónoma de Nuevo León; Av. Guerrero y Progreso
28
29 s/n, Col. Treviño, Monterrey 64570, Nuevo León, México; +52 (81) 83-29-4000 Ext.
30
31 3406 y 3438; <http://orcid.org/0000-0002-4267-157X>

32
33
34
35
36 Edi Alvaro Malo Rivera; emr@ecosur.mx; El Colegio de la Frontera Sur; Carretera
37
38 Antiguo Aeropuerto Km. 2.5. Tapachula 30700, Chiapas, México; +52 (962) 6289800
39
40 ext. 5450; <http://orcid.org/0000-0002-1697-0277>

41
42
43
44
45 Hugo Alejandro Nájera-Aguilar; hnajera72@hotmail.com; Escuela de Ingeniería
46
47 Ambiental, Universidad de Ciencias y Artes de Chiapas; Ira Sur Poniente No. 1460,
48
49 Tuxtla Gutiérrez 29000, Chiapas, México; +52 (961) 61 704 00; [http://orcid.org/0000-](http://orcid.org/0000-0002-9337-8242)
50
51 [0002-9337-8242](http://orcid.org/0000-0002-9337-8242)

Disclosure statement

The authors declare no conflict of interest.

Acknowledgements

R.F. Gutiérrez-Hernández gratefully acknowledges the scholarships provided by CONACyT and DGEST.

Word count: 4,140 (main text only)

Photo-assisted Electrochemical Degradation of Polychlorinated Biphenyls (PCBs) with Boron Doped Diamond Electrodes

The capacity of the photo electro-Fenton (PEF) process to degrade a mixture of seven polychlorinated biphenyl (PCB) congeners (PCB28, PCB52, PCB101, PCB138, PCB153, PCB180 and PCB209), each at an initial concentration of $50 \mu\text{g L}^{-1}$, was studied. Boron-doped diamond (BDD) sheets were used as anode and cathode in the experimental electrolytic cell that contained Na_2SO_4 0.05 M at pH 3 as supporting electrolyte for the electro generation of H_2O_2 at the cathode. The effects of UV light intensity (254 and 365 nm), current density (8, 16 and 24 mA cm^{-2}) and the initial concentration of the ferrous ion (0.1, 0.2 and 0.3 mM) on PCB degradation efficiency were evaluated. PCB concentration was monitored with a gas chromatograph coupled to an electron capture detector (GC-ECD). The highest level of degradation of the PCB mixture (97%) was achieved with 16 mA cm^{-2} of current density, 0.1 mM of ferrous ion and UV light at 365 nm as irradiation source after 6 hours of reaction. PCB28, PCB52 and PCB101 were not detected by the chromatographic method after 0.5, 1.5 and 3 h of reaction, respectively. The degradation of PCB138, PCB153, PCB180 and PCB209 was also high ($> 95\%$), reaching a maximum of 97% for PCB 138. The PEF system outperformed other advanced oxidation processes, namely electro-Fenton, anodic oxidation, Fenton, photo-Fenton and UV photolysis, in terms of reaction rate and degradation efficiency. These results demonstrate for the first time the degradation of PCB209, the most highly chlorinated PCB congener, by an advanced electrochemical oxidation process.

Keywords: Advanced electrochemical oxidation processes; BDD electrodes; PCB209, Persistent organic pollutants; Photo electro-Fenton system.

1. Introduction

Polychlorinated biphenyls (PCBs) are known for their high toxicity, low biodegradability, for being bioaccumulative and for their potential to be transported over long distances. Due to these characteristics, PCBs have been included in the list of the twelve key persistent organic pollutants by the Stockholm convention.[1] The PCBs family consists of 209 congeners, all of them described by the empirical formula $\text{C}_{12}\text{H}_{10-n}\text{Cl}_n$ ($n=1-10$) but with different number and position of chlorine atoms in their

1
2
3 molecule. It is estimated that during the time the PCBs were produced, 1.3 to 2 million
4
5 tons of these compounds were discharged to the atmosphere.[2] By the end of the
6
7 1970's, most governments banned the production of PCBs. However, even today
8
9 widespread environmental contamination persists as a result of accidental spills and
10
11 leaks that occurred in the past due to improper transportation, storage and disposal of
12
13 PCBs.[3] The environmental presence of PCBs still represents a serious risk to both the
14
15 environment and the human health (e.g. it is a risk factor for cancer and genetic
16
17 mutations).[4] For this reason, a large number of studies aimed at solving this pollution
18
19 problem has been reported.[1,5-7] The degradation of PCBs has been studied using
20
21 various chemical and biological processes such as incineration,[8] biodegradation with
22
23 fungi and bacteria,[9,10] radiolytic degradation using Co^{60} as source of γ rays,[11] as
24
25 well as some advanced oxidation processes (AOPs).[5,12] However, there are still some
26
27 limitations in the application of these methods. For example, the incineration of PCBs
28
29 can produce undesirable products such as dioxins and furanes,[8,13] which are more
30
31 toxic than the PCBs themselves. Biological processes, despite being widely
32
33 investigated, have high specificity,[14] and, particularly, treatment times that can be as
34
35 long as several months.[15] Meanwhile, most of the AOPs that have been studied had
36
37 been able to degrade only PCBs with a low number of chlorine atoms in their molecule
38
39 (mono, di-, tri-, tetra-, penta- or hexachlorinated).[1,5,16,17] The AOPs most
40
41 extensively studied in the degradation of PCBs are the Fenton (F) and the photo-Fenton
42
43 (PF) systems. With these processes, it has been possible to significantly reduce
44
45 treatment times from a length of months to days.
46
47
48
49
50

51
52
53 In recent years, the traditional set of AOPs has been extended to include novel
54
55 electrochemical processes such as electro-Fenton (EF), photo electro-Fenton (PEF) and
56
57 anodic oxidation (AO) systems, among others. The improvements brought about by
58
59
60

1
2
3 these systems are due to the fact that they accomplish a continuous and *in situ*
4
5 production of the precursor species of the degradation process. This way, the
6
7 electrochemical advanced oxidation processes (EAOP) can achieve high degradation
8
9 efficiencies on a broad spectrum of contaminating molecules. For example, these
10
11 processes have been successfully applied to the degradation of pesticides,[18-20]
12
13 pigments and dyes,[21,22] and various emerging contaminants such as
14
15 pharmaceutical[23-25] and personal care products,[26,27] among other molecules. In
16
17 EAOPs, the electrode material plays an important role in the efficiency of degradation
18
19 and different alternatives have been used including Pt electrodes, stainless steel,
20
21 carbonaceous materials, Ag and boron doped diamond (BDD) electrodes. Among the
22
23 main advantages of BDD are its low capacitance, extreme electrochemical stability and,
24
25 especially, its wide range of electrochemical potential in non-aqueous and aqueous
26
27 media [23]. Furthermore, the high potential of such electrodes enables the production of
28
29 larger amounts of $\cdot\text{OH}$ and consequently higher rates and degradation efficiencies.
30
31 Considering the above, the coupling of the PEF system and BDD electrodes, as both
32
33 anode and cathode, offers a promising alternative for treating chemically stable
34
35 molecules such as highly chlorinated PCBs congeners. The objective of this study was
36
37 to evaluate the degradation of a mixture of seven PCB congeners (PCB28, PCB52,
38
39 PCB101, PCB138, PCB153, PCB180 and PCB209) using the PEF system with BDD
40
41 electrodes.

42 43 44 45 46 47 48 **2. Materials and methods**

49 50 51 **2.1. Reagents**

52
53
54 The mixture of standard grade PCBs (PCB28, PCB52, PCB101, PCB138, PCB153,
55
56 PCB180 and PCB209, $1 \times 10^4 \mu\text{g L}^{-1}$ of each one), Na_2SO_4 and H_2SO_4 , both analytical
57
58
59
60

1
2
3 reagent grade, and hexane and methanol, both HPLC grade, were obtained from Sigma-
4 Aldrich. Analytical reagent grade $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ and H_2O_2 were supplied by J. T. Baker.
5
6
7 Distilled and deionised water was used in the preparation of all aqueous solutions.
8
9

10 **2.2. Electrochemical system**

11
12
13 The experiments were conducted in an undivided electrolytic cell of 50 mL working
14 volume, filled with Na_2SO_4 0.05 M at pH 3 as supporting electrolyte. This pH value was
15 used since many studies have reported that the optimum pH of the Fenton process is
16 around 3.[28,29] This is because iron species begin to precipitate as ferric hydroxides at
17 higher pH values and form stable complexes with H_2O_2 at lower pH values, leading to
18 deactivation of the catalyst. BDD electrodes (25 x 50 mm bipolar/Si 1 mm; Adamant
19 Technologies, Switzerland), positioned in parallel with 2 cm spacing, were used as
20 anode and cathode. Before starting the oxidation process, the reaction medium was
21 saturated with oxygen by bubbling air at a flow of 300 mL min^{-1} for 45 minutes.
22 Following this, electric current was induced into the system for an hour which enabled
23 the electro production of hydrogen peroxide. Next, the reaction medium was spiked
24 with the mixture of PCBs at a concentration of $50 \mu\text{g L}^{-1}$ for each of the seven
25 congeners. Soon after, the oxidation process was initiated by adding Fe^{2+} and by
26 irradiating the medium with UV light ($\lambda = 254$ and 365 nm). The degradation reaction
27 was carried out for 6 hours, and during this time, the agitation, temperature and air
28 bubbling were maintained at constant values of 850 rpm, $25 \pm 2^\circ\text{C}$ and 300 mL min^{-1} ,
29 respectively. The degradation of PCBs was monitored by analysing samples of the
30 reaction medium collected every 90 minutes; this analysis was performed by gas
31 chromatography. All glass materials used in the oxidation tests and chromatographic
32 analyses were previously acid washed and heated at 450°C for 2 h.
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

2.3. Extraction of PCBs

PCBs were extracted from the aqueous phase using a liquid:liquid extraction method, with a 1:2 sample:solvent (hexane) ratio. This mixture was mixed vigorously for 10 min using a vortex. The recovered organic phase was mixed again with 0.075 g of Na₂SO₄ to remove moisture. Finally, the extract was stored until chromatographic analysis. The recovery percentages obtained with this method are presented in Table 1.

2.4. Chromatographic method

The analysis and quantification of PCB congeners was performed on a Clarus 500 gas chromatograph (Perkin Elmer, Massachusetts, USA) with an electron capture detector (GC-ECD). A MDS-5S glass capillary column (Supelco, Pasadena, USA) of 30 m long, 0.25-mm i.d. and 250- μ m film was used. Samples (2 μ L) were injected in split less mode. H₂ at 45.0 cm seg⁻¹ was used as carrier gas. The temperatures of the injector and detector were set at 280°C and 350°C, respectively. The analysis was conducted using the following oven temperature program: 80°C for 1 minute increased to 200°C with a ramp of 45°C min⁻¹; increased further to 250°C at 3°C min⁻¹, hold for 7 min. The validation of the chromatographic method was performed by determining the accuracy expressed as relative standard deviation (RSD), the linearity between the concentrations of the PCBs and their chromatographic response as denoted by R², the limit of quantitation (LOQ) and the limit of detection (LOD). The values obtained for these parameters are shown in Table 1.

[Table 1 near here]

2.5. Analytical methods

1
2
3 The concentration of total iron and ferric ion (Fe^{3+}) was determined using the
4
5 colorimetric method with phenanthroline, quantifying the complex formed at 510
6
7 nm.[30] The concentration of ferrous ion (Fe^{2+}) was calculated from the difference
8
9 between the concentration of total iron and Fe^{3+} . The residual hydrogen peroxide was
10
11 also monitored using a colourimetric method with titanium oxysulfate; the coloured
12
13 complex was quantified at 406 nm. A UV/Vis spectrophotometer SQ-2800 (Cole
14
15 Palmer) was used for these analyses.
16
17

18 19 20 **2.6. Statistical analysis**



21
22 Degradation tests followed a 2x3x3 factorial design, where the UV light intensity (254
23
24 and 365 nm) was the first factor, the initial concentration of ferrous ion (0.1, 0.2 and 0.3
25
26 mM) was the second factor and the current density (8, 16 and 24 mA cm^{-2}) was the third
27
28 factor. Statistical analysis of data was performed with Statistica 7 (StatSoft, Inc.)
29
30 software with a significance level of 5%.
31
32

33 34 35 **3. Results and discussion**

36 37 38 **3.1. Degradation of PCBs by the photo electro-Fenton system**

39
40 The ANOVA performed on the results of the PCBs degradation tests by the PEF system
41
42 (Table 2), showed the existence of significant differences among treatments. In this test
43
44 set, the highest percentage of degradation (97.5 ± 0.2 % of the initial concentration of
45
46 $350 \mu\text{g } \Sigma\text{PCBs L}^{-1}$) was achieved when the system operated with 16 mA cm^{-2} of current
47
48 density, 0.1 mM Fe^{2+} and UV light of 365 nm (Fig. 1). These results can be explained
49
50 by the way reactions occur in the PEF system. The PEF process is initiated with the
51
52 continuous production of H_2O_2 by the reduction of dissolved oxygen via 2 electrons
53
54 (Eq. 1), which then reacts with the added Fe^{2+} to generate $\cdot\text{OH}$ radicals (Eq. 2).
55
56 Equations 1-2 show that as the current intensity increases, there is a higher generation of
57
58
59
60

the oxidising species $\bullet\text{OH}$ and, consequently, an increased degradation efficiency due to more $\bullet\text{OH}$ being available to react with the saturated and aromatic organic compounds (Eq. 3 and 4, respectively).[31] However, it can also be expected that once certain concentrations of Fe^{2+} and H_2O_2 are reached, the degradation efficiency would start to decline.[31,32] This happens due to the occurrence of collateral reactions that compete for $\bullet\text{OH}$ radicals. Reactions shown in Equations 5 and 6 are among the competitive reactions that contribute the most to diminished pollutant degradation efficiency. This system behavior was observed in this study. Degradation efficiency showed a tendency to decrease with increased concentration of Fe^{+2} (Fig 1) which suggests that Fe^{+2} is not only reacting as shown in Eq. 2 but also taking part of the reaction depicted by Eq. 5. It can also be observed from Fig 1 that when current density increased from 8 a 16 mA cm^{-2} , the efficiency of PCB degradation also increased which can be explained by the electro generated H_2O_2 reacting mainly according to Eq. 2. However, when current density increased from 16 to 24 mA cm^{-2} , the degradation efficiency showed a decline probably due to a higher oxidation of H_2O_2 as more $\bullet\text{OH}$ radicals become available (Eq. 6).



[Table 2 near here]



[Figure 1 near here]

1
2
3 On the other hand, the rate of degradation of PCBs congeners by the PEF system
4 was inversely proportional to the percentage of chlorination of each molecule (Fig. 2).
5
6 This behavior has been reported in previous works where other PCB congeners have
7
8 been degraded with different AOP.[1,5,16,33] The concentration of the PCB28, PCB52
9
10 and PCB101 congeners were reduced below the LOD at 30, 180 and 270 min,
11
12 respectively. Congeners with a higher number of chlorine atoms in their molecules
13
14 (PCB138, PCB153, PCB180 and PCB209) were still detected in the residue obtained
15
16 after the degradation process, although their concentrations were below 5% of the initial
17
18 concentration. At the end of the oxidation process, there was a 96.3% reduction in the
19
20 initial concentration of PCB209. The observed relationship between the efficiency of
21
22 degradation and the percentage of chlorination of PCB congeners, is due to the free $\cdot\text{OH}$
23
24 radicals reacting initially at unchlorinated positions, which decrease when the
25
26 chlorination percentage increase, while the steric barrier increases.[5,34] This results in
27
28 a great chemical stability which is characteristic of PCBs molecules. Because of this,
29
30 previous studies on PCBs degradation using AOPs have focused on the oxidation of
31
32 congeners with low percentages of chlorination.[1,5] This is the first time to the best of
33
34 our knowledge that the degradation of the highly chlorinated and stable PCB209
35
36 congener by an EAOP is reported.
37
38
39
40
41
42
43

44 [Figure 2 near here]

45
46
47 The strength of the PEF system is due to the fact that in this reaction medium
48
49 various degradation processes such as $\text{H}_2\text{O}_2/\text{UV}$, $\text{H}_2\text{O}_2/\text{Fe}^{2+}$ and AO, among others,
50
51 occur simultaneously. In all these, the initial degradation step is the generation of $\cdot\text{OH}$
52
53 radical, and therefore, all degradation routes are conducted via free radicals. This EF
54
55 system is enhanced when the reaction medium is irradiated with UV light because it
56
57
58
59
60

produces the regeneration of Fe^{2+} from $Fe(OH)^{2+}$ photo reduction (Eq. 7) and from the photolysis of Fe^{3+} complexes with generated carboxylic acids (Eq. 8).[31] This complete system represented by equations 1-8 is known as PEF system.



In the PEF system, H_2O_2 photolysis also occurs (Eq 9). Likewise, water oxidation on BDD electrodes can produce large amounts of $\cdot OH$ radicals (Eq. 10), which remain adsorbed on the anode surface ($\cdot OH_{ads}$). These $\cdot OH$ radicals are capable of reacting with the organic compounds until full mineralisation.[35-37]



3.2. Concentration profiles during PEF treatment

The concentration profiles of the Fenton reagents and PCBs mixture during PEF treatment are presented in Fig. 3. It can be seen that in the first 30 minutes of reaction, the high rate of consumption of both H_2O_2 and Fe^{2+} corresponds to the highest rate of degradation of the mixture of PCBs. After this initial period, the PCBs degradation rate decreases while the concentration of both H_2O_2 and Fe^{2+} is slightly recovered (see Eqs. 1 and 7-8). This is due to the fact that by lowering the concentration of PCBs (limiting reagent), the probability of collision and reaction of the reactants also decrease. Meanwhile, competing and recombination reactions are favoured, which is manifested in a decreasing rate of degradation of PCBs. On the other hand, the concentration profile of Fe^{3+} has an inverse behavior than that of Fe^{2+} ; that is to say, its concentration increases rapidly in the first 30 minutes and then a slight decrease and stabilisation is observed, which is justified by Eqs. 2,7 and 8. The same Figure 3 shows that during the

1
2
3 degradation reaction, pH slightly increased; however, by the end of the reaction period
4
5 it is still within the range where Fenton type reactions are carried out optimally.[38,39]
6

7 The monitoring of the potential difference showed that at the end of the reaction a
8
9 potential of 17.5 V was held, which was 2.4 V below the initial value. This variation
10
11 can be attributed to the generation of both negative and positive ions during the
12
13 degradation process, which facilitate the electrical flow between the electrodes. One of
14
15 these ions can be the Cl^- anion. The release of Cl ions during the photocatalytic
16
17 treatment of PCB-contaminated soils has indeed been reported.[40] However, Przado et
18
19 al [1] found no significant release of chloride ions from the degradation of PCBs by
20
21 Fenton's reagent. If present in the electrochemical reaction medium, Cl^- anions may
22
23 favour the formation of oxidising compounds such as HClO , responsible for indirect
24
25 oxidation reactions.[41]. They may also act as scavengers of hydroxyl radicals.[42]
26
27 Moreover, the BDD anode can lead to the formation of higher oxidation states of
28
29 chlorine, i.e., chlorite, chlorate and perchlorate.[41]
30
31
32
33
34

35 [Figure 3 near here]
36
37

38 **3.3. UV light effect**

39

40
41 The concentration profiles of H_2O_2 , Fe^{2+} and Fe^{3+} in the reaction medium, both in the
42
43 EF and the PEF system, are presented in Figure 4. In both cases, the electro production
44
45 of H_2O_2 was carried out under similar conditions (16 mA cm^{-2} , $300 \text{ mL air min}^{-1}$), thus
46
47 the initial concentrations were approximately the same in both systems. However, it can
48
49 be seen from Figure 4 that during the reaction period, H_2O_2 concentration was lower in
50
51 the PEF than in the EF system. This could be the result of the photolysis of the H_2O_2 in
52
53 the former system, as represented by Eq. 9, which do not occur when the system is not
54
55 photo-assisted. Therefore, the continuous generation (Eqs. 7,8) and reaction (Eq. 2) of
56
57
58
59
60

1
2
3 Fe^{2+} ion with H_2O_2 in the Fenton system, on one side, and the photolysis of H_2O_2 (Eq.
4
5 9), on the other, can explain the higher consumption of H_2O_2 in the PEF system.
6
7 Furthermore, these same reactions (Eq. 7 and 9) explain an additional route generating
8
9 $\cdot\text{OH}$, which could increase the rate of degradation of PCBs in the photo-assisted system.
10

11
12 The behaviour of the Fe^{2+} ion is also observed in Figure 4. In the EF system,
13
14 Fe^{2+} concentration decreases during the reaction time, while in the PEF system a slight
15
16 increase in its concentration is observed after the first 30 minutes of the reaction, which
17
18 can be explained according to Eqs. 7-8.
19

20
21 [Figure 4 near here]
22

23 24 25 **3.4. Degradation process kinetics** 26

27
28 The degradation of the PCBs mixture in the PEF system followed pseudo first order
29
30 kinetics (Table 3), which has also been observed when AOPs have been applied to the
31
32 degradation of other molecules.[18,43] The regression coefficients (R^2) presented in
33
34 Table 3 confirm that the experimental data is well described by this type of reaction
35
36 kinetics. As noted before, it has been reported on numerous occasions [1,5] the
37
38 existence of an inverse relationship between the degree of chlorination and the
39
40 degradability of the PCBs. The decrease in the values of the pseudo first order kinetic
41
42 coefficients (K) as the level of chlorination increase (Table 3) show that the degradation
43
44 of the PCB mixture generally fits the reported trend. However, there are two apparent
45
46 exceptions. It can be seen that PCB101, with five chlorine atoms in its atomic structure,
47
48 apparently degrades slower than PCB138, with six chlorine atoms. This can be the
49
50 result of PCB101 being removed during the treatment process but also simultaneously
51
52 produced, as an intermediary product, from the dechlorination of PCB congeners with
53
54 six or more chlorine atoms in their structure such as PCB153, PCB180 and PCB209.
55
56
57
58
59
60

1
2
3 This would explain why after 30 min of reaction, the concentration of PCB101 is higher
4 than that of PCB138 (Fig. 2). A similar case happens with PCB153 and PCB180,
5
6 although the concentration difference observed is much lower than in the case described
7
8 above. This behavior is consistent with previous reports.[44]
9
10

11
12
13 [Table 3 near here]
14

15 16 **3.5. Comparison of the PEF system with other AOPs** 17

18
19 In order to compare the efficiency of the PEF system in degrading the PCBs mixture,
20 additional tests were performed with other AOPs. The processes evaluated were F, EF,
21 PF, AO, H₂O₂/UV and direct photolysis (DP) of PCBs. In the Fenton reaction, the initial
22 concentration of H₂O₂ was 12.5 mg L⁻¹ and 0.1 mM of Fe²⁺ ion. In AO a current density
23 of 16 mA cm⁻² was applied, and in the case of photo-assisted systems UV light at 365
24 nm was used. These conditions were similar to those that allowed the highest PCBs
25 removal in the PEF system. The degradation profile for each of the evaluated processes
26 is presented in Figure 5. With the exception of DP, the degradation profile of the
27 evaluated processes was adjusted to a pseudo first order kinetic. The kinetics coefficient
28 values obtained in each process (Table 4) demonstrate that the PEF system presented
29 the highest degradation rate ($k = 0.0191 \text{ L } \mu\text{g}^{-1} \text{ h}^{-1}$).
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44

45 [Figure 5 near here]
46

47
48 [Table 4 near here]
49

50
51 Among the evaluated processes, the DP presented the lowest degradation
52 percentage (2.5 %). With this system, only the PCBs congeners with a low chlorination
53 percentage were degraded.[9] This is because degradation is only promoted by the
54 energy input from the UV light during the reaction. In the H₂O₂/UV system, the
55
56
57
58
59
60

1
2
3 photolysis of both the PCBs mixture and H_2O_2 occurs (Eq. 5). The latter results in a
4
5 second degradation route via free radicals. For this reason, the H_2O_2/UV system
6
7 achieved a higher degradation percentage (21.5 %) compared to DP. In the AO system,
8
9 BDD sheets were used as electrodes since BDD is considered as the best material for a
10
11 non-active anode, due to its weak interaction with the $\cdot OH$ generated according to Eq.
12
13 10.[23] With this system, a degradation percentage of 40.2% was achieved. The low
14
15 degradation percentage is due to the fact that degradation in this process mainly depends
16
17 on the probability of collision between a mobile species (i.e. PCB congeners) and the
18
19 anode surface. This probability decreases as the concentration of mobile species is
20
21 reduced.
22
23

24
25
26 The Fenton systems presented the highest removal percentages. The achieved
27
28 degradation percentage was 45% with the F system, 49.6% with the PF system and
29
30 74.1% for the EF system. This is because in these systems, $\cdot OH$ radicals are dispersed in
31
32 the reaction medium, which increases the probability of collision and reaction between
33
34 them and the PCBs, consequently, the removal efficiency increases. The kinetic
35
36 coefficients analysis (Table 4) shows that PEF, besides reaching the highest degradation
37
38 percentage, also presented the highest degradation rate. The limiting factor in both F
39
40 and PF systems is the availability of Fenton reagents which are depleted as reaction
41
42 progress and hence the generation of $\cdot OH$ radicals also decreases. This limitation is not
43
44 present in the PEF system where a continuous generation of H_2O_2 occurs, as in the EF.
45
46 The advantage of the PEF system is that the UV light energy supplied to the system
47
48 results in an additional degradation pathway,[45] and also causes the reduction of Fe^{3+}
49
50 to Fe^{2+} which maintains high concentrations of the Fenton reagents. This explains why,
51
52 compared to other AOPs, the PEF system achieved the highest percentage and rate of
53
54 PCBs degradation.
55
56
57
58
59
60

The energy consumption (EC) for each process was calculated according to Eq. 11 [18].

$$EC = \frac{VIt}{m_i - m_f} \quad (11)$$

Where,

EC: energy consumption per unit mass of PCB removed, Kwh μg^{-1}

V: potential difference between electrode, V

I: applied current, Amper

t: electrolysis time, hour

m_i : mass of initial PCBs, μg

m_f : mass of final PCBs, μg

The energy consumption for 300 minutes of electrolysis is shown in Table 5. In line with their higher efficiency in the removal of PCBs, the Fenton processes showed a lower energy consumption when compared to the anodic oxidation or the $\text{H}_2\text{O}_2/\text{UV}$ systems. Among the Fenton processes, electro Fenton was the most energy efficient in removing PCBs. The photo-assisted Fenton processes were less energy efficient which shows that the improvement in PCB degradation brought about by UV light irradiation comes at a high energy expense. Overall, the EC of the evaluated systems was much higher than those reported for the five-minute degradation of a pesticide (6.71×10^{-9} – 54.17×10^{-9} kWh μg pesticide).[18] This difference can be explained by the lower initial concentrations of the PCBs and their higher recalcitrance which required a much longer treatment time.

[Table 4 near here]

4. Conclusions

The PEF system, operated with a current density of 16 mA cm^{-2} , 0.1 mM Fe^{2+} and UV light at 365 nm , efficiently degraded seven PCBs congeners with an initial total concentration of $350 \mu\text{g L}^{-1}$. With this system, it was possible to reduce the treatment time reported in previous studies from days to hours. It was also possible to degrade the most highly chlorinated congener (i.e. PCB209). This is the first report of PCB209 degradation by an electrochemical advanced oxidation process. This system proved to be the most efficient for PCBs degradation compared to the anodic oxidation and other types of Fenton systems evaluated.

References

- [1] Przado D, Kafarski P, Steininger M. Studies on degradation of polychlorinated biphenyls by means of Fenton's reagent. *Pol. J. Environ. Stud.* 2007;6(16):881-887.
- [2] Ockenden WA, Breivik K, Meijer SN, et al. The global re-cycling of persistent organic pollutants is strongly retarded by soils. *Environ. Pollut.* 2003;121(1):75–80.
- [3] Passatore L, Rossetti S, Juwarkar AA, et al. Phytoremediation and bioremediation of polychlorinated biphenyls (PCBs): state of knowledge and research perspectives. *J. Hazard. Mater.* 2014;278:189-202.
- [4] Hunt G, Stegeman J, Robertson L. PCBs: exposures, effects, remediation, and regulation with special emphasis on PCBs in schools. *Environ Sci Pollut Res.* 2016;23:1971–1974.
- [5] Quiroga JM, Riaza A, Manzano MA. Chemical degradation of PCB in the contaminated soils slurry: Direct Fenton oxidation and desorption combined with the photo-Fenton process. *J Environ Sci Heal A.* 2009;44:1120–1126.
- [6] Mercier A, Joulian C, Michel C, et al. Evaluation of three activated carbons for

- 1
2
3 combined adsorption and biodegradation of PCBs in aquatic sediment. *Water Res.*
4
5 2014;59:304-315.
6
- 7 [7] Demirtepe H, Kjellerup B, Sowers K, et al. Evaluation of PCB dechlorination
8
9 pathways in anaerobic sediment microcosms using an anaerobic dechlorination
10
11 model. *J. Hazard. Mater.* 2015;296:120–127.
12
- 13 [8] Ikonomou MG, Sather P, Oh JE, et al. PCB levels and congener patterns from
14
15 Korean municipal waste incinerator stack emissions. *Chemosphere.* 2002;24:205-
16
17 216.
18
19
- 20 [9] Chun CL, Payne RB, Sowers KR, et al. Electrical stimulation of microbial PCB
21
22 degradation in sediment. *Water Res.* 2013;47:141-152.
23
- 24 [10] Kjellerup BV, Naff C, Edwards SJ, et al. Effects of activated carbon on reductive
25
26 dechlorination of PCBs by organohalide respiring bacteria indigenous to sediments.
27
28 *Water Res.* 2014;52:1-10.
29
- 30 [11] Schmelling DC, Poster D, Chaychian M, et al. Degradation of Polychlorinated
31
32 Biphenyls Induced by Ionizing Radiation in Aqueous Micellar Solutions. *Environ.*
33
34 *Sci. Technol.* 1998;32:270-275.
35
36
- 37 [12] Zhang G, Hua I. Cavitation chemistry of polychlorinated: Decomposition
38
39 mechanisms and rates. *Environ. Sci. Technol.* 2000;34:1529–1534.
40
41
- 42 [13] Schaub WM, Tsang W. Dioxin formation in incinerators. *Environ. Sci. Technol.*
43
44 1983;17:721-730.
45
46
- 47 [14] Pieper DH. Aerobic degradation of polychlorinated biphenyls. *Appl. Microbiol.*
48
49 *Biotechnol.* 2005;67:170-179.
50
- 51 [15] Singer AC, Gilbert ES, Luepromchai E. Bioremediation of polychlorinated
52
53 biphenyl-contaminated soil using carvone and surfactant-grown bacteria. *Appl.*
54
55 *Microbiol. Biotechnol.* 2000;54(6):838-843.
56
57
58
59
60

- 1
2
3 [16] Dercová K, Vrana B, Tandlich R. et al. Fenton's type reaction and chemical
4 pretreatment of PCBs. *Chemosphere*. 1999;39:2621-2628.
5
6
7 [17] DeVor R, Carvalho-Knighton K, Aitken B, et al. Dechlorination comparison of
8 mono-substituted PCBs with Mg/Pd in different solvent systems. *Chemosphere*.
9 2008;73:896-900.
10
11
12 [18] Yatmaz C, Uzman Y. Degradation of pesticide monochrotophos from aqueous
13 solutions by electrochemical method. *Int. J. Electrochem. Sci.* 2009;4:614-626.
14
15
16 [19] Navarro S, Fenoll J, Vela N, et al. Removal of ten pesticides from leaching water at
17 pilot plant scale by photo-Fenton treatment. *Chem Eng J.* 2011;167:42–49.
18
19
20 [20] Cao M, Wang L, Wang L, et al. Remediation of DDTs contaminated soil in a novel
21 Fenton-like system with zero-valent iron. *Chemosphere*. 2013;90:2303–2308.
22
23
24 [21] Sennaoui A, Sakr F, Dinne M, et al. Degradation of zenative yellow BF3R dye by
25 the Fenton process. *J. Mater. Environ. Sci.* 2014;5(5):1406-1411.
26
27
28 [22] Zuorroa A, Lavecchia R. Evaluation of UV/H₂O₂ advanced oxidation process
29 (AOP) for the degradation of diazo dye Reactive Green 19 in aqueous solution.
30 *Desalin Water Treat.* 2014;52:1571–1577.
31
32
33 [23] Domínguez JR, González T, Palo P, et al. Anodic oxidation of ketoprofen on
34 boron-doped diamond (BDD) electrodes. Role of operative parameters. *Chem. Eng.*
35 *J.* 2010;162(3):1012-1018.
36
37
38 [24] Muruganathan M, Latha SS, Bhaskar G, et al. Anodic oxidation of ketoprofen—
39 An anti-inflammatory drug using boron doped diamond and platinum electrodes. *J*
40 *Hazard Mater.* 2010;180:753–758.
41
42
43 [25] De la Cruz N, Esquius L, Grandjean D, et al. Degradation of emergent
44 contaminants by UV, UV/H₂O₂ and neutral photo-Fenton at pilot scale in a
45 domestic wastewater treatment plant. *Water Res.* 2013;47(15):5836-5845.
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3 [26] Jiang JQ, Zhou Z, Sharma VK. Occurrence, transportation, monitoring and
4
5 treatment of emerging micro-pollutants in waste water- A review from global
6
7 views. *Microchem J.* 2013;110:292-300.
8
9
10 [27] Borikar D, Mohseni M, Jasim S. Evaluation and Comparison of Conventional and
11
12 Advanced Oxidation Processes for the Removal of PPCPs and EDCs and Their
13
14 Effect on THM-Formation Potentials. *Ozone: Sci. Eng.* 2015;37:154–169.
15
16 [28] Nidheesh PV, Gandhimathi R. Trends in electro-Fenton process for water and
17
18 wastewater treatment: An overview. *Desalination.* 2012;299:1-15.
19
20
21 [29] Wei J, Song Y, Tu X, et al. Pre-treatment of dry-spun acrylic fiber manufacturing
22
23 wastewater by Fenton process: Optimization, kinetics and mechanisms. *Chem. Eng.*
24
25 *J.* 2013;218:319-326.
26
27 [30] APHA, Standard Methods for examination of water and wastewater. 1992, 18th
28
29 edition.
30
31 [31] Brillas E, Garrido JA, Rodriguez RM, et al. Wastewater by electrochemical
32
33 oxidation processes using BDD anode and electrogenerated H₂O₂ with Fe(II) and
34
35 UV light as catalysts. *Port Electrochim Acta.* 2008;26:15-46.
36
37 [32] Gutiérrez RF, Santiesteban A, Cruz-López L, et al. Removal of chlorothalonil,
38
39 methyl parathion and methamidophos from water by the Fenton reaction. *Environ*
40
41 *Tech.* 2007;28:267-272.
42
43 [33] Rianza-Frutos A, Quiroga JM, Manzano MA. Remediation of contaminated soils
44
45 with PCBs using an integrated treatment: desorption and oxidation. *J Environ Eng.*
46
47 2007;133:541-547.
48
49 [34] Sediak DL, Andrew WA. Aqueous-Phase oxidation of polychlorinated biphenyls
50
51 by Hydroxyl radicals. *Environ. Sci. Technol.* 1991;25:1419-1427.
52
53
54
55
56
57
58
59
60

- 1
2
3 [35] Michaud PA, Panizza M, Ouattara L, et al. Electrochemical oxidation of water on
4 synthetic boron-doped diamond thin film Anodes. *J Appl Electrochem.*
5
6 2003;33:151–154.
7
8
9
10 [36] Martínez-Huitle CA, Ferro S. Electrochemical oxidation of organic pollutants for
11 the wastewater treatment: direct and indirect processes. *Chem. Soc. Rev.*
12
13 2006;35:1324–1340.
14
15
16 [37] Garrido JA, Brillas E, Cabot PL, et al. Mineralization of Drugs in Aqueous
17
18 Medium by Advanced Oxidation Processes. *Port. Electrochim. Acta.* 2007;25:19-
19
20 41.
21
22
23 [38] Mackuňak T, Takáčová A, Gál M, et al. PVC degradation by Fenton reaction and
24 biological decomposition. *Polymer Degradation and Stability.* 2015;120:226-231.
25
26
27 [39] Ramteke LP, Gogate PR. Treatment of toluene, benzene, naphthalene and xylene
28
29 (BTNXs) containing wastewater using improved biological oxidation with
30
31 pretreatment using Fenton/ultrasound based processes. *J Ind Eng Chem.*
32
33 2015;28:247–260.
34
35
36 [40] Occulti F, Roda GC, Berselli S, et al. Sustainable decontamination of an actual-site
37
38 aged PCB-polluted soil through a biosurfactant-based washing followed by a
39
40 photocatalytic treatment. *Biotech. Bioeng.* 2008;99(6):1525-1534.
41
42
43 [41] Cabeza A, Urriaga AM, Ortiz I. Electrochemical Treatment of Landfill Leachates
44
45 Using a Boron-Doped Diamond Anode. *Ind. Eng. Chem. Res.* 2007;46(5):1439–
46
47 1446.
48
49
50 [42] Pignatello JJ, Oliveros E, MacKay A. Advanced oxidation processes for organic
51
52 contaminant destruction based on the Fenton reaction and related chemistry. *Crit.*
53
54 *Rev. Environ. Sci. Technol.* 2006;36:1-84.
55
56
57
58
59
60

- 1
2
3 [43] Aaron JJ, Oturan MA. New photochemical and electrochemical methods for the
4 degradation of pesticides in aqueous media-environmental applications. Turk J.
5 Chem. 2001;25:509-520.
6
7
8
9
10 [44] Yao Y, Kakimoto K, Ogawa HI, et al. Photodechlorination pathways of non-ortho
11 substituted PCBs by ultraviolet irradiation in alkaline 2-propanol. Bull Environ
12 Contam Toxicol. 1997;59:238–45.
13
14
15
16 [45] Dasary SSR, Saloni J, Fletcher A, et al. Photodegradation of selected PCBs in the
17 presence of nano-TiO₂ as catalyst and H₂O₂ as an oxidant. Int. J. Environ. Res.
18 Public Health. 2010;7:3987-4001.
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Table 1. Analytical method validation parameters. RSD: Relative standard deviation, LOD: Limit of detection, LOQ: Limit of quantitation.

Congener	R ²	% Recovery	RSD	LOD ($\mu\text{g L}^{-1}$)	LOQ ($\mu\text{g L}^{-1}$)
28	0.9512	97	2.54	0.1227	0.2971
52	0.9877	96	5.73	0.1060	0.2568
101	0.909	96	5.53	0.0493	0.1194
138	0.9787	98	1.75	0.0271	0.0657
153	0.9842	99	3.31	0.0252	0.0611
180	0.9787	98	1.6	0.0159	0.0386
209	0.9835	98	2.28	0.0248	0.0602

Table 2. ANOVA of oxidation tests results with PEF system. SS: Sum of Squares, DF: Degrees of Freedom, MS: Mean Square, F: F distribution, p: Probability.

Variation source	SS	DF	MS	F	p
Current Density	128.544	2	64.27	5.74	0.007
UV light intensity (Wavelength)	3.479	1	3.48	0.31	0.581
Fe ²⁺ concentration	734.943	2	367.47	32.81	<0.001
Current Density*Wavelength	137.705	2	68.85	6.15	0.005
Current Density*Fe ²⁺ Conc.	119.732	4	29.93	2.67	0.047
Wavelength*Fe ²⁺ Conc.	150.992	2	75.50	6.74	0.003
Curr. Density*Wavelength*Fe ²⁺ Conc.	214.100	4	53.53	4.78	0.003
Residual	403.165	36	11.20		
Total	1893.661	53	35.71		

Table 3. Apparent kinetic coefficients of the PEF system, using a current density of 16 mA cm⁻², 0.1 mM of Fe²⁺ and UV light of 365 nm.

Congener	1st Order		Pseudo 1st Order	
	K (h ⁻¹)	R ²	K (L μg ⁻¹ h ⁻¹)	R ²
PCB28				
PCB52	5.13	0.9673	0.2259	0.9022
PCB101	1.77	0.8807	0.0721	0.9992
PCB138	1.68	0.6737	0.1008	0.8384
PCB153	1.0695	0.7986	0.0305	0.9326
PCB180	1.1502	0.8385	0.0354	0.9692
PCB209	0.9958	0.7962	0.0262	0.9229
Mixture	1.137	0.7922	0.0191	0.9024

Table 4. Kinetic coefficients (k) of pseudo first order of each of the evaluated systems.

	System					
	PEF	EF	PF	F	AO	H ₂ O ₂ /UV
K (L μg ⁻¹ h ⁻¹)	0.0191	0.0097	0.0037	0.0024	0.0013	0.0008

PEF: photo electro-Fenton, EF: electro-Fenton, PF: photo Fenton, AO: anodic oxidation

Table 5. Energy consumption (EC) of each of the evaluated systems.

		System				
		PEF	EF	PF	AO	H ₂ O ₂ /UV
EC	(kWh μg ⁻¹	14.6x10 ⁻⁵	9.7x10 ⁻⁵	13.8x10 ⁻⁵	17.9x10 ⁻⁵	32.0x10 ⁻⁵
PCBs)						

PEF: photo electro-Fenton, EF: electro-Fenton, PF: photo Fenton, AO: anodic oxidation

1
2
3
4
5 Figure 1. PCBs degradation efficiency (%) by the photoelectron-Fenton system ($C_0=350$
6 $\mu\text{g PCBs mixture L}^{-1}$).
7
8
9

10
11
12 Figure 2. PCBs mixture degradation profile with the PEF system. The system was
13 operated with current density of 16 mA cm^{-2} , UV light of 365 nm and 0.1 mM of Fe^{2+} .
14
15 The initial concentration of each congener was adjusted to $50 \mu\text{g L}^{-1}$.
16
17
18
19

20
21
22 Figure 3. PEF system conditions along the degradation reactions. Initial concentration
23 of the PCBs mixture was $350 \mu\text{g L}^{-1}$. The system was operated with 16 mA cm^{-2} , 0.1
24 mM of Fe^{2+} and UV light of 365 nm. (\square) pH, (Δ) Potential difference, (∇) Fe^{3+} , (\circ)
25 Fe^{2+} , (\blacktriangle) H_2O_2 , (\diamond) PCBs residual.
26
27
28
29
30
31

32
33 Figure 4. Concentration profiles of hydrogen peroxide and iron. (a) EF system: (\blacksquare)
34 H_2O_2 , (\bullet) Fe^{2+} , (\blacktriangle) Fe^{3+} . (b) PEF system: (\square) H_2O_2 , (\circ) Fe^{2+} , (Δ) Fe^{3+} .
35
36
37
38
39

40 Figure 5. PCBs degradation profile with AOP, (\bullet) PEF system, (\circ) EF system, (\blacktriangledown) PF
41 system, (Δ) F system, (\blacksquare) AO, (\square) $\text{H}_2\text{O}_2/\text{UV}$, (\blacklozenge) DP. The initial concentration of the
42 mixture was adjusted to $350 \mu\text{g L}^{-1}$.
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Figure 1



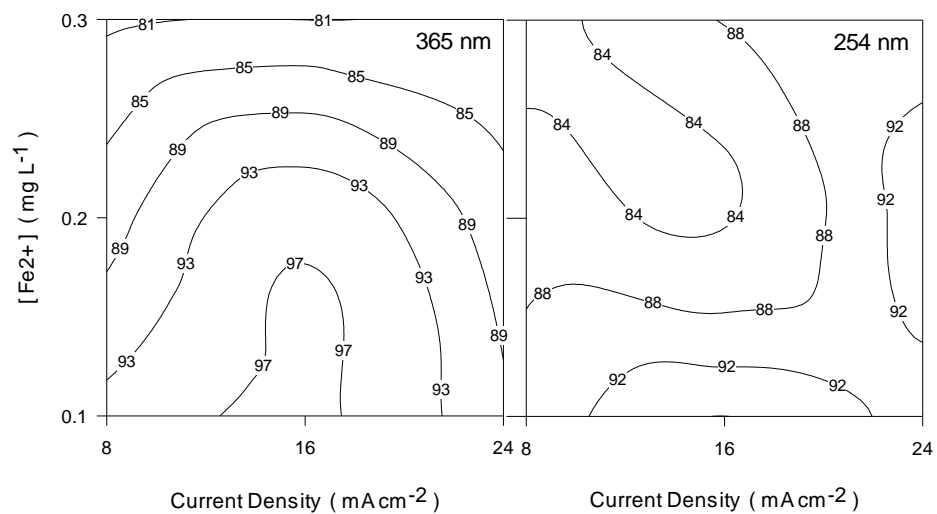


Figure 2

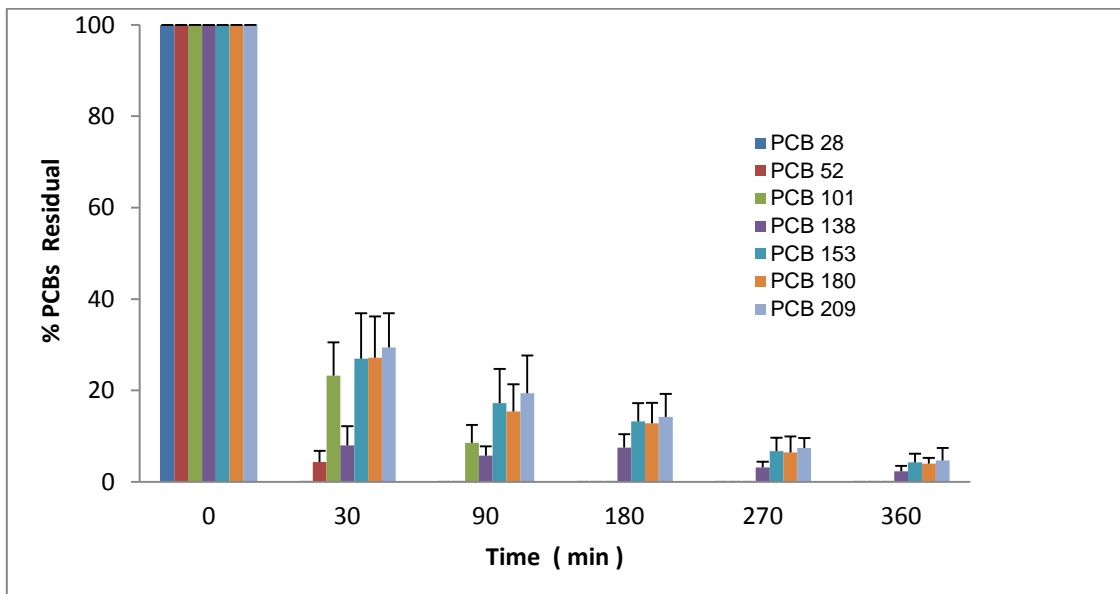


Review Only

Figure 3

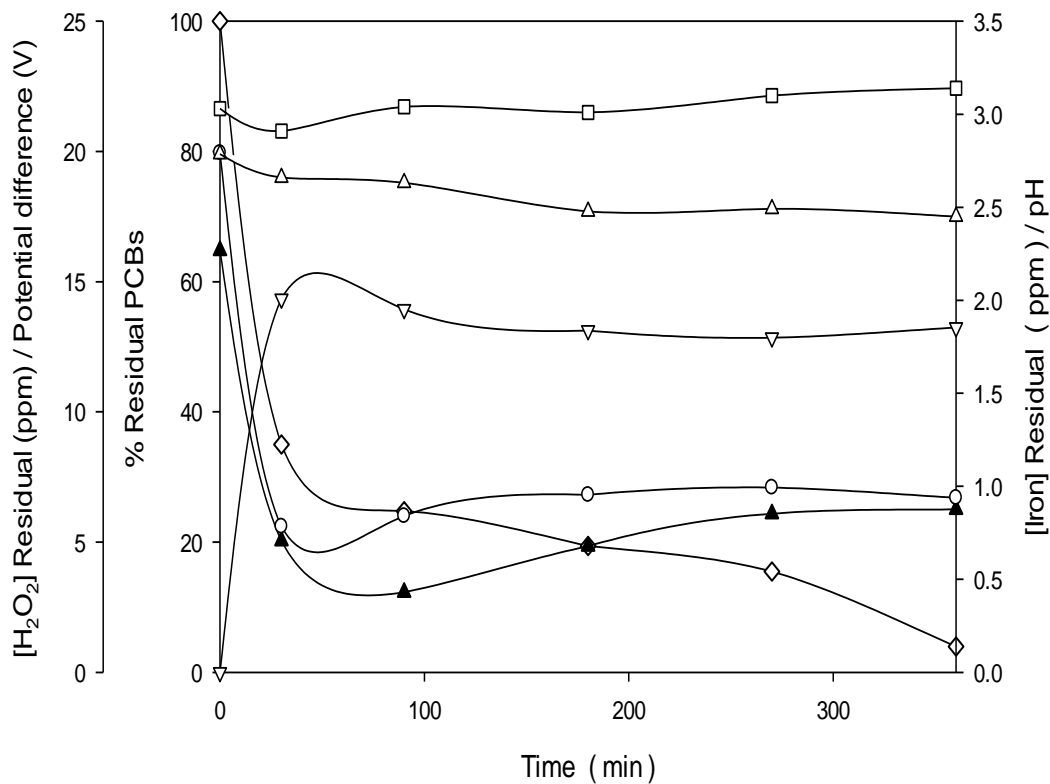


ew Only

Figure 4

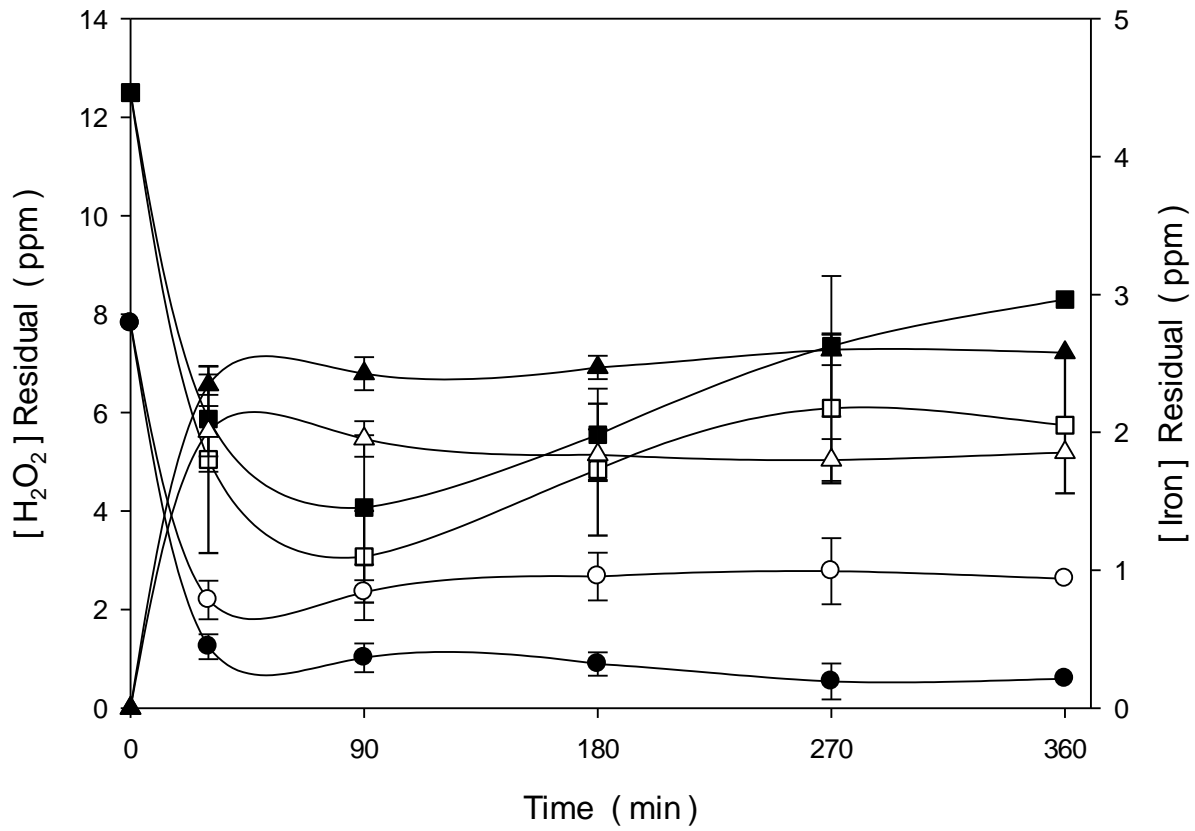

Only

Figure 5

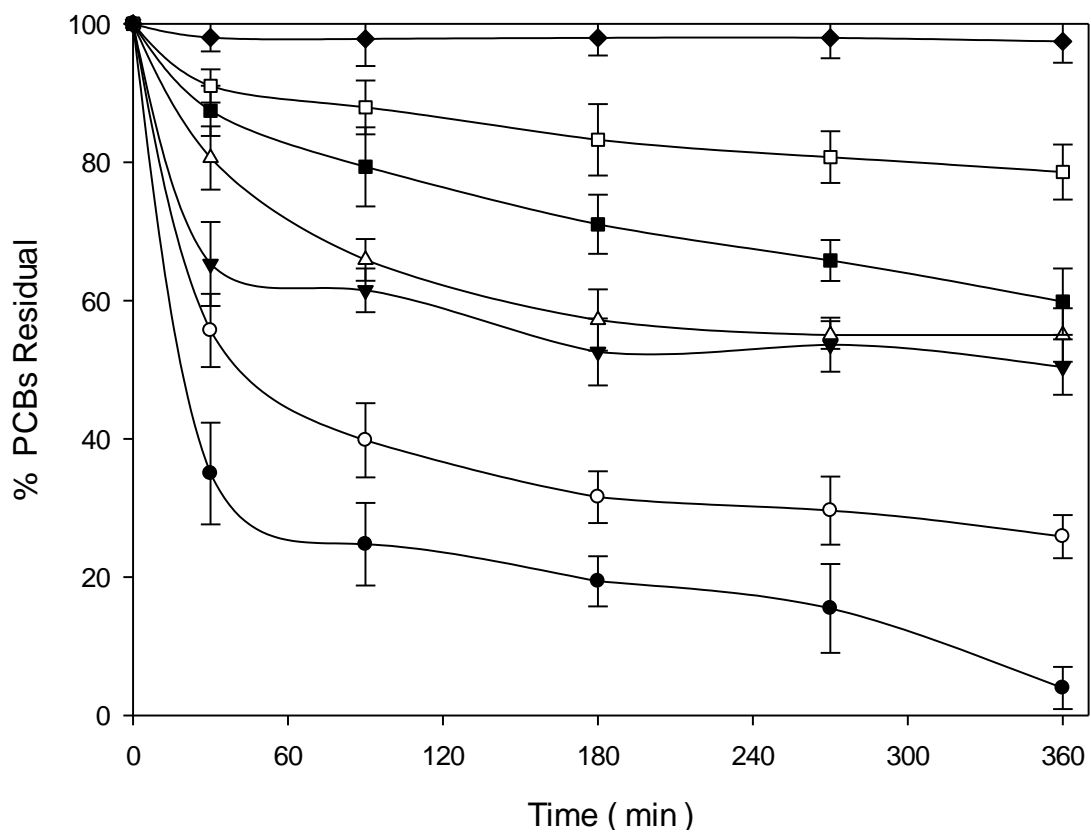

Only