

THE HADAMARD CONJECTURE AND CIRCUITS OF LENGTH FOUR IN A COMPLETE BIPARTITE GRAPH

CHARLES H. C. LITTLE and DAVID J. THUENTE

(Received 26 August 1980)

Communicated by W. D. Wallis

Abstract

We show that the problem of settling the existence of an $n \times n$ Hadamard matrix, where n is divisible by 4, is equivalent to that of finding the cardinality of a smallest set T of 4-circuits in the complete bipartite graph $K_{n,n}$ such that T contains at least one circuit of each copy of $K_{2,3}$ in $K_{n,n}$.

1980 *Mathematics subject classification (Amer. Math. Soc.):* 05 C 50.

An Hadamard matrix is an $n \times n$ $(1, -1)$ -matrix in which the rows are mutually orthogonal. The Hadamard conjecture asserts that there exists an Hadamard matrix of order n whenever n is divisible by 4. (See Wallis (1972) and the references found therein.) In Little and Thuente (1979), we restate the conjecture as a problem concerning the 1-factors of a complete bipartite graph. In the present paper, the conjecture is shown to be equivalent to one about the circuits of length 4 in a complete bipartite graph.

We begin with a lemma.

LEMMA 1. *Let S be a set with $|S| = n$ for some n divisible by 4. Suppose there exist subsets T_1, T_2, \dots, T_{n-1} of S , of cardinality $n/2$, such that $|T_i \cap T_j| = n/4$ whenever $i \neq j$. Then there exists an Hadamard matrix of order n .*

PROOF. Let $S = \{s_1, s_2, \dots, s_n\}$. Define $H = (h_{ij})$, where $h_{ij} = 1$ for all $j \in \{1, 2, \dots, n\}$ and, for all $i \in \{2, 3, \dots, n\}$,

$$h_{ij} = \begin{cases} 1 & \text{if } s_j \in T_{i-1}, \\ -1 & \text{otherwise.} \end{cases}$$

Since $|T_i| = n/2$ for all i , the first row is orthogonal to all the others. Furthermore since $|T_i| = n/2$, $|T_j| = n/2$ and $|T_i \cap T_j| = n/4$ for all $j \neq i$, we must have $|T_j - T_i| = |T_i - T_j| = n/4$, so that $|\bar{T}_i \cap \bar{T}_j| = n/4$ where $\bar{T}_i = S - T_i$ and $\bar{T}_j = S - T_j$. It follows that rows $i + 1$ and $j + 1$ are orthogonal. Hence H is an Hadamard matrix of order n .

As an example, let $S = \{s_1, s_2, s_3, s_4\}$, $T_1 = \{s_1, s_2\}$, $T_2 = \{s_1, s_3\}$, and $T_3 = \{s_1, s_4\}$. Then

$$H = \begin{pmatrix} 1 & 1 & 1 & 1 \\ 1 & 1 & -1 & -1 \\ 1 & -1 & 1 & -1 \\ 1 & -1 & -1 & 1 \end{pmatrix}.$$

The equivalence of the Hadamard conjecture with a problem on the 4-circuits of a complete bipartite graph is shown in the following theorem.

THEOREM. *Let S be the set of all 4-circuits of $K_{n,n}$ where n is even. Let S_1, \dots, S_k be the collection of all subsets S_i of S , of cardinality 3, such that the union of the three circuits of S_i is $K_{2,3}$. Let T be a smallest subset of S such that $T \cap S_i \neq \emptyset$ for each i . Then $|T| \geq \frac{1}{8}n^2(n - 1)(n - 2)$, and equality holds if and only if there exists an Hadamard matrix of order n .*

PROOF. Let A be an $n \times n$ $(1, -1)$ -matrix (a_{ij}) . Let $K_{n,n}$ be the complete bipartite graph with vertex set $\{v_1, v_2, \dots, v_n, w_1, w_2, \dots, w_n\}$, where v_i and w_j are adjacent for each i and j . Furthermore, for each i and j let the edge joining v_i to w_j be directed from v_i to w_j if $a_{ij} = 1$ and from w_j to v_i otherwise.

Note that a pair of rows and a pair of columns of A corresponds in an obvious way to an undirected 4-circuit in $K_{n,n}$. We say that this 4-circuit is clockwise even if the number of edges directed in the clockwise sense is even, and clockwise odd otherwise. Let C be a 4-circuit of $K_{n,n}$ with vertex set $\{v_h, v_i, w_j, w_k\}$. If $a_{hj} = a_{ij}$, then exactly one of the two edges of C incident on w_j is directed in the clockwise sense. If $a_{hj} \neq a_{ij}$, then those edges are directed in the same sense on C . Analogous results hold for a_{hk} and a_{ik} . It follows that C is clockwise odd if and only if exactly one of the equations $a_{hj} = a_{ij}$ and $a_{hk} = a_{ik}$ holds. This condition holds if and only if $a_{hj}a_{ij} + a_{hk}a_{ik} = 0$.

If we let X_{hi} be the set of columns j of A for which $a_{hj} = a_{ij}$ and let Y_{hi} be the set of all the remaining columns of A , it follows from the above considerations that the number of clockwise odd 4-circuits containing v_h and v_i is $|X_{hi}| |Y_{hi}|$. This product is a maximum if $|X_{hi}| = |Y_{hi}|$, and this condition holds if and only if rows h and i of A are orthogonal. It follows that the number of clockwise odd 4-circuits of $K_{n,n}$ is maximised if A is an Hadamard matrix.

Suppose therefore that A is an Hadamard matrix. Then $|X_{hi}| = |Y_{hi}| = \frac{1}{2}n$ for all h and i , so that there are $(\frac{1}{2}n)^2$ clockwise odd 4-circuits of $K_{n,n}$ containing v_h and v_i . Therefore $K_{n,n}$ has $\frac{1}{4}\binom{n}{2}n^2$ clockwise odd 4-circuits altogether, and therefore $\binom{n}{2}^2 - \frac{1}{4}\binom{n}{2}n^2 = \frac{1}{8}n^2(n-1)(n-2)$ clockwise even ones. Let T_0 be the set of all clockwise even 4-circuits of $K_{n,n}$.

The graph $K_{2,3}$ is drawn in Figure 1, where an orientation is given in which all three circuits are clockwise even. Since every edge of $K_{2,3}$ belongs to exactly two circuits of $K_{2,3}$, it follows that for any orientation of $K_{2,3}$ there are an odd number of clockwise even circuits. It follows that $T_0 \cap S_i \neq \emptyset$ for all i .

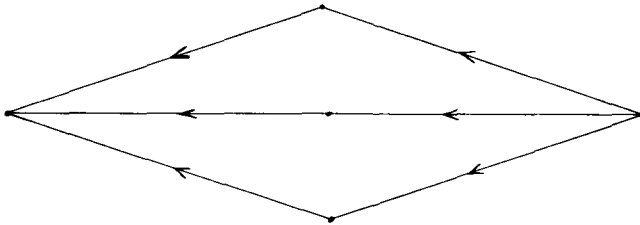


FIGURE 1

We have now proved that if there exists an Hadamard matrix of order n , then $|T| < \frac{1}{8}n^2(n-1)(n-2)$. We prove next that in fact $|T| > \frac{1}{8}n^2(n-1)(n-2)$. The existence of an $n \times n$ Hadamard matrix will then imply that $|T| = \frac{1}{8}n^2(n-1)(n-2)$. We will then prove the converse.

Suppose therefore that $T \cap S_i \neq \emptyset$ for all i . We consider first those copies of $K_{2,3}$ in $K_{n,n}$ which contain exactly three vertices of $\{v_1, \dots, v_n\}$. We denote the complement of $K_{n,n}$ by $2K_n$, since it has exactly two components, C_1 and C_2 , each isomorphic to K_n . Let C_1 be the component with vertex set $\{v_1, \dots, v_n\}$. Then the complement (in K_5) of a copy of $K_{2,3}$ containing three vertices of $\{v_1, \dots, v_n\}$ is $P_1 \cup P_2$, where P_1 is a triangle of C_1 and P_2 an edge of C_2 . The complement (in K_4) of a circuit in $K_{2,3}$ is then the union of P_2 with an edge of P_1 . Let us now temporarily fix P_2 and let P_1 run through all triangles in C_1 . In order to contain at least one circuit in each of the corresponding copies of $K_{2,3}$, T must contain at least as many circuits as the cardinality of the smallest set of edges whose deletion from K_n yields a graph with no triangles, and furthermore each such circuit must contain both end-vertices of the edge P_2 . By a well known theorem of Turán (see Turán (1941) or Harary (1969) p. 17), the largest subgraph of K_n having no triangles is $K_{n/2, n/2}$, since n is even. Since K_n has $\binom{n}{2}$ edges and $K_{n/2, n/2}$ has $\frac{1}{4}n^2$ edges, T must contain at least $\binom{n}{2} - \frac{1}{4}n^2$ circuits which include the end-vertices of P_2 . Since there are $\binom{n}{2}$ choices for P_2 , it follows that $|T| \geq \binom{n}{2}(\binom{n}{2} - \frac{1}{4}n^2) = \frac{1}{8}n^2(n-1)(n-2)$.

We continue the argument under the assumption that

$$|T| = \frac{1}{8}n^2(n - 1)(n - 2)$$

and prove the existence of an $n \times n$ Hadamard matrix. We now consider the copies of $K_{2,3}$ in $K_{n,n}$ which have only two vertices of $\{v_1, \dots, v_n\}$. The complement (in K_5) of such a copy of $K_{2,3}$ is $P_1 \cup P_2$ where P_1 is an edge of C_1 and P_2 a triangle of C_2 . The complement (in K_4) of any circuit in such a copy Z of $K_{2,3}$ is the union of P_1 with an edge e of P_2 . We have already seen that in order to include at least one circuit of each copy of $K_{2,3}$ that includes the end-vertices of e and three vertices of $\{v_1, \dots, v_n\}$, T must contain all the 4-circuits whose complements in K_4 are pairs of edges where one edge of the pair is e and the other is chosen from the complement, $2K_{n/2}$, in C_1 of a fixed copy of $K_{n/2,n/2}$. In order to ensure that T contains a circuit of Z , the copies of $K_{n/2,n/2}$ in C_1 corresponding to the edges of P_2 must be chosen in such a way that the edge P_1 appears in the complement of at least one of them. Since P_1 is any edge of C_1 , we find that C_1 must be the union of three copies of $2K_{n/2}$, each copy being the complement in C_1 of a copy of $K_{n/2,n/2}$ chosen to correspond to an edge of P_2 . Since P_2 is any triangle of C_2 , we see that to each edge of C_2 there corresponds a subgraph $2K_{n/2}$ of C_1 in such a way that for any triangle of C_2 the union of the corresponding subgraphs of C_1 is C_1 itself. For any edge e of C_2 , let us denote by $V_1(e)$ and $V_2(e)$ the vertex sets of the copies of $K_{n/2}$ in the subgraph $2K_{n/2}$ of C_1 corresponding to e . Thus $|V_1(e)| = |V_2(e)| = \frac{1}{2}n$ for each e .

Let us now consider a triangle of C_2 with edge set $\{e_1, e_2, e_3\}$. Since C_1 is the union of the corresponding copies of $2K_{n/2}$, each pair of vertices of C_1 must be contained in at least one of the sets $V_i(e_j)$ where $e \in \{1, 2\}$ and $j \in \{1, 2, 3\}$. It follows that

$$\{V_1(e_3), V_2(e_3)\} = \{[V_1(e_1) \cap V_1(e_2)] \cup [V_2(e_1) \cap V_2(e_2)], [V_1(e_1) \cap V_2(e_2)] \cup [V_2(e_1) \cap V_1(e_2)]\}.$$

Note that $|V_1(e_1) \cap V_1(e_2)| = |V_2(e_1) \cap V_2(e_2)|$, since

$$|V_1(e_1)| = |V_2(e_2)|, |V_1(e_1)| = |V_1(e_1) \cap V_1(e_2)| + |V_1(e_1) \cap V_2(e_2)|$$

and $|V_2(e_2)| = |V_1(e_1) \cap V_2(e_2)| + |V_2(e_1) \cap V_2(e_2)|$. Since

$$|V_1(e_1) \cap V_1(e_2)| + |V_2(e_1) \cap V_2(e_2)| = |V_1(e_3)| = |V_2(e_3)| = \frac{1}{2}n,$$

it follows that n is divisible by 4 and $|V_1(e_1) \cap V_1(e_2)| = \frac{1}{4}n$.

Finally we consider a subgraph $K_{1,n-1}$ of C_2 . Any pair of the $n - 1$ edges f_1, \dots, f_{n-1} in this subgraph form two sides of a triangle in C_2 . It is now immediate that the sets $V_1(f_1), \dots, V_1(f_{n-1})$ satisfy the conditions of Lemma 1. The existence of an Hadamard matrix of order n follows.

References

- F. Harary (1969), *Graph theory* (Addison-Wesley, London).
- C. H. C. Little and D. J. Tuente (1979), 'Complete bipartite graphs and the Hadamard conjecture', *Proc. Tenth Southeastern Conference on Combinatorics, Graph Theory and Computing*, Florida Atlantic Univ., Boca Raton, edited by F. Hoffman, D. McCarthy, R. C. Mullin and R. G. Stanton, pp. 721–726. (Utilitas Mathematica, Winnipeg).
- P. Turán (1941), 'Eine Extremalaufgabe aus der Graphentheorie', *Mat. Fiz. Lapok* **48**, 436–452.
- J. S. Wallis (1972), *Hadamard matrices*, Lecture Notes in Mathematics 292, 273–489 (Springer-Verlag, New York).

Department of Mathematics
Royal Melbourne Institute
of Technology Ltd.
Melbourne, Victoria 3000
Australia

Department of Mathematics
Purdue University at Fort Wayne
Indiana 46805
U.S.A.