

- [12] Kudrjavcev V B. The coverings of precomplete classes of  $k$ -valued logic. *Diskret. Analiz.*, 1970, 17: 32-44. (in Russian)
- [13] Liu Renren. The minimal covering of precomplete classes in partial three-valued logic. *Natur. Sci., J. Xiangtan Univ.*, 1991, 13(2): 158-164.
- [14] Liu Renren. The minimal covering of precomplete classes in partial four-valued logic. In *Proc. ICYCS'91*, 1991, pp.280-282.
- [15] Liu Renren. Some results on the decision for Sheffer functions in partial  $K$ -valued logic. *Multiple Valued Logic—An International Journal*, 1996, 1, 253-269.
- [16] Liu Renren. Some results on the decision for Sheffer functions in partial  $K$ -valued logic (II). In *Proc. the 28th International Symposium on Multiple-Valued Logic*, 1998, pp.77-81.
- [17] Liu Renren. Research on the similarity among precomplete sets preserving  $m$ -ary relations in partial  $K$ -valued logic. In *Proc. the 29th Int. Symp. Multiple-Valued Logic*, 1999, pp.136-139.
- [18] Liu Renren. Some results on the minimal coverings of precomplete classes in partial  $K$ -valued logic functions. In *Proc. 2003 IEEE Int. Conf. Systems, Man & Cybernetics*, 0-7803-7952-7/03 ©2003 IEEE, pp.2645-2647.

Corrections

Figs.6, 7 of *A Framed Temporal Logic Programming Language*, Zhen-Hua Duan et al. 19(3): 341-351.

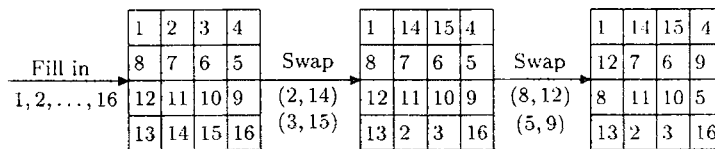


Fig.6.  $4 \times 4$  magic square produced by the deterministic program. (p.349)

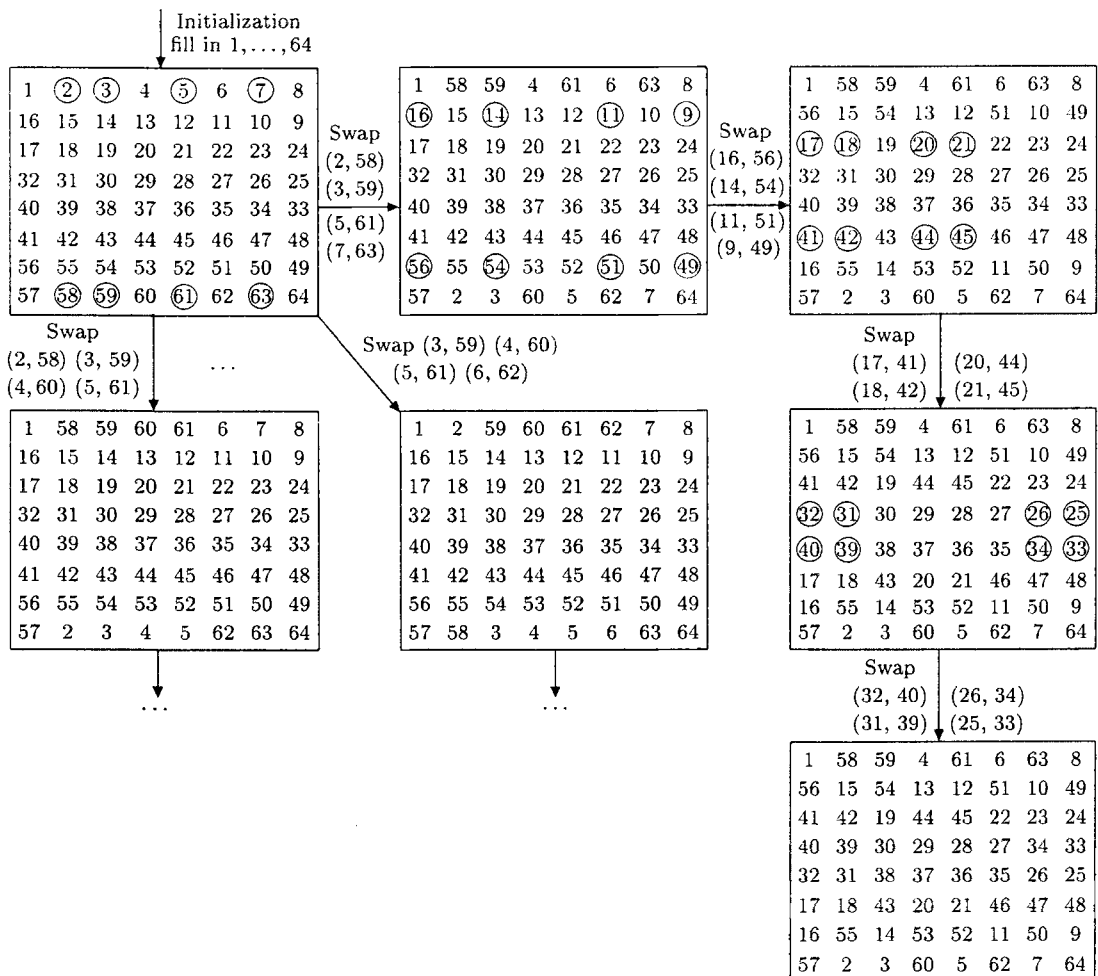


Fig.7.  $8 \times 8$  magic squares produced by the non-deterministic program. (p.349)