

Authenticated and Misuse-Resistant Encryption of Key-Dependent Data

Mihir Bellare

Sriram Keelveedhi


University of California, San Diego

Full version of this work appears in the Cryptology ePrint Archive

Classical Security: IND-CPA

[GM84, BDJR97]


Caveat: Messages do not depend on the key

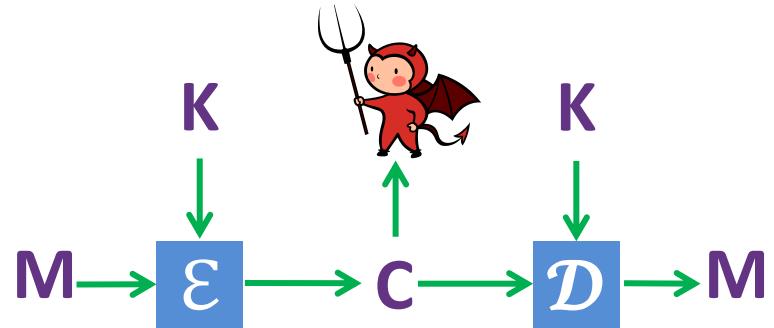

Key Dependent Messages

[CL01] Applications to anonymous credentials

[BRS02] Connections to formal methods

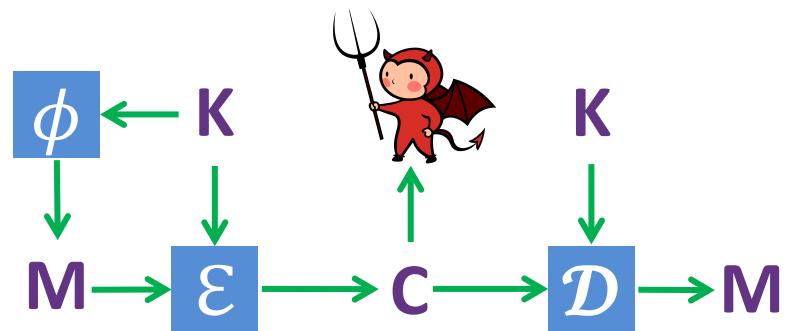

Key-dependent messages in practice

Disk encryption (BitLocker): Encryption key could reside on disk

Password, password hash could be stored on the system

IEEE 1619: KDM attack on LRW influenced its rejection

KDM-secure encryption is more misuse-resistant

Previous Work

[BRS02]



- Model and definitions for KDM-CPA secure encryption
- RO model solution $\mathcal{E}(K, R, M) = H(K || R) \oplus M$

Standard Model KDM secure encryption schemes

[BHHO08, BHFI10, BGK11, ACPS09, BG10, MTY11]

- Restricted classes of message deriving functions
- Inefficient


KDM for other primitives

- Limited KDM security for PRFs/PRPs [HK07]
- Basic form of AE [BPS07]



Revisit

[BPS07] considered classical AE

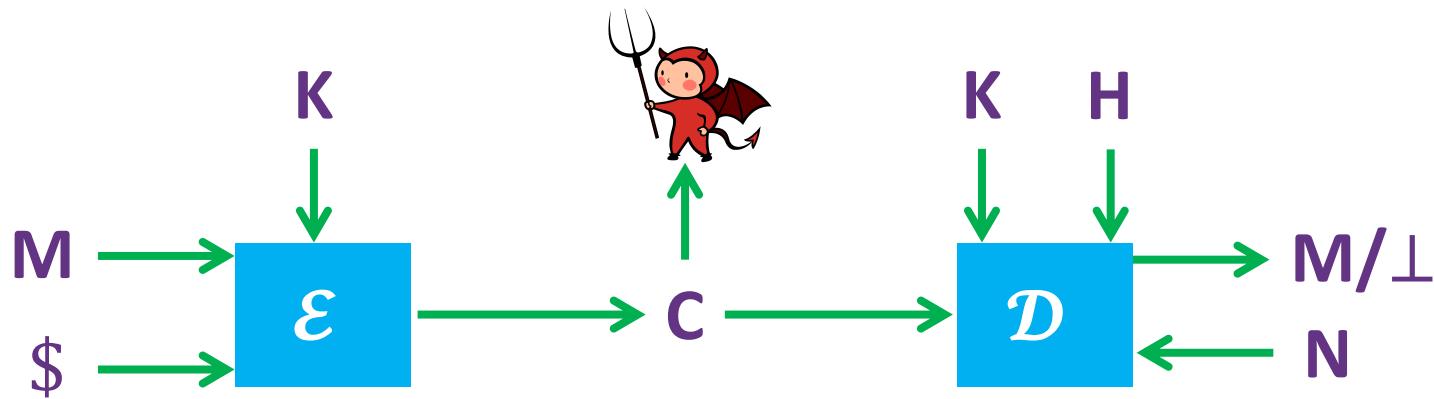

Privacy and Integrity of message M

Standards are of this form


Modern/in practice AE is more complex

- CCM in IEEE 802.11, IEEE 802.15.4, IPSEC ESP and IKEv2;

- GCM in SP 800-38D

- EAX in ANSI C12.22 and ISO/IEC 19772

- QCB2.0 in ISO 19772

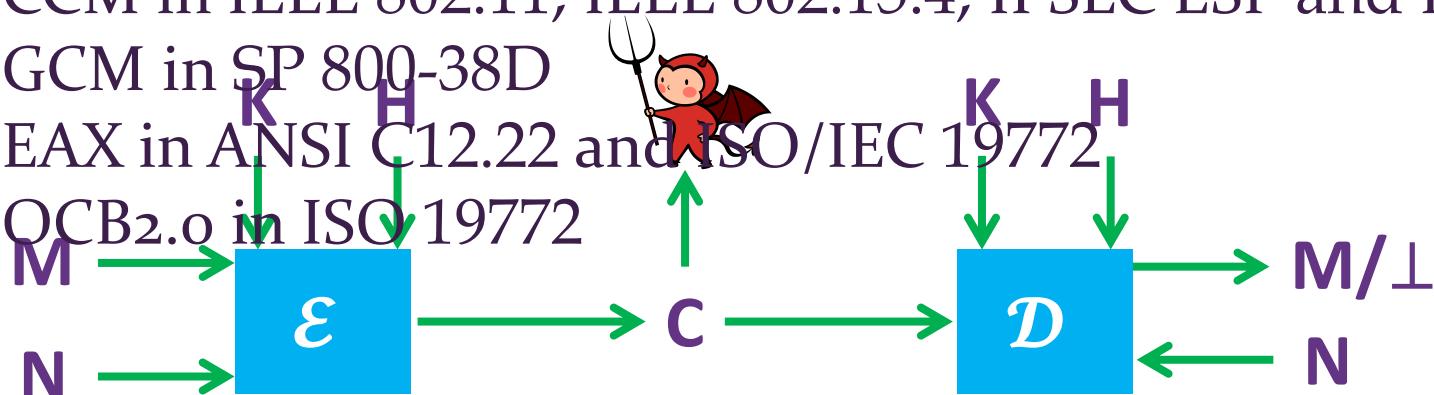

Only Integrity of header H

Issues

- Message (M): key-dependent (**kd**) or key-independent (**ki**)
- Header (H): key-dependent (**kd**) or key-independent (**ki**)
- Security: Random nonce or universal nonce

Security notion	Nonce/IV (N)
Random nonce security	Should be randomly generated
Universal nonce security	Any non-repeating sequence will do

AE variants

- Message (M): key-dependent (**kd**) or key-independent (**ki**)
- Header (H): key-dependent (**kd**) or key-independent (**ki**)
- Security: Random nonce or universal nonce

Security	M: kd H: kd	M: kd H: kd	M: kd H: kd	M: kd H: ki
Random nonce	Yes	?	?	?
Universal nonce	Yes	?	?	?

We ask: When is security achievable?


Our Contributions

- Simple unified definitions of security encompassing all variants of AE under KDM
- **Attacks:**
 - **NO** scheme secure with **universal nonces**
 - **NO** scheme secure with **key dependent headers**
- **RHtE**: Security under **M:kd; H:ki**



- **Features:**
 - Minimal computational overhead
 - Zero bandwidth overhead
 - Simple software changes
- **Security:** RO model solution


Recall: AE Security

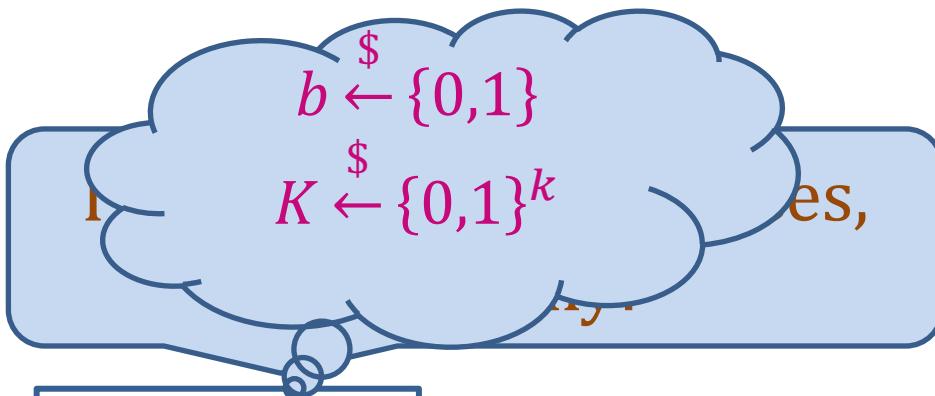

$$\mathcal{AE} = (k, \mathcal{E}, \mathcal{D})$$


Universality
Randomness

I know b !

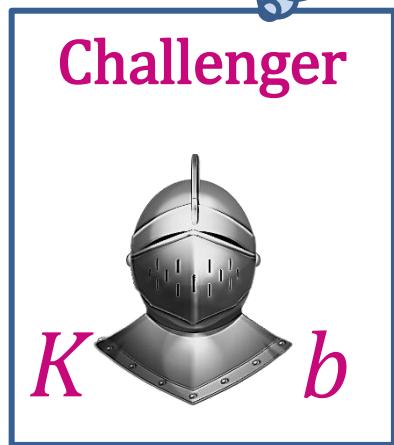

$b = 1$: Use real scheme
 $b = 0$: Return rnd bits for Enc, 0 for Dec

KDM Security

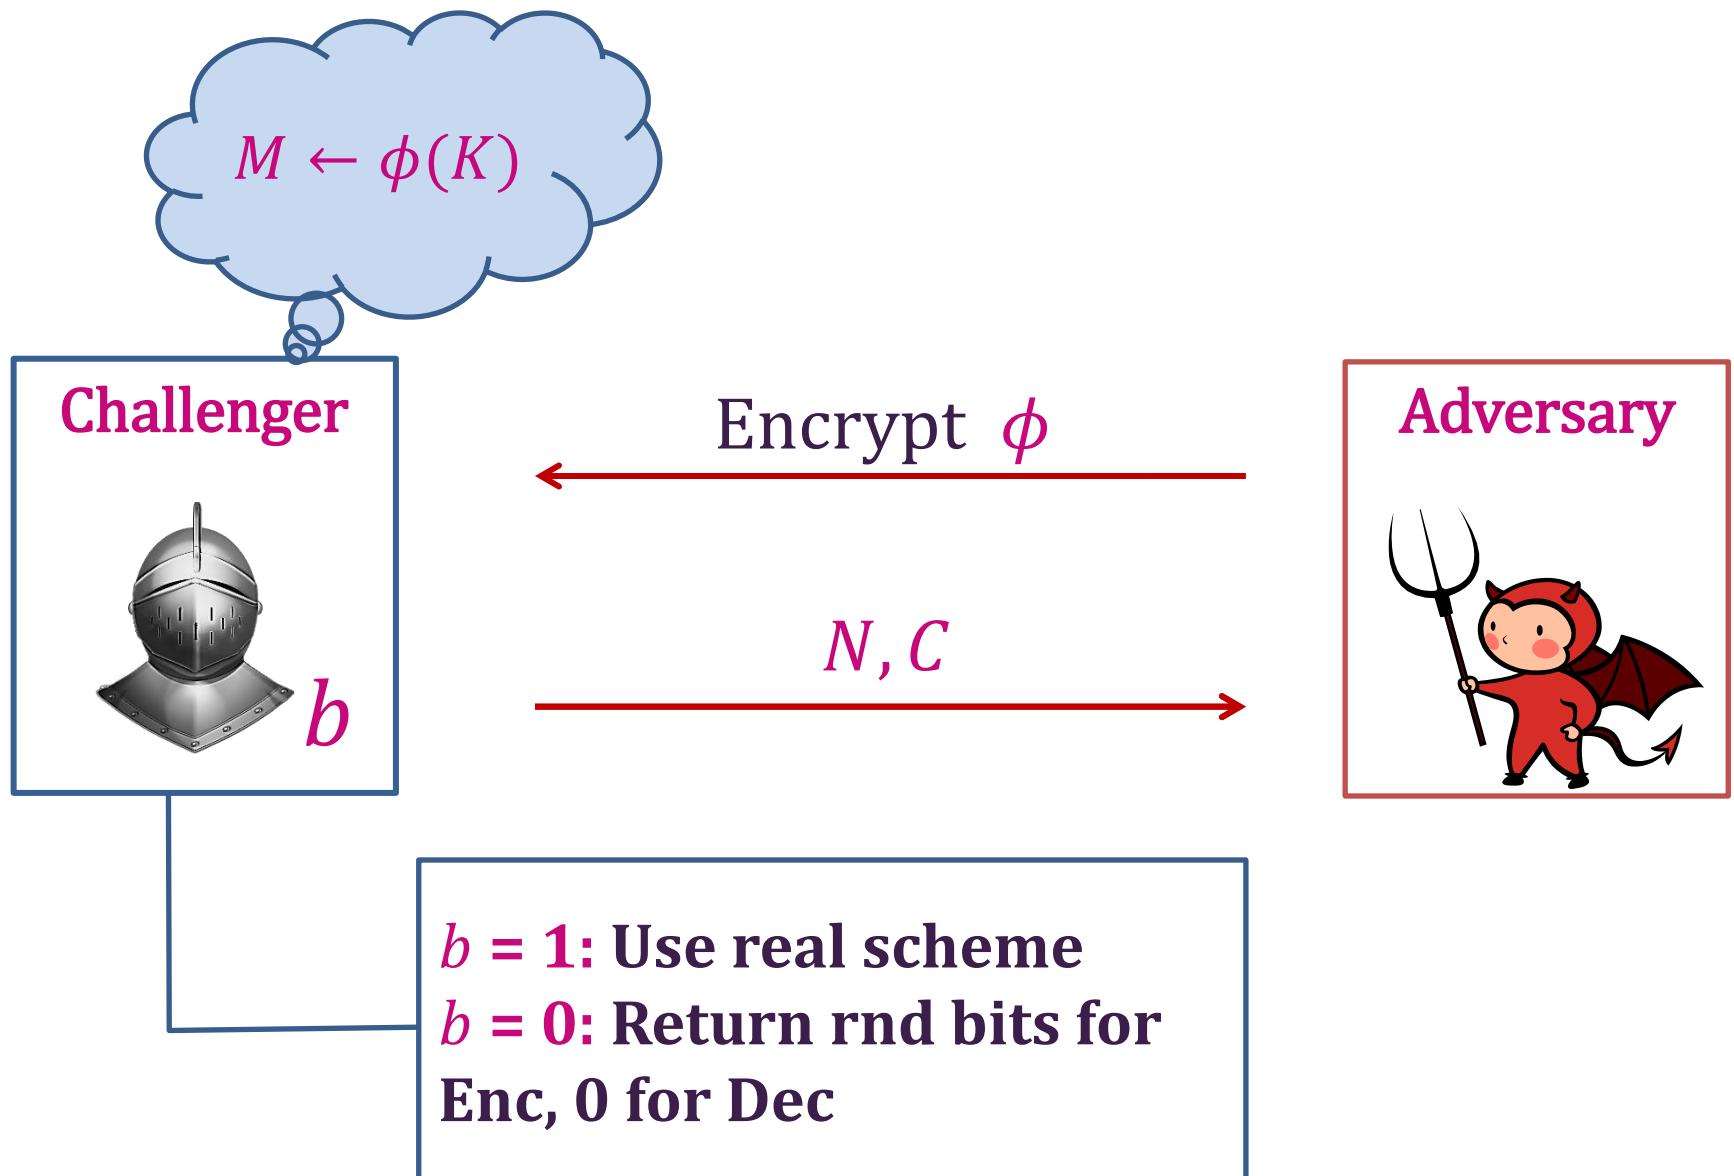

Universal nonce KDM-secure AE is impossible

Starting point: [BRS02] attack on stateful encryption

- Adversary gets to choose nonce
- Embed nonce N in ϕ
- ϕ knows N, K
 - Can simulate encryption of any message

Adversary A	$\phi_{S,N}(K)$
$N \xleftarrow{\$} \{0,1\}^r; S \xleftarrow{\$} \{0,1\}^s$ $(N, C) \leftarrow \mathbf{Enc}(N, \phi_{S,N})$ $K[1] \leftarrow S \cdot C$	$\text{Find } M \text{ s.t}$ $S \cdot \mathcal{E}(K, N, M) = K[1]$

Problem: How long will it take to find M ?

Our Attack

- $F: \{0,1\}^s \times \{0,1\}^c \rightarrow \{0,1\}$ family of pairwise independent hash functions
- m_1, m_2, \dots list of all m -bit messages

Adversary A	$\phi_{s,i,N}(K)$
$\begin{aligned} N &\leftarrow 0; S \stackrel{\$}{\leftarrow} \{0,1\}^s \\ \text{For } i = 1, \dots k \text{ do} \\ (N_i, C_i) &\leftarrow \mathbf{Enc}(N, \epsilon, \phi_{s,i,N}) \\ N &\leftarrow N + 1 \\ L[i] &\leftarrow F(S, C_i) \\ //L &= K \text{ w.h.p} \end{aligned}$	$\begin{aligned} \text{For } j = 1, \dots l \text{ do} \\ C &\leftarrow \mathcal{E}(K, N, m_j) \\ \text{If } K[j] = F(S, C) \text{ then} \\ &\quad \text{Ret } m_j \\ &\quad \text{Ret } m_1 \end{aligned}$

Claim: If $l = o(k)$, $\Pr[L \neq K] \leq \frac{1}{4}$

AE variants: Revisit

- No scheme secure with universal nonces
- No scheme secure with key-dependent headers

Security	M: kd H: kd	M: ki H: kd	M: kd H: ki
Random nonce	No	No	Yes  RHTe
Universal nonce	No	No	No

Message(M) , Header (H): key-dependent (**kd**) or key-independent (**ki**)

- No: Full KDM security is not possible

RHtE: RANDOMIZE, HASH then ENCRYPT



Hash function $F: \{0,1\}^* \rightarrow \{0,1\}^k$

$\bar{\mathcal{E}}(L, R, H, M)$	$\bar{\mathcal{D}}(L, R, H, C)$
$K \leftarrow F(L R)$ $C \leftarrow \mathcal{E}(K, H, M)$ Return C	$K \leftarrow F(L R)$ $M \leftarrow \mathcal{D}(K, H, C)$ Return M

- Minimal computational overhead
- Zero bandwidth overhead
- Simple software changes

Questions?