

# CAPTCHA Celebrating its Quattuordecennial – A Complete Reference

Ragavi.V<sup>1</sup>, Dr.G.Geetha<sup>2\*</sup>

<sup>1</sup>Department of Computer Applications,  
<sup>1</sup>Sathyabama University, Chennai, India.

\* Corresponding Author

<sup>2</sup>Department of Computer Science Engineering  
<sup>2</sup>Lovely Professional University, Phagwara, India.

## Abstract

Recently web services have become an important business tool in e-commerce. The emergence of intelligent, sophisticated attacks like DoS makes web services more vulnerable than ever. One of the most common attacks against web services is a denial of service attack. To mitigate the DoS attack, CAPTCHA is used as one of the standard security technology. CAPTCHAs generate and grade tests that most humans can pass but current computer programs can't. Such tests often called CAPTCHA challenges are based on hard, open artificial intelligence problems. During past years, many researchers worked on HIP and CAPTCHA systems. This paper is a collection of 179 published works on HIP and CAPTCHA. CAPTCHA scheme, attacks and analysis, applications, usability issues and recaptcha are the heads under which the papers have been categorised. We hope that this paper would help new researchers in CAPTCHA domain to quickly find the works that are done previously.

**Keywords:** CAPTCHA, Security, DoS

## 1. Introduction

Completely Automated Public Turing Tests to Tell Computers and Humans Apart (CAPTCHAs) are one of the important branches of HIP systems. It is used for defending against undesirable and malicious bot programs on the Internet.

Internet spans the globe crossing national boundaries. Internet security is of critical importance to our society, as the government and economy increasingly rely on the Internet to conduct their business, and people use the Internet as a convenient vehicle for simplifying a wide range of tasks, from banking to shopping. Unfortunately, the current Internet infrastructure is vulnerable to Denial of Service (DoS) attack. Because DoS attacks typically depends on compromising a large number of hosts to generate traffic to a single destination, the severity of

DoS attacks will likely increase as greater numbers of poorly secured hosts are connected to high bandwidth Internet connections. This occupies a large volume of the resources of the site in favor of the profit-seeking programmers and reduces the performance of the system. Various methods have been presented in order to prevent such attacks, aiming at distinguishing human users from computer programs. A turing test was proposed [156] for proving the intelligence of a computer. A similar test administered by computer was generated by Carnegie Mellon University [159] known as CAPTCHA. These are the automatic filters that are widely used these days to disallow any automated script that can perform the work of a human.

In this paper, we bring out the work carried out by people around the globe on CAPTCHA. In Section II we briefly discuss various CAPTCHA schemes like text based CAPTCHAS; Image based CAPTCHAS and sound Based CAPTCHAS. In Section III we attempt to collect the entire novel CAPTCHAS developed recently. Section IV deals with applications of CAPTCHAS. CAPTCHAS are not free from attacks. They are also tested by attacks and analysis. This is brought out in Section V. Enthusiastic Artificial Intelligent Experts create more and more novel CAPTCHAS in a way to provide security actually creates havoc amidst humans. As a result, the humans are unable to prove that they are humans. In Section VI, we have discussed the usability issues with respect to human usage. Section VII emphasizes on reengineering CAPTCHAS.

## 2. CAPTCHA Schemes

Moni Naor in 1996 was the first to design the turing test [90], followed by him a method was designed by AltaVista in 1997 which is one of the first CAPTCHA

methods. A formal definition of CAPTCHA was given by von Ahn in [161]. The authors in [160] explained how this turing test can be conducted automatically. In [5] H.S. Baird has generated some CAPTCHA methods and in [6, 7] he has discussed how human interactive proof can be used to identify bots. CAPTCHA can be broadly classified into four schemes. The various schemes of CAPTCHA are discussed in detailed in the following sections

### 2.1 Text – Based CAPTCHAs

Text-Based CAPTCHAs have been the most widely deployed schemes. Major web sites such as Google, Yahoo and Microsoft all have their own text-based CAPTCHAs deployed for years. Pessim Print [9] is one of the first text based scheme. Another early work on text-based CAPTCHA scheme is [169]. BaffleText [27], ScatterType [8] are text based schemes that generate meaning less pronounceable words. In [11], [165], [43] the authors have discussed how to generate random words.

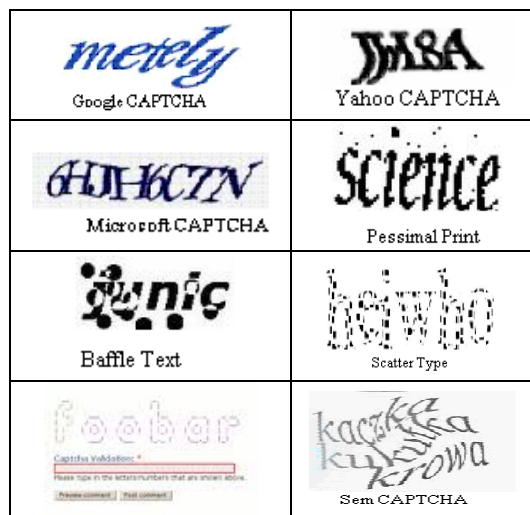


Fig 1: Some Text Based CAPTCHA

Human Interactive Proofs (HIPs) which is currently used by Microsoft web services is described in [23,24,25, and 26]. Embedding information within dynamic visual patterns is discussed in [83]. Here various visual patterns are used as foreground and background for displaying the text. The majority of works done on CAPTCHA are for English CAPTCHA methods. There are a few CAPTCHA methods for other languages like Arabic, Chinese etc., [117, 170, 118, 119, 120, 121 and 39]. A unified model for character recognition is presented in [30]. A SemCAPTCHA has been proposed in [86]; here the system is based not only on text recognition but also on text understanding. The Text-Graphics Character

(TGC) CAPTCHA is proposed in [36] demonstrates its utility in a prototype based on the SSH (Secure Shell) protocol suite. A novel Visual word-based CAPTCHA using 3D characters is projected in [111] which use 3D characters with 3D boundaries delimited by shadows.

### 2.2 Image Based CAPTCHAs

Image-based CAPTCHAs such as [4, 10, 12, 106 and 28] have been proposed as alternatives to the text media. PIX and EPS methods [162] are one of the first Image Based methods. Bongo, which is created in the CMU CAPTCHA project, is described in [15]. ASIRRA (Animal Species Image Recognition for Restricting Access) is a HIP that works by asking users to identify photographs of cats and dogs [41]. More robust and user-friendly systems have been developed. Images are randomly distorted before presenting them. State-of-the art content-based image retrieval (CBIR) and annotation techniques are taken as the main perception and are discussed in [108, 109]. The idea discussed in method [82] is to exchange a number of blocks in an image and ask the user to click on that blocks. CAPTCHAs using facial expressions, facial features and face recognition are brought out in [112, 152, 87 and 88]. A new type of CAPTCHA called as Collage CAPTCHA is introduced in [122, 123] where distorted shapes are used instead of images. While most of the image CAPTCHA is 2D, there is yet another discovery of 3D CAPTCHAs discussed in [57, 60, 35 and 94]. [59],[84] talks about how 3D images can be used interactively for CAPTCHA.

Most of visual image based methods require a database of labeled images. Creating a database of labeled images is costly and time consuming. An approach for solving this problem is creating games such as EPS-Game [162]. Another idea is using image search engines for this purpose [124, 125].

Moving images can also be used instead of stable images. CAPTCHAs using moving images are discussed in [4, 126]. A combination of both text and image CAPTCHA is brought out as a hybrid CAPTCHA in [85]. In another novel proposal where a real time image is used which will portray some action and the user have to type the answer [149]. An algorithm for designing CAPTCHA is proposed in [61] where the images are splitted and rotated against OCRs. In another method, activity recognition is taken as the criteria and is discussed in [159]. Based on the principle of cognitive psychology [113] a new type of image based CAPTCHA was proposed.

Automatic image tagging appears to be a harder problem, an effort to tag images based on nonpixel data is discussed and proposed in [95]. . Visual CAPTCHAs can

be used for securing the path without the need for additional hardware; the way is paved in [44].

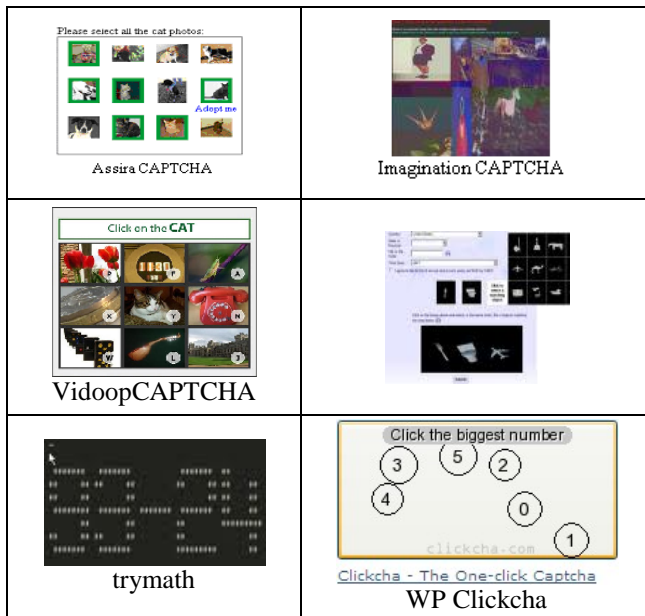


Fig 2: Some Image Based CAPTCHA

Yamamoto.T.et al proposed a humorous CAPTCHA with cartoons in [175]. An image based CAPTCHA using Jigsaw Puzzle is discussed in [50]. In [63] Sequenced Picture Captcha (SPC) which comprises of object pictures accompanied by a Tag, is given, the user is required to determine the logical sequence of the displayed object pictures based on the Tags. Hence, the user is required to identify both the object pictures and the Tags. In [72] an effective image-based CAPTCHA based on the orientation of N-gonal cropped sub-images as a solution of CAPTCHAs is given by Jong-Woo Kim et al.

CAPTCHA methods are usually designed for using with computers and are not suitable for other devices such as mobile phones and PDAs. A number of methods are designed especially for devices such as mobile phones [127, 128, 129, and 58].

### 2.3 Sound Based CAPTCHAs

Audio CAPTCHAs were introduced as an accessible alternative for those unable to use the more common visual CAPTCHAs. In [77, 20, and 130] it typically requires users to solve a speech recognition task. The different types of audio CAPTCHAs are discussed in [131, 132, 133, 134 and 16]. Audio CAPTCHAs are clearly more difficult and time-consuming. In order to address this concern, a new interface is developed for solving CAPTCHAs optimized for non-visual use that

can be added in-place to existing audio CAPTCHAs[68]. Haichang Gao et al has proposed a new sound based CAPTCHA in [51].

### 3. Novel CAPTCHAs

Apart from the commonly deployed CAPTCHAs like text, image and sound CAPTCHAs, there are other novel CAPTCHAs designed for security purpose. Collaborative filtering, a new type of CAPTCHA methods is proposed in [29] in which there is no specific answer to the question asked to the user.

POSH [166] –a puzzle only solvable by human is a prompt with three import properties: it can be generated by a computer, it can be answered consistently by a human, and a human answer cannot be efficiently predicted by a computer. Here, the user is checked for consistency, not for correction.

To convert the regular keyboard-entry CAPTCHAs into clickable CAPTCHAs is discussed in [106]. Linguistic problem of word-sense ambiguity CAPTCHA in text domain was desired from the beginning, but there are few works done in this field including [13, 168]. As the authors of these paper said, it seems that designing a Text Domain CAPTCHA is very difficult. Another group of methods uses questions which need reasoning to be answered such as [135]. This idea can be extended to create HIP systems which can distinguish between different groups of people, such as method explained in [79, 80]. In another proposal a system [150] is designed with two components, one to detect unknown chat bots, and the other to detect known bots.

Sequenced Tagged CAPTCHA [49],[105], a novel scheme where numbers are embedded in text CAPTCHA. Rusu proposed Handwritten CAPTCHA, which uses scanned handwritten words for generating CAPTCHA images [115]. A new scheme of Synthetic handwritten CAPTCHAs is presented in [1]. AssoCAPTCHA [31] is another type of CAPTCHA that requires no greater user-interaction than conventional solutions. [45] G.Geetha has discussed how RBFN (Radial Basis Function Network) can be used to mitigate DoS Attack.

Zhang's CAPTCHA [167] is based on intelligent interaction via RIA. It includes two lines of defenses against various types of attacks. SS-CAPTCHA [174] is based on even more advanced human-cognitive-processing abilities. The CAPTCHA uses the human ability of recognizing “strangeness”. CAPTCHA using Strangeness in Sentences (SS-CAPTCHA), which detects malware by checking if users can natural

sentences created by humans from machine-translated sentences. CAPTCHA design based on moving object identification and tracking problems is discussed in [34, 69]. A Multiple Challenge-Response system call M-CR CAPTCHA mechanism is proposed in [84]. Here a user is expected to respond to multiple questions before access is granted.

Another approach 'drag and drop CAPTCHA' or 'DnD' is a HIP challenge that uses conventional mouse events to recognize human intervention proof [39]. A 3-layer Dynamic CAPTCHA uses 3-layer structure to makes the design of CAPTCHA is given by JingSong Cui et al in [70]. A novel CAPTCHA that is based on the current hard AI problem of mixed-text (handwriting and printed-text) segmentation is given in [156].

#### 4. CAPTCHA Applications

CAPTCHA methods was initially designed to prevent spammers from registering free accounts in the free email services [7]. Nowadays CAPTCHAs are not only used for the above but many more. They are been employed to prevent spam emails [53, 74, 137, 138]. Another application of CAPTCHA is online games [47, 173, 110,179,56] where it is used to prevent bots from playing games. CAPTCHA methods are used in different applications to identify bots. These methods identify bots and block them in automated attacks such as Denial of Service (DoS) attacks [73, 75]. Spammers are also using CAPTCHA techniques for sending undetectable spams [81]. A new method for filtering images is discussed in [14]. CAPTCHA is used in preventing dictionary attacks in many applications [18, 139, 140, 100, 151, 171]. An extended idea of CAPTCHA is applied for addressing online threats [19, 37, 116, 32, 152]. CAPTCHA is not only used for defending online threats but also for offline attack [42]. The various other special applications are [45, 141, 142, 143, and 95]. CAPTCHA is applied in filtering group sending SMS spam [98] and prevent Phishing [154]. CAPTCHA is also employed in defending ecommerce [101]. An innovative solution for security of Internet polls is described in [3, 89]. CAPTCHA is widely used in smart cards to prevent illegitimate users [172]. To prevent the spam in VoIP (Voice over Internet Protocol) CAPTCHA is used [2]. [52] suggests a novel solution to eradicate the Sybil threat using a unique combination of neural networks and CAPTCHA. [163] discusses how to eliminate botnets in Internet Relay Chat (IRC), Peer-to-Peer (P2P) and web-based protocols using an encryption algorithm with session keys and a CAPTCHA verification.

#### 5. Attacks and Analysis

CAPTCHAs that are carefully designed are vulnerable to novel but simple attacks; one of the first and well known attacks to CAPTCHA methods (Gimpy method) is [91]. Other attacks on Gimpy method are [93, 155, 92]. In [102] two attacks are discussed on how text-based CAPTCHAs have been broken. A more recent attack on character-based CAPTCHA methods are reported in [64]. Similar text-based attacks are discussed in [24, 27]. A low-cost attack on Microsoft CAPTCHA with a success rate of more than 60% is analysed in [65]. In [99] an investigation of attacking the image based CAPTCHA was successful with a success rate of 82.7%. Similar attack on image based CAPTCHA is discussed in [40]. Attacking in the form of a game is given in [66]. An algorithm to break visual CAPTCHA is proposed in [21]. The limitation of CAPTCHA is used to bypass its vulnerability are analysed in [33]. An analysis of different CAPTCHA breaking algorithms is brought in [62], a method by which child users can be identified is given in [144]. Algorithms were developed [13, 78, 164, 48, 176, 177 and 92] to break CAPTCHAs. In [46] G.Geetha et al, have discussed how curvelets can be used to break image CAPTCHA. Algorithm for Secured Online Authentication Using CAPTCHA [22] discusses how CAPTCHA can be verified by a three step process. In [71] Jisong Zhang; Xingfen Wang, have discussed how to use instance learning for breaking Internet Banking CAPTCHA. Hernandez-Castro et al in [54] have explained how by using image recognition and machine learning can break HumanaAuth CAPTCHA.

#### 6. Usability Issues

Usability and robustness are two fundamental issues with CAPTCHA, and they often interconnect with each other. In [67, 78] the authors discuss the usability issues that should be considered and addressed in the design of CAPTCHA. In [103, 97] it explores the usability issues of image based CAPTCHA. In [79] we can see how usability meets access control. In [145] the authors taking into account the issues of the existing CAPTCHA propose a new system where the user is given options regarding to the user's needs such as user language and disabilities. A new method for disabled people with more than one disability is proposed in [146]. The various issues of both text-based and image-based CAPTCHA are brought to light in [153]. Kurt Alfred et al in [80] have discussed how to balance the usability and security of video CAPTCHA. In [76] Karunathilake et al has discussed in detail about the various usability issues humans are facing and proposed a novel technique for reverse Turing test. In [17] the author has spoken about

the usability issues of audio CAPTCHA in particular. Issues in image based captcha is elaborated in [104].

## 7. ReCAPTCHA

CAPTCHAs are generated by software and the structure of a CAPTCHA gives hints to its implementation. Thus due to these properties of image processing and image composition, the process that creates CAPTCHAs can often be reverse engineered. Once the implementation strategy of a family of CAPTCHAs has been reverse engineered the CAPTCHA instances may be solved automatically by leveraging weaknesses in the creation process or by comparing a CAPTCHA's output against itself, this concept is discussed in [55].

## 8. Conclusion

CAPTCHA systems are used to distinguish between human users and computer programs. Today they are widely deployed in web applications to offer better services to human users. In this paper we have surveyed the works done on CAPTCHA during past years. We find that lots of work needs to be done on the usability issues of CAPTCHA and reCAPTCHA. As spammers advance, the puzzles get progressively harder and more of a burden is placed on humans. We hope that this paper can assist many researchers who work in the area.

## References

- [1] Achint Oommen Thomas, Amalia Rusu, Venu Govindaraju. Synthetic handwritten CAPTCHAs. *Pattern Recognition*, vol. 42 Issue 12. December 2009. (Elsevier Science Inc).
- [2] Ahmedy, I.; Portmann, M.; Using Captchas to Mitigate the VoIP Spam Problem; Second International Conference on Computer Research and Development, 2010. pp : 136 – 140.
- [3] Alessandro Basso, Michele Miraglia. Avoiding Massive Automated Voting in Internet Polls. *Electronic Notes in Theoretical Computer Science (ENTCS)*, vol. 197 Issue 2. February 2008. (Elsevier Science).
- [4] Athanasopoulos.E and Antonatos.S. Enhanced CAPTCHAs: Using animation to tell humans and computers apart. *Proc. of 10th Int. Conf. on Communications and Multimedia Security (CMS 2006)*, vol. 4237 of LNCS, pp. 97–108, October 2006.
- [5] H. S. Baird. *Data Complexity in Pattern Recognition*, chapter in Complex Image Recognition and Web Security. Springer, 2006.
- [6] H. S. Baird and D. P. Lopresti. Second international workshop on human interactive proofs - preface. *Proc. of 2nd Int. Workshop on Human Interactive Proofs (HIP 2005)*, vol. 3517 of LNCS, May 2005.
- [7] H. S. Baird and K. Popat. Human interactive proofs and document image analysis. *Proc. of 5th IAPR Int. Workshop on Document Analysis Systems (DAS 2002)*, vol. 2423 of LNCS, pp. 507–518, 2002.
- [8] H. S. Baird, M. A. Moll, and S.-Y. Wang. Scattertype: A legible but hard-to-segment CAPTCHA. *Proc. of 8th Int. Conf. on Document Analysis and Recognition (ICDAR 05)*, vol. 2, pp. 935–939, August–September 2005
- [9] H. S. Baird, A. L. Coates, and R. J. Fateman. Pessimprint: a reverse turing test. *International Journal on Document Analysis and Recognition (IJ DAR)*, 5(2–3):158–163, April 2003.
- [10] H. S. Baird and J. L. Bentley. Implicit CAPTCHAs. *Proc. of SPIE-IS&T Electronic Imaging, Document Recognition and Retrieval XII*, vol. 5676 of SPIE Proceedings, pp. 191–196, January 2005.
- [11] J. Bentley and C. Mallows. CAPTCHA challenge strings: problems and improvements. *Proceedings of 18th SPIE-IS&T Electronic Imaging, Document Recognition and Retrieval XIII*, vol. 6067 of SPIE Proceedings, January 2006.
- [12] J. Bentley and C. Mallows. How much assurance does a PIN provide? *Proc. of 2nd Int. Workshop on Human Interactive Proofs (HIP 2005)*, vol. 3517 of LNCS, pp. 111–126, May 2005.
- [13] R. Bergmair and S. Katzenbeisser. Towards human interactive proofs in the text-domain: Using the problem of sense-ambiguity for security. *Proc. of 7th Int. Information Security Conference (ISC 2004)*, vol. 3225 of LNCS, pp. 257–267, September 2004.
- [14] B. Biggio, G. Fumera, I. Pillai, and F. Roli. Image spam filtering using visual information. *Proc. of 14th Int. Conf. on Image Analysis and Processing (ICIAP 2007)*, pp. 105–110, September 2007.
- [15] D. Blank. A practical turing test for detecting adbots. *Intelligence*, 12(4):6, October 2001.
- [16] Bruno N. da Silva, Lucia H. da Silva, Ana C. Garcia. Achieving accessibility with self-interested designers: a strategic knowledge-acquisition approach. CHI '08: CHI '08 extended abstracts on Human factors in computing systems. April 2008 (ACM).
- [17] Bursztein, Elie; Bethard, Steven; Fabry, Celine; Mitchell, John C.; Jurafsky, Dan; How Good Are Humans at Solving CAPTCHAs? A Large Scale Evaluation; IEEE Symposium on Security and Privacy (SP), 2010. Pp: 399 – 413.
- [18] S. Chakrabarti and M. Singhal. Password-based authentication: Preventing dictionary attacks. *Computer*, 40(6): pp. 68–74, June 2007.
- [19] M. Chandrasekaran, R. Chinchani, and S. Upadhyaya. PHONEY: Mimicking user response to detect phishing attacks. *Proc. of 2006 Int. Symposium on on World of Wireless, Mobile and Multimedia Networks (WOWMOM '06)*, pp. 668–672, June 2006.
- [20] T.-Y. Chan. Using a text-to-speech synthesizer to generate a reverse Turing test. *Proc. of 15th IEEE Int. Conf. on Tools with Artificial Intelligence (ICTAI 03)*, pp. 226–232, November 2003.
- [21] Chandavale, A. A.; Sapkal, A. M.; Jalnekar, R. M. Algorithm to Break Visual CAPTCHA. *Emerging Trends in Engineering and Technology (ICETET)*, 2009 2nd International Conference. pp 258 – 262. December 2009.
- [22] Chandavale, A.A.; Sapkal, A.M.; Algorithm for Secured Online Authentication Using CAPTCHA, 3rd International Conference on Emerging Trends in Engineering and Technology (ICETET), 2010, pp: 292-297.

- [23] K. Chellapilla, K. Larson, P. Simard, and M. Czerwinski. Computers beat humans at single character recognition in reading based human interaction proofs (HIPs). *Proc. of 2nd Conf. on Email and Anti-Spam*, July 2005.
- [24] K. Chellapilla, K. Larson, P. Simard, and M. Czerwinski. Designing human friendly human interaction proofs (HIPs). *Proc. of SIGCHI Conf. on Human factors in computing systems (CHI 05)*, pp. 711–720, April 2005.
- [25] K. Chellapilla, K. Larson, P. Y. Simard, and M. Czerwinski. Building segmentation based human-friendly human interaction proofs (HIPs). *Proc. of 2nd Int. Workshop on Human Interactive Proofs (HIP 2005)*, vol. 3517 of LNCS, pp. 1–26, May 2005.
- [26] K. Chellapilla and P. Simard. Using machine learning to break visual human interaction proofs (HIPs). *Advances in Neural Information Processing Systems*, December. 2004.
- [27] M. Chew and H. S. Baird. Baffletext: A human interactive proof. *Proc. of SPIE-IS&T Electronic Imaging, Document Recognition and Retrieval X*, vol. 5010 of *Proceedings of SPIE*, pp. 305–316, January 2003.
- [28] M. Chew and J. Tygar. Image recognition CAPTCHAs. Technical Report UCB/CSD-04-1333, Computer Science Division, UC Berkeley, USA, June 2004.
- [29] M. Chew and J. Tygar. Collaborative filtering CAPTCHAs. *Proc. of 2nd Int. Workshop on Human Interactive Proofs (HIP 2005)*, vol. 3517 of *Lecture Notes in Computer Science*, pp. 66–81, May 2005.
- [30] Chi-Wei Lin; Yu-Han Chen; Liang-Gee Chen. Bio-inspired unified model of visual segmentation system for CAPTCHA character recognition. *Signal Processing Systems*, 2008. SIPS 2008. Pages:158 – 163. IEEE Workshop on 8-10 October 2008.
- [31] Chinmay Eishan Kulkarni. Assocaptcha: designing human-friendly secure captchas using word associations. CHI '08: CHI '08 extended abstracts on Human factors in computing systems. April 2008. (ACM).
- [32] Chun-Ming Leung. Depress phishing by CAPTCHA with OTP. Anti-counterfeiting, Security, and Identification in Communication, 2009. ASID 2009. 3rd International Conference, pp.187 – 192, Aug. 2009.
- [33] Chun-Ming Leung. Visual security is feeble for anti-phishing. Anti-counterfeiting, Security, and identification in Communication, 2009. ASID 2009. 3rd International Conference. pp.118 – 123. August 2009.
- [34] Cui, JingSong; Wang, LiJing; Mei, JingTing; Zhang, Da; Wang, Xia; Peng, Yang; Zhang, WuZhou; CAPTCHA design based on moving object recognition problem , 3rd International Conference on Information Sciences and Interaction Sciences (ICIS),2010,pp:158–162.
- [35] Cui, Jing-Song; Mei, Jing-Ting; Wang, Xia; Zhang, Da; Zhang, Wu-Zhou. A CAPTCHA Implementation Based on 3D Animation. *Multimedia Information Networking and Security*, 2009. MINES '09. International Conference on Volume 2, pp. 179 – 182, November 2009.
- [36] M. Dailey and C. Namprempre. A text-graphics character CAPTCHA for password authentication. *Proc. of 2004 IEEE Region 10 Conference (TENCON 2004)*, vol. 2, pp. 45–48, November 2004.
- [37] R. Dhamija and J. D. Tygar. Phish and HIPs : Human interactive proofs to detect phishing attacks. *Proc. Of 2nd Int. Workshop on Human Interactive Proofs (HIP 2005)*, vol. 3517 of LNCS, pp. 127–141, May 2005.
- [38] Desai, A.; Patadia, P.; Drag and Drop: A Better Approach to CAPTCHA , Annual IEEE India Conference (INDICON), 2009. pp: 1 – 4.
- [39] Dong Chen. Research of the chinese CAPTCHA system based on AJAX. *WSEAS Transactions on Circuits and Systems* , Volume 8 Issue 1. January 2009.
- [40] Donn Morrison, Stéphane Marchand-Maillet, Éric Bruno. TagCaptcha: annotating images with CAPTCHAs. *HCOMP '09: Proceedings of the ACM SIGKDD Workshop on Human Computation*. June 2009. (ACM).
- [41] J. Elson, J. R. Douceur, J. Howell, and J. Saul. ASIRRA: a CAPTCHA that exploits interest-aligned manual image categorization. *Proc. of 14th ACM Conf. on Computer and Communications Security (CCS 2007)*, pp. 366–374, October – November 2007.
- [42] Erguler, I.; Anarim, E. A Password-Based Key Establishment Protocol with Symmetric Key Cryptography. *Networking and Communications*, 2008. WIMOB '08. IEEE International Conference on Wireless and Mobile Computing, pp:543 - 548 , Oct. 2008
- [43] Ferzli, R.; Bazzi, R.; Karam, L.J.; A Captcha Based on the Human Visual Systems Masking Characteristics; IEEE International Conference on Multimedia and Expo, 2006,pp517-520.
- [44] Fischer, I.; Herfet, T. Visual CAPTCHAs for Document Authentication. *Multimedia Signal Processing*, 2006 IEEE 8th Workshop, pp. 471 – 474, October 2006.
- [45] G.Geetha, Discernment of Man and Machine to Mitigate DoS by RBFN, *The ICFAI Journal of Systems Management*, Vol. 6, No. 1, pp. 48 – 57, February 2008.
- [46] Geeth.G et al, Boon and Bane of Curvelet Transform, *BAIP 2010, CCIS 70*, pp 545 – 551, 2010. © Springer- Verlag Berlin Heidelberg 2010.
- [47] P. Golle and N. Ducheneaut. Preventing bots from playing online games. *Comput. Entertain.*, 3(3):3, 2005.
- [48] J. Goodman and R. Rounthwaite. Stopping outgoing spam. *Proc. of 5th ACM Conf. on Electronic commerce (EC '04)*, pp. 30–39, May 2004.
- [49] Gupta, A.; Jain, Ashish; Raj, A.; Jain, Abhimanyu. Sequenced Tagged Captcha: Generation and its Analysis. *Advance Computing Conference*, 2009. IACC 2009. IEEE International , pp. 1286 – 1291, March 2009.
- [50] Haichang Gao; Dan Yao; Honggang Liu; Xiyang Liu; Liming Wang; A Novel Image Based CAPTCHA Using Jigsaw Puzzle, *IEEE 13th International Conference on Computational Science and Engineering (CSE)*, 2010. pp: 351 –356.
- [51] Haichang Gao; Honggang Liu; Dan Yao; Xiyang Liu; Aickelin, U.; An Audio CAPTCHA to Distinguish Humans from Computers ; *Third International Symposium on Electronic Commerce and Security (ISECS)*, 2010 .pp : 265 – 269.
- [52] Haribabu, K.; Arora, D.; Kothari, B.; Hota, C.; Detecting Sybils in Peer-to-Peer Overlays Using Neural Networks and CAPTCHAs, *International Conference on Computational Intelligence and Communication Networks (CICN)*, 2010. pp : 154 – 161.
- [53] P. He, Y. Sun, W. Zheng, and X. Wen. Filtering short message spam of group sending using captcha. *Proc. Of Int.*

*Workshop on Knowledge Discovery and Data Mining (WKDD 2008)*, pp. 558–561, January 2008.

[54] Hernandez-Castro, Carlos Javier; Ribagorda, Arturo; Saez, Yago; Side-channel attack on the HumanAuth CAPTCHA; Proceedings of the 2010 International Conference on Security and Cryptography (SECRYPT), pp1–7.

[55] Hindle, A.; Godfrey, M.W.; Holt, R.C. Reverse Engineering CAPTCHAs. *Reverse Engineering*, 2008. WCRE '08. 15th Working Conference. pp:59– 68. October 2008.

[56] Hilaire, S.; Hyun-chul Kim; Chong-kwon Kim; How to deal with bot scum in MMORPGs?; IEEE International Workshop Technical Committee on Communications Quality and Reliability (CQR), 2010. Pp: 1 – 6.

[57] M. E. Hoque, D. J. Russomanno, and M. Yeasin. 2d captchas from 3d models. *Proc. of IEEE SoutheastCon 2006*, pp. 165–170, March–April 2006.

[58] Hua Zhang; Xiangming Wen; Peizhou He; Wei Zheng. Dealing with Telephone Fraud Using CAPTCHA. *Computer and Information Science*, 2009. ICIS 2009. Eighth IEEE/ACIS International Conference, pp. 1096 – 1099, June 2009.

[59] Imsamai, M.; Phimoltares, S.; 3D CAPTCHA: A Next Generation of the CAPTCHA, *International Conference on Information Science and Applications (ICISA)*, 2010. pp: 1 – 8.

[60] Ince, Ibrahim Furkan; Salman, Yucel Batu; Yildirim, Mustafa Eren; Yang, Tae-Cheon. Execution Time Prediction for 3D Interactive CAPTCHA by Keystroke Level Model. *Computer Sciences and Convergence Information Technology*, 2009. ICCIT '09. Fourth International Conference, pp. 1057 – 1061, November 2009.

[61] Ince, I.F.; Ilker Yengin; Salman, Y.B.; Hwan-Gue Cho; Tae-Cheon Yang; Designing CAPTCHA Algorithm: Splitting and Rotating the Images against OCRs. *Convergence and Hybrid Information Technology*, 2008. ICCIT '08. Third International Conference on vol.2, pp.596 – 601, Nov' 2008.

[62] Jain, Ashish; Raj, A.; Pahwa, T.; Jain, Abhimanyu; Gupta, A. Overlapping variants of sequenced tagged captcha (STC): Generation and their comparative analysis. *Networked Digital Technologies*, 2009. NDT '09. First International Conference. pp:177–182. July 2009.

[63] Jain, Abhimanyu; Jain, Ashish; Raj, A.; Pahwa, T.; Sequenced picture captcha: generation and its strength analysis; *International Conference for Internet Technology and Secured Transactions (ICITST)*, 2009. pp:1-8.

[64] Jeff Yan and A. S. E. Ahmad. Breaking visual CAPTCHAs with naive pattern recognition algorithms. *Proc. of 23rd Annual Computer Security Applications Conference (ACSAC 2007)*, pp. 279–291, Dec. 2007.

[65] Jeff Yan, Ahmad Salah El Ahmad. A low-cost attack on a Microsoft captcha. CCS '08: Proceedings of the 15th ACM conference on Computer and communications security. October 2008. (ACM)

[66] Jeff Yan, Su-Yang Yu, Streamlining attacks on CAPTCHAs with a computer game. *IJCAI'09: Proceedings of the 21st International Joint conference on Artificial intelligence*. July 2009. (Morgan Kaufmann Publishers Inc).

[67] Jeff Yan, Ahmad Salah El Ahmad. Usability of CAPTCHAs or usability issues in CAPTCHA design. *SOUPS '08: Proceedings of the 4th symposium on Usable privacy and security*. July 2008. (ACM)

[68] Jeffrey P. Bigham, Anna C. Cavender. Evaluating existing audio CAPTCHAs and an interface optimized for non-visual

use. *CHI '09: Proceedings of the 27th international conference on Human factors in computing systems*. April 2009. (ACM).

[69] Jing-Song Cui; Jing-Ting Mei; Wu-Zhou Zhang; XiaWang; DaZhang; A CAPTCHA Implementation Based on Moving Objects Recognition Problem 2010 International Conference on E-Business and E-Government (ICEE), 2010. pp:1277 -1280.

[70] JingSong Cui; WuZhou Zhang; Yang Peng; Yu Liang; Bang Xiao; JingTing Mei; Da Zhang; Xia Wang; A 3-layer Dynamic CAPTCHA Implementation ; *Second International Workshop on Education Technology and Computer Science (ETCS)*, 2010 .pp : 23 – 26.

[71] Jisong Zhang; Xingfen Wang; Breaking Internet Banking CAPTCHA Based on Instance Learning; *International Symposium on Computational Intelligence and Design (ISCID)*, 2010. pp: 39 – 43.

[72] Jong-Woo Kim; Woo-Keun Chung; Seon-Yeong Kim; Hwan-Gue Cho; Detecting the Orientation of N-gonal Cropped Sub-images and Its Application; *10th International Conference on Computer and Information Technology (CIT)*, 2010. pp 552 – 559.

[73] S. Kandula, D. Katabi, M. Jacob, and A. Berger. Botz-4-sale: surviving organized ddos attacks that mimic flash crowds. *Proc. of 2nd Symposium on Networked Systems Design & Implementation*, pp. 287–300, May 2005.

[74] E. J. Kartaltepe and S. Xu. Towards blocking outgoing malicious impostor emails. *Proc. of 2006 International Symposium on World of Wireless, Mobile and Multimedia Networks (WOWMOM06)*, pp. 657–661, June 2006.

[75] R. P. Karrer. Ec: an edge-based architecture against ddos attacks and malware spread. *Proc. of 20th Int. Conf. on Advanced Information Networking and Applications (AINA '06)*, pp. 49–56, April 2006.

[76] Karunathilake, A.K.B.; Balasuriya, B.M.D.; Ragel, R.G.; User friendly line CAPTCHAs; *International Conference on Industrial and Information Systems (ICIIS)*, 2009. Pp 210 – 215.

[77] G. Kochanski, D. Lopresti, and C. Shih. A reverse turing test using speech. *Proc. of 7th Int. Conf. on Spoken Language Processing*, pp. 1357–1360, September 2002.

[78] A. Kolupaev and J. Ogijenko. CAPTCHAs: Humans vs. bots. *IEEE Security & Privacy*, 6(1):68–70, Jan. 2008.

[79] Konstantin Beznosov, Philip Inglesant, Jorge Lobo, Rob Reeder, Mary Ellen Zurko. Usability meets access control: challenges and research opportunities. *SACMAT '09: Proceedings of the 14th ACM symposium on Access control models and technologies*. June 2009.

[80] Kurt Alfred Kluever, Richard Zanibbi. Balancing usability and security in a video CAPTCHA. *SOUPS '09: Proceedings of the 5th Symposium on Usable Privacy and Security*. July 2009.

[81] N. Leavitt. Vendors fight spam's sudden rise. *Computer*, 40(3):16–19, March 2007.

[82] W.-H. Liao. A CAPTCHA mechanism by exchange image blocks. *Proc. of 18th Int. Conf. on Pattern Recognition (ICPR 06)*, pp. 1179–1183, August 2006.

[83] W. Liao and C. Chang. Embedding information within dynamic visual patterns. *Proc. of 2004 Int. Conf. on Multimedia and Expo*, vol. 2, pp. 895–898, June 2004.

[84] Longe, O.B.; Robert, A.B.C.; Onwudebelu, U.; Checking Internet masquerading using multiple CAPTCHA challenge-response systems; *2nd International Conference on Adaptive Science & Technology (ICAST)*, 2009. pp: 244 – 249.

- [85] D. Lopresti. Leveraging the CAPTCHA problem. *Proc. of 2nd Int. Workshop on Human Interactive Proofs (HIP 2005)*, vol. 3517 of *Lecture Notes in Computer Science*, pp. 97–110, May 2005.
- [86] Lupkowski, P.; Urbanski, M. SemCAPTCHA—user-friendly alternative for OCR-based CAPTCHA systems. *Computer Science and Information Technology*, 2008. IMCSIT 2008. International Multiconference. Page(s):325-329. on 20-22 October 2008.
- [87] Misra, D.; Gaj, K. Face Recognition CAPTCHAs. *Telecommunications*, 2006. AICT-ICIW '06. International Conference on Internet and Web Applications and Services/Advanced International Conference, pp. 122 – 122, February 2006.
- [88] D. Misra and K. Gaj. Face recognition CAPTCHAs. *Proc. of Advanced Int. Conf. on Telecommunications and Int. Conf. on Internet and Web Applications and Services (AICT-ICIW 06)*, p. 122, 2006.
- [89] Mohammadi, S.; Abbasimehr, H.; A high level security mechanism for Internet polls; 2nd International Conference on Signal Processing Systems (ICSPS), 2010. Vol 3 pp: 101- 105.
- [90] Moni Naor. Verification of a Human in the loop or Identification via the Turing Test. [http://www.wisdom.weizmann.ac.il/~naor/PAPERS/human\\_ab\\_s.html](http://www.wisdom.weizmann.ac.il/~naor/PAPERS/human_ab_s.html).1996.
- [91] G. Mori and J. Malik. Recognizing objects in adversarial clutter: Breaking a visual CAPTCHA. *Proc. of 2003 IEEE Conf. on Computer Vision and Pattern Recognition (CVPR 03)*, vol. 1, pp. 134–141, June 2003.
- [92] G. Mori, S. Belongie, and J. Malik. Efficient shape matching using shape contexts. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 27(11):1832–1837, November 2005.
- [93] G. Moy, N. Jones, C. Harkless, and R. Potter. Distortion estimation techniques in solving visual CAPTCHAs. *Proc. of 2004 IEEE Conf. on Computer Vision and Pattern Recognition*, vol. 2, pp. 23–28, June–July 2004.
- [94] Niloy J. Mitra, Hung-Kuo Chu, Tong-Yee Lee, Lior Wolf, Hezy Yeshurun, Daniel Cohen-Or. Emerging images. SIGGRAPH Asia '09: SIGGRAPH Asia 2009 papers. December 2009. (ACM).
- [95] Pavlidis, T. Why meaningful automatic tagging of images is very hard. *Multimedia and Expo, 2009. ICME 2009. IEEE International Conference*, pp. 1432 – 1435, July 2009. (ACM).
- [96] Paulson, Linda Dailey. News Briefs. *Computer* Volume 41, Issue 10, pp 20 – 22. Oct. 2008.
- [97] Peter Faymonville, Kai Wang, John Miller, Serge Belongie. CAPTCHA-based image labeling on the Soylent Grid. HCOMP '09: Proceedings of the ACM SIGKDD Workshop on Human Computation. June 2009.(ACM).
- [98] Peizhou He; Xiangming Wen; Wei Zheng; A Novel Method for Filtering Group Sending Short Message Spam. *Convergence and Hybrid Information Technology*, 2008. ICHIT '08. International Conference , pp :60 – 65. Aug. 2008.
- [99] Philippe Golle. Machine learning attacks against the Asirra CAPTCHA CCS '08: Proceedings of the 15th ACM conference on Computer and communications security. October 2008
- [100] B. Pinkas and T. Sander. Securing passwords against dictionary attacks. *Proc. of 9th Conf. on Computer and Communications Security*, pp. 161–170, Nov. 2002.
- [101] C. Pope and K. Kaur. Is it human or computer? Defending e-commerce with captchas. *IT Professional*, 7(2):43–49, March 2005.
- [102] M. Ponec. Visual reverse turing tests: A false sense of security. *Proc. of 2006 IEEE Workshop on Information Assurance*, pp. 305–311, June 2006.
- [103] Ragavi.V, Geetha.G, An Analysis of IMAGINATION CAPTCHA, 2<sup>nd</sup> International Conference on Signal and Image Processing , ICSIP 2009, pp649-651. August 2009.
- [104] Ragavi.V, Geetha.G, Usability Issues on Image Based CAPTCHA, National Conference on Network and Desitributed Systems Security, SCSVMV University, Kanchipuram. Pp: 63-67. Jan ' 2011.
- [105] Raj, A.; Ashish Jain; Pahwa, T.; Abhimanyu Jain; Analysis of tagging variants of Sequenced Tagged Captcha (STC); IEEE Toronto International Conference on Science and Technology for Humanity (TIC-STH), 2009. pp:427 – 432.
- [106] Rich Gossweiler, Maryam Kamvar, Shumeet Baluja. What's up CAPTCHA?: a CAPTCHA based on image orientation. Proceedings of the 18th international conference on World Wide Web. April 2009. (ACM).
- [107] Richard Chow, Philippe Golle, Markus Jakobsson, Lusha Wang, XiaoFeng Wang. Making CAPTCHAs clickable. HotMobile '08: Proceedings of the 9th workshop on Mobile computing systems and applications. February 2008. (ACM).
- [108] Ritendra Datta, J. Li, and J. Z. Wang. IMAGINATION: a robust image-based CAPTCHA generation system. *Proc. of 13th ACM Int. Conf. on Multimedia (MULTIMEDIA 05)*, pp. 331–334, November 2005.
- [109] Ritendra Datta, Jia Li, James Z. Wang. Exploiting the human-machine gap in image recognition for designing CAPTCHAs. *IEEE Transactions on Information Forensics and Security*, Volume 4 Issue 3. September 2009.
- [110] Roman V. Yampolskiy, Venu Govindaraju. Embedded noninteractive continuous bot detection. *Computers in Entertainment (CIE)*, vol. 5 Issue 4. March 2008. (ACM)
- [111] Romero Macias, Cristina; Izquierdo, Ebroul; Visual word-based CAPTCHA using 3D characters; 3rd International Conference on Crime Detection and Prevention (ICDP) 2009, pp: 1 – 5.
- [112] Y. Rui and Z. Liu. ARTIFACIAL: Automated reverse turing test using facial features. Technical Report MSRTR-2003-48, Microsoft, April 2003.
- [113] Rusu, A.; Docimo, R. Securing the Web Using Human Perception and Visual Object Interpretation. *Information Visualisation*, 2009 13th International Conference, pp. 613 – 618, July 2009.
- [114] Rusu, A.; Govindaraju, V. Handwritten CAPTCHA: using the difference in the abilities of humans and machines in reading handwritten words. *Frontiers in Handwriting Recognition*, 2004. IWFHR-9 2004. Ninth International Workshop, pp. 226 – 231, October 2004.
- [115] A. Rusu. *Exploiting the Gap in Human and Machine Abilities in Handwriting Recognition for Web Security Applications*. PhD thesis, Dept. of Comp. Sci. and Eng. , University of New York at Buffalo, USA, August 2006.
- [116] S. Saklikar and S. Saha. Public key-embedded graphic CAPTCHAs. *Proc. of 5th Consumer Communications and Networking Conference*, pp. 262–266, Jan. 2008.



- [117] M. H. Shirali-Shahreza and M. Shirali-Shahreza. Persian / Arabic Baffletext CAPTCHA. *Journal of Universal Computer Science*, 12(12):1783–1796, December 2006.
- [118] M. H. Shirali-Shahreza and M. Shirali-Shahreza. Nastaliq CAPTCHA. *Iranian Journal of Electrical and Computer Engineering (IJECE)*, 5(2):109–114, 2007.
- [119] M. H. Shirali-Shahreza and M. Shirali-Shahreza. Multilingual CAPTCHA. *Proc. of 5th Int. Conf. on Computational Cybernetics*, pp. 135–139, October 2007.
- [120] M. H. Shirali-shahreza and M. Shirali-shahreza. Persian / Arabic CAPTCHA. *IADIS International Journal on Computer Science and Information Systems (IJCSIS)*, 1(2):63–75, October 2006.
- [121] Shirali-Shahreza, M.H and M. Shirali-Shahreza. Advanced Nastaliq CAPTCHA. Cybernetic Intelligent Systems, 2008. CIS 2008. 7th IEEE International Conference Page(s):1 – 3, 9-10 September 2008.
- [122] M. Shirali-Shahreza and S. Shirali-Shahreza. Collage CAPTCHA. *Proc. of 20th IEEE Int. Symposium Signal Processing and Application (ISSPA 2007)*, February 2007.
- [123] Shirali-Shahreza, M.; Shirali-Shahreza, S.; Advanced Collage CAPTCHA Information Technology: New Generations, 2008. ITNG 2008. Fifth International Conference, pp. 1234 – 1235, April 2008.
- [124] M. Shirali-Shahreza and S. Shirali-Shahreza. Online collage CAPTCHA. *Proc. of 8th Int. Workshop on Image Analysis for Multimedia Interactive Services (WIAMIS 2007)*, p. 58, June 2007.
- [125] M. Shirali-Shahreza and M. H. Shirali-Shahreza. Online PIX CAPTCHA. *Proc. of IEEE Int. Conf. on Signal Processing, Communications and Networking (ICSCN 2008)*, pp. 582–585, January 2008.
- [126] M. Shirali-Shahreza and S. Shirali-Shahreza. Motion CAPTCHA. *Proc. of Conf. on Human System Interaction. (HSI 2008)*, pp. 1042–1044, May 2008.
- [127] M. Shirali-Shahreza. Highlighting CAPTCHA. *Proc of the Conf. on Human System Interaction (HSI 2008)*, pp. 247–250, May 2008.
- [128] M. Shirali-Shahreza and S. Shirali-Shahreza. Drawing CAPTCHA. *Proc. of 28th Int. Conf. Information Technology Interfaces (ITI 2006)*, pp. 475–480, June 2006.
- [129] Shirali Shahreza, M.H.; Shirali Shahreza, M. An Anti-SMS-Spam Using CAPTCHA. Computing, Communication, Control, and Management, 2008. CCCM '08. ISECS International Colloquium on vol. 2, pp. 318 – 321. August 2008.
- [130] Shirali-Shahreza, S.; Abolhassani, H.; Sameti, H.; Shirali-Shahreza, M.H. Spoken captcha: A captcha system for blind users. Computing, Communication, Control, and Management, 2009. CCCM 2009. ISECS International Colloquium on vol.1, pp. 221 – 224, August 2009.
- [131] M. Shirali-Shahreza and S. Shirali-Shahreza. CAPTCHA for blind people. *Proc. of 7th IEEE Int. Symposium on Signal Processing and Information Technology (ISSPIT 2007)*, pp. 995–998, December 2007.
- [132] M. H. Shirali-Shahreza and M. Shirali-Shahreza. Localized CAPTCHA for illiterate people. *Proc. of Int. Conf. on Intelligent & Advanced Systems*, November 2007.
- [133] S. Shirali-Shahreza and M. Shirali-Shahreza. CAPTCHA for children. *Proc. of 3rd Int. Conf. on System of Systems Engineering*, June 2008.
- [134] S. Shirali-Shahreza and M. Shirali-Shahreza. A new human interactive proofs system for deaf persons. *Proc. Of 5th Int. Conf. on Information Technology: New Generations (ITNG 2008)*, pp. 807–810, April 2008.
- [135] M. Shirali-Shahreza and S. Shirali-Shahreza. Question-Based CAPTCHA. *Proc. of Int. Conf. on Computational Intelligence and Multimedia Applications (ICCIMA 2007)*, vol. 4, pp. 54–58, December 2007.
- [136] S. Shirali-Shahreza, M. Shirali-Shahreza, and A. Movaghar. Exam HIP. *Proc. of 2007 IEEE Int. Workshop on Anti-counterfeiting, Security, Identification (ASID 2007)*, pp. 415–418, April 2007.
- [137] M. Shirali-Shahreza. Verifying spam SMS by Arabic CAPTCHA. *Proc. of 2nd IEEE Int. Conf. on Information and Communication Technologies: From Theory to Applications (ICTTA 06)*, vol. 1, pp. 78–83, April 2006.
- [138] S. Shirali-Shahreza and A. Movaghar. A new anti-spam protocol using CAPTCHA. *Proc. of 2007 Int. Conf. Networking, Sensing and Control*, pp. 234–238, Apr. 2007.
- [139] S. Shirali-Shahreza, M. Shirali-Shahreza, and M. T. Manzuri-Shalmani. Easy and secure login by CAPTCHA. *International Reviews on Computers and Software (IReCoS)*, 2(4):393–400, July 2007.
- [140] M. Shirali-Shahreza and S. Shirali-Shahreza. Preventing mobile software cracking using CAPTCHA. *Proc. of IEEE Int. Conf. on Innovations in Information Technology 2006 (IIT 2006)*, pp. 128, November 2006.
- [141] S. Shirali-Shahreza, M. Shirali-Shahreza, and A. Movaghar. Restricted access to exam grades on the web by HIP. *Proc. of 1st IEEE Int. Workshop on e-Activity (IEEE-IWEA2007)*, pp. 967–971, July 2007.
- [142] M. H. Shirali-Shahreza and M. Shirali-Shahreza. New solution for password key transferring in steganography methods. *Proc. of Int. Conf. on Computational Intelligence and Multimedia Applications (ICCIMA 2007)*, vol. 4, pp. 123–125, December 2007.
- [143] M. Shirali-Shahreza and S. Shirali-Shahreza. Passwordless login system for mobile phones using CAPTCHA. *Proc. of 49th Int. Symposium ELMAR-2007*, pp. 243–246, September 2007.
- [144] Shirali-Shahreza, S.; Shirali-Shahreza, M. Identifying child users: Is it possible? SICE Annual Conference, 2008. pp :3241 – 3244. Aug. 2008.
- [145] Shirali-Shahreza, M.; Shirali-Shahreza, S. Dynamic CAPTCHA. Communications and Information Technologies, 2008. ISCIT 2008. International Symposium. pp: 436 – 440. October 2008.
- [146] Shirali-Shahreza, M.; Shirali-Shahreza, S. CAPTCHA systems for disabled people. Intelligent Computer Communication and Processing, 2008. ICCP 2008. 4th International Conference. pp:319 – 322. Aug. 2008.
- [147] Shirali-Shahreza, S.; Shirali-Shahreza, M.H.; Bibliography of works done on CAPTCHA, 3rd International Conference on Intelligent System and Knowledge Engineering (ISKE), 2008. Vol 1, pp : 205 – 210.
- [148] Shuo Zhai; Tao He; Design and implementation of password-based identity authentication system. International Conference on Computer Application and System Modeling (ICCSAM), 2010. Vol 9, pp : 253 – 257.
- [149] V. Srikanth, C. Vishwanathan, Udit Asati, N. Ch. Sriman Narayana Iyengar. Think-an image based CAPTCHA

mechanism (testifying human based on intelligence and knowledge). ICAC3 '09: Proceedings of the International Conference on Advances in Computing, Communication and Control. January 2009.

[150] Steven Gianvecchio, Mengjun Xie, Zhenyu Wu, Haining Wang. Measurement and classification of humans and bots in internet chat. SS'08: Proceedings of the 17th conference on Security symposium. July 2008. (USENIX).

[151] M. Szydłowski, C. Kruegel, and E. Kirda. Secure input for web applications. *Proc. of 23rd Annual Computer Security Applications Conference (ACSAC 2007)*, pp. 375–384, December 2007.

[152] Striletschi, C.; Vaida, M.F. A Web 3.0 solution for restraining the web-bots access to the on-line displayed content. Information Technology Interfaces, 2009. ITI '09. Proceedings of the ITI 2009 31st International Conference. pp :633 - 638 , June 2009.

[153] Sui-Yu Wang; Baird, H.S. CAPTCHA Challenge Tradeoffs: Familiarity of Strings versus Degradation of Images. 18th International Conference on Pattern Recognition. Volume 3. pp:164 – 167. August 2006.

[154] Tak, G.K.; Badge, N.; Manwatkar, P.; Ranganathan, A.; Tapaswi, S.; Asynchronous Anti Phishing Image Captcha approach towards phishing; 2nd International Conference on Future Computer and Communication (ICFCC), 2010. Vol 3, pp: 694 – 698.

[155] A. Thayananthan, B. Stenger, P. Torr, and R. Cipolla. Shape context and chamfer matching in cluttered scenes. *Proc. of 2003 Conf. on Computer Vision and Pattern Recognition*, vol. 1, pp. 127–133, June 2003.

[156] Thomas, A.O.; Choudhury, S.; Govindaraju, V.; Leveraging the Mixed-Text Segmentation Problem to Design Secure Handwritten CAPTCHAs; International Conference on Frontiers in Handwriting Recognition (ICFHR), 2010. Pp:13–18.

[157] A. M. Turing. Computing machinery and intelligence. *Mind*, 59(236):433–460, 1950

[158] Vimina, E.R. An Automated Reverse Turing Test Using Facial Expressions \_Human System Interactions, pp. 314 - 317, May 2009.

[159] Vimina, E.R.; Areekal, A.U. Telling computers and humans apart automatically using activity recognition. Systems, Man and Cybernetics, 2009. SMC 2009. IEEE International Conference, pp. 4906 – 4909, October 2009.

[160] L. von Ahn, M. Blum, and J. Langford. Telling humans and computers apart automatically. *Communications of the ACM*, 47(2):56–60, February 2004.

[161] L. von Ahn, M. Blum, N. J. Hopper, and J. Langford. CAPTCHA: Using hard AI problems for security. *Proc. of Int. Conf. on the Theory and Applications of Cryptographic Techniques (EUROCRYPT 2003)*, vol. 2656 of LNCS, pp. 294–311, May 2003.

[162] L. von Ahn. *Human Computation*. PhD thesis, School of Computer Science, Carnegie Mellon University, Pittsburgh, PA, USA, December 2005.

[163] Vo, N.H.; Pieprzyk, J.; Protecting Web 2.0 Services from Botnet Exploitations; Second Cybercrime and Trustworthy Computing Workshop (CTC), 2010. pp 18 – 28.

[164] D. Voth. The paradox of CAPTCHAs. *IEEE Intelligent Systems*, 18(2):6–7, March–April 2003.

[165] S.-Y. Wang and J. L. Bentley. CAPTCHA challenge tradeoffs: Familiarity of strings versus degradation of images. *Proc. of 18th Int. Conf. on Pattern Recognition (ICPR 06)*, pp. 164–167, August 2006.

[166] Waseem Daher, Ran Canetti. POSH: a generalized captcha with security applications. AISec '08: Proceedings of the 1st ACM workshop on Workshop on AISec. October 2008.

[167] Wenjun Zhang; Zhang's CAPTCHA architecture based on intelligent interaction via RIA, 2nd International Conference on Computer Engineering and Technology (ICCET) 2010, vol 6, pp: 57 - 62.

[168] P. Ximenes, A. dos Santos, M. Fernandez, and J. Celestino. A CAPTCHA in the text domain. *Proc. Of Workshops On the Move to Meaningful Internet Systems 2006 (OTM 2006)*, vol. 4277 of LNCS, pp. 605–615, October–November 2006.

[169] J. Xu, I. A. Essa, and R. J. Lipton. Hello, are you human? Technical Report GIT-CC-00-28, Georgia Institute of Technology, November 2000.

[170] S. Xu, F. C. M. Lau, W. K. Cheung, and Y. Pan. Automatic generation of artistic chinese calligraphy. *IEEE Intelligent Systems*, 20(3):32–39, May 2005.

[171] J. Xu, R. Lipton, I. Essa, M. Sung, and Y. Zhu. Mandatory human participation: a new authentication scheme for building secure systems. *Proc. of 12th Int. Conf on Computer Communications and Networks (ICCCN 2003)*, pp. 547–552, October 2003.

[172] Ya-Jun Fan; Qiao-Yan Wen; Hua Zhang; Smart card-based authenticated key exchange protocol with CAPTCHA for wireless mobile network; 2nd International Conference on Future Computer and Communication (ICFCC), 2010. Vol 2 pp: 119 – 123.

[173] R. V. Yampolskiy. Detecting and controlling cheating in online poker. *Proc. of 5th Consumer Communications and Networking Conference*, pp. 848–853, Jan. 2008.

[174] Yamamoto, T.; Tygar, J.D.; Nishigaki, M.; CAPTCHA Using Strangeness in Machine Translation ; 24th IEEE International Conference on Advanced Information Networking and Applications (AINA) 2010, pp:430-437.

[175] Yamamoto, T.; Suzuki, T.; Nishigaki, M.; A Proposal of Four-Panel Cartoon CAPTCHA: The Concept , 13th International Conference on Network-Based Information Systems (NBIS), 2010, pp: 575 – 578.

[176] Yan, J.; El Ahmad, A.S. CAPTCHA Security: A Case Study. Security & Privacy, IEEE Volume 7, Issue 4. pp:22 – 28. July-Aug. 2009.

[177] Yan, J.; El Ahmad, A.S. Breaking Visual CAPTCHAs with Naive Pattern Recognition Algorithms. Computer Security Applications Conference, 2007. ACSAC 2007. Twenty-Third Annual. pp:279 – 291. Dec. 2007.

[178] Yan, J.; El Ahmad, A.S.; Captcha Robustness: A Security Engineering Perspective; Computer, vol 44 pp : 54 – 60. October 2010.

[179] Yang-Wai Chow; Susilo, W.; Hua-Yu Zhou; CAPTCHA Challenges for Massively Multiplayer Online Games: Minigame CAPTCHAs; International Conference on Cyberworlds (CW), 2010. pp 254 – 261.