

ECRINS/86: An Extended Entity-Relationship Data Base Management System and its Semantic Query Language

FALQUET, Gilles, LEONARD, Michel Paul, JUNET, Marc

Abstract

We propose a DBMS the data model of which is an extension of the Entity-Relationship model of Chen. The main extensions include the specialization and generalization concepts of Smith & Smith and the possibility to define relationships between relationships. In addition we extend the concept of a role in a relationship, to a multi-valued role which enables to associate a set of tuples performing the same function in a relationship. A query language has been designed in order to deal with the enhanced semantic capabilities of the data model supported by the ECRINS/86 system.

Reference

FALQUET, Gilles, LEONARD, Michel Paul, JUNET, Marc. ECRINS/86: An Extended Entity-Relationship Data Base Management System and its Semantic Query Language. In: Chu, W.-W. & Gardarin, G. & Ohsuga, S. & Kambayashi, Y. *Proceedings of the Twelfth International Conference on Very Large Data Bases*. San Francisco : Morgan Kaufmann, 1986. p. 259-266

Available at:

<http://archive-ouverte.unige.ch/unige:46595>

Disclaimer: layout of this document may differ from the published version.



UNIVERSITÉ
DE GENÈVE

ECRINS/86 : An Extended Entity-Relationship Data Base Management System
and its Semantic Query Language

Marc Junet, Gilles Falquet, Michel Leonard

University of Geneva, Centre Universitaire d'Informatique
12, rue du Lac, CH - 1207 Geneva, Switzerland

ABSTRACT : we propose a DBMS the data model of which is an extension of the Entity-Relationship model of Chen. The main extensions include the specialization and generalization concepts of Smith & Smith and the possibility to define relationships between relationships. In addition we extend the concept of a role in a relationship, to a multi-valued role which enables to associate a set of tuples performing the same function in a relationship. A query language has been designed in order to deal with the enhanced semantic capabilities of the data model supported by the ECRINS/86 system.

1. INTRODUCTION

ECRINS/86 is a DBMS (Data Base Management System) the data model of which is an Extended Entity-Relationship Model. This paper is narrowed to the description of the extensions of the E-R Model proposed by Chen [CHEN76] and to the semantic query language we developed to deal with the ECRINS/86 system. A more complete description of the system may be found in [JUNET86]. In addition to the concepts proposed by Chen we included the generalization and specialization concepts developed by Smith & Smith [SMITH77]. We also extended the role concept of an entity in a relationship. A role in the E-R Model is the function that an entity performs in a relationship; through one role only one tuple of an entity relation can be related to one tuple of a relationship relation. We introduce the new concept of multi-valued role which enables to associate a set of tuples performing the same function in a relationship. Furthermore in ECRINS/86 a role in a relationship relation may be performed either by an entity or another relationship relation (the original E-R Model was criticized for its lack of capability to express such relationships [SCHEUER79]). In addition a new graphical representation adapted to the Extended E-R Model of ECRINS/86 is proposed. Obviously the ECRINS/86 system validates automatically all the inherent integrity constraints related to the data model implemented. The description of those integrity constraints can be found in [JUNET86]. They mainly concern : a) the domain of the attributes, b) the keys of the relations, c) the existence dependencies, d) the cardinality and e) unknown values.

In section 2 only the new concepts of the data

model are presented in order to explain and illustrate the particularities of the query language. Section 3 describes some features of this query language. These are : 1) the definition and use of extended relation obtained by joining tuples of different relations associated through relationship relations, 2) the handling of non-first normal form relations appearing when multi-valued roles are defined in a relationship relation, 3) the deduction of an extended relation containing all the attributes of a query.

2. THE EXTENDED E-R MODEL IMPLEMENTED WITH THE DBMS ECRINS/86

In order to point out some of the modeling facilities offered by the Extended E-R Model of ECRINS/86, we will first model an example concerning an airline company with the n-ary relational model of Codd [CODD70].

2.1 A n-ary Relational Modeling Example

Let us consider an airline company made up of the following relations and attributes (the keys of each relation are underlined).

```
FLYING-STAFF (NAME, AGE, SALARY, JOB-CLASS)
PILOT (PNAME, LICENCE-NUMBER, LICENCE-TYPE)
OPERATOR (ONAME, JOB-HISTORY)
STEWARDESS (SNAME, YEARS-OF-SERVICE)
CABIN-CREW (CREW-NUMBER, CHIEFPNAME, COPI-
-----
PNAME, COP2PNAME, ONAME, NBFLIGHT)
-----
AIRPORT (AIRPORT-NAME, CITY)
PLANE (PLANE-NUMBER, KIND-OF-PLANE, NB-SEAT)
FLIGHT (FLIGHT-NUMBER, CREW-NUMBER, SNAME1,
-----
SNAME2, SNAME3, SNAME4, DEP-AIRPORT-
-----
NAME, ARR-AIRPORT-NAME, PLANE-NUMBER,
-----
DEP-HOUR, ARR-HOUR)
```

The relations PILOT, OPERATOR and STEWARDESS are specializations of the relation FLYING-STAFF. With the n-ary relational model 4 relations need to be defined in order to model this specialization concept. The data base designer must also be aware of all the integrity constraints which are related to this structure (i.e. deleting a tuple of PILOT must trigger the deletion of the corresponding tuple in relation FLYING-STAFF).

Permission to copy without fee all or part of this material is granted provided that the copies are not made or distributed for direct commercial advantage, the VLDB copyright notice and the title of the publication and its date appear, and notice is given that copying is by permission of the Very Large Data Base Endowment. To copy otherwise, or to republish, requires a fee and/or special permission from the Endowment.

Proceedings of the Twelfth International Conference on Very Large Data Bases

Kyoto, August, 1986

Within the relation CABIN-CREW we observe two different keys and the following functional dependencies :

CREW-NUMBER -> CHIEFPNAME, COP1PNAME, COP2PNAME, ONAME, NBFLLIGHT
CHIEFPNAME, COP1PNAME, COP2PNAME, ONAME -> CREW-NUMBER, NBFLLIGHT

Nevertheless a chief pilot and a co-pilot are both pilots. In other words the attributes CHIEFPNAME, COP1PNAME and COP2PNAME have the same domain and semantic as the attribute PNAME of the relation PILOT. The n-ary relational model is not appropriate to explicitly express this correspondance between CHIEFPNAME, COP1PNAME, COP2PNAME with PNAME.

The problem described for the relation CABIN-CREW is identical for the relation FLIGHT. But concerning this relation a new problem is due to "undefined" unknown values ("undefined" and "nothing" unknown values were introduced by Abrial in [ABRIAL74] and discussed by Tjoa [TJOA79] concerning their implications within the E-R Model). Considering the fact that a flight may need only two stewardess, the key attributes SNAME3 and SNAME4 will have "undefined" unknown values. But with the n-ary relational model "undefined" unknown values are prohibited for key attributes.

2.2 Data Model and Definitions

The Extended E-R Model of the ECRINS/86 system takes care of the problems we briefly described in the airline company example. We shall now define the different concepts used in our Extended E-R Model in order to show how the airline company example can be modeled with ECRINS/86. In the appendix A, a definition of this example with the Data base Definition Language (DDL) of the ECRINS/86 system is proposed.

2.2.1 Regular Entity Relation

A regular entity relation is composed by a set of attributes and a primary key (PK) is defined with a subset of attributes. For example : the n-ary relations FLYING-STAFF, AIRPORT and PLANE can be defined as regular entity relations.

2.2.2 Sub-relation

The term of sub-relation is used to define the generalization and specialization concepts [SMITH77]. In ECRINS/86 we restricted the implementation of those concepts to a "tree generic hierarchy". According to this restriction a specialization can be considered as a subset of a relation and we shall call it sub-relation.

A sub-relation SR is defined from one and only one relation R (called the SR generic relation). A tuple of SR is a tuple of R, and R attributes may be viewed as SR attributes. The PK of SR is the PK of R. A generic relation may be of any

kind (entity, relationship, sub-relation). Furthermore a SR may have own attributes. For example : the n-ary relations PILOT, OPERATOR and STEWARDESS can be defined as sub-relations of the regular entity relation FLYING-STAFF.

Obviously the ECRINS/86 system validates all the inherent constraints due to the specialization and generalization concepts we implemented.

2.2.3 Relationship Relation

In ECRINS/86 no distinction is made between weak and regular relationship relations. Both are handled in the same way since we allow any kind of relation playing a role in a relationship relation. A relationship relation RS is a relation which is defined over n relations : Rf_1, Rf_2, \dots, Rf_n : they are called the RS reference relations (reference relations may not be distinct). A reference relation may be either a regular entity relation, a weak entity relation, a sub-relation or a relationship relation.

A role of a reference relation in a relationship relation is the function that it performs in the relationship. Each reference relation may perform m distinct roles in a relationship : ro_1, ro_2, \dots, ro_m . A role is defined as a simple role when a single tuple of a reference relation is associated to one tuple of a relationship relation. A role is a multi-valued role when a set of tuples is associated to one tuple of a relationship relation. Multi-valued roles are distinguished from simple roles with a superscript "*" (i.e. ro_1^* is a multi-valued role) and the maximum number of tuples which can be associated is the degree of the multi-valued role. In the ECRINS/86 system a role may be declared as "not-mandatory" (the "mandatory" concept of a role is similar to "mandatory automatic set" in [CODASYL71]). It is then possible to create tuples in a relationship relation with "undefined" unknown values through those roles.

The set of attributes of a relationship relation is composed by the PK of the reference relations, plus own attributes. For each role that is performed by a reference relation in a relationship, the PK of the reference relation is "exported" to the relationship relation. This set of "exported" attributes can be considered as the PK of the relationship relation. The PK "exported" through a multi-valued role becomes an higher order object (see definition in section 3.3.1), noted PK*, in the relationship relation. It may be possible to define a secondary key to a relationship relation representing the aggregation of all the "imported" attributes.

Example :

The n-ary relation CABIN-CREW can be defined as a relationship relation with 2 reference relations : PILOT and OPERATOR. PILOT performs the simple role CHIEF-PILOT and the

multi-valued role CO-PILOT* of degree 2 in the relationship. OPERATOR performs a simple role OPERATOR-OF-CREW. The PK of CABIN-CREW is composed by the attributes : NAME (as a chief-pilot), NAME* (as 2 co-pilots), NAME (as an operator). The secondary key is the attribute CREW-NUMBER.

Through the multi-valued role CO-PILOT, two pilots may be associated to one cabin-crew. Without the concept of multi-valued role a database designer must declare two different roles, CO-PILOT-1 and CO-PILOT-2, to express the fact that a cabin-crew may have two co-pilots. In this case, a pilot does not play the same role in the relationship. He is either a first (CO-PILOT-1) or a second (CO-PILOT-2) co-pilot.

In the same way the n-ary relation FLIGHT can be defined as a relationship relation, the reference relations of which are : CABIN-CREW (role : CREW-OF-FLIGHT), STEWARDESS (role : STEWARDESS-OF-FLIGHT*), AIRPORT (roles : DEP-AIRPORT, ARR-AIRPORT), PLANE (role : PLANE-OF-FLIGHT). The degree of the role STEWARDESS-OF-FLIGHT* is 4, but by defining this role as "not-mandatory", only 2 stewardess may appear in one flight.

When a reference relation Rf performs one multi-valued role and/or many roles in a relationship relation RS, it may be possible to declare Rf as mono-reference. This enables to insure that a tuple rf of Rf may not be associated in a tuple rs of RS more than once (mono-tuple association). Otherwise there is a multi-tuple association.

Example :

PILOT is mono-reference in CABIN-CREW considering that a tuple p₁ of PILOT may not be in a tuple c₁ of CABIN-CREW, a chief-pilot and a co-pilot. AIRPORT is multi-reference in FLIGHT considering that a tuple a₁ of AIRPORT may be in a tuple f₁ of FLIGHT, the departure and the arrival airport.

To each role it may be possible to declare a maximum cardinality parameter (maxcard) which indicates the maximum of RS tuples which can be related to one tuple of a reference relation through this role. This parameter maxcard enables to declare all the different kinds of mapping of a relationship relation.

Obviously the ECRINS/86 system validates automatically all the inherent constraints due to the relationship relations (i.e. existence dependencies, cardinality constraints, ...).

2.2.4 Weak Entity Relation

We define a weak entity relation as a relation in which the existence of a tuple depends upon the existence of a specific tuple of a reference relation Rf. In the same way as relationship

relations, a reference relation may be of any kind. The PK of a weak entity relation is composed by the PK of its reference relation Rf and by other supplementary attributes. There is a 1:M mapping between Rf and the weak entity relation.

Example :

Let consider a new relation QUALIFICATION as a weak entity relation which reference relation is OPERATOR. Its PK is composed by the key attribute of OPERATOR (NAME) and a supplementary attribute QUAL-NUMBER (which is a serial number used to distinguish the various qualifications of one operator). Own attributes of QUALIFICATION are an explanation of the qualification (EXPLANATION) and the number of years the operator practiced it (YEARS-OF-PRACTICE).

2.2.5 Graphical Representation

As soon as a data schema contains several relations of various kinds, the use of a graphical representation helps in the understanding and the communication. Because of the features of the Extended E-R Model implemented with the ECRINS/86 system, we defined new conventions for a graphical representation.

The set of relations is mapped onto a graph where single nodes correspond to regular (thin) and weak entity relations (thick), thin double nodes to relationship relations. Thin edges corresponds to roles and thick edges to links between a weak entity relations and its reference relation. Thin edges are directed from a relationship relation to its corresponding reference relations; the name, the cardinality, the minimum and maximum degree of a multi-valued role are put near to it. A single arrow is used for simple roles, while double arrows represent multi-valued roles.

Sub-relations which have the same generic relation are mapped onto single nodes put inside the node of their generic relation. A symbol representing the exclusive or ($\bar{\vee}$) is used to show the different sub-relations of a relation.

We introduce 4 new sub-relations to the airline company example in order to show how it is possible to represent a sub-relation the generic relation of which is another sub-relation or a relationship relation. Let consider that an operator may be either a student (sub-relation STUDENT) or a diplomed operator (sub-relation DIPLOMED) and a cabin-crew either active (sub-relation ACTIVE) or inactive (sub-relation INACTIVE). In a tuple of relation CABIN-CREW only one diplomed operator may be involved and in a tuple of relation FLIGHT only an active cabin-crew.

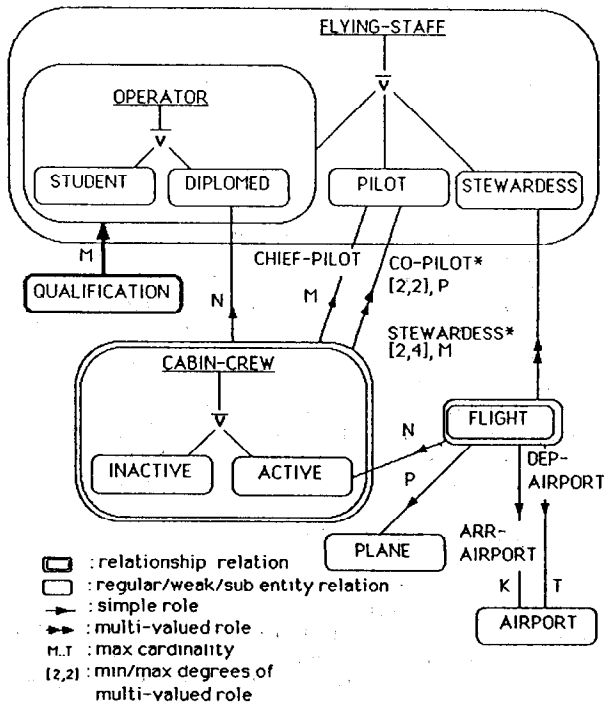


Figure: THE "AIRLINE COMPANY" GRAPHICAL REPRESENTATION

3. THE ECRINS/86 QUERY LANGUAGE

3.1 General Structure

The basic structure of the query language is a "query block" similar to what can be found in common languages such as SQL. A query block is made of a target attributes list specifying the attributes to be output, a "from" clause specifying the relations to use in the query and a "where" clause giving the selection condition. The following sections describe some aspects of the query language related to the structure and the semantic of the data model implemented with ECRINS/86, these are : extended relations, nested relations structures and deduction of extended relations.

3.2 Extended Relations

The "from" clause of a query may contain, apart from entity and relationship relations, a list of expressions defining derived relationship relations called extended relations. The use of extended relations, expressed in a simple form, allows to withdraw from the "where" clause the conditions that are only used to associate tuples of different relations.

A linear-extended relation expression is an expression of the form :

$$ER = Rel_1 \text{ of } ro_1 \text{ of } Rel_2 \text{ of } \dots \text{ of } Rel_n,$$

where the Rel_j 's are entity or relationship relations.

The corresponding derived relation is the set of all tuples $\langle t_1, \dots, t_n \rangle$ where t_i is a tuple of Rel_i and t_i is associated to t_{i+1} through the simple role ro_i ($0 < i < n$) (the semantic of associations through multi-valued roles is described in section 3.3). Let us also define $first(ER)$ as Rel_1 and $last(ER)$ as Rel_n .

Example :

PLANE of FLIGHT of ARR-AIRPORT of AIRPORT

is the extended relation associating a flight to its plane and its arrival airport. Note the absence of role specification between PLANE and FLIGHT since PLANE performs only one role in the relationship relation FLIGHT.

A tree-extended relation is an expression of the form :

$$ER = (ER_1 \text{ of } ro_1, ER_2 \text{ of } ro_2, \dots, ER_{m-1} \text{ of } ro_{m-1}) \text{ of } ER_m$$

where the ER_j 's are extended relations and ro_j associates $last(ER_j)$ with $first(ER_m)$ (ER_m may not be a tree extended relation). The corresponding derived relation is the set of all tuples $\langle \langle t_1^1, \dots, t_1^{k1} \rangle, \dots, \langle t_m^1, \dots, t_m^{km} \rangle \rangle$ such that $\langle t_j^1, \dots, t_j^{kj} \rangle$ belongs to ER_j ($0 < i < m+1$) and t_j^{kj} is associated to t_m^1 through role ro_j .

In this case $last(ER)$ is defined as $last(ER_m)$ and $first(ER)$ is undefined.

Example :

(OPERATOR of CABIN-CREW, AIRPORT of ARR-AIRPORT) of FLIGHT of PLANE

Finally a cyclic-extended relation is an expression of the form :

$$ER = ER_1 \text{ of } (ro_1 \text{ of } ER_2 \text{ of } ro_2 \langle \text{connect} \rangle ro_3 \text{ of } ER_3 \text{ of } ro_4) \text{ of } ER_4$$

where the ER_j 's are extended relations and ro_1 (ro_3) associates $last(ER_1)$ to $first(ER_2)$ ($first(ER_3)$) and ro_2 (ro_4) associates $last(ER_2)$ ($last(ER_3)$) to $first(ER_4)$. $\langle \text{connect} \rangle$ is one of the connectors: and, or, diff. The corresponding extended relation is the set of tuples $\langle \langle t_1^1, \dots, t_1^{k1} \rangle, \dots, \langle t_4^1, \dots, t_4^{k4} \rangle \rangle$ such that $t_j = \langle t_j^1, \dots, t_j^{kj} \rangle$ belongs to ER_j ($0 < j < 4$) and :

- a) and
 - (C1) t_1^{k1} is associated to t_2^1 through ro_1 and t_2^{k2} is associated to t_4^1 through ro_2 and
 - (C2) t_1^{k1} is associated to t_3^1 through ro_3 and t_3^{k3} is associated to t_4^1 through ro_4 .
- b) or
 - (C1 and C2) or
 - (C1 and t_3 is null and there is no tuple t_3' of ER_3 associating t_1 and t_4) or
 - (C2 and t_2 is null and there is no tuple t_2' in ER_2 associating t_1 and t_4).

c) diff

C1 and t3 is null and there is no tuple t3' of ER3 associating t1 and t4.

first(ER) is defined as first(ER1) and last(ER) as last(ER4).

Example :

AIRPORT of (DEP-AIRPORT of FLIGHT or ARR-AIRPORT of FLIGHT) of CABIN-CREW.

Corresponds to the relation associating each flight to its cabin-crew to its departure or arrival airport.

As the same relation may appear many times in an extended relation expression, an explicit renaming can be used to distinguish different occurrences. The new names can then serve as a qualification for attributes.

Example :

"Find the city of arrival, the city of departure, the operator's and chief-pilot's names of every flight"

```
select CITY of AR, CITY of DEP,
       NAME of OPERATOR, NAME of PILOT
from((PILOT of CHIEF-PILOT, OPERATOR) of CREW,
     DEP : AIRPORT of DEP-AIRPORT,
     AR : AIRPORT of ARR-AIRPORT) of FLIGHT.
```

Note the nesting of the tree extended relations.

3.3 Nested Extended Relations

The presence of multi-valued roles in the data model leads naturally to non-1NF relations. Non-1NF relations, [ABIT85] [FISCH85] are relations which tuples are defined on atomic values and/or (non-1NF) relations. This kind of structure is what one intuitively expects when associating relations through multi-valued roles. The expected meaning of "STEWARDESS of FLIGHT of PLANE" is a set of tuples <s,f,p> where f is a flight, p is its plane and s is the set of stewardess (i.e. a relation) of this flight. Non-1NF relation also arise when considering weak entity relations. Since many tuples of a weak entity relation are associated to one tuple of the reference relation, they can be considered as a relation nested in their reference tuple. For example :

OPERATOR (NAME, JOB-HISTORY, (QUALIFICATION)* with QUALIFICATION (QUAL-NUMBER, EXPLANATION, YEARS-OF-PRACTICE). Nested relations are evidently not limited to one level.

3.3.1 Nested Joins

Let us first define a nested relation scheme as a set of attributes and schemes (called higher order objects). For example :

FLIGHT(FLIGHT-NUMBER, CREW-NUMBER, STD*)

with the scheme

STD(NAME, YEARS-OF-SERVICE)

is a nested relation scheme (with one level of nesting).

A (nested) relation over a nested relation scheme (A1...AmY1*Y2*...Yn*) (a * follows each higher order object) is then recursively defined as a set of tuples <a1,...am,y1,...,yn> where ai is a value taken from the domain of Ai (1 < i < m) and yj is a (nested) relation on scheme Yj (1 < j < n).

Given two schemes :

R = (X Y1*...Yk*), S = (Z U1*...Uq*)

with

K1* in Y1*, K2* in K1*, ... , Kn* in Kn-1*, A in Kn*

and

L1* in U1*, L2* in L1*, ... , Lm* in Lm-1*, B in Lm*

and two relations :

I on R and J on S,

the nested equi-join of I and J on A and B used in ECRINS/86 (noted I*<A=B>*J) is recursively defined as :

1. if n = m (i.e. the two attributes are at the same level)

1.1 if A is in R and B is in S then

I*<A=B>*J = I[A=B]J

(the standard equi-join of "flat" relations)

1.2 else

I*<A=B>*J =

{ t / there exists u in I, v in J such that
t[X Y2*...Yk*] = u[X Y2*...Yk*] and
t[Z U2*...Uq*] = v[Z U2*...Uq*] and
t[(Y1U1)*] = u[Y1*]*<A=B>*v[U1*] ≠ ∅ }.

2. if n is different from m (say m < n) then

I*<A=B>*J = I*<A=B>*aug^p(J) where p = n-m and aug(J) (the structural augmentation of J) is a relation defined on (Z U1*...Uq*)* and composed of only one tuple t with t[(Z U1*...Uq*)*] = J.

In the appendix B, two examples of nested equi-join are given.

A nested theta-join may be defined in a similar way, as well as a nested set-theta-join with set comparison operators between higher order objects replacing the join attributes.

3.3.2 Extended Relations with Multi-Valued Roles and Set Expressions

The nested extended relation corresponding to an linear extended relation expression with multi-valued roles is obtained by taking the nested equi-join of all the relations with the PK attributes representing the different roles used as join attributes. If there's no multi-valued role the resulting relation is equal to the linear extended relation defined in section 3.2. Nested tree and cyclic extended relations are defined in a similar way as tree and cyclic extended relations but with nested equi-joins used to associate the different (nested) extended relations.

Examples :

1. STEWARDESS of FLIGHT of PLANE
is interpreted as :
STEWARDESS*<NAME=SNAME>*FLIGHT*
<PLANE-NUMBER=PLANE-NUMBER>*PLANE
with FLIGHT being a nested relation defined
on
(FLIGHT-NUMBER, CREW-NUMBER,
DEP-AIRPORT-NAME, ARR-AIRPORT-NAME,
DEP-HOUR, ARR-HOUR, (SNAME)*).

2. Let TICKET be a relationship relation which
reference relation is FLIGHT performing a
multi-valued role, then

STEWARDESS of FLIGHT of TICKET
is interpreted as :
STEWARDESS*<NAME=SNAME>*FLIGHT*
<FLIGHT-NUMBER=FLIGHT-NUMBER>*TICKET

which associates to a ticket a set of flight
and to each one of these flights a set of
stewardess.

The connectors containing, included in, equals,
etc. appearing in an extended relation expression
give rise to set-theta-joins in the computing of
the extended relation .

Example :

"Find all the flight numbers of flights
needing all the stewardess of flight number
102".

```
select FLIGHT-NUMBER of F1
from F1 : FLIGHT of STEWARDESS containing
STEWARDESS of F2 : FLIGHT
where FLIGHT-NUMBER of F2 = 102.
```

Two additional operators : one and set
[MARKOW83] can be applied to convert a
multi-valued role to a simple role and
vice-versa.

Example :

"Find the name of the co-pilots of any cabin
crew who have a type B licence".

```
select NAME of PILOT
from PILOT of one CO-PILOT of CABIN-CREW
where LICENCE-TYPE = "B".
```

3.4 Deduction of Extended Relations

3.4.1 Qualification Expressions

A qualification is an expression taking the same
form as an extended relation. A qualified
attribute [MGREG85] is an attribute A followed by
a qualification ER such that A is an attribute of
first(ER). The qualifications are used in a query
block to specify to which extended relation a set
of attributes belongs. Given a set of
qualifications ER_1, \dots, ER_k , the corresponding
extended relation is defined as then minimal
extended relation "covering" the ER_j 's. If more
than one such extended relation exists then the
qualifications are said to be ambiguous. Thus the
qualifications determine the semantic connection
between attributes of the query.

Example :

```
select NAME of DIPLOMED,
      KIND-OF-PLANE of PLANE
```

is interpreted as

```
select NAME of DIPLOMED,
      KIND-OF-PLANE of PLANE
from DIPLOMED of ACTIVE of FLIGHT of PLANE
while
```

```
select NAME of PILOT, KIND-OF-PLANE of PLANE
is ambiguous since PILOT and PLANE can be
associated through CHIEF-PILOT or CO-PILOT.
```

3.4.2 Abbreviated Qualifications

ECRINS/86 offers the possibility to abbreviate
the qualification of an attribute as long as no
ambiguity appears. An abbreviated (or incomplete)
qualification is said to be unambiguous if it can
be expanded to only one qualification.

Example :

```
NAME of OPERATOR of PLANE
```

will be expanded to

```
NAME of DIPLOMED of ACTIVE of FLIGHT of
PLANE.
```

4. CONCLUSION

The data model we implemented with the ECRINS/86
system is powerful enough to take care of the
main integrity constraints of a complex data
schema. The main advantage of a DBMS such as
ECRINS/86 is due to its capability to implement a
data structure very quickly without developing
wearisome validation programs. The query language
allows the user to access the database in a
simple way. The construct of the language are
closely related to the data model and thus
provide a coherent interface to the data base.
Actually the ECRINS/86 system runs on computers
such as UNIVAC 1100/60, VAX-780 (VMS+UNIX
systems), PRIME-750, Personal Computer running
with MS/DOS, SUN, ... A first version of
ECRINS/86, restricted to binary relationship
relations [LEON85], has been installed in some
universities in Switzerland and in Europe, as
well as in private companies. We also used this
version to manage the meta-base of two DBMS
implemented at the C.U.I. The first one is PIREE
used to store data on economics, the second one
is FARANDOLE used in data analysis [SNELLA86].
The query language is under development;
nevertheless a subset of it, including extended
relations and automatic extended relations
deduction, has been implemented for the PIREE
DBMS. Since ECRINS/86 is not a front-end for
another DBMS such as Ariel [MGREG85] the
execution of queries can take advantage of
physical data structures well suited for
implementing an extended E-R Model.

ACKNOWLEDGEMENT

The authors would like to thank all the members of the Data Base Group in the C.U.I. who contributed to the implementation of the system. Special thanks go to R. Tschopp, A. Galland for their earlier contribution to the project, to F. Bodard for his valuable comments and to E. Kohl for her precious collaboration for the page-setting of this paper.

REFERENCES

- [ABIT84] ABITEBOUL, S.; BIDOIT, N.; Non First Normal Form Relations to Represent Hierarchically Organized Data; Proc. ACM Symp. PODS, Waterloo, Ontario, 1984.
- [ABRIAL74] ABRIAL, J.R.; Data Semantics; Klimbie, J.W. and Koffeman, K.L. (eds), Data Base Management, North Holland, Amsterdam, 1974.
- [CHEN76] CHEN, P.P.S.; The Entity Relationship Model-Toward a Unified View of Data; ACM TODS, Vol.1, Nb.1, 1976.
- [CODASYL71] CODASYL; Data Base Task Group Report; ACM, New-York, 1971.
- [CODD70] CODD, E.F.; A Relational Model of Data for Large Shared Data Banks; ACM TODS, Vol. 13, 1970.
- [FISCH85] FISCHER, P.C.; VAN GUCHT, D.; Determining when a Structure is a Nested Relation; Proc. ACM 11th. VLDB, Stockholm, Sweden, 1985.
- [JUNET86] JUNET, M.; Features and Physical Implementation of the Extended Entity-Relationship DBMS ECRINS/86; Technical Report Nb 88, University of Geneva, Switzerland, 1986.
- [LEON85] LEONARD, M.; GALLAND, A.; JUNET, M.; TSCHOPP, R.; ECRINS : Un Modèle relationnel tendu et un SGBD pour petite bases de données; Convention Informatique Latine, Barcelona, Espagne, 1985.
- [MARKOW83] MARKOWITZ, V.M.; ROZ, Y.; ERROL: An Entity-Relationship, Role-Oriented, Query Language; Proc. Int. Conf. on E-R Approach to Software Engineering, Anaheim, 1983.
- [MCGREG85] Mc GREGOR, R.M.; ARIEL -- a Semantic Front-End to Relational DBMSs; Proc. ACM 11th. VLDB, Stockholm, Sweden, 1985
- [SCHEUER79] SCHEUERMANN, P.; SCHIFFNER, G.; WEBER, H.; Abstraction Capabilities and Invariant Properties Modelling within the Entity-Relationship Approach; Proc. International Conf. on Entity-Relationship Approach to Systems Analysis and Design, 1979.
- [SMITH77] SMITH, J.M.; SMITH, D.C.P.; Database Abstractions : Aggregation and Generalization; ACM TODS, Vol.2, Nb. 2, 1977.
- [SNELLA86] SNELLA, J.J.; ABDELJAOUED BOUJEMAA, A.; LEONARD, M.; A Database Model for Statistical Data Analysis and Economic Analysis : FARANDOLE and PIREE; Sec. Baghdad Conf. on Computer Technology and Applications, Irak, 1986.
- [TJOA79] TJOA, A.; WAGNER, R.; Some Considerations on the Entity-Relationship Model; Proc. of the International Conf. on Entity-Relationship Approach to System Analysis and Design, Los Angeles, 1979.

Appendix A : The "airline company" example defined with the ECRINS/86 Data Definition Language.

This definition, includes all the extensions added throughout this paper.

structure AIRLINE-COMPANY

begin

```
declare regular entity relation FLYING-STAFF
key is
```

```
  NAME char (36);
```

```
with properties
```

```
  AGE integer (12:75);
```

```
  SALARY real (1000:20000);
```

```
  JOB-CLASS word generic (sr PILOT
                           sr OPERATOR sr STEWARDESS);
```

```
  MARITAL-STATUS word (SINGLE MARRIED
                       DIVORCED WIDOWED);
```

```
  if not SINGLE then
    YEARS-OF-MARRIAGE integer (1900:2100);
    PLACE-OF-MARRIAGE char;
```

```
  endif
```

```
end-declare
```

```
declare sub-relation PILOT
```

```
with properties
```

```
  LICENCE-TYPE char;
```

```
secondary key is
```

```
  LICENCE-NUMBER integer;
```

```
end-declare
```

```
declare sub-relation OPERATOR
```

```
with properties
```

```
  JOB-HISTORY char;
```

```
  STATUS word generic (sr STUDENT
                       sr DIPLOMED) mandatory;
```

```
end-declare
```

```
declare sub-relation STUDENT
```

```
with properties
```

```
  YEARS-OF-STUDY integer (1:5);
```

```
end-declare
```

```
declare sub-relation DIPLOMED
```

```
with properties
```

```
  KIND-OF-DIPLOMA char;
```

```
end-declare
```

```
declare sub-relation STEWARDESS
```

```
with properties
```

```
  YEARS-OF-SERVICE integer (0:50);
```

```
end-declare
```

```
declare weak entity relation QUALIFICATION
```

```
reference is OPERATOR with maxcard 5
```

```
key is
```

```
  QUAL-NUMBER rank;
```



```

with properties
  EXPLANATION char;
  YEARS-OF-PRACTICE integer (0:50);
end-declare

declare relationship relation CABIN-CREW
association of
  PILOT mono-reference
    (CHIEF-PILOT) with maxcard 3
    (CO-PILOT) multi-valued of degree 2
      with maxcard 15
  DIPLOMED with maxcard 15
with properties
  NBFLIGHT integer (0:10000);
  CREW-STATUS word generic (sr INACTIVE
    sr ACTIVE);

  secondary key is
    CREW-NUMBER integer (100:200);
end-declare

declare sub-relation INACTIVE
with properties
  REASONS char;
end-declare

declare regular entity relation AIRPORT
key is
  AIRPORT-NAME char (24);
with properties
  CITY char (24);
end-declare

declare regular entity relation PLANE
key is
  PLANE-NUMBER integer;
with properties
  KIND-OF-PLANE char mandatory;
  NB-SEAT integer (12:500) mandatory;
end-declare

declare relationship relation FLIGHT
association of
  STEWARDESS multi-valued of degree 4
    not mandatory with maxcard 100
  ACTIVE with maxcard unknown
  PLANE with maxcard 25
  AIRPORT (DEP-AIRPORT) with maxcard 100
    (ARR-AIRPORT) with maxcard 100
with properties
  DEP-HOUR real;
  ARR-HOUR real;
  secondary key is
    FLIGHT-NUMBER integer (100:1000);
end-declare

declare relationship relation TICKET
association upon
  FLIGHT mono-reference
    multi-valued of degree 5 not mandatory
    with maxcard unknown
with properties
  DATE-OF-ISSUE integer mandatory;
  PRICE real mandatory;
  PASSENGER-NAME char (36) mandatory;
  secondary key is
    TICKET-NUMBER integer;
end-declare
end

```

Appendix B : Examples of nested equi-joins

Example 1 :

FLIGHT:		GROUP-OF-STEWARDESS:	
FLT-NO.	STD* SNAME	GROUP-NO.	STD'* SNAME'
101	name1 name2 name4	1	name1 name7
103	name2 name3 name4	2	name2 name3 name4
104	name5 name6	3	name8 name6

FLIGHT*(<SNAME=SNAME'>)*GROUP-OF-STEWARDESS:

FLT-NO.	GROUP-NO.	(STD STD')*	
		SNAME	SNAME'
101	1	name1	name1
101	2	name2 name4	name2 name4
103	2	name2 name3 name4	name2 name3 name4
104	3	name6	name6

Example 2 :

STEWARDESS:		aug ¹ (STEWARDESS):	
NAME	SALARY	(NAME SALARY)*	
		NAME	SALARY
name1	21000	name1	21000
name2	19000	name2	19000
name3	22000	name3	22000
name4	21500	name4	21500
name5	27000	name5	27000
name6	22000	name6	22000

FLIGHT*(<SNAME=NAME>)*STEWARDESS:

FLT-NO.	(SNAME NAME SALARY)*		
	SNAME	NAME	SALARY
101	name1 name2 name4	name1 name2 name4	21000 19000 21500
103	name2 name3 name4	name2 name3 name4	19000 22000 21500
104	name5 name6	name5 name6	27000 22000

end