
Mesh Parameterization Methods and Their Applications

Mesh Parameterization Methods and Their Applications

Alla Sheffer

*University of British Columbia, Canada
sheffa@cs.ubc.ca*

Emil Praun

Google, USA

Kenneth Rose

*University of British Columbia, Canada
kenrose@cs.ubc.ca*

now
the essence of knowledge
Boston – Delft

Foundations and Trends[®] in Computer Graphics and Vision

Published, sold and distributed by:

now Publishers Inc.
PO Box 1024
Hanover, MA 02339
USA
Tel. +1-781-985-4510
www.nowpublishers.com
sales@nowpublishers.com

Outside North America:

now Publishers Inc.
PO Box 179
2600 AD Delft
The Netherlands
Tel. +31-6-51115274

Library of Congress Control Number: 2006939152

The preferred citation for this publication is A. Sheffer, E. Praun and K. Rose, Mesh Parameterization Methods and Their Applications, Foundation and Trends[®] in Computer Graphics and Vision, vol 2, no 2, pp 105–171, 2006

Printed on acid-free paper

ISBN: 1-933019-43-3

© 2006 A. Sheffer, E. Praun and K. Rose

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, mechanical, photocopying, recording or otherwise, without prior written permission of the publishers.

Photocopying. In the USA: This journal is registered at the Copyright Clearance Center, Inc., 222 Rosewood Drive, Danvers, MA 01923. Authorization to photocopy items for internal or personal use, or the internal or personal use of specific clients, is granted by now Publishers Inc for users registered with the Copyright Clearance Center (CCC). The 'services' for users can be found on the internet at: www.copyright.com

For those organizations that have been granted a photocopy license, a separate system of payment has been arranged. Authorization does not extend to other kinds of copying, such as that for general distribution, for advertising or promotional purposes, for creating new collective works, or for resale. In the rest of the world: Permission to photocopy must be obtained from the copyright owner. Please apply to now Publishers Inc., PO Box 1024, Hanover, MA 02339, USA; Tel. +1 781 871 0245; www.nowpublishers.com; sales@nowpublishers.com

now Publishers Inc. has an exclusive license to publish this material worldwide. Permission to use this content must be obtained from the copyright license holder. Please apply to now Publishers, PO Box 179, 2600 AD Delft, The Netherlands, www.nowpublishers.com; e-mail: sales@nowpublishers.com

**Foundations and Trends[®] in
Computer Graphics and Vision**
Volume 2 Issue 2, 2006
Editorial Board

Editor-in-Chief:

Brian Curless

University of Washington

Luc Van Gool

KU Leuven/ETH Zurich

Richard Szeliski

Microsoft Research

Editors

Marc Alexa (TU Berlin)

Ronen Basri (Weizmann Inst)

Peter Belhumeur (Columbia)

Andrew Blake (Microsoft Research)

Chris Bregler (NYU)

Joachim Buhmann (ETH Zurich)

Michael Cohen (Microsoft Research)

Paul Debevec (USC, ICT)

Julie Dorsey (Yale)

Fredo Durand (MIT)

Olivier Faugeras (INRIA)

Mike Gleicher (U. of Wisconsin)

William Freeman (MIT)

Richard Hartley (ANU)

Aaron Hertzmann (U. of Toronto)

Hugues Hoppe (Microsoft Research)

David Lowe (U. British Columbia)

Jitendra Malik (UC. Berkeley)

Steve Marschner (Cornell U.)

Shree Nayar (Columbia)

James O'Brien (UC. Berkeley)

Tomas Pajdla (Czech Tech U)

Pietro Perona (Caltech)

Marc Pollefeys (U. North Carolina)

Jean Ponce (UIUC)

Long Quan (HKUST)

Cordelia Schmid (INRIA)

Steve Seitz (U. Washington)

Amnon Shashua (Hebrew Univ)

Peter Shirley (U. of Utah)

Stefano Soatto (UCLA)

Joachim Weickert (U. Saarland)

Song Chun Zhu (UCLA)

Andrew Zisserman (Oxford Univ)

Editorial Scope

Foundations and Trends[®] in Computer Graphics and Vision

will publish survey and tutorial articles in the following topics:

- Rendering: Lighting models; Forward rendering; Inverse rendering; Image-based rendering; Non-photorealistic rendering; Graphics hardware; Visibility computation
- Shape: Surface reconstruction; Range imaging; Geometric modelling; Parameterization;
- Mesh simplification
- Animation: Motion capture and processing; Physics-based modelling; Character animation
- Sensors and sensing
- Image restoration and enhancement
- Segmentation and grouping
- Feature detection and selection
- Color processing
- Texture analysis and synthesis
- Illumination and reflectance modeling
- Shape Representation
- Tracking
- Calibration
- Structure from motion
- Motion estimation and registration
- Stereo matching and reconstruction
- 3D reconstruction and image-based modeling
- Learning and statistical methods
- Appearance-based matching
- Object and scene recognition
- Face detection and recognition
- Activity and gesture recognition
- Image and Video Retrieval
- Video analysis and event recognition
- Medical Image Analysis
- Robot Localization and Navigation

Information for Librarians

Foundations and Trends[®] in Computer Graphics and Vision, 2006, Volume 2, 4 issues. ISSN paper version 1572-2740. ISSN online version 1572-2759. Also available as a combined paper and online subscription.

Mesh Parameterization Methods and Their Applications

Alla Sheffer¹, Emil Praun² and Kenneth Rose³

¹ *University of British Columbia, Canada, sheffa@cs.ubc.ca*

² *Google, USA*

³ *University of British Columbia, Canada, kenrose@cs.ubc.ca*

Abstract

We present a survey of recent methods for creating piecewise linear mappings between triangulations in 3D and simpler domains such as planar regions, simplicial complexes, and spheres. We also discuss emerging tools such as global parameterization, inter-surface mapping, and parameterization with constraints. We start by describing the wide range of applications where parameterization tools have been used in recent years. We then briefly review the pertinent mathematical background and terminology, before proceeding to survey the existing parameterization techniques. Our survey summarizes the main ideas of each technique and discusses its main properties, comparing it to other methods available. Thus it aims to provide guidance to researchers and developers when assessing the suitability of different methods for various applications. This survey focuses on the practical aspects of the methods available, such as time complexity and robustness and shows multiple examples of parameterizations generated using different methods, allowing the reader to visually evaluate and compare the results.

Contents

1	Introduction	1
1.1	Applications	2
2	Terminology	9
3	Parameterization of Topological Disks	13
3.1	Planar Mesh Embedding	15
3.2	Angle-Preserving Parameterization	20
3.3	Distance Preserving Parameterization	27
3.4	Area-Preserving Parameterization	29
3.5	Trade-Off Between Metrics	29
4	Cutting/Chart Generation	33
4.1	Mesh Segmentation	34
4.2	Seam Cutting	36
5	Alternate Base Domains	39
5.1	Simplicial and Quadrilateral Complexes	40
5.2	The Unit Sphere	46
5.3	Discrete Differential One-Forms	49
5.4	Hyperbolic Plane	53

6 Constraints	55
7 Conclusions	61
Acknowledgements	63
References	65

1

Introduction

Given any two surfaces with similar topology, it is possible to compute a one-to-one and onto mapping between them. If one of these surfaces is represented by a triangular mesh, the problem of computing such a mapping is referred to as mesh parameterization [7, 35]. The surface that the mesh is mapped to is typically referred to as the parameter domain. Parameterizations between surface meshes and a variety of domains have numerous applications in computer graphics and geometry processing as described below. In recent years numerous methods for parameterizing meshes were developed, targeting diverse parameter domains and focusing on different parameterization properties. This survey reviews the various parameterization methods, summarizing the main ideas of each technique and focusing on the practical aspects of the methods. It also provides examples of the results generated by many of the more popular methods. When several methods address the same parameterization problem, the survey strives to provide an objective comparison between them based on criteria such as parameterization quality, efficiency, and robustness.

We start by surveying the applications which can benefit from parameterization in Section 1.1 and then in Section 2 briefly review

2 Introduction

the terminology commonly used in the parameterization literature. The rest of the survey describes the different techniques available, classifying them based on the parameter domain used. Section 3 describes techniques for planar parameterization. Section 4 reviews methods for pre-processing meshes for planar parameterization by cutting them into one or more charts. Section 5 examines parameterization methods for alternative domains such as a sphere or a base mesh as well as methods for cross-parameterization between mesh surfaces. Section 6 discusses ways to introduce constraints into a parameterization. Finally, Section 7 summarizes the paper and discusses potential open problems in mesh parameterization.

1.1 Applications

Surface parameterization was introduced to computer graphics as a method for mapping textures onto surfaces [7,84]. Over the last decade, it has gradually become a ubiquitous tool, useful for many mesh processing applications, discussed below (Figure 1.1).

Detail Mapping Detailed objects can be efficiently represented by a coarse geometric shape (polygonal mesh or subdivision surface) with the details corresponding to each triangle stored in a separate 2D array. In traditional texture mapping, the detail is the local albedo of a Lambertian surface. Texture maps alone can enrich the appearance of a surface in a static picture, but since neighboring pixels will have similar shadowing, objects may still look flat in animations with varying lighting conditions. Bump mapping stores small deviations of the point-wise normal from that of the smooth underlying surface and uses the perturbed version during shading [13]. Normal mapping [130, 118] is a similar technique that replaces the normals directly rather than storing a perturbation. As the light direction changes, the shading variations produced by the normal perturbations simulate the shadows caused by small pits and dimples in the surface. Since the actual geometry of the object is not modified, the silhouettes still look polygonal or smooth. Displacement mapping addresses this problem by storing small local deformations of the surface, typically in the direction of the normal.

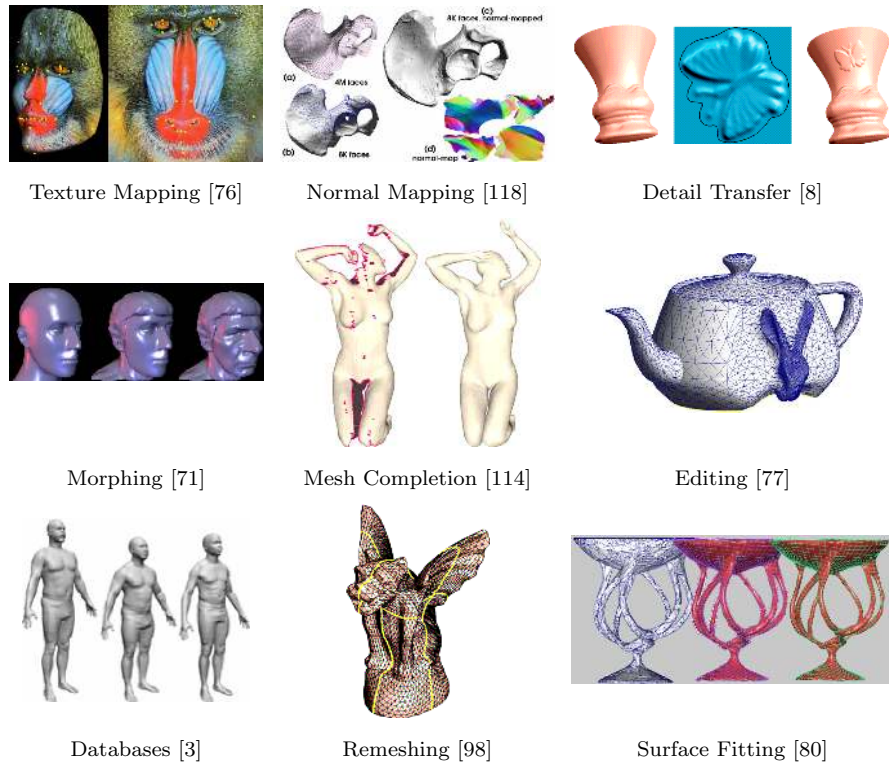


Fig. 1.1 Parameterization applications.

Recent techniques [75,93,96] model a thick region of space in the neighborhood of the surface by using a volumetric texture, rather than a 2D one. Such techniques are needed in order to model detail with complicated topology or detail that cannot be easily approximated locally by a height field, such as sparsely interwoven structures or animal fur. The natural way to map details to surfaces is using planar parameterization (Section 3).

Detail Synthesis While the goal of texture mapping is to *represent* the complicated appearance of 3D objects, several methods make use of mesh parameterization to *create* the local detail necessary for a rich appearance. Such techniques can use as input flat patches with sample detail [92, 97, 129, 127, 131, 119]; parametric or procedural models; or

4 Introduction

direct user input and editing [57, 17]. The type of detail can be quite varied and the intermediate representations used to create it parallel the final representations used to store it.

Morphing and Detail Transfer A map between the surfaces of two objects allows the transfer of detail from one object to another [81, 121, 99], or the interpolation between the shape and appearance of several objects [71, 2, 66, 63, 109]. By varying the interpolation ratios over time, one can produce morphing animations. In spatially varying and frequency-varying morphs, the rate of change can be different for different parts of the objects, or different frequency bands (coarseness of the features being transformed) [71, 66, 63]. Such a map can either be computed directly or, as more commonly done, computed by mapping both object surfaces to a common domain (Sections 5 and 6).

In addition to transferring the static appearance of surfaces, inter-surface parameterizations allow the transfer of animation data between shapes, either by transferring the local surface influence from bones of an animation rig, or by directly transferring the local affine transformation of each triangle in the mesh [122].

Mesh Completion Meshes from range scans often contain holes and multiple components. Lévy [77] uses planar parameterization to obtain the natural shape for hole boundaries and to triangulate those. In many cases, prior knowledge about the overall shape of the scanned models exists. For instance, for human scans, templates of a generic human shape are readily available. Allen *et al.* [3], and Anguelov *et al.* [6] use this prior knowledge to facilitate completion of scans by computing a mapping between the scan and a template human model. Kraevoy and Sheffer [67] develop a more generic and robust template-based approach for completion of any type of scans. The techniques typically use an inter-surface parameterization between the template and the scan (Sections 5 and 6).

Mesh Editing Editing operations often benefit from a local parameterization between pairs of models. Biermann *et al.* [8] use local parameterization to facilitate cut-and-paste transfer of details between models.

They locally parameterize the regions of interest on the two models in 2D and overlap the two parameterizations. They use the parameterization to transfer shape properties from one model to the other. Sorkine *et al.* [121] and Lévy [77] use local parameterization for mesh composition in a similar manner. They compute an overlapping planar parameterization of the regions near the composition boundary on the input models and use it to extract and smoothly blend shape information from the two models.

Creation of Object Databases Once a large number of models are parameterized on a common domain (Sections 5 and 6), one can perform an analysis determining the common factors between objects and their distinguishing traits. For example on a database of human shapes [3], the distinguishing traits may be gender, height, and weight, while a database of human faces may add facial expressions [12, 85, 10, 11]. Objects can be compared against the database and scored against each of these dimensions, and the database can be used to create new plausible object instances by interpolation or extrapolation of existing ones.

Remeshing There are many possible triangulations that represent the same shape with similar levels of accuracy. Some triangulation may be more desirable than others for different applications. For example, for numerical simulations on surfaces, triangles with a good aspect ratio (that are not too small or too “skinny”) are important for convergence and numerical accuracy. One common way to remesh surfaces, or to replace one triangulation by another, is to parameterize the surface, then map a desirable, well-understood, and easy to create triangulation of the domain back to the original surface. For example, Gu *et al.* [41] use a regular grid sampling of a planar square domain, while subdivision based methods [49, 72, 63] use regular subdivision (usually one-to-four triangle splits) on the faces of a simplicial domain. Such locally regular meshes can usually support the creation of smooth surfaces as the limit process of applying subdivision rules. To generate high quality triangulations Desbrun *et al.* [26] parameterize the input mesh in the plane and then use planar Delaunay triangulation to obtain

6 Introduction

a high quality remeshing of the surface. One problem these methods face is the appearance of visible discontinuities along the cuts created to facilitate the parameterization.

Surazhsky and Gotsman [123] avoid global parameterization, and instead use local parameterization to move vertices along the mesh as part of an explicit remeshing scheme. Ray *et al.* [102] use global periodic parameterization to generate a predominantly quadrilateral mesh directly on the 3D surface. Dong *et al.* [26] use a parameterization induced by the Morse complex to generate a quad only mesh of the surface.

More details on the use of parameterization for remeshing can be found in a recent survey by Alliez *et al.* [5].

Mesh Compression Mesh compression is used to compactly store or transmit geometric models [4]. As with other data, compression rates are inversely proportional to the data entropy. Thus higher compression rates can be obtained when models are represented by meshes that are as regular as possible, both topologically and geometrically. Topological regularity refers to meshes where almost all vertices have the same degree. Geometric regularity implies that triangles are similar to each other in terms of shape and size, and vertices are close to the centroid of their neighbors. Such meshes can be obtained by parameterizing the original objects and then remeshing with regular sampling patterns [41, 52]. The quality of the parameterization directly impacts the compression efficiency.

Surface Fitting One of the earlier applications of mesh parameterization is surface fitting [32, 51, 54, 80, 82]. Many applications in geometry processing require a smooth analytical surface to be constructed from an input mesh. A parameterization of the mesh over a base domain significantly simplifies this task. Earlier methods either parameterized the entire mesh in the plane [32] or segmented it and parameterized each patch independently (Sections 3 and 4). More recent methods [80, 82, 51] focus on constructing smooth global parameterizations (Section 5.1) and use those for fitting, achieving global continuity of the constructed surfaces.

Modeling from Material Sheets While computer graphics focuses on virtual models, geometry processing has numerous real-world engineering applications. Particularly, planar mesh parameterization is an important tool when modeling 3D objects from sheets of material, ranging from garment modeling to metal forming or forging [7, 88, 86, 60]. All of these applications require the computation of planar patterns to form the desired 3D shapes. Typically, models are first segmented into nearly developable charts (Section 4), and these charts are then parameterized in the plane (Section 3).

Medical Visualization Complex geometric structures are often better visualized and analyzed by mapping the surface normal-map, color, and other properties to a simpler, canonical domain. One of the structures for which such mapping is particularly useful is the human brain [42, 50, 56]. Most methods for brain mapping use the fact that the brain has genus zero, and visualize it through spherical [42, 50] (Section 5.2) or planar [56] (Section 3) parameterization.

Given the vast range of processing techniques that have benefited from parameterization, we expect that many more applications can utilize it as a powerful processing tool.

References

- [1] M. Alexa, "Merging polyhedral shapes with scattered features," *The Visual Computer*, vol. 16, no. 1, pp. 26–37, 2000.
- [2] M. Alexa, "Recent advances in mesh morphing," *Computer Graphics Forum*, vol. 21, no. 2, pp. 173–196, 2002.
- [3] B. Allen, B. Curless, and Z. Popović, "The space of human body shapes: Reconstruction and parameterization from range scans," in *ACM SIGGRAPH 2003*, pp. 587–594, 2003.
- [4] P. Alliez and C. Gotsman, "Recent advances in compression of 3D meshes," in *Advances in Multiresolution for Geometric Modelling*, pp. 3–26, 2005.
- [5] P. Alliez, G. Ucelli, C. Gotsman, and M. Attene, *Recent advances in remeshing of surfaces*. Springer, 2005.
- [6] D. Anguelov, P. Srinivasan, D. Koller, S. Thrun, J. Rodgers, and J. Davis, "SCAPE: Shape completion and animation of people," in *ACM SIGGRAPH 2005*, 2005.
- [7] C. Bennis, J.-M. Vézien, and G. Iglésias, "Piecewise surface flattening for nondistorted texture mapping," in *ACM SIGGRAPH '91*, pp. 237–246, 1991.
- [8] H. Biermann, I. Martin, F. Bernardini, and D. Zorin, "Cut-and-paste editing of multiresolution surfaces," in *ACM SIGGRAPH 2002*, pp. 312–321, 2002.
- [9] H. Birkholz, "Shape-preserving parametrization of genus 0 surfaces," in *Proceedings of Winter Conference on Computer Graphics (WSCG)*, 2004.
- [10] V. Blanz, C. Basso, T. Poggio, and T. Vetter, "Reanimating faces in images and video," *Computer Graphics Forum (EUROGRAPHICS 2003)*, vol. 22, no. 3, pp. 641–650, 2003.
- [11] V. Blanz, K. Scherbaum, T. Vetter, and H.-P. Seidel, "Exchanging faces in images," in *EUROGRAPHICS 2004*, 2004.

66 References

- [12] V. Blanz and T. Vetter, "A morphable model for the synthesis of 3D faces," in *ACM SIGGRAPH 1999*, 1999.
- [13] J. F. Blinn, "Simulation of wrinkled surfaces," in *ACM SIGGRAPH '78*, pp. 286–292, 1978.
- [14] I. Boier-Martin, H. Rushmeier, and J. Jin, "Parameterization of triangle meshes over quadrilateral domains," in *Eurographics Symposium on Geometry Processing 2004*, pp. 197–208, 2004.
- [15] P. Bowers and M. Hurdal, "Planar conformal mappings of piecewise flat surfaces," in *Visualization and Mathematics III*, pp. 3–34, Springer Verlag, 2003.
- [16] N. Carr and J. Hart, "Meshed atlases for real-time procedural solid texturing," *ACM Transactions on Graphics*, vol. 21, no. 2, April 2002.
- [17] N. Carr and J. Hart, "Painting detail," in *ACM SIGGRAPH 2004*, 2004.
- [18] N. Carr, J. Hoberock, K. Crane, and J. Hart, "Rectangular multi-chart geometry images," in *Proceedings of Symposium on Geometry Processing (SGP)*, 2006.
- [19] F. R. K. Chung in *Spectral Graph Theory*, Providence, RI: American Mathematical Society, 1997.
- [20] U. Clarenz, N. Litke, and M. Rumpf, "Axioms and variational problems in surface parameterization," *Computer Aided Geometric Design*, vol. 21, no. 8, 2004.
- [21] D. Cohen-Steiner, P. Alliez, and M. Desbrun, "Variational shape approximation," in *ACM SIGGRAPH 2004*, pp. 905–914, 2004.
- [22] Y. Colin de Verdière, "On a new graph invariant and a criterion for planarity," in *Graph structure Theory/Contemporary Mathematics*, pp. 137–147, 1990.
- [23] C. Collins and K. Stephenson, "A circle packing algorithm," in *Computational Geometry: Theory and Applications 25*, pp. 233–256, 2003.
- [24] P. Degener, J. Meseth, and R. Klein, "An adaptable surface parameterization method," in *Proceedings, 12th International Meshing Roundtable*, pp. 201–213, 2003.
- [25] M. Desbrun, M. Meyer, and P. Alliez, "Intrinsic parameterizations of surface meshes," *Computer Graphics Forum*, vol. 21, pp. 209–218, 2002.
- [26] M. do Carmo, "Differential geometry of curves and surfaces," Prentice Hall, 1976.
- [27] S. Dong, P.-T. Bremer, M. Garland, V. Pascucci, and J. C. Hart, "Spectral surface quadrangulation," in *ACM SIGGRAPH 2006*, 2006.
- [28] M. Eck, T. DeRose, T. Duchamp, H. Hoppe, M. Lounsbery, and W. Stuetzle, "Multiresolution analysis of arbitrary meshes," in *ACM SIGGRAPH 95*, pp. 173–182, 1995.
- [29] I. Eckstein, V. Surazhsky, and C. Gotsman, "Texture mapping with hard constraints," in *Eurographics 2001*, pp. 95–104, 2001.
- [30] J. Erickson and S. Har-Peled, "Optimally cutting a surface into a disk," *Discrete Computational Geometry*, vol. 31, no. 1, pp. 37–59, 2004.
- [31] H. Ferguson and A. Rockwood, "Multiperiodic functions for surface design," *Computer Aided Geometric Design*, vol. 10, no. 3, pp. 315–328, 1993.

- [32] M. Floater, "Parameterization and smooth approximation of surface triangulations," *Computer Aided Geometric Design 1997*, vol. 14, no. 3, pp. 231–250, 1997.
- [33] M. Floater, "Mean value coordinates," *Computer Aided Geometric Design*, vol. 20, no. 1, pp. 19–27, 2003.
- [34] M. Floater and K. Hormann, "Parameterization of triangulations and unorganized points," *Tutorials on Multiresolution in Geometric Modelling*, 2002.
- [35] M. Floater and K. Hormann, "Surface parameterization: A tutorial and survey," in *Advances in Multiresolution for Geometric Modelling*, pp. 157–186, 2005.
- [36] M. Garland, A. Willmott, and P. Heckbert, "Hierarchical face clustering on polygonal surfaces," in *Proceedings of ACM Symposium on Interactive 3D Graphics 2001*, 2001.
- [37] S. J. Gortler, C. Gotsman, and D. Thurston, "Discrete one-forms on meshes and applications to 3D mesh parameterization," *Computer Aided Geometric Design*, 2005.
- [38] C. Gotsman, X. Gu, and A. Sheffer, "Fundamentals of spherical parameterization for 3D meshes," in *ACM SIGGRAPH 2003*, pp. 358–364, 2003.
- [39] Graphite <http://www.loria.fr/~levy/Graphite/index.html>, 2003.
- [40] C. Grimm and J. Hughes, "Parameterizing N-holed Tori," in *The Mathematics of Surfaces IX*, 2003.
- [41] X. Gu, S. Gortler, and H. Hoppe, "Geometry images," in *ACM SIGGRAPH 2002*, pp. 356–361, 2002.
- [42] X. Gu, Y. Wang, T. F. Chan, P. M. Thompson, and S.-T. Yau, "Genus zero surface conformal mapping and its application to brain surface mapping," *IEEE Transaction on Medical Imaging*, vol. 23, no. 7, 2004.
- [43] X. Gu, Y. Wang, and S.-T. Yau, "Geometric compression using Riemann surface structure," in *Communication in Information and Systems*, 2003.
- [44] X. Gu, Y. Wang, and S.-T. Yau, "Multiresolution computation of conformal structures of surfaces," *Journal of Systemics, Cybernetics and Informatics*, vol. 1, no. 6, 2004.
- [45] X. Gu and S.-T. Yau, "Computing conformal structures of surfaces," *Communications in Information and Systems*, vol. 2, no. 2, pp. 121–146, 2002.
- [46] X. Gu and S.-T. Yau, "Global conformal surface parameterization," *Symposium on Geometry Processing*, pp. 127–137, 2003.
- [47] I. Guskov, "An anisotropic mesh parameterization scheme," in *Proceedings of the 11th International Meshing Roundtable*, pp. 325–332, 2002.
- [48] I. Guskov, A. Khodakovsky, P. Schröder, and W. Sweldens, "Hybrid meshes: Multiresolution using regular and irregular refinement," in *ACM Symposium on Computational Geometry 2002*, pp. 264–272, 2002.
- [49] I. Guskov, K. Vidimče, W. Sweldens, and P. Schröder, "Normal meshes," in *ACM SIGGRAPH 2000*, pp. 95–102, 2000.
- [50] S. Haker, S. Angenent, S. Tannenbaum, R. Kikinis, G. Sapiro, and M. Halle, "Conformal surface parametrization for texture mapping," *IEEE TVCG*, vol. 6, no. 2, pp. 181–189, 2000.

68 References

- [51] Y. He, X. Gu, and H. Qin, "Rational spherical splines for genus zero shape modeling," in *Proceedings of IEEE International Conference on Shape Modeling and Applications 2005*, 2005.
- [52] H. Hoppe and E. Praun, "Shape compression using spherical geometry images," in *Advances in Multiresolution for Geometric Modeling*, pp. 3–26, 2005.
- [53] K. Hormann, "Fitting free form surfaces," in *Principles of 3D Image Analysis and Synthesis*, 2000.
- [54] K. Hormann and G. Greiner, "MIPS: An efficient global parametrization method," in *Curve and Surface Design*, pp. 153–162, 2000.
- [55] K. Hormann, G. Greiner, and S. Campagna, "Hierarchical parametrization of triangulated surfaces," *Vision, Modeling, and Visualization*, pp. 219–226, 1999.
- [56] M. K. Hurdal, P. L. Bowers, K. Stephenson, D. W. L. Sumners, K. Rehm, K. Schaper, and D. A. Rottenberg, "Quasi-conformally flat mapping the human cerebellum," in *Medical Image Computing and Computer-Assisted Intervention 1679*, pp. 279–286, 1999.
- [57] T. Igarashi and D. Cosgrove, "Adaptive unwrapping for interactive texture painting," in *ACM Symposium on Interactive 3D Graphics*, pp. 209–216, 2001.
- [58] M. Isenburg, S. Gumhold, and C. Gotsman, "Connectivity shapes," in *Proceedings of IEEE Visualization*, pp. 135–142, 2001.
- [59] M. Jin, F. Luo, and X. Gu., "Computing surface hyperbolic structure and real projective structure, solid and physics modeling," in *Proceedings Solid and Physics Modeling*, 2006.
- [60] D. Julius, V. Kraevoy, and A. Sheffer, "D-charts: Quasi-developable mesh segmentation," *Computer Graphics Forum (Proceedings of Eurographics 2005)*, vol. 24, no. 3, pp. 981–990, 2005.
- [61] Z. Karni, C. Gotsman, and S. Gortler, "Free-boundary linear parameterization of 3D meshes in the presence of constraints," in *Proceedings of Shape Modeling and Applications 2005*, 2005.
- [62] L. Kharevych, B. Springborn, and P. Schröder, "Discrete conformal mappings via circle patterns," *ACM Transactions on Graphics*, vol. 25, no. 2, 2006.
- [63] A. Khodakovsky, N. Litke, and P. Schröder, "Globally smooth parameterizations with low distortion," in *ACM SIGGRAPH 2003*, pp. 350–357, 2003.
- [64] L. P. Kobbelt, J. Vorsatz, U. Labisk, and H.-P. Seidel, "A shrink-wrapping approach to remeshing polygonal surfaces," in *Proceedings of Eurographics*, 1999.
- [65] G. Kos and T. Varady, "Parameterizing complex triangular meshes," in *Curve and Surface Design*, pp. 265–274, 2003.
- [66] V. Kraevoy and A. Sheffer, "Cross-parameterization and compatible remeshing of 3D models," in *ACM SIGGRAPH 2004*, 2004.
- [67] V. Kraevoy and A. Sheffer, "Template based mesh completion," in *Proceedings of Symposium on Geometry Processing (SGP)*, 2005.
- [68] V. Kraevoy, A. Sheffer, and C. Gotsman, "Matchmaker: Constructing constrained texture maps," in *ACM SIGGRAPH 2003*, pp. 326–333, 2003.

- [69] U. Labsik, K. Hormann, and G. Greiner, "Using most isometric parametrizations for remeshing polygonal surfaces," in *Geometric Modeling and Processing*, 2000.
- [70] F. Lazarus, M. Pocchiola, G. Vegter, and A. Verroust, "Computing a canonical polygonal schema of an orientable triangulated surface," in *Proceedings of the 17th Annual Symposium on Computational Geometry*, (Medford, Massachusetts, United States), 2001.
- [71] A. Lee, D. Dobkin, W. Sweldens, and P. Schröder, "Multiresolution mesh morphing," in *ACM SIGGRAPH '99*, pp. 343–350, 1999.
- [72] A. Lee, H. Hoppe, and H. Moreton, "Displaced subdivision surfaces," in *ACM SIGGRAPH 2000*, 2000.
- [73] A. Lee, W. Sweldens, P. Schröder, L. Cowsar, and D. Dobkin, "MAPS: Multiresolution adaptive parameterization of surfaces," in *ACM SIGGRAPH '98*, pp. 85–94, 1998.
- [74] Y. Lee, H. S. Kim, and S. Lee, "Mesh parameterization with a virtual boundary," *Computers and Graphics*, vol. 26, no. 5, pp. 677–686, 2002.
- [75] J. Lengyel, E. Praun, A. Finkelstein, and H. Hoppe, "Real-time fur on arbitrary surfaces," in *Symposium on Interactive 3D Graphics*, pp. 227–232, 2001.
- [76] B. Lévy, "Constrained texture mapping for polygonal meshes," in *ACM SIGGRAPH 2001*, pp. 417–424, 2001.
- [77] B. Lévy, "Dual domain extrapolation," in *ACM SIGGRAPH 2003*, 2003.
- [78] B. Lévy and J.-L. Mallet, "Non-distorted texture mapping for sheared triangulated meshes," in *ACM SIGGRAPH '98*, pp. 343–352, 1998.
- [79] B. Lévy, S. Petitjean, N. Ray, and J. Maillot, "Least squares conformal maps for automatic texture atlas generation," in *ACM SIGGRAPH 2002*, pp. 362–371, 2002.
- [80] W. C. Li, N. Ray, and B. Levy, "Automatic and interactive mesh to T-spline conversion," in *EG/ACM Symposium on Geometry Processing*, 2006.
- [81] N. Litke, M. Droske, M. Rumpf, and P. Schröder, "An image processing approach to surface matching," in *Proceedings of the Symposium on Geometry Processing 2005*, 2005.
- [82] F. Losasso, H. Hoppe, S. Schaefer, and J. Warren, "Smooth geometry images," in *Eurographics Symposium on Geometry Processing*, pp. 138–145, 2003.
- [83] L. Lovasz and A. Schrijver, "On the null space of a Colin de Verdière matrix," *Annales de l'Institut Fournier*, vol. 40, no. 3, pp. 1017–1026, 1999.
- [84] J. Maillot, H. Yahia, and A. Verroust, "Interactive texture mapping," in *ACM SIGGRAPH '93*, pp. 27–34, 1993.
- [85] S. Marschner, B. Guenter, and S. Ragupathy, "Modeling and rendering for realistic facial animation," in *Proceedings of the Eurographics Workshop on Rendering Techniques*, pp. 231–242, 2000.
- [86] J. McCartney, B. K. Hinds, and B. L. Seow, "The flattening of triangulated surfaces incorporating darts and gussets," *Computer-Aided Design*, vol. 31, no. 4, pp. 249–260, 1999.
- [87] V. J. Milenkovic, "Rotational polygon containment and minimum enclosure," in *ACM Symposium on Computational Geometry*, 1998.

70 References

- [88] J. Mitani and H. Suzuki, "Making papercraft toys from meshes using strip-based approximate unfolding," in *ACM SIGGRAPH 2004*, pp. 259–263, 2004.
- [89] F. Morgan in *Riemann Geometry – A Beginner’s Guide*, (A. K. Peters, ed.), (Massachusetts), Wellesley, 1998.
- [90] X. Ni, M. Garland, and J. C. Hart, "Fair Morse functions for extracting the topological structure of a surface mesh," in *ACM SIGGRAPH 2004*, pp. 613–622, 2004.
- [91] J. Pach and R. Wenger, "Embedding planar graphs at fixed vertex locations," in *Graph Drawing*, pp. 263–274, 1998.
- [92] H.-K. Pederson, "Decorating implicit surfaces," in *ACM SIGGRAPH '95*, 1995.
- [93] J. Peng, D. Kristjansson, and D. Zorin, "Interactive modeling of topologically complex geometric detail," in *ACM SIGGRAPH 2004*, 2004.
- [94] U. Pinkall and K. Polthier, "Computing discrete minimal surfaces and their conjugates," *Experimental Mathematics*, vol. 2, no. 1, pp. 15–36, 1993.
- [95] D. Pioni and G. Borshukov, "Seamless texture mapping of subdivision surfaces by model pelting and texture blending," in *ACM SIGGRAPH 2000*, pp. 471–478, 2000.
- [96] S. Porumbescu, B. Budge, L. Feng, and K. I. Joy, "Shell maps," in *ACM SIGGRAPH 2005*, 2005.
- [97] E. Praun, A. Finkelstein, and H. Hoppe, "Lapped textures," in *ACM SIGGRAPH 2000*, pp. 465–470, 2000.
- [98] E. Praun and H. Hoppe, "Spherical parameterization and remeshing," in *ACM SIGGRAPH 2003*, pp. 340–350, 2003.
- [99] E. Praun, W. Sweldens, and P. Schröder, "Consistent mesh parameterizations," in *ACM SIGGRAPH 2001*, pp. 179–184, 2001.
- [100] B. Purnomo, J. Cohen, and S. Kumar, "Seamless texture atlases," in *Eurographics/ACM SIGGRAPH Symposium on Geometry Processing 2004*, pp. 67–76, 2004.
- [101] N. Ray and B. Lévy, "Hierarchical least squares conformal maps," in *Proceedings of the 11th Pacific Conference on Computer Graphics and Applications*, pp. 263–270, 2003.
- [102] N. Ray, W.-C. Li, B. Lévy, A. Sheffer, and P. Alliez, "Periodic global parameterization," *ACM Transactions on Graphic*, vol. 25, no. 3, 2006.
- [103] A. Rockwood and H. Park, "Interactive design of smooth genus N objects using multiperiodic functions and applications," *International Journal of Shape Modeling*, vol. 5, pp. 135–157, 1999.
- [104] B. Rodin and D. Sullivan, "The convergence of circle packings to the Riemann mapping," *Journal of Differential Geometry*, vol. 26, no. 2, pp. 349–360, 1987.
- [105] S. Saba, I. Yavneh, C. Gotsman, and A. Sheffer, "Practical spherical embedding of manifold triangle meshes," in *Proceedings of Shape Modeling International*, 2005.
- [106] P. Sander, S. Gortler, J. Snyder, and H. Hoppe, "Signal-specialized parametrization," in *Eurographics Workshop on Rendering*, pp. 87–100, 2002.
- [107] P. Sander, J. Snyder, S. Gortler, and H. Hoppe, "Texture mapping progressive meshes," in *ACM SIGGRAPH 2001*, pp. 409–416, 2001.

- [108] P. Sander, Z. Wood, S. Gortler, J. Snyder, and H. Hoppe, “Multi-chart geometry images,” in *ACM Symposium on Geometry Processing 2003*, 2003.
- [109] J. Schreiner, A. Asirvatham, E. Praun, and H. Hoppe, “Inter-surface mapping,” in *ACM SIGGRAPH 2004*, 2004.
- [110] A. Shamir, “A formulation of boundary mesh segmentation,” in *International Symposium on 3D Data Processing, Visualization, and Transmission*, pp. 82–89, 2004.
- [111] A. Shapiro and A. Tal, “Polyhedron realization for shape transformation,” *The Visual Computer*, vol. 14, no. 8, pp. 429–444, 1998.
- [112] A. Sheffer, “Spanning tree seams for reducing parameterization distortion of triangulated surfaces,” in *Shape Modelling International*, pp. 61–66, 2002.
- [113] A. Sheffer and E. de Sturler, “Surface parameterization for meshing by triangulation flattening,” *Proceedings of 9th International Meshing Roundtable*, pp. 161–172, 2000.
- [114] A. Sheffer and E. de Sturler, “Parameterization of faceted surfaces for meshing using angle based flattening,” *Engineering with Computers*, vol. 17, no. 3, pp. 326–337, 2001.
- [115] A. Sheffer and E. de Sturler, “Smoothing an overlay grid to minimize linear distortion in texture mapping,” *ACM Transaction on Graphics*, vol. 21, no. 4, pp. 874–890, 2002.
- [116] A. Sheffer, C. Gotsman, and N. Dyn, “Robust spherical parameterization of triangular meshes,” in *4th Israel-Korea Bi-National Conference on Geometric Modeling and Computer Graphics*, pp. 94–99, 2003.
- [117] A. Sheffer and J. Hart, “Seamster: Inconspicuous low-distortion texture seam layout,” in *IEEE Visualization*, pp. 291–298, 2002.
- [118] A. Sheffer, B. Lévy, M. Mogilnitsky, and A. Bogomyakov, “ABF++: Fast and robust angle based flattening,” *ACM Transactions on Graphics*, vol. 24, no. 2, pp. 311–330, 2005.
- [119] C. Soler, M.-P. Cani, and A. Angelidis, “Hierarchical pattern mapping,” *ACM SIGGRAPH 2002*, pp. 673–680, 2002.
- [120] O. Sorkine, D. Cohen-Or, R. Goldenthal, and D. Lischinski, “Bounded-distortion piecewise mesh parametrization,” in *IEEE Visualization*, pp. 355–362, 2002.
- [121] O. Sorkine, D. Cohen-Or, Y. Lipman, M. Alexa, C. Rösslund, and H.-P. Seidel, “Laplacian surface editing,” in *Proceedings of Eurographics/ACM Symposium on Geometry Processing*, pp. 179–188, 2004.
- [122] R. Sumner and J. Popović, “Deformation transfer for triangle meshes,” in *ACM SIGGRAPH 2004*, pp. 399–405, 2004.
- [123] V. Surazhky and C. Gotsman, “Explicit surface remeshing,” in *ACM/Eurographics Symposium on Geometry Processing*, 2003.
- [124] M. Tarini, K. Hormann, P. Cignoni, and C. Montani, “Poly-cube maps,” in *ACM SIGGRAPH 2004*, pp. 853–860, 2004.
- [125] G. Tewari, J. Snyder, P. Sander, S. Gortler, and H. Hoppe, “Signal-specialized parameterization for piecewise linear reconstruction,” in *Eurographics Symposium on Geometry Processing*, pp. 57–66, 2004.

72 References

- [126] Y. Tong, P. Alliez, D. Cohen-Steiner, and M. Desbrun, "Designing quadrangulations with discrete harmonic forms," in *Symposium on Geometry Processing*, 2006.
- [127] G. Turk, "Texture synthesis on surfaces," in *ACM SIGGRAPH 2001*, pp. 347–354, 2001.
- [128] W. T. Tutte, "How to draw a graph," *London Mathematical Society 1963*, vol. 13, pp. 743–768, 1963.
- [129] L.-Y. Wei and M. Levoy, "Texture synthesis over arbitrary manifold surfaces," in *ACM SIGGRAPH 2001*, 2001.
- [130] Wikipedia, Normal Mapping. http://en.wikipedia.org/wiki/Normal_mapping.
- [131] L. Ying, A. Hertzmann, H. Biermann, and D. Zorin, "Texture and shape synthesis on surfaces," in *Eurographics Workshop on Rendering*, 2001.
- [132] S. Yoshizawa, A. Belyaev, and H.-P. Seidel, "A fast and simple stretch-minimizing mesh parameterization," in *Shape Modeling International*, 2004.
- [133] R. Zayer, C. Rossel, and H.-P. Seidel, "Variations on angle based flattening," in *Proceedings of Multiresolution in Geometric Modelling*, pp. 285–296, 2003.
- [134] R. Zayer, C. Rössel, and H.-P. Seidel, "Discrete tensorial quasi-harmonic maps," in *Proceedings of Shape Modeling and Applications*, pp. 276–285, 2005.
- [135] R. Zayer, C. Rössel, and H.-P. Seidel, "Setting the boundary free: A composite approach to surface parameterization," in *Symposium on Geometry Processing*, pp. 91–100, 2005.
- [136] R. Zayer, C. Rössel, and H.-P. Seidel, "Curvilinear spherical parameterization," in *Proceedings of Shape Modeling and Applications*, pp. 57–64, 2006.
- [137] E. Zhang, Mischaikow, and G. Turk, "Feature-based surface parameterization and texture mapping," *ACM Transaction on Graphics*, vol. 24, no. 1, pp. 1–27, 2005.
- [138] K. Zhou, J. Snyder, B. Guo, and H.-Y. Shum, "Iso-charts: Stretch-driven mesh parameterization using spectral analysis," in *Eurographics Symposium on Geometry Processing*, pp. 47–56, 2004.
- [139] K. Zhou, X. Wang, Y. Tong, M. Desbrun, B. Guo, and H.-Y. Shum, "Texture Montage: Seamless texturing of arbitrary surfaces from multiple images," in *ACM SIGGRAPH 2005*, 2005.
- [140] G. Zigelman, R. Kimmel, and N. Kiryati, "Texture mapping using surface flattening via multi-dimensional scaling," *IEEE Transactions on Visualization and Computer Graphics*, vol. 8, no. 2, pp. 198–207, 2002.