
Open Graph Benchmark: Datasets for Machine Learning on Graphs

Weihua Hu¹, Matthias Fey², Marinka Zitnik³, Yuxiao Dong⁴,
Hongyu Ren¹, Bowen Liu⁵, Michele Catasta¹, Jure Leskovec¹

¹Department of Computer Science, ⁵Chemistry, Stanford University

²Department of Computer Science, TU Dortmund University

³Department of Biomedical Informatics, Harvard University

⁴Microsoft Research, Redmond

ogb@cs.stanford.edu

Steering Committee

Regina Barzilay, Peter Battaglia, Yoshua Bengio, Michael Bronstein,
Stephan Günnemann, Will Hamilton, Tommi Jaakkola, Stefanie Jegelka,
Maximilian Nickel, Chris Re, Le Song, Jian Tang, Max Welling, Rich Zemel

Abstract

We present the OPEN GRAPH BENCHMARK (OGB), a diverse set of challenging and realistic benchmark datasets to facilitate scalable, robust, and reproducible graph machine learning (ML) research. OGB datasets are large-scale, encompass multiple important graph ML tasks, and cover a diverse range of domains, ranging from social and information networks to biological networks, molecular graphs, source code ASTs, and knowledge graphs. For each dataset, we provide a unified evaluation protocol using meaningful application-specific data splits and evaluation metrics. In addition to building the datasets, we also perform extensive benchmark experiments for each dataset. Our experiments suggest that OGB datasets present significant challenges of scalability to large-scale graphs and out-of-distribution generalization under realistic data splits, indicating fruitful opportunities for future research. Finally, OGB provides an automated end-to-end graph ML pipeline that simplifies and standardizes the process of graph data loading, experimental setup, and model evaluation. OGB will be regularly updated and welcomes inputs from the community. OGB datasets as well as data loaders, evaluation scripts, baseline code, and leaderboards are publicly available at <https://ogb.stanford.edu>.

1 Introduction

Graphs are widely used for abstracting complex systems of interacting objects, such as social networks [30], knowledge graphs [63], molecular graphs [92], and biological networks [9], as well as for modeling 3D objects [75], manifolds [15], and source code [4]. Machine learning, especially deep learning, on graphs is an emerging field [15, 38]. Recently, significant methodological advances have been made in graph ML [35, 49, 84, 94, 100], which have produced promising results in applications from diverse domains [77, 99, 107].

How can we further advance research in graph ML? Historically, high-quality and large-scale datasets have played significant roles in advancing research, as exemplified by IMAGENET [23] and MS COCO [58] in computer vision, GLUE BENCHMARK [86] and SQUAD [69] in natural language processing, and LIBRISPEECH [64] and CHIME [10] in speech processing. However, in graph

ML research, commonly-used datasets and evaluation procedures present issues that may negatively impact future progress.

Issues with current benchmarks. Most of the frequently-used graph datasets are extremely small compared to graphs found in real applications (with more than 1 million nodes or 100 thousand graphs) [12, 43, 85, 87, 92, 99]. For example, the widely-used node classification datasets, CORA, CITESEER, and PUBMED [98], only have 2,700 to 20,000 nodes, the popular graph classification datasets from the TU collection [47, 95] only contain 200 to 5,000 graphs, and the commonly-used knowledge graph completion datasets, FB15K and WN18 [14], only have 15,000 to 40,000 entities. As models are extensively developed on these small datasets, the majority of them turn out to be not scalable to larger graphs [14, 49, 81, 83]. The small datasets also make it hard to rigorously evaluate data-hungry models, such as Graph Neural Networks (GNNs) [28, 34, 56, 94]. In fact, the performance of GNNs on these datasets is often unstable and nearly statistically identical to each other, due to the small number of samples the models are trained and evaluated on [29, 40].

Furthermore, there is no unified and commonly-followed experimental protocol. Different studies adopt their own dataset splits, evaluation metrics, and cross-validation protocols, making it challenging to compare performance reported across various studies [29, 31, 74]. In addition, many studies follow the convention of using random splits to generate training/test sets [14, 49, 94], which is not realistic or useful for real-world applications and generally leads to overly optimistic performance results [59]. An extensive discussion on the shortcomings of the current benchmarks is further provided in Appendix A.

As a result, there is an urgent need for a comprehensive suite of real-world benchmarks that combine a diverse set of datasets of various sizes coming from different domains. Fixed data splits as well as evaluation metrics are important so that progress can be measured in a consistent and reproducible way. Last but not least, benchmarks need to provide different types of tasks, such as node classification, link prediction, and graph classification.

Present work: OGB. Here, we present the OPEN GRAPH BENCHMARK (OGB) with the goal of facilitating scalable, robust, and reproducible graph ML research. The premise of OGB is to develop a diverse set of challenging and realistic benchmark datasets that can empower the rigorous advancements in graph ML. As illustrated in Figure 1, the OGB datasets are designed to have the following three characteristics:

1. *Large scale.* The OGB datasets are orders-of-magnitude larger than existing benchmarks and can be categorized into three different scales (small, medium, and large). Even the “small” OGB graphs have more than 100 thousand nodes or more than 1 million edges, but are small enough to fit into the memory of a single GPU, making them suitable for testing computationally intensive algorithms. Additionally, OGB introduces “medium” (more than 1 million nodes or more than 10 million edges) and “large” (on the order of 100 million nodes or 1 billion edges) datasets, which can facilitate the development of scalable models based on mini-batching and distributed training.
2. *Diverse domains.* The OGB datasets aim to include graphs that are representative of a wide variety of domains, ranging from social and information networks to biological networks, molecular graphs, source code ASTs, and knowledge graphs. The broad coverage of domains in OGB empowers the development and demonstration of general-purpose models, and can be used to distinguish them from domain-specific techniques. Furthermore, for each dataset, OGB adopts domain-specific data splits (*e.g.*, based on time, species, molecular structure, GITHUB project, etc.) that are more realistic and meaningful than conventional random splits.
3. *Multiple task categories.* Besides data diversity, OGB supports three categories of fundamental graph ML tasks, *i.e.*, node, link, and graph property predictions, each of which requires the models to make predictions at different levels of graphs, *i.e.*, at the level of a node, link, and entire graph, respectively.

The currently-available OGB datasets are summarized in Table 1, and their graph statistics are provided in Table 2. Currently, OGB includes 15 diverse graph datasets, with at least 4 datasets



Figure 1: **OGB provides datasets that are diverse in scale, domains, and task categories.**

Table 1: **Summary of currently-available OGB datasets.** An OGB dataset, *e.g.*, `ogbg-molhiv`, is identified by its prefix (`ogbg-`) and its name (`molhiv`). The prefix specifies the category of the graph ML task, *i.e.*, node (`ogbn-`), link (`ogbl-`), or graph (`ogbg-`) property prediction. Datasets come from diverse domains: **Nature** domain includes biological networks and molecular graphs, **Society** domain includes academic graphs and e-commerce networks, and **Information** domain includes knowledge graphs. A realistic data split scheme is provided for each dataset, whose detail can be found in Appendices B, C, and D, for each dataset.

Category	Name	Domain	Node Feat.	Edge Feat.	Directed	Hetero	#Tasks	Split Scheme	Split Ratio	Task Type	Metric
Node ogbn-	products	Society	✓	-	-	-	1	Sales rank	8/2/90	Multi-cls class.	Accuracy
	proteins	Nature	-	✓	-	-	112	Species	65/16/19	Binary class.	ROC-AUC
	arxiv	Society	✓	-	✓	-	1	Time	54/18/28	Multi-cls class.	Accuracy
	papers100M	Society	✓	-	✓	-	1	Time	78/8/14	Multi-cls class.	Accuracy
	mag	Information	✓	✓	✓	✓	1	Time	85/9/6	Multi-cls class.	Accuracy
Link ogbl-	ppa	Nature	✓	-	-	-	1	Throughput	70/20/10	Link prediction	Hits@100
	collab	Society	✓	-	-	-	1	Time	92/4/4	Link prediction	Hits@50
	ddi	Nature	-	-	-	-	1	Protein target	80/10/10	Link prediction	Hits@20
	citation	Society	✓	-	✓	-	1	Time	99/1/1	Link prediction	MRR
	wikikg	Information	-	✓	✓	-	1	Time	94/3/3	KG completion	MRR
	biokg	Information	-	✓	✓	✓	1	Random	94/3/3	KG completion	MRR
Graph ogbg-	molhiv	Nature	✓	✓	-	-	1	Scaffold	80/10/10	Binary class.	ROC-AUC
	molpcba	Nature	✓	✓	-	-	128	Scaffold	80/10/10	Binary class.	AP
	ppa	Nature	-	✓	-	-	1	Species	49/29/22	Multi-class class.	Accuracy
	code	Information	✓	✓	✓	-	1	Project	90/5/5	Sub-token prediction	F1 score

Table 2: **Statistics of currently-available OGB datasets.** The first 3 statistics are calculated over raw training/validation/test graphs. The last 4 graph statistics are calculated over the ‘standardized’ training graphs, where the graphs are first converted into undirected and unlabeled homogeneous graphs with duplicated edges removed. The SNAP library [53] is then used to compute the graph statistics, where the graph diameter is approximated by performing BFS from 1,000 randomly-sampled nodes. The MaxSCC ratio represents the fraction of nodes in the largest strongly connected component of the graph.

Category	Name	Scale	#Graphs	Average #Nodes	Average #Edges	Average Node Deg.	Average Clust. Coeff.	MaxSCC Ratio	Graph Diameter
Node ogbn-	products	medium	1	2,449,029	61,859,140	50.5	0.411	0.974	27
	proteins	medium	1	132,534	39,561,252	597.0	0.280	1.000	9
	arxiv	small	1	169,343	1,166,243	13.7	0.226	1.000	23
	papers100M	large	1	111,059,956	1,615,685,872	29.1	0.085	1.000	25
	mag	medium	1	1,939,743	25,582,108	21.7	0.098	1.000	6
Link ogbl-	ppa	medium	1	576,289	30,326,273	73.7	0.223	0.999	14
	collab	small	1	235,868	1,285,465	8.2	0.729	0.987	22
	ddi	small	1	4,267	1,334,889	500.5	0.514	1.000	5
	citation	medium	1	2,927,963	30,561,187	20.7	0.178	0.996	21
	wikikg	medium	1	2,500,604	17,137,181	12.2	0.168	1.000	26
	biokg	small	1	93,773	5,088,434	47.5	0.409	0.999	8
Graph ogbg-	molhiv	small	41,127	25.5	27.5	2.2	0.002	0.993	12.0
	molpcba	medium	437,929	26.0	28.1	2.2	0.002	0.999	13.6
	ppa	medium	158,100	243.4	2,266.1	18.3	0.513	1.000	4.8
	code	medium	452,741	125.2	124.2	2.0	0.0	1.000	13.5

for each task category. All the datasets are constructed by ourselves, except for `ogbn-products`, `ogbg-molpcba`, and `ogbg-molhiv`, whose graphs and target labels are adopted from Chiang *et al.* [17] and Wu *et al.* [92]. For these datasets, we resolve critical issues of the existing data splits by presenting more meaningful and standardized splits. OGB is a community-driven, open-source initiative. Over time, we plan to release new datasets and tasks, based on the input from the community.

In addition to building the graph datasets, we also perform extensive benchmark experiments for each dataset. Through the experiments and ablation studies, we highlight research challenges and opportunities provided by each dataset, especially on (1) scaling models to large graphs, and (2) improving *out-of-distribution* generalization performance under the realistic data split scenarios.

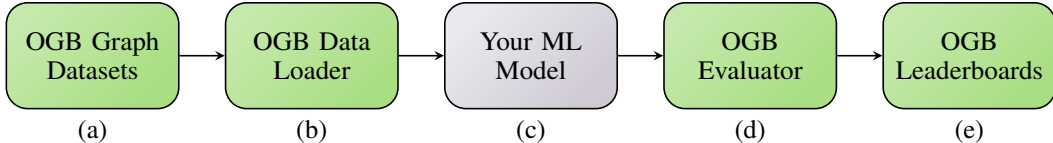


Figure 2: **Overview of the OGB pipeline:** (a) OGB provides realistic graph benchmark datasets that cover different prediction tasks (node, link, graph), are from diverse application domains, and are at different scales. (b) OGB fully automates dataset processing and splitting. That is, the OGB data loaders automatically download and process graphs, provide graph objects (compatible with PYTORCH [65] and its associated graph libraries, PYTORCH GEOMETRIC [33] and DEEP GRAPH LIBRARY [88]), and further split the datasets in a standardized manner. (c) After an ML model is developed, (d) OGB evaluates the model in a dataset-dependent manner, and outputs the model performance appropriate for the task at hand. Finally, (e) OGB provides public leaderboards to keep track of recent advances. Steps (b) and (d) are supported by our OGB Python package, whose usage is explained in Appendix E.

Finally, as illustrated in Figure 2, OGB presents an automated end-to-end graph ML pipeline that simplifies and standardizes the process of graph data loading, experimental setup, and model evaluation, in the same spirit as OpenML [32, 82]. Specifically, given the OGB datasets (a), the end-users can focus on developing their graph ML models (c) by using the OGB data loaders (b) and evaluators (d), both of which are provided by our OGB Python package (<https://github.com/snap-stanford/ogb>). OGB also hosts a public leaderboard (e) for publicizing state-of-the-art, reproducible graph ML research (https://ogb.stanford.edu/docs/leader_overview).

2 OGB Datasets and Benchmark Analyses: Overview

The goal of OGB is to catalyze graph ML research by providing realistic, diverse, and large-scale graph datasets with unified evaluation protocols. Table 1 summarizes the OGB datasets along with their graph types, prediction tasks, as well as evaluation protocols (data splits and evaluation metrics).

In the subsequent sections (Sections 3, 4, and 5), we detail currently-available datasets for each task category. Along with this, we provide an extensive benchmark analysis for each dataset, using representative node embedding models, GNNs, as well as recently-introduced mini-batch-based GNNs. We discuss our initial findings, and highlight research challenges and opportunities in: (1) scaling models to large graphs, and (2) improving *out-of-distribution* generalization under the realistic data splits. We repeat each experiment 10 times using different random seeds and report the mean and unbiased standard deviation of all training and test results corresponding to the best validation results. All code to reproduce our baseline experiments is publicly available at <https://github.com/snap-stanford/ogb/tree/master/examples> and is meant as a starting point to accelerate further research on our proposed datasets. We refer the interested reader to our code base for the details of model architectures and hyper-parameter settings.

Finally, we highlight the diversity of our graph datasets by comparing their basic graph statistics in Table 2. Importantly, we observe the diversity in *graph structure*, beyond the diversity in the dataset scales. For example, comparing the average node degrees, we see that biology-related graphs (*e.g.*, `ogbn-proteins`, `ogbl-ddi`, `ogbl-ppa`, `ogbg-ppa`) are much denser than the social and information networks. The other statistics (average clustering coefficient and graph diameter) also vary significantly across different datasets. These differences in graph structure result in the inherent difference in how information propagates in the graphs, which can significantly affect the behavior of many graph ML models such as GNNs and random-walk-based node embeddings [93]. For the graph property prediction datasets, it is worth highlighting the diversity of graph sizes (the number of nodes and edges *per graph*), ranging from small molecular graphs (`ogbg-molhiv` and `ogbg-molpcba`), to medium-sized source code ASTs (`ogbg-code`), up to large and dense protein-protein association subgraphs (`ogbg-ppa`). Overall, the diversity in graph characteristics originates from the diverse application domains and is crucial to evaluate the versatility of graph ML models.

3 OGB Node Property Prediction

We currently provide 5 datasets, adopted from diverse application domains, for predicting the properties of individual nodes. Specifically, `ogbn-products` is an Amazon products co-purchasing network [12] originally developed by Chiang *et al.* [17]. The `ogbn-arxiv`, `ogbn-mag`, and `ogbn-papers100M` datasets are extracted from the Microsoft Academic Graph (MAG) [87], with different scales, tasks, and include both homogeneous and heterogeneous graphs. Specifically, `ogbn-arxiv` is a paper citation network of ARXIV papers, `ogbn-mag` is a heterogeneous academic graph containing different node types (papers, authors, institutions, and topics) and their relations, and `ogbn-papers100M` is an extremely large paper citation network from the entire MAG with more than *100 million nodes* and *1 billion edges*. The `ogbn-proteins` dataset is a protein-protein association network [80]. Below we present the `ogbn-products` dataset and its baseline experiments. Due to space constraints, we present all the datasets comprehensively in Appendix B.

The `ogbn-products` dataset. This dataset is an undirected and unweighted graph, representing an Amazon product co-purchasing network [12]. Nodes represent products sold in Amazon, and edges between two products indicate that the products are purchased together. The graphs, target labels, and node features are generated following Chiang *et al.* [17], where node features are dimensionality-reduced bag-of-words of the product descriptions. Our contribution, when adopting the dataset in OGB, is to resolve its critical data split issue by presenting a more realistic and challenging split (see below).

Prediction task. The task is to predict the category of a product in a multi-class classification setup, where the 47 top-level categories are used for target labels.

Dataset splitting. We consider a more challenging and realistic dataset splitting that differs from the one used in Chiang *et al.* [17]. Instead of *randomly* assigning 90% of the nodes for training and 10% of the nodes for testing (without a validation set), we use the *sales ranking* (popularity) to split nodes into training/validation/test sets. Specifically, we sort the products according to their sales ranking and use the top 8% for training, next top 2% for validation, and the rest for testing. This is a more challenging splitting procedure that closely matches the real-world application where manual labeling is prioritized to important nodes in the network and ML models are subsequently used to make predictions on less important ones.

Baselines. We perform an extensive empirical study, including the representative node embedding model, GNNs, and as well as recently-introduced mini-batch-based GNN models, as baselines.

- **MLP:** A multilayer perceptron (MLP) predictor that uses the given raw node features directly as input. Graph structure information is not utilized.
- **NODE2VEC:** An MLP predictor that uses as input the concatenation of the raw node features and NODE2VEC embeddings [35, 66].
- Full-batch GNNs: **GCN** [49] and **GRAPHSAGE** (mean pool) [37].
- Mini-batch training of GNNs based on **NEIGHBORSAMPLING** [37], **CLUSTERGCN** [17] and **GRAPHSAINTE** [103].

Note that the full-batch GCN and GRAPHSAGE are GPU memory-intensive for large graphs as all the node embeddings need to be loaded onto GPU all at once. The mini-batch training techniques, NEIGHBORSAMPLING, CLUSTERGCN, and GRAPHSAINTE, do not suffer from this issue and are more GPU memory-efficient. All models are trained with a fixed hidden dimensionality of 256, a fixed number of three layers, and a tuned dropout ratio $\in \{0.0, 0.5\}$.

Results and discussion. Our benchmarking results in Table 3 show that the highest test performances are attained by GNNs, while the MLP baseline that solely relies on a product’s description is not sufficient for accurately predicting the category of a product. Even with the GNNs, we observe the huge generalization gap¹, which can be explained by differing node distributions across the splits, as visualized in Figure 3. This is in stark contrast with the conventional *random split* used by Chiang *et al.* [17]. Even with the same split ratio (8/2/88), we find GRAPHSAGE already achieves $88.20 \pm 0.08\%$ test accuracy with only ≈ 1 percentage points of generalization gap. These results indicate that the realistic split is much more challenging than the random split and offer an important opportunity to improve *out-of-distribution* generalization.

¹Defined by the difference between training and test accuracy.

Table 3: **Results for ogbn-products.**
[†]Requires a GPU with 33GB of memory.

Method	Accuracy (%)		
	Training	Validation	Test
MLP	84.03 \pm 0.93	75.54 \pm 0.14	61.06 \pm 0.08
NODE2VEC	93.39 \pm 0.10	90.32 \pm 0.06	72.49 \pm 0.10
GCN [†]	93.56 \pm 0.09	92.00 \pm 0.03	75.64 \pm 0.21
GRAPHSAGE [†]	94.09 \pm 0.05	92.24 \pm 0.07	78.50 \pm 0.14
NEIGHBOR SAMPLING	92.96 \pm 0.07	91.70 \pm 0.09	78.70 \pm 0.36
CLUSTERGCN	93.75 \pm 0.13	92.12 \pm 0.09	78.97 \pm 0.33
GRAPHSAINTE	92.71 \pm 0.14	91.62 \pm 0.08	79.08 \pm 0.24

● Train ● Validation ● Test



Figure 3: t-SNE visualization of training/validation/test nodes in ogbn-products.

Table 3 also shows that the recent mini-batch-based GNNs² give promising results, even slightly outperforming the full-batch version of GRAPHSAGE that does not fit into ordinary GPU memory. The improved performance can be attributed to the regularization effects of mini-batch noise and edge dropout [71]. Nevertheless, the mini-batch GNNs have been much less explored compared to the full-batch GNNs due to the prevalent use of the extremely small benchmark datasets such as CORA and CITESEER. As a result, many important questions remain open, *e.g.*, what mini-batch training methods can induce the best regularization effect, and how to allow mini-batch training for advanced GNNs that rely on large receptive-field sizes [50, 54, 93], since the current mini-batch methods are rather limited by the number of nodes from which they aggregate information. Overall, ogbn-products is an ideal benchmark dataset for the field to move beyond the extremely small graph datasets and to catalyze the development of scalable mini-batch-based graph models with improved *out-of-distribution* prediction accuracy.

In Appendix B.4, we present ogbn-papers100M, which is even larger and is meant to push the scalability to gigantic web-scale graphs in the real world.

4 OGB Link Property Prediction

We currently provide 6 datasets, adopted from diverse application domains, for predicting the properties of links (pairs of nodes). Specifically, ogbl-ppa is a protein-protein association network [80], ogbl-collab is an author collaboration network [87], ogbl-ddi is a drug-drug interaction network [90], ogbl-citation is a paper citation network [87], ogbl-biokg is a heterogeneous knowledge graph compiled from a large number of biomedical repositories, and ogbl-wikikg is a Wikidata knowledge graph [85]. Below we present the ogbl-wikikg dataset and its baseline experiments. Due to space constraints, we present all the datasets comprehensively in Appendix C.

The ogbl-wikikg dataset. This dataset is a Knowledge Graph (KG) extracted from the Wikidata knowledge base [85]. It contains a set of triplet edges (head, relation, tail), capturing the different types of relations between entities in the world, *e.g.*, *Canada* $\xrightarrow{\text{citizen}}$ *Hinton*. We retrieve all the relational statements in Wikidata and filter out rare entities. Our KG contains 2,500,604 entities and 535 relation types.

Prediction task. The task is to predict new triplet edges given the training edges. The evaluation metric follows the standard filtered metric widely used in KGs [14, 78, 81, 96]. Specifically, we corrupt each test triplet edge by replacing its head or tail with randomly-sampled 1,000 negative entities (500 for head and 500 for tail), while ensuring the resulting triplets do not appear in the KG. The goal is to rank the true head (or tail) entities higher than the negative entities, which is measured by the Mean Reciprocal Rank (MRR).

Dataset splitting. We split the triplets according to time, simulating a realistic KG completion scenario that aims to fill in missing triplets that are not present at a certain timestamp. Specifically, we downloaded Wikidata at three different time stamps³ (May, August, and November of 2015), and construct three KGs, where we only retain entities and relation types that appear in the earliest May

²The GRAPHSAGE architecture is used for neighbor aggregation.

³Available at <https://archive.org/search.php?query=creator%3A%22Wikidata+editors%22>

Table 4: **Results for ogbl-wikikg.**
[†]Requires a GPU with 48GB of memory.

Method	MRR		
	Training (Unfiltered)	Validation (Filtered)	Test (Filtered)
TRANSE	0.3326 \pm 0.0041	0.2314 \pm 0.0035	0.2535 \pm 0.0036
DISTMULT	0.4131 \pm 0.0057	0.3142 \pm 0.0066	0.3434 \pm 0.0079
COMPLEX	0.4605 \pm 0.0020	0.3612 \pm 0.0063	0.3877 \pm 0.0051
ROTATE	0.3469 \pm 0.0055	0.2366 \pm 0.0043	0.2681 \pm 0.0047
TRANSE (6 \times dim) [†]	0.6491 \pm 0.0022	0.4587 \pm 0.0031	0.4536 \pm 0.0028
DISTMULT (6 \times dim) [†]	0.4339 \pm 0.0011	0.3403 \pm 0.0009	0.3612 \pm 0.0030
COMPLEX (6 \times dim) [†]	0.4712 \pm 0.0045	0.3787 \pm 0.0036	0.4028 \pm 0.0033
ROTATE (6 \times dim) [†]	0.6084 \pm 0.0025	0.3613 \pm 0.0031	0.3626 \pm 0.0041

KG. We use the triplets in the May KG for training, and use the additional triplets in the August and November KGs for validation and test, respectively. Note that our dataset split is different from the existing Wikidata KG dataset that adopts a conventional random split [89], which does not reflect the practical usage of KG completion.

Baselines. We consider the four representative KG embedding models: **TRANSE** [14], **DISTMULT** [96], **COMPLEX** [81], and **ROTATE** [78]. For KGs with many entities and relations, the embedding dimensionality can be limited by the available GPU memory, as the embeddings need to be loaded into GPU all at once. We therefore choose the dimensionality such that training can be performed on a fixed-budget of GPU memory. Our training procedure follows Sun *et al.* [78], where we perform negative sampling and use margin-based logistic loss for the loss function.

Results and discussion. Our benchmark results are provided in Table 4, where the upper-half baselines are implemented on a single commodity GPU with 11GB memory, while the bottom-half baselines are implemented on a high-end GPU with 48GB memory.⁴ Training MRR in Table 4 is an *unfiltered* metric,⁵ as filtering is computationally expensive for the large number of training triplets.

First, we see from the upper-half of Table 4 that when the limited embedding dimensionality is used, **COMPLEX** performs the best among the four baselines. With the increased dimensionality, all four models are able to achieve higher MRR on training, validation and test sets, as seen from the bottom-half of Table 4. This suggests the importance of using a sufficient large embedding dimensionality to achieve good performance in this dataset. Interestingly, although **TRANSE** performs the worst with the limited dimensionality, it obtains the best performance with the increased dimensionality. Nevertheless, the extremely low test MRR⁶ suggests that our realistic KG completion dataset is highly non-trivial. It presents a realistic generalization challenge of *discovering* new triplets based on existing ones, which necessitates the development of KG models with more robust and generalizable reasoning capability. Furthermore, this dataset presents an important challenge of effectively scaling embedding models to large KGs—naïvely training KG embedding models with reasonable dimensionality would require a high-end GPU, which is extremely costly and not scalable to even larger KGs. A promising approach to improve scalability is to distribute training across multiple commodity GPUs [52, 105, 106]. A different approach is to share parameters across entities and relations, so that a smaller number of embedding parameters need to be put onto the GPU memory at once.

⁴Given a fixed 11GB GPU memory budget, we adopt 100-dimension embeddings for **DISTMULT** and **TRANSE**. Since **ROTATE** and **COMPLEX** require the entity embeddings with the real and imaginary parts, we train these two models with the dimensionality of 50 for each part. On the other hand, on the high-end GPU with 48GB memory, we are able to train all the models with 6 \times larger embedding dimensionality.

⁵This means that the training MRR is computed by ranking against randomly-selected negative entities without filtering out triplets that appear in KG. The unfiltered metric has the systematic bias of being smaller than the filtered counterpart (computed by ranking against “true” negative entities, *i.e.*, the resulting triplets do not appear in the KG) [14].

⁶Note that our test MRR on ogbl-wikikg is computed using only 500 negative entities per triplet, which is much less than the number of negative entities used to compute MRR in the existing KG datasets, such as FB15K and FB15K-237 (around 15,000 negative entities). Nevertheless, **ROTATE** gives either lower or comparable test MRR on ogbl-wikikg compared to FB15K and FB15K-237 [78].

Table 5: Results for `ogbg-molhiv`.

Method	Add. Feat.	Virt. Node	ROC-AUC (%)		
			Training	Validation	Test
GCN	✗	✓	88.65±1.01	83.73±0.78	74.18±1.22
	✓	✗	88.65±2.19	82.04±1.41	76.06±0.97
	✓	✓	90.07±4.69	83.84±0.91	75.99±1.19
GIN	✗	✓	93.89±2.96	84.10±1.05	75.20±1.30
	✓	✗	88.64±2.54	82.32±0.90	75.58±1.40
	✓	✓	92.73±3.80	84.79±0.68	77.07±1.49

Table 6: Results for `ogbg-molpcba`.

Method	Add. Feat.	Virt. Node	AP (%)		
			Training	Validation	Test
GCN	✗	✓	36.25±0.71	23.88±0.22	22.91±0.37
	✓	✗	28.04±0.58	20.59±0.33	20.20±0.24
	✓	✓	38.25±0.50	24.95±0.42	24.24±0.34
GIN	✗	✓	45.70±0.61	27.54±0.25	26.61±0.17
	✓	✗	37.05±0.31	23.05±0.27	22.66±0.28
	✓	✓	46.96±0.57	27.98±0.25	27.03±0.23

5 OGB Graph Property Prediction

We currently provide 4 datasets, adopted from 3 distinct application domains, for predicting the properties of entire graphs or subgraphs. Specifically, `ogbg-molhiv` and `ogbg-molpcba` are molecular graphs originally curated by Wu *et al.* [92], `ogbg-ppa` is a set of protein-protein association subgraphs [108], and `ogbg-code` is a collection of ASTs of source code [43]. Below we present the `ogbg-molhiv` and `ogbg-molpcba` datasets and their baseline experiments. Due to space constraints, we present all the datasets comprehensively in Appendix D.

The `ogbg-molhiv` and `ogbg-molpcba` datasets. These datasets are two molecular property prediction datasets adopted from the MOLECULENET [92], and are among the largest of the MOLECULENET datasets. Besides the two main molecule datasets, we also provide the 10 other MOLECULENET datasets, which are summarized and benchmarked in Appendix F. These datasets can be used to stress-test molecule-specific methods [46, 97] and transfer learning [40]. All the molecules are pre-processed using RDKit [51]. Each graph represents a molecule, where nodes are atoms, and edges are chemical bonds. Input node features are 9-dimensional, containing atomic number and chirality, as well as other *additional* atom features such as formal charge and whether the atom is in the ring. Input edge features are 3-dimensional, containing bond type, bond stereochemistry as well as an *additional* bond feature indicating whether the bond is conjugated. Note that the above additional features are not needed to uniquely identify molecules, and are not adopted in the previous work [40, 44]. In the experiments, we perform an ablation study on the molecule features and find that including the additional features improves generalization performance.

Prediction task. The task is to predict the target molecular properties as accurately as possible, where the molecular properties are cast as binary labels, *e.g.*, whether a molecule inhibits HIV virus replication or not. For evaluation metric, we closely follow Wu *et al.* [92]. Specifically, for `ogbg-molhiv`, we use ROC-AUC for evaluation. For `ogbg-molpcba`, as the class balance is extremely skewed (only 1.4% of data is positive) and the dataset contains multiple classification tasks, we use the Average Precision (AP) averaged over the tasks as the evaluation metric.

Dataset splitting. We adopt the *scaffold splitting* procedure that splits the molecules based on their two-dimensional structural frameworks. The scaffold splitting attempts to separate structurally different molecules into different subsets, which provides a more realistic estimate of model performance in prospective experimental settings. The scaffold splitting was originally proposed by Wu *et al.* [92] and has been adopted by the follow-up works [40, 44, 70, 97]; however, the precise implementation differs significantly across works, making their results not directly comparable to each other. In OGB, we aim to standardize the scaffold split by adopting its most challenging version where test molecules are maximally diverse.

Baselines. We consider the two representative GNNs: GCN [49] and GIN [94]. We additionally consider augmenting the models with VIRTUAL NODES, where message-passing is performed over an augmented graph with an additional node that is connected to all nodes in the original graph [34, 44, 55]. We use 5-layer GNNs, average graph pooling, a hidden dimensionality of 300, and a tuned dropout ratio of {0, 0.5}. To include edge features, we follow Hu *et al.* [40] and add transformed edge features into the incoming node features.

Results and discussion. Benchmarking results are given in Tables 5 and 6. We see that GIN with both additional features and VIRTUAL NODES provides the best performance in the two datasets. In Appendix F, we show that even for the other MOLECULENET datasets, the additional features

consistently improve generalization performance. In OGB, we therefore include the additional node/edge features in our molecular graphs.

We further report the performance on the random splitting, keeping the split ratio the same as the scaffold splitting. We find the random split to be much easier than scaffold split. On random splits of `ogbg-molhiv` and `ogbg-molpcba`, the best GIN achieves the ROC-AUC of $82.73 \pm 2.02\%$ (5.66 percentage points higher than scaffold) and AP of $34.40 \pm 0.90\%$ (7.37 percentage points higher than scaffold), respectively. The same trend holds true for the other MOLECULENET datasets, *e.g.*, the best GIN performance on the random split of `ogbg-molttox21` is $86.03 \pm 1.37\%$, which is 8.46 percentage points higher than that of the best GIN for the scaffold split ($77.57 \pm 0.62\%$ ROC-AUC). These results highlight the challenges of the scaffold split compared to the random split, and opens up a fruitful research opportunity to increase the out-of-distribution generalization capability of GNNs.

6 Conclusions

To enable scalable, robust, and reproducible graph ML research, we introduce the Open Graph Benchmark (OGB)—a diverse set of realistic graph datasets in terms of scales, domains, and task categories. We employ realistic data splits for the given datasets, driven by application-specific use cases. Through extensive benchmark experiments, we highlight that the OGB datasets present significant challenges for ML models to handle large-scale graphs and make accurate prediction under the realistic data splitting scenarios. Altogether, OGB presents fruitful opportunities for future research to push the frontier of graph ML.

OGB is an open-source initiative that provides ready-to-use datasets as well as their data loaders, evaluation scripts, and public leaderboards. We hereby invite the community to develop and contribute state-of-the-art graph ML models at <https://ogb.stanford.edu>.

Broader Impact

We expect the Open Graph Benchmark (OGB) to have a significant impact on fundamental graph ML research as well as many of its application domains. We also discuss a potential negative impact.

Impact on Graph ML Research

Historically, high-quality and large-scale datasets have played significant roles in advancing research fields (*e.g.*, IMAGENET [23], MS-COCO [58], GLUE benchmark [86], SQUAD [69]). The amount of impact these datasets have brought is enormous, leading to the significant methodological advancements in the respective fields [24, 39].

We expect OGB to be a standard benchmark in graph ML, contributing to the significant advancements of the field. To this end, our datasets are carefully designed to address the two major drawbacks of current graph benchmark datasets, namely (1) small dataset sizes, and (2) unrealistic random splits. Overall, OGB provides a set of diverse, realistic, and large-scale graph datasets to facilitate the development of graph ML models that are scalable and generalizable under realistic data splits, both of which are crucial in practice.

In addition, OGB aims to address the fundamental problem of reproducibility in graph ML research. We promote the reproducibility by standardizing the research pipeline, as illustrated in Figure 2, and provide official leaderboards, for which public code is mandatory to make a submission. Altogether, OGB incentivises researchers to release their code, and allows researchers to easily compare different models under equal settings.

Impact on Diverse Application Domains

In OGB, we have curated graph datasets that are relevant to a variety of practical and realistic application domains, including science (*e.g.*, biology, chemistry), knowledge graphs, academic graphs, and source code ASTs. For example, we provided a biomedical knowledge graph (`ogbl-biokg`), where algorithmic advances on this dataset can be immediately translated into solutions for problems in precision medicine. In another example, we provide a dataset of 450K molecular graphs (`ogbg-molpcba`) that have direct implications for drug discovery. In academic domains, we

prepared a variety of prediction tasks (e.g., recommending missing citations as well as future collaborations, predicting paper categories and venues, etc.), solving which can lead to improved scholarly efficiency and to better organization of academic knowledge. In technological domains, OGB includes a dataset of source code snippets (`ogbg-code`). The development of graph ML models on this dataset can lead to exciting applications for advanced code analysis and retrieval.

To further increase the impact of OGB, all of our datasets are mapped to real entities in the world. For example, each node in the drug-drug interaction network (`ogbl-ddi`) is mapped to a unique Drug ID in DrugBank [90], each molecule in the molecule datasets (`ogbg-mol*`) is mapped to a SMILES string that uniquely identifies the molecule, and each node in the paper citation networks (`ogbn-arxiv` and `ogbn-papers100M`) is mapped into a real research paper indexed by the Microsoft Academic Graph [87]. Such mappings to real entities allow researchers to draw scientific insight and to augment the graphs with external information.

Potential Negative Impact

If OGB becomes the standard de-facto benchmark for graph ML, one potential negative impact is that OGB might contribute to narrowing down the scope of future papers to the tasks and dataset types that have been included in OGB. In order to avoid such a negative impact, we will regularly update our datasets and tasks, based on the input from the community.

Acknowledgements

We thank Adrijan Bradaschia and Rok Sosic for their help in setting up the server and website. We also thank Emma Pierson and Shigeru Maya for their suggestions on the paper writing. Finally, we thank the entire community of graph ML for providing valuable feedback to improve OGB. Weihua Hu is supported by Funai Overseas Scholarship and Masason Foundation Fellowship. Matthias Fey is supported by the German Research Association (DFG) within the Collaborative Research Center SFB 876 “Providing Information by Resource-Constrained Analysis”, project A6. Marinka Zitnik is in part supported by NSF IIS-2030459. We gratefully acknowledge the support of DARPA under Nos. FA865018C7880 (ASED), N660011924033 (MCS); ARO under Nos. W911NF-16-1-0342 (MURI), W911NF-16-1-0171 (DURIP); NSF under Nos. OAC-1835598 (CINES), OAC-1934578 (HDR), CCF-1918940 (Expeditions), IIS-2030477 (RAPID); Stanford Data Science Initiative, Wu Tsai Neurosciences Institute, Chan Zuckerberg Biohub, Amazon, Boeing, JPMoran Chase, Docomo, Hitachi, JD.com, KDDI, NVIDIA, Dell. Jure Leskovec is a Chan Zuckerberg Biohub investigator.

References

- [1] Martín Abadi, Paul Barham, Jianmin Chen, Zhifeng Chen, Andy Davis, Jeffrey Dean, Matthieu Devin, Sanjay Ghemawat, Geoffrey Irving, Michael Isard, *et al.* Tensorflow: A system for large-scale machine learning. In *Symposium on Operating Systems Design and Implementation OSDI*, pages 265–283, 2016.
- [2] Miltiadis Allamanis. The adverse effects of code duplication in machine learning models of code. In *Proceedings of the 2019 ACM SIGPLAN International Symposium on New Ideas, New Paradigms, and Reflections on Programming and Software*, pages 143–153, 2019.
- [3] Miltiadis Allamanis, Hao Peng, and Charles Sutton. A convolutional attention network for extreme summarization of source code. In *International conference on machine learning*, pages 2091–2100, 2016.
- [4] Miltiadis Allamanis, Marc Brockschmidt, and Mahmoud Khademi. Learning to represent programs with graphs. *arXiv preprint arXiv:1711.00740*, 2017.
- [5] Miltiadis Allamanis, Earl T Barr, Premkumar Devanbu, and Charles Sutton. A survey of machine learning for big code and naturalness. *ACM Computing Surveys (CSUR)*, 51(4):1–37, 2018.
- [6] Uri Alon, Shaked Brody, Omer Levy, and Eran Yahav. code2seq: Generating sequences from structured representations of code. *arXiv preprint arXiv:1808.01400*, 2018.

- [7] Uri Alon, Meital Zilberstein, Omer Levy, and Eran Yahav. code2vec: Learning distributed representations of code. *Proceedings of the ACM on Programming Languages*, 3(POPL):1–29, 2019.
- [8] Jürgen Bajorath. Integration of virtual and high-throughput screening. *Nature Reviews Drug Discovery*, 1(11):882–894, 2002.
- [9] Albert-Laszlo Barabasi and Zoltan N Oltvai. Network biology: understanding the cell’s functional organization. *Nature reviews genetics*, 5(2):101–113, 2004.
- [10] Jon Barker, Ricard Marxer, Emmanuel Vincent, and Shinji Watanabe. The third ‘chime’ speech separation and recognition challenge: Dataset, task and baselines. In *2015 IEEE Workshop on Automatic Speech Recognition and Understanding (ASRU)*, pages 504–511. IEEE, 2015.
- [11] Rianne van den Berg, Thomas N. Kipf, and Max Welling. Graph convolutional matrix completion. *arXiv preprint arXiv:1706.02263*, 2017.
- [12] K. Bhatia, K. Dahiya, H. Jain, A. Mittal, Y. Prabhu, and M. Varma. The extreme classification repository: Multi-label datasets and code, 2016. URL <http://manikvarma.org/downloads/XC/XMLRepository.html>.
- [13] Kurt Bollacker, Colin Evans, Praveen Paritosh, Tim Sturge, and Jamie Taylor. Freebase: a collaboratively created graph database for structuring human knowledge. In *Special Interest Group on Management of Data (SIGMOD)*, pages 1247–1250. AcM, 2008.
- [14] Antoine Bordes, Nicolas Usunier, Alberto Garcia-Duran, Jason Weston, and Oksana Yakhnenko. Translating embeddings for modeling multi-relational data. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 2787–2795, 2013.
- [15] Michael M Bronstein, Joan Bruna, Yann LeCun, Arthur Szlam, and Pierre Vandergheynst. Geometric deep learning: going beyond euclidean data. *IEEE Signal Processing Magazine*, 34(4):18–42, 2017.
- [16] Tianqi Chen, Mu Li, Yutian Li, Min Lin, Naiyan Wang, Minjie Wang, Tianjun Xiao, Bing Xu, Chiyuan Zhang, and Zheng Zhang. Mxnet: A flexible and efficient machine learning library for heterogeneous distributed systems. In *NeurIPS workshop on Machine Learning Systems*, 2015.
- [17] Wei-Lin Chiang, Xuanqing Liu, Si Si, Yang Li, Samy Bengio, and Cho-Jui Hsieh. ClusterGCN: An efficient algorithm for training deep and large graph convolutional networks. In *ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD)*, pages 257–266, 2019.
- [18] Gene Ontology Consortium. The gene ontology resource: 20 years and still going strong. *Nucleic acids research*, 47(D1):D330–D338, 2018.
- [19] Lenore Cowen, Trey Ideker, Benjamin J Raphael, and Roded Sharan. Network propagation: a universal amplifier of genetic associations. *Nature Reviews Genetics*, 18(9):551, 2017.
- [20] Allan Peter Davis, Cynthia J Grondin, Robin J Johnson, Daniela Sciaky, Roy McMorran, Jolene Wieggers, Thomas C Wieggers, and Carolyn J Mattingly. The comparative toxicogenomics database: update 2019. *Nucleic Acids Research*, 47(D1):D948–D954, 2019.
- [21] Jesse Davis and Mark Goadrich. The relationship between precision-recall and roc curves. In *International Conference on Machine Learning (ICML)*, pages 233–240, 2006.
- [22] David De Juan, Florencio Pazos, and Alfonso Valencia. Emerging methods in protein co-evolution. *Nature Reviews Genetics*, 14(4):249–261, 2013.
- [23] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *cvpr*, pages 248–255. Ieee, 2009.
- [24] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [25] Elizabeth Dinella, Hanjun Dai, Ziyang Li, Mayur Naik, Le Song, and Ke Wang. Hoppity: Learning graph transformations to detect and fix bugs in programs. In *International Conference on Learning Representations (ICLR)*, 2020.

- [26] Yuxiao Dong, Nitesh V Chawla, and Ananthram Swami. metapath2vec: Scalable representation learning for heterogeneous networks. In *ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD)*, pages 135–144, 2017.
- [27] Yuxiao Dong, Hao Ma, Zhihong Shen, and Kuansan Wang. A century of science: Globalization of scientific collaborations, citations, and innovations. In *ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD)*, pages 1437–1446. ACM, 2017.
- [28] David K Duvenaud, Dougal Maclaurin, Jorge Iparraguirre, Rafael Bombarell, Timothy Hirzel, Alán Aspuru-Guzik, and Ryan P Adams. Convolutional networks on graphs for learning molecular fingerprints. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 2224–2232, 2015.
- [29] Vijay Prakash Dwivedi, Chaitanya K Joshi, Thomas Laurent, Yoshua Bengio, and Xavier Bresson. Benchmarking graph neural networks. *arXiv preprint arXiv:2003.00982*, 2020.
- [30] David Easley, Jon Kleinberg, *et al.* *Networks, crowds, and markets*, volume 8. Cambridge university press Cambridge, 2010.
- [31] Federico Errica, Marco Podda, Davide Bacciu, and Alessio Micheli. A fair comparison of graph neural networks for graph classification. *arXiv preprint arXiv:1912.09893*, 2019.
- [32] Matthias Feurer, Jan N van Rijn, Arlind Kadra, Pieter Gijsbers, Neeratyoy Mallik, Sahithya Ravi, Andreas Müller, Joaquin Vanschoren, and Frank Hutter. Openml-python: an extensible python api for openml. *arXiv preprint arXiv:1911.02490*, 2019.
- [33] M. Fey and J. E. Lenssen. Fast graph representation learning with PyTorch Geometric. In *ICLR Workshop on Representation Learning on Graphs and Manifolds*, 2019.
- [34] Justin Gilmer, Samuel S Schoenholz, Patrick F Riley, Oriol Vinyals, and George E Dahl. Neural message passing for quantum chemistry. In *International Conference on Machine Learning (ICML)*, pages 1273–1272, 2017.
- [35] Aditya Grover and Jure Leskovec. node2vec: Scalable feature learning for networks. In *ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD)*, pages 855–864. ACM, 2016.
- [36] Emre Guney. Reproducible drug repurposing: When similarity does not suffice. In *Pacific Symposium on Biocomputing*, pages 132–143, 2017.
- [37] William L Hamilton, Rex Ying, and Jure Leskovec. Inductive representation learning on large graphs. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 1025–1035, 2017.
- [38] William L Hamilton, Rex Ying, and Jure Leskovec. Representation learning on graphs: Methods and applications. *IEEE Data Engineering Bulletin*, 40(3):52–74, 2017.
- [39] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 770–778, 2016.
- [40] Weihua Hu, Bowen Liu, Joseph Gomes, Marinka Zitnik, Percy Liang, Vijay Pande, and Jure Leskovec. Strategies for pre-training graph neural networks. In *International Conference on Learning Representations (ICLR)*, 2020.
- [41] Ziniu Hu, Yuxiao Dong, Kuansan Wang, and Yizhou Sun. Heterogeneous graph transformer. In *Proceedings of the International World Wide Web Conference (WWW)*, 2020.
- [42] Laura A Hug, Brett J Baker, Karthik Anantharaman, Christopher T Brown, Alexander J Probst, Cindy J Castelle, Cristina N Butterfield, Alex W Hensdorf, Yuki Amano, Kotaro Ise, *et al.* A new view of the tree of life. *Nature Microbiology*, 1(5):16048, 2016.
- [43] Hamel Husain, Ho-Hsiang Wu, Tiferet Gazit, Miltiadis Allamanis, and Marc Brockschmidt. Codesearchnet challenge: Evaluating the state of semantic code search. *arXiv preprint arXiv:1909.09436*, 2019.
- [44] Katsuhiko Ishiguro, Shin-ichi Maeda, and Masanori Koyama. Graph warp module: An auxiliary module for boosting the power of graph neural networks. *arXiv preprint arXiv:1902.01020*, 2019.
- [45] S. Ivanov, S. Sviridov, and E. Burnaev. Understanding isomorphism bias in graph data sets. *arXiv preprint arXiv:1910.12091*, 2019.

- [46] Wengong Jin, Regina Barzilay, and Tommi Jaakkola. Hierarchical generation of molecular graphs using structural motifs. *arXiv preprint arXiv:2002.03230*, 2020.
- [47] Kristian Kersting, Nils M Kriege, Christopher Morris, Petra Mutzel, and Marion Neumann. Benchmark data sets for graph kernels, 2020. URL <http://www.graphlearning.io/>.
- [48] Thomas N. Kipf and Max Welling. Variational graph auto-encoders. *arXiv preprint arXiv:1611.07308*, 2016.
- [49] Thomas N. Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. In *International Conference on Learning Representations (ICLR)*, 2017.
- [50] Johannes Klicpera, Aleksandar Bojchevski, and Stephan Günnemann. Predict then propagate: Graph neural networks meet personalized pagerank. In *International Conference on Learning Representations (ICLR)*, 2019.
- [51] Greg Landrum *et al.* Rdkit: Open-source cheminformatics, 2006.
- [52] Adam Lerer, Ledell Wu, Jiajun Shen, Timothee Lacroix, Luca Wehrstedt, Abhijit Bose, and Alex Peysakhovich. Pytorch-biggraph: A large-scale graph embedding system. *arXiv preprint arXiv:1903.12287*, 2019.
- [53] Jure Leskovec and Rok Sosič. Snap: A general-purpose network analysis and graph-mining library. *ACM Transactions on Intelligent Systems and Technology (TIST)*, 8(1):1–20, 2016.
- [54] Guohao Li, Matthias Muller, Ali Thabet, and Bernard Ghanem. Deepgcns: Can gcns go as deep as cnns? In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 9267–9276, 2019.
- [55] Junying Li, Deng Cai, and Xiaofei He. Learning graph-level representation for drug discovery. *arXiv preprint arXiv:1709.03741*, 2017.
- [56] Yujia Li, Daniel Tarlow, Marc Brockschmidt, and Richard Zemel. Gated graph sequence neural networks. In *International Conference on Learning Representations (ICLR)*, 2016.
- [57] David Liben-Nowell and Jon M. Kleinberg. The link-prediction problem for social networks. *Journal of the Association for Information Science and Technology*, 58(7):1019–1031, 2007.
- [58] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *eccv*, pages 740–755. Springer, 2014.
- [59] Sharon L Lohr. *Sampling: design and analysis*. Nelson Education, 2009.
- [60] Ricardo Macarron, Martyn N Banks, Dejan Bojanic, David J Burns, Dragan A Cirovic, Tina Garyantes, Darren VS Green, Robert P Hertzberg, William P Janzen, Jeff W Paslay, *et al.* Impact of high-throughput screening in biomedical research. *Nature Reviews Drug discovery*, 10(3):188–195, 2011.
- [61] Noël Malod-Dognin, Kristina Ban, and Nataša Pržulj. Unified alignment of protein-protein interaction networks. *Scientific Reports*, 7(1):1–11, 2017.
- [62] Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. Distributed representations of words and phrases and their compositionality. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 3111–3119, 2013.
- [63] Maximilian Nickel, Kevin Murphy, Volker Tresp, and Evgeniy Gabrilovich. A review of relational machine learning for knowledge graphs. *Proceedings of the IEEE*, 104(1):11–33, 2015.
- [64] Vassil Panayotov, Guoguo Chen, Daniel Povey, and Sanjeev Khudanpur. Librispeech: an asr corpus based on public domain audio books. In *2015 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5206–5210. IEEE, 2015.
- [65] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, *et al.* PyTorch: An imperative style, high-performance deep learning library. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 8024–8035, 2019.
- [66] Bryan Perozzi, Rami Al-Rfou, and Steven Skiena. Deepwalk: Online learning of social representations. In *ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD)*, pages 701–710. ACM, 2014.

- [67] Janet Piñero, Juan Manuel Ramírez-Anguita, Josep Saüch-Pitarch, Francesco Ronzano, Emilio Centeno, Ferran Sanz, and Laura I Furlong. The DisGeNET knowledge platform for disease genomics: 2019 update. *Nucleic Acids Research*, 48(D1):D845–D855, 2020.
- [68] Jiezhong Qiu, Yuxiao Dong, Hao Ma, Jian Li, Chi Wang, Kuansan Wang, and Jie Tang. Netsmf: Large-scale network embedding as sparse matrix factorization. In *Proceedings of the International World Wide Web Conference (WWW)*, pages 1509–1520, 2019.
- [69] Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. Squad: 100,000+ questions for machine comprehension of text. *arXiv preprint arXiv:1606.05250*, 2016.
- [70] Yu Rong, Yatao Bian, Tingyang Xu, Weiyang Xie, Ying Wei, Wenbing Huang, and Junzhou Huang. Grover: Self-supervised message passing transformer on large-scale molecular data. *arXiv preprint arXiv:2007.02835*, 2020.
- [71] Yu Rong, Wenbing Huang, Tingyang Xu, and Junzhou Huang. Dropedge: Towards deep graph convolutional networks on node classification. In *International Conference on Learning Representations (ICLR)*, 2020.
- [72] Michael Schlichtkrull, Thomas N Kipf, Peter Bloem, Rianne Van Den Berg, Ivan Titov, and Max Welling. Modeling relational data with graph convolutional networks. In *European Semantic Web Conference*, pages 593–607. Springer, 2018.
- [73] Roded Sharan, Silpa Suthram, Ryan M Kelley, Tanja Kuhn, Scott McCuine, Peter Uetz, Taylor Sittler, Richard M Karp, and Trey Ideker. Conserved patterns of protein interaction in multiple species. *Proceedings of the National Academy of Sciences*, 102(6):1974–1979, 2005.
- [74] Oleksandr Shchur, Maximilian Mumme, Aleksandar Bojchevski, and Stephan Günnemann. Pitfalls of graph neural network evaluation. *arXiv preprint arXiv:1811.05868*, 2018.
- [75] Martin Simonovsky and Nikos Komodakis. Dynamic edge-conditioned filters in convolutional neural networks on graphs. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 3693–3702, 2017.
- [76] Koustuv Sinha, Shagun Sodhani, Joelle Pineau, and William L Hamilton. Evaluating logical generalization in graph neural networks. *arXiv preprint arXiv:2003.06560*, 2020.
- [77] Jonathan M Stokes, Kevin Yang, Kyle Swanson, Wengong Jin, Andres Cubillos-Ruiz, Nina M Donghia, Craig R MacNair, Shawn French, Lindsey A Carfrae, Zohar Bloom-Ackerman, *et al.* A deep learning approach to antibiotic discovery. *Cell*, 180(4):688–702, 2020.
- [78] Zhiqing Sun, Zhi-Hong Deng, Jian-Yun Nie, and Jian Tang. Rotate: Knowledge graph embedding by relational rotation in complex space. In *International Conference on Learning Representations (ICLR)*, 2019.
- [79] Damian Szklarczyk, Alberto Santos, Christian von Mering, Lars Juhl Jensen, Peer Bork, and Michael Kuhn. STITCH 5: augmenting protein–chemical interaction networks with tissue and affinity data. *Nucleic Acids Research*, 44(D1):D380–D384, 2016.
- [80] Damian Szklarczyk, Annika L Gable, David Lyon, Alexander Junge, Stefan Wyder, Jaime Huerta-Cepas, Milan Simonovic, Nadezhda T Doncheva, John H Morris, Peer Bork, *et al.* STRING v11: protein–protein association networks with increased coverage, supporting functional discovery in genome-wide experimental datasets. *Nucleic Acids Research*, 47(D1):D607–D613, 2019.
- [81] Théo Trouillon, Johannes Welbl, Sebastian Riedel, Éric Gaussier, and Guillaume Bouchard. Complex embeddings for simple link prediction. In *International Conference on Machine Learning (ICML)*, pages 2071–2080, 2016.
- [82] Joaquin Vanschoren, Jan N. van Rijn, Bernd Bischl, and Luis Torgo. Openml: Networked science in machine learning. *SIGKDD Explorations*, 15(2):49–60, 2013. doi: 10.1145/2641190.2641198. URL <http://doi.acm.org/10.1145/2641190.2641198>.
- [83] Petar Velickovic, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Lio, and Yoshua Bengio. Graph attention networks. In *International Conference on Learning Representations (ICLR)*, 2018.
- [84] Petar Veličković, William Fedus, William L Hamilton, Pietro Liò, Yoshua Bengio, and R Devon Hjelm. Deep graph infomax. In *International Conference on Learning Representations (ICLR)*, 2019.

- [85] Denny Vrandečić and Markus Krötzsch. Wikidata: a free collaborative knowledgebase. *Communications of the ACM*, 57(10):78–85, 2014.
- [86] Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R Bowman. Glue: A multi-task benchmark and analysis platform for natural language understanding. *arXiv preprint arXiv:1804.07461*, 2018.
- [87] Kuansan Wang, Zhihong Shen, Chiyuan Huang, Chieh-Han Wu, Yuxiao Dong, and Anshul Kanakia. Microsoft academic graph: When experts are not enough. *Quantitative Science Studies*, 1(1):396–413, 2020.
- [88] Minjie Wang, Lingfan Yu, Da Zheng, Quan Gan, Yu Gai, Zihao Ye, Mufei Li, Jinjing Zhou, Qi Huang, Chao Ma, Ziyue Huang, Qipeng Guo, Hao Zhang, Haibin Lin, Junbo Zhao, Jinyang Li, Alexander J Smola, and Zheng Zhang. Deep graph library: Towards efficient and scalable deep learning on graphs. *ICLR Workshop on Representation Learning on Graphs and Manifolds*, 2019. URL <https://arxiv.org/abs/1909.01315>.
- [89] Xiaozhi Wang, Tianyu Gao, Zhaocheng Zhu, Zhiyuan Liu, Juanzi Li, and Jian Tang. Kepler: A unified model for knowledge embedding and pre-trained language representation. *arXiv preprint arXiv:1911.06136*, 2019.
- [90] David S Wishart, Yannick D Feunang, An C Guo, Elvis J Lo, Ana Marcu, Jason R Grant, Tanvir Sajed, Daniel Johnson, Carin Li, Zinat Sayeeda, *et al.* DrugBank 5.0: a major update to the DrugBank database for 2018. *Nucleic Acids Research*, 46(D1):D1074–D1082, 2018.
- [91] Felix Wu, Tianyi Zhang, Amauri Holanda de Souza Jr, Christopher Fifty, Tao Yu, and Kilian Q Weinberger. Simplifying graph convolutional networks. In *International Conference on Machine Learning (ICML)*, 2019.
- [92] Zhenqin Wu, Bharath Ramsundar, Evan N Feinberg, Joseph Gomes, Caleb Geniesse, Aneesh S Pappu, Karl Leswing, and Vijay Pande. Moleculenet: a benchmark for molecular machine learning. *Chemical science*, 9(2):513–530, 2018.
- [93] Keyulu Xu, Chengtao Li, Yonglong Tian, Tomohiro Sonobe, Ken-ichi Kawarabayashi, and Stefanie Jegelka. Representation learning on graphs with jumping knowledge networks. In *International Conference on Machine Learning (ICML)*, pages 5453–5462, 2018.
- [94] Keyulu Xu, Weihua Hu, Jure Leskovec, and Stefanie Jegelka. How powerful are graph neural networks? In *International Conference on Learning Representations (ICLR)*, 2019.
- [95] Pinar Yanardag and SVN Vishwanathan. Deep graph kernels. In *ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD)*, pages 1365–1374. ACM, 2015.
- [96] Bishan Yang, Wen-tau Yih, Xiaodong He, Jianfeng Gao, and Li Deng. Embedding entities and relations for learning and inference in knowledge bases. In *International Conference on Learning Representations (ICLR)*, 2015.
- [97] Kevin Yang, Kyle Swanson, Wengong Jin, Connor Coley, Philipp Eiden, Hua Gao, Angel Guzman-Perez, Timothy Hopper, Brian Kelley, Miriam Mathea, *et al.* Analyzing learned molecular representations for property prediction. *Journal of chemical information and modeling*, 59(8):3370–3388, 2019.
- [98] Zhilin Yang, William W Cohen, and Ruslan Salakhutdinov. Revisiting semi-supervised learning with graph embeddings. In *International Conference on Machine Learning (ICML)*, pages 40–48, 2016.
- [99] Rex Ying, Ruining He, Kaifeng Chen, Pong Eksombatchai, William L Hamilton, and Jure Leskovec. Graph convolutional neural networks for web-scale recommender systems. In *ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD)*, pages 974–983, 2018.
- [100] Rex Ying, Jiaxuan You, Christopher Morris, Xiang Ren, William L Hamilton, and Jure Leskovec. Hierarchical graph representation learning with differentiable pooling. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2018.
- [101] Jiaxuan You, Rex Ying, and Jure Leskovec. Position-aware graph neural networks. In *International Conference on Machine Learning (ICML)*, 2019.
- [102] David Younger, Stephanie Berger, David Baker, and Eric Klavins. High-throughput characterization of protein–protein interactions by reprogramming yeast mating. *Proceedings of the National Academy of Sciences*, 114(46):12166–12171, 2017.

- [103] Hanqing Zeng, Hongkuan Zhou, Ajitesh Srivastava, Rajgopal Kannan, and Viktor Prasanna. GraphSaint: Graph sampling based inductive learning method. In *International Conference on Learning Representations (ICLR)*, 2020.
- [104] Muhan Zhang and Yixin Chen. Link prediction based on graph neural networks. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 5165–5175, 2018.
- [105] Da Zheng, Xiang Song, Chao Ma, Zeyuan Tan, Zihao Ye, Jin Dong, Hao Xiong, Zheng Zhang, and George Karypis. Dgl-ke: Training knowledge graph embeddings at scale. *arXiv preprint arXiv:2004.08532*, 2020.
- [106] Zhaocheng Zhu, Shizhen Xu, Jian Tang, and Meng Qu. Graphvite: A high-performance cpu-gpu hybrid system for node embedding. In *Proceedings of the International World Wide Web Conference (WWW)*, pages 2494–2504, 2019.
- [107] Marinka Zitnik, Monica Agrawal, and Jure Leskovec. Modeling polypharmacy side effects with graph convolutional networks. *Bioinformatics*, 34(13):457–466, 2018.
- [108] Marinka Zitnik, Marcus W Feldman, Jure Leskovec, *et al.* Evolution of resilience in protein interactomes across the tree of life. *Proceedings of the National Academy of Sciences*, 116(10):4426–4433, 2019.
- [109] Xu Zou, Qiuye Jia, Jianwei Zhang, Chang Zhou, Zijun Yao, Hongxia Yang, and Jie Tang. Dimensional reweighting graph convolution networks, 2020. URL <https://openreview.net/forum?id=SJeLO34KwS>.

Appendices

A	Shortcomings of Current Benchmarks	1
B	Comprehensive Descriptions of OGB Node Property Prediction	3
B.1	ogbn-products: Amazon Products Co-purchasing Network	3
B.2	ogbn-proteins: Protein-Protein Association Network	5
B.3	ogbn-arxiv: Paper Citation Network	5
B.4	ogbn-papers100M: Paper Citation Network	6
B.5	ogbn-mag: Heterogeneous Microsoft Academic Graph (MAG)	7
C	Comprehensive Descriptions of OGB Link Property Prediction	8
C.1	ogbl-ppa: Protein-Protein Association Network	10
C.2	ogbl-collab: Author Collaboration Network	10
C.3	ogbl-ddi: Drug-Drug Interaction Network	11
C.4	ogbl-citation: Paper Citation Network	12
C.5	ogbl-wikikg: Wikidata Knowledge Graph	13
C.6	ogbl-biokg: Biomedical Knowledge Graph	14
D	Comprehensive Descriptions of OGB Graph Property Prediction	15
D.1	ogbg-mol*: Molecular Graphs	16
D.2	ogbg-ppa: Protein-Protein Association Network	17
D.3	ogbg-code: Abstract Syntax Tree of Source Code	18
E	OGB Package	20
E.1	OGB Data Loaders	20
E.2	OGB Evaluators	20
F	More Benchmark Results on ogbg-mol* Datasets	21

A Shortcomings of Current Benchmarks

We first review commonly-used graph benchmarks and discuss the current state of the field. We organize the discussion around three categories of graph ML tasks: predictions at the level of nodes, links, and graphs.

Node property prediction. Currently, the three graphs (CORA, CITESEER and PUBMED) proposed in Yang *et al.* [98] have been widely used as semi-supervised node classification datasets, particularly for evaluating GNNs. The sizes of these graphs are rather small, ranging from 2,700 to 20,000 nodes. Recent studies suggest that datasets at this small scale can be solved quite well with simple GNN architectures [74, 91], and the performance of different GNNs on these datasets is nearly statistically identical [29, 40]. Furthermore, there is no consensus on the splitting procedures for these datasets, which makes it hard to fairly compare different model designs [74]. Finally, a recent study [109] shows that these datasets have some fundamental data quality issues. For example, in CORA, 42% of the nodes leak information between their features and labels, and 1% of the nodes are duplicated. The situation for CITESEER is even worse, with leakage rates of 62% and duplication rates of 5%.

Some recent works in graph ML have proposed relatively large datasets, such as PPI (56,944 nodes), REDDIT (334,863 nodes) [38] and AMAZON2M (2,449,029 nodes) [17]. However, there exist some inherent issues with the proposed data splits. Specifically, 83%, 65% and 90% of the nodes are used for training in the PPI, REDDIT and AMAZON2M datasets, respectively, which results in an artificially small distribution shift across the training/validation/test sets. Consequently, as may be expected, the performance improvements on these benchmarks have quickly saturated. For example, recent GNN models [17, 103] can already yield F1 scores of 99.5 for PPI and 97.0 for REDDIT, and 90.4% accuracy for AMAZON2M, with extremely small generalization gaps between training and test accuracy. Finally, it is also practically required for graph ML models to handle web-scale graphs (beyond 100 million nodes and 1 billion edges) in industrial applications [99]. However, to date, there have been no publicly available graph datasets of such scale with label information.

In summary, several factors (*e.g.*, size, leakage, splits, etc.) associated with the current use of existing datasets make them unsuitable as benchmark datasets for graph ML.

Link property prediction. Broadly, there are two lines of efforts for the link-level task: link prediction in homogeneous networks [57, 104] and relation completion in (heterogeneous) knowledge graphs [14, 41, 63]. There are several problems with the current benchmark datasets in these areas.

First, representative datasets are either extremely small or do not come with input node features. For link prediction, while the well-known recommender system datasets used in Berg *et al.* [11] include node features, their sizes are very small, with the largest having only 6,000 nodes. On the other hand, although the Open Academic Graph (OAG) used in Qiu *et al.* [68] comprises tens of millions of nodes, there are no associated node features. Regarding the knowledge graph completion, the widely-used dataset, FB15K, is very small, containing only 14,951 entities, which is a tiny subset of the original Freebase knowledge graph with more than 50 million entities [13].

Second, similar to the node-level task, random splits are predominantly used in link-level prediction [14, 35]. The random splits are not realistic in many practical applications such as friend recommendation in social networks, in which test edges (friend relations *after* a certain timestamp) naturally follow a different distribution from training edges (friend relations *before* a certain timestamp).

Finally, the existing datasets are mostly oriented to applications in recommender systems, social media and knowledge graphs, in which the graphs are typically very sparse. This may result in techniques specialised for sparse link inference that are not generalizable to domains with dense graphs, such as the protein-protein association graphs and drug-drug interaction networks typically found in biology and medicine [20, 67, 79, 80, 90]. Very recently, Sinha *et al.* [76] proposed a synthetic link prediction benchmark to diagnose model’s logical generalization capability. Their focus is on synthetic tasks, which is complementary to OGB that focuses on realistic tasks.

Graph property prediction. Graph-level prediction tasks are found in important applications in natural sciences, such as predicting molecular properties in chemistry [28, 34, 40], where molecules are naturally represented as molecular graphs.

In graph classification, the most widely-used graph-level datasets from the TU collection [47] are known to have many issues, such as small sizes (*i.e.*, most of the datasets only contain less than 1,000 graphs),⁷ unrealistic settings (*e.g.*, no bond features for molecules), random data splits, inconsistent evaluation protocols, and isomorphism bias [45]. A very recent attempt [29] to address these issues mainly focuses on benchmarking ML models, specifically the building blocks of GNNs, rather than developing application-oriented realistic datasets. In fact, five out of the six proposed datasets are synthetic.

Recent work in graph ML [40, 44] has started to adopt MOLECULENET [92] which contains a set of realistic and large-scale molecular property prediction datasets. However, there is limited consensus in the dataset splitting and molecular graph features, making it hard to compare different models in a fair manner. OGB adopts the MOLECULENET datasets, while providing unified dataset splits as well as the molecular graph features that are found to provide favorable performance over naïve features.

⁷Recently, some progress has been made to increase the dataset sizes: <http://graphlearning.io>. Nevertheless, most of them are still small compared to the OGB datasets, and evaluation protocols are not standardized.

Beyond molecular graphs, OGB also provides graphs from other domains, such as biological networks and Abstract Syntax Tree (AST) representations of source code. These types of graphs exhibit distinct characteristics from molecular graphs, enabling the evaluation of the versatility of graph ML models.

B Comprehensive Descriptions of OGB Node Property Prediction

We currently provide 5 datasets, adopted from 3 different application domains, for predicting the properties of individual nodes. Specifically, `ogbn-products` is an Amazon products co-purchasing network [12] originally developed by Chiang *et al.* [17] (*cf.* Appendix B.1). The `ogbn-arxiv`, `ogbn-mag`, and `ogbn-papers100M` datasets are extracted from the Microsoft Academic Graph (MAG) [87], with different scales, tasks, and include both homogeneous and heterogeneous graphs. Specifically, `ogbn-arxiv` is a paper citation network of arXiv papers (*cf.* Appendix B.3), `ogbn-mag` is a heterogeneous academic graph containing different node types (papers, authors, institutions, and topics) and their relations (*cf.* Appendix B.5), and `ogbn-papers100M` is an extremely large paper citation network from the entire MAG with more than 100 million nodes and 1 billion edges (*cf.* Appendix B.4). The `ogbn-proteins` dataset is a protein-protein association network [80] (*cf.* Appendix B.2).

The 5 datasets exhibit highly diverse graph statistics, as shown in Table 2. Notably, the biological network, `ogbn-proteins`, is much denser than the social/information networks as can be observed from its large average node degree and small graph diameter. On the other hand, the co-purchasing network, `ogbn-products`, has more clustered graph structure than the other datasets, as can be seen from its large average clustering coefficient. Finally, the heterogeneous academic graph, `ogbn-mag`, exhibits rather interesting graph characteristics, simultaneously having small average node degree, clustering coefficient, and graph diameter.

Baselines. We consider the following representative models as our baselines unless otherwise specified.

- **MLP:** A multilayer perceptron (MLP) predictor that uses the given raw node features directly as input. Graph structure information is not utilized.
- **NODE2VEC:** An MLP predictor that uses as input the concatenation of the raw node features and NODE2VEC embeddings [35, 66].
- **GCN:** Full-batch Graph Convolutional Network [49].
- **GRAPHSAGE:** Full-batch GraphSAGE [37], where we adopt the mean pooling variant and a simple skip connection to preserve central node features.
- **NEIGHBORSAMPLING** (optional): A mini-batch training technique of GNNs [37] that samples neighborhood nodes when performing aggregation.
- **CLUSTERGCN** (optional): A mini-batch training technique of GNNs [17] that partitions the graphs into a fixed number of subgraphs and draws mini-batches from them.
- **GRAPHSAINTE** (optional): A mini-batch training technique of GNNs [103] that samples subgraphs via a random walk sampler.

The three mini-batch GNN training, NEIGHBORSAMPLING, CLUSTERGCN, and GRAPHSAINTE, are explored only for graph datasets where full-batch GCN/GRAPHSAGE did not fit into the common GPU memory size of 11GB. The mini-batch GNNs are more GPU memory-efficient than the full-batch GNNs because they first partition and sample the graph into subgraphs. Hence, in order to train the network, they require only a small amount of nodes to be loaded into the GPU memory at each mini-batch. Inference is then performed on the whole graph without GPU usage. To choose the architecture for the mini-batch GNNs, we first run full-batch GCN and GRAPHSAGE on an NVIDIA Quadro RTX 8000 with 48GB of memory, and then adopt the best performing full-batch GNN architecture for the mini-batch GNNs. All models are trained with a fixed hidden dimensionality of 256, a fixed number of two or three layers, and a tuned dropout ratio $\in \{0.0, 0.5\}$.

B.1 `ogbn-products`: Amazon Products Co-purchasing Network

The `ogbn-products` dataset is an undirected and unweighted graph, representing an Amazon product co-purchasing network [12]. Nodes represent products sold in Amazon, and edges between two products indicate that the products are purchased together. The graphs, target labels, and node features are generated following Chiang *et al.* [17], where node features are dimensionality-reduced

Table 7: **Results for ogbn-products.**
[†]Requires a GPU with 33GB of memory.

Method	Accuracy (%)		
	Training	Validation	Test
MLP	84.03 \pm 0.93	75.54 \pm 0.14	61.06 \pm 0.08
NODE2VEC	93.39 \pm 0.10	90.32 \pm 0.06	72.49 \pm 0.10
GCN [†]	93.56 \pm 0.09	92.00 \pm 0.03	75.64 \pm 0.21
GRAPHSAGE [†]	94.09 \pm 0.05	92.24 \pm 0.07	78.50 \pm 0.14
NEIGHBORSAMPLING	92.96 \pm 0.07	91.70 \pm 0.09	78.70 \pm 0.36
CLUSTERGCN	93.75 \pm 0.13	92.12 \pm 0.09	78.97 \pm 0.33
GRAPHSAINTE	92.71 \pm 0.14	91.62 \pm 0.08	79.08 \pm 0.24

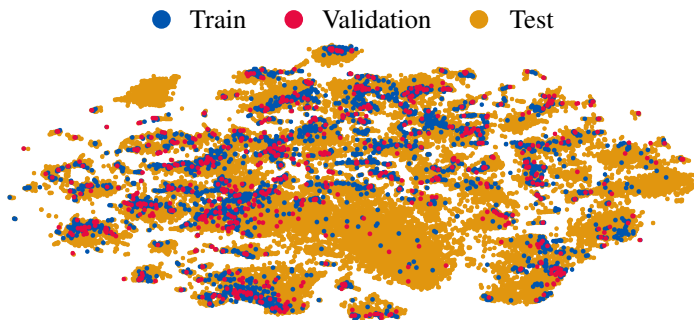


Figure 4: T-SNE visualization of training/validation/test nodes in ogbn-products.

bag-of-words of the product descriptions. Our contribution, when adopting the dataset in OGB, is to resolve its critical data split issue by presenting a more realistic and challenging split (see below).

Prediction task. The task is to predict the category of a product in a multi-class classification setup, where the 47 top-level categories are used for target labels.

Dataset splitting. We consider a more challenging and realistic dataset splitting that differs from the one used in Chiang *et al.* [17]. Instead of randomly assigning 90% of the nodes for training and 10% of the nodes for testing (without a validation set), we use the *sales ranking* (popularity) to split nodes into training/validation/test sets. Specifically, we sort the products according to their sales ranking and use the top 8% for training, next top 2% for validation, and the rest for testing. This is a more challenging splitting procedure that closely matches the real-world application where manual labeling is prioritized to important nodes in the network and ML models are subsequently used to make predictions on less important ones.

Discussion. Our benchmarking results in Table 7 show that the highest test performances are attained by GNNs, while the MLP baseline that solely relies on a product’s description is not sufficient for accurately predicting the category of a product. Even with the GNNs, we observe the huge generalization gap⁸, which can be explained by differing node distributions across the splits, as visualized in Figure 4. This is in stark contrast with the conventional *random* split used by Chiang *et al.* [17]. Even with the same split ratio (8/2/90), we find GRAPHSAGE already achieves 88.20 \pm 0.08% test accuracy with only \approx 1 percentage points of generalization gap. These results indicate that the realistic split is much more challenging than the random split and offer an important opportunity to improve *out-of-distribution* generalization.

Table 7 also shows that the recent mini-batch-based GNNs⁹ give promising results, even slightly outperforming the full-batch version of GRAPHSAGE that does not fit into ordinary GPU memory. The improved performance can be attributed to the regularization effects of mini-batch noise and edge dropout [71]. Nevertheless, the mini-batch GNNs have been much less explored compared to

⁸Defined by the difference between training and test accuracy.

⁹The GRAPHSAGE architecture is used for neighbor aggregation.

the full-batch GNNs due to the prevalent use of the extremely small benchmark datasets such as CORA and CITESEER. As a result, many important questions remain open, *e.g.*, what mini-batch training methods can induce the best regularization effect, and how to allow mini-batch training for advanced GNNs that rely on large receptive-field sizes [50, 54, 93], since the current mini-batch methods are rather limited by the number of nodes from which they aggregate information. Overall, `ogbn-products` is an ideal benchmark dataset for the field to move beyond the extremely small graph datasets and to catalyze the development of scalable mini-batch-based graph models with improved *out-of-distribution* prediction accuracy.

B.2 `ogbn-proteins`: Protein-Protein Association Network

The `ogbn-proteins` dataset is an undirected, weighted, and typed (according to species) graph. Nodes represent proteins, and edges indicate different types of biologically meaningful associations between proteins, *e.g.*, physical interactions, co-expression or homology [18, 80]. All edges come with 8-dimensional features, where each dimension represents the strength of a single association type and takes on values between 0 and 1 (the larger the value, the stronger the association). The proteins come from 8 species.

Prediction task. The task is to predict the presence of protein functions in a multi-label binary classification setup, where there are 112 kinds of labels to predict in total. The performance is measured by the average of ROC-AUC scores across the 112 tasks.

Dataset splitting. We split the protein nodes into training/validation/test sets according to the species which the proteins come from. This enables the evaluation of the generalization performance of the model *across* different species.

Discussion. The `ogbn-proteins` dataset does not have input node features¹⁰, but has edge features on more than 30 million edges. In our baseline experiments, we opt for simplicity and use the average edge features of incoming edges as node features.

Benchmarking results are shown in Table 8. Surprisingly, simple MLPs¹¹ perform better than more sophisticated approaches like NODE2VEC and GCN. Only GRAPHSAGE is able to outperform the naïve MLP approach, which indicates that central node information (that is not explicitly modeled in GCN in its message-passing) already contains a lot of crucial information for making correct predictions.

We further evaluate the best performing GRAPHSAGE on conventional *random split* with the same split ratio as the species split. On the random split, we find the generalization gap is extremely low, with $87.83 \pm 0.03\%$ test ROC-AUC that is only 0.27 percentage points lower than the training ROC-AUC ($88.10 \pm 0.01\%$). This is in contrast to 10.18 percentage points of generalization gap (training AUC minus test AUC) in the species split, as calculated from the GRAPHSAGE experiment in Table 8. The result suggests the unique challenge of *across-species* generalization that needs to be tackled in future research.

Since the number of nodes in `ogbn-proteins` is fairly small and easily fit onto common GPUs, we did not run the CLUSTERGCN and GRAPHSAINT experiments. Nonetheless, this dataset presents an interesting research question of how to utilize edge features in a more sophisticated way than just naïve averaging, *e.g.*, by the usage of attention or by treating the graph as a multi-relational graph (as there are 8 different association types between proteins). The challenge is to scalably handle the huge number of edge features efficiently on GPU, which might require clever graph partitioning based on the edge weights.

B.3 `ogbn-arxiv`: Paper Citation Network

The `ogbn-arxiv` dataset is a directed graph, representing the citation network between all Computer Science (CS) ARXIV papers indexed by MAG [87]. Each node is an ARXIV paper and each directed edge indicates that one paper cites another one. Each paper comes with a 128-dimensional

¹⁰In our preliminary experiments, we used one-hot encodings of species ID as node features, but that did not work well empirically, which can be explained by the fact that the species ID is used for dataset splitting.

¹¹Note that the input features here are graph-aware in some sense, because they are obtained by averaging the incoming edge features.

Table 8: Results for ogbn-proteins.

Method	ROC-AUC (%)		
	Training	Validation	Test
MLP	81.78 \pm 0.48	77.06 \pm 0.14	72.04 \pm 0.48
NODE2VEC	79.76 \pm 1.88	70.07 \pm 0.53	68.81 \pm 0.65
GCN	82.77 \pm 0.16	79.21 \pm 0.18	72.51 \pm 0.35
GRAPHSAGE	87.86 \pm 0.13	83.34 \pm 0.13	77.68 \pm 0.20

Table 9: Results for ogbn-arxiv.

Method	Accuracy (%)		
	Training	Validation	Test
MLP	63.58 \pm 0.81	57.65 \pm 0.12	55.50 \pm 0.23
NODE2VEC	76.43 \pm 0.81	71.29 \pm 0.13	70.07 \pm 0.13
GCN	78.87 \pm 0.66	73.00 \pm 0.17	71.74 \pm 0.29
GRAPHSAGE	82.35 \pm 1.51	72.77 \pm 0.16	71.49 \pm 0.27

feature vector obtained by averaging the embeddings of words in its title and abstract. The embeddings of individual words are computed by running the WORD2VEC model [62] over the MAG corpus. In addition, all papers are also associated with the year that the corresponding paper was published.

Prediction task. The task is to predict the 40 subject areas of ARXIV CS papers,¹² *e.g.*, *cs.AI*, *cs.LG*, and *cs.OS*, which are manually determined (*i.e.*, labeled) by the paper’s authors and ARXIV moderators. With the volume of scientific publications doubling every 12 years over the past century [27], it is practically important to automatically classify each publication’s areas and topics. Formally, the task is to predict the primary categories of the ARXIV papers, which is formulated as a 40-class classification problem.

Dataset splitting. The previously-used Cora, CiteSeer, and PubMed citation networks are split randomly [98]. In contrast, we consider a realistic data split based on the publication dates of the papers. The general setting is that the ML models are trained on existing papers and then used to predict the subject areas of newly-published papers, which supports the direct application of them into real-world scenarios, such as helping the ARXIV moderators. Specifically, we propose to train on papers published until 2017, validate on those published in 2018, and test on those published since 2019.

Discussion. Our initial benchmarking results are shown in Table 9, where the directed graph is converted to an undirected one for simplicity. First, we observe that the naïve MLP baseline that does not utilize any graph information is significantly outperformed by the other three models that utilize graph information. This suggests that graph information can dramatically improve the performance of predicting a paper’s category. Comparing models that do utilize graph information, we find GNN models, *i.e.*, GCN and GRAPHSAGE, slightly outperform the NODE2VEC model. We also conduct additional experiments on conventional *random split* with the same split ratio. On the random split, we find that GCN achieves 73.54 \pm 0.13% test accuracy, suggesting that the realistic time split is indeed more challenging than the random split, providing an opportunity to improve the out-of-distribution generalization performance. Furthermore, we think it will be fruitful to explore how the edge direction information as well as the node temporal information (*e.g.*, year in which papers are published) can be taken into account to improve prediction performance.

B.4 ogbn-papers100M: Paper Citation Network

The ogbn-papers100M dataset is a directed citation graph of 111 million papers indexed by MAG [87]. Its graph structure and node features are constructed in the same way as ogbn-arxiv in Appendix B.3. Among its node set, approximately 1.5 million of them are ARXIV papers, each of

¹²<https://arxiv.org/corr/subjectclasses>

Table 10: **Results for ogbn-papers100M.**

Method	Accuracy (%)		
	Training	Validation	Test
MLP	54.84 \pm 0.43	49.60 \pm 0.29	47.24 \pm 0.31
SGC	67.54 \pm 0.43	66.48 \pm 0.20	63.29 \pm 0.19

which is manually labeled with one of ARXIV’s subject areas (*cf.* Appendix B.3). Overall, this dataset is orders-of-magnitude larger than any existing node classification datasets.

Prediction task. Given the full ogbn-papers100M graph, the task is to predict the subject areas of the subset of papers that are published in ARXIV. The majority of nodes (corresponding to non-ARXIV papers) are not associated with label information, and only their node features and reference information are given. The task is to leverage the entire citation network to infer the labels of the ARXIV papers.¹³ In total, there are 172 ARXIV subject areas, making the prediction task a 172-class classification problem.

Dataset splitting. The splitting strategy is the same as that used in ogbn-arxiv, *i.e.*, the time-based split. Specifically, the training nodes (with labels) are all ARXIV papers published until 2017, while the validation nodes are the ARXIV papers published in 2018, and the models are tested on ARXIV papers published since 2019.

Discussion. Our initial benchmarking results are shown in Table 10, where the directed graph is converted to an undirected one for simplicity. As most existing models have difficulty handling such a gigantic graph, we benchmark the two simplest models,¹⁴ MLP and SGC [91], which is a simplified variant of textscGCN [49] that essentially pre-processes node features using graph adjacency information. We obtain SGC node embeddings on the CPU (requiring more than 100GB of memory), after which we train the final MLP with mini-batches on an ordinary GPU.

We see from Table 10 that the graph-based model, SGC, despite its simplicity, performs much better than the naïve MLP baseline. Nevertheless, we observe severe underfitting of SGC, indicating that using more expressive GNNs is likely to improve both training and test accuracy. It is therefore fruitful to explore how to scale expressive and advanced GNNs to the gigantic Web-scale graph, going beyond the simple pre-processing of node features. Overall, ogbn-papers100M is by far the largest benchmark dataset for node classification over a homogeneous graph, and is meant to significantly push the scalability of graph models.

B.5 ogbn-mag: Heterogeneous Microsoft Academic Graph (MAG)

The ogbn-mag dataset is a heterogeneous network composed of a subset of the Microsoft Academic Graph (MAG) [87]. It contains four types of entities—papers (736,389 nodes), authors (1,134,649 nodes), institutions (8,740 nodes), and fields of study (59,965 nodes)—as well as four types of directed relations connecting two types of entities—an author “is affiliated with” an institution,¹⁵ an author “writes” a paper, a paper “cites” a paper, and a paper “has a topic of” a field of study. Similar to ogbn-arxiv described in Appendix B.3, each paper is associated with a 128-dimensional WORD2VEC feature vector, and all the other types of entities are not associated with input node features.

Prediction task. Given the heterogeneous ogbn-mag data, the task is to predict the venue (conference or journal) of each paper, given its content, references, authors, and authors’ affiliations. This is of practical interest as some manuscripts’ venue information is unknown or missing in MAG, due to the noisy nature of Web data. In total, there are 349 different venues in ogbn-mag, making the task a 349-class classification problem.

Dataset splitting. We follow the same time-based strategy as ogbn-arxiv and ogbn-papers100M to split the paper nodes in the heterogeneous graph, *i.e.*, training models

¹³In practice, the trained models can also be used to predict labels of even non-ARXIV papers.

¹⁴NODE2VEC is omitted as it is computationally costly on such a gigantic graph.

¹⁵For each author, we include all the institutions that the author has ever belonged to.

Table 11: **Results for ogbn-mag.**
[†]Requires a GPU with 14GB of memory.

Method	Accuracy (%)		
	Training	Validation	Test
MLP	28.33±0.20	26.26±0.16	26.92±0.26
GCN	29.71±0.19	29.53±0.22	30.43±0.25
GRAPHSAGE	30.79±0.19	30.70±0.19	31.53±0.15
METAPATH2VEC	38.35±1.39	35.06±0.17	35.44±0.36
R-GCN [†]	75.87±4.19	40.84±0.41	39.77±0.46
NEIGHBORSAMPLING	68.53±7.27	47.61±0.68	46.78±0.67
CLUSTERGCN	79.65±4.12	38.40±0.31	37.32±0.37
GRAPHSAINTE	79.64±1.70	48.37 ±0.26	47.51 ±0.22

to predict venue labels of all papers published before 2018, validating and testing the models on papers published in 2018 and since 2019, respectively.

Discussion. As ogbn-mag is a heterogeneous graph, we consider slightly different sets of GNN and node embedding baselines. Specifically, for GCN and GRAPHSAGE, as they are originally designed for homogeneous graphs, we apply the models over the homogeneous subgraph, retaining only paper nodes and their citation relations. We also consider the RELATIONAL-GCN (R-GCN) [72] that is specifically designed for heterogeneous graphs and uses specialized message passing parameters for different edge types. Since only “paper” nodes come with node features, we use trainable embeddings for the remaining nodes. For the node embedding model, instead of NODE2VEC, we adopt METAPATH2VEC [26], as it is specifically designed for heterogeneous graphs. For each relation, *e.g.*, an author “writes” a paper, the reverse relation, *e.g.*, a paper “is written by” an author, is added to allow bidirectional message passing in GNNs.

Our benchmarking results are shown in Table 11. First, we see that MLP, GCN, and GRAPHSAGE perform worse than the models that actually utilize heterogeneous graph information, *i.e.*, METAPATH2VEC, R-GCN, and the mini-batch GNNs.¹⁶ This highlights that exploiting the heterogeneous nature of the graph is essential to achieving good performance on this dataset.

Second, we see that the mini-batch GNNs, especially NEIGHBORSAMPLING and GRAPHSAINTE, give surprisingly promising results, outperforming the full-batch R-GCN by a large margin. This is likely due to the regularization effect of the noise induced by mini-batch sampling and edge dropout [71]. In contrast, CLUSTERGCN gives worse performance than its full-batch variant, indicating that the bias introduced by the pre-computed partitioning has a negative effect on the model’s performance (as can be also seen by its highly overfitting training performance).

Nevertheless, heterogeneous graph models as well as their mini-batch training methods have been much less explored compared to their homogeneous counterparts, due to the smaller number of established benchmarks. Overall, ogbn-mag is meant to catalyze the development of scalable and accurate heterogeneous graph models, going beyond homogeneous graphs. A fruitful research direction is to adopt advanced techniques developed for homogeneous graphs to improve the performance on heterogeneous graphs.

C Comprehensive Descriptions of OGB Link Property Prediction

We currently provide 6 datasets, adopted from diverse application domains for predicting the properties of links (pairs of nodes). Specifically, ogbl-ppa is a protein-protein association network [80] (*cf.* Appendix C.1), ogbl-collab is an author collaboration network [87] (*cf.* Appendix C.2), ogbl-ddi is a drug-drug interaction network [90] (*cf.* Appendix C.3), ogbl-citation is a paper citation network [87] (*cf.* Appendix C.4), ogbl-biokg is a heterogeneous knowledge graph

¹⁶The R-GCN architecture is used for neighbor aggregation.

compiled from a large number of biomedical repositories (*cf.* Appendix C.6), and `ogbl-wikikg` is a Wikidata knowledge graph [85] (*cf.* Appendix C.5).

The different datasets are highly diverse in their graph structure, as shown in Table 2. For example, the biological networks (`ogbl-ppa` and `ogbl-ddi`) are much denser than the academic networks (`ogbl-collab` and `ogbl-citation`) and the knowledge graphs (`ogbl-wikikg` and `ogbl-biokg`), as can be seen from the large average node degree, small number of nodes, and the small graph diameter. On the other hand, the collaboration network, `ogbl-collab`, has more clustered graph structure than the other datasets, as can be seen from its high average clustering coefficient. Comparing the two knowledge graph datasets, `ogbl-wikikg` and `ogbl-biokg`, we see that the former is much more sparse and less clustered than the latter.

Baselines. We implement different sets of baselines for link prediction datasets that only have a single edge type, and KG completion datasets that have multiple edge/relation types.

Baselines for link prediction datasets. We consider the following representative models as our baselines for the link prediction datasets unless otherwise specified. For all models, edge features are obtained by using the Hadamard operator \odot between pair-wise node embeddings, and are then inputted to an MLP for the final prediction. During training, we randomly sample edges and use them as negative examples. We use the same number of negative edges as there are positive edges. Below, we describe how each model obtains node embeddings:

- **MLP:** Input node features are directly used as node embeddings.
- **NODE2VEC:** The node embeddings are obtained by concatenating input features and NODE2VEC embeddings [35, 66].
- **GCN:** The node embeddings are obtained by full-batch Graph Convolutional Networks (GCN) [49].
- **GRAPHSAGE:** The node embeddings are obtained by full-batch GraphSAGE [37], where we adopt its mean pooling variant and a simple skip connection to preserve central node features.
- **MATRIXFACTORIZATION:** The distinct embeddings are assigned to different nodes and are learned in an end-to-end manner together with the MLP predictor.
- **NEIGHBORSAMPLING** (optional): A mini-batch training technique of GNNs [37] that samples neighborhood nodes when performing aggregation.
- **CLUSTERGCN** (optional): A mini-batch training technique of GNNs [17] that partitions the graphs into a fixed number of subgraphs and draws mini-batches from them.
- **GRAPHSAINTE** (optional): A mini-batch training technique of GNNs [103] that samples subgraphs via a random walk sampler.

Similar to the node property prediction baselines, the mini-batch GNN training, NEIGHBORSAMPLING, CLUSTERGCN, and GRAPHSAINTE, are experimented only for graph datasets where full-batch GCN and GRAPHSAGE did not fit into the common GPU memory size of 11GB. To choose the GNN architecture for the mini-batch GNNs, we first run full-batch GCN and GRAPHSAGE on a NVIDIA Quadro RTX 8000 with 48GB of memory, and then adopt the best performing full-batch GNN architecture for the mini-batch GNNs. All models are trained with a fixed hidden dimensionality of 256, a fixed number of three layers, and a tuned dropout ratio $\in \{0.0, 0.5\}$.

Baselines for KG completion datasets. We consider the following representative KG embedding models as our baselines for the KG datasets unless otherwise specified.

- **TRANSE:** Translation-based KG embedding model by Bordes *et al.* [14].
- **DISTMULT:** Multiplication-based KG embedding model by Yang *et al.* [96].
- **COMPLEX:** Complex-valued multiplication-based KG embedding model by Trouillon *et al.* [81].
- **ROTATE:** Rotation-based KG embedding model by Sun *et al.* [78].

For KGs with many entities and relations, the embedding dimensionality can be limited by the available GPU memory, as the embeddings need to be loaded into GPU all at once. We therefore choose the dimensionality such that training can be performed on a fixed-budget of GPU memory. Our training procedure follows Sun *et al.* [78], where we perform negative sampling and use margin-based logistic loss for the loss function.

Table 12: Results for ogbl-ppa.

Method	Hits@100 (%)		
	Training	Validation	Test
MLP	0.46±0.00	0.46±0.00	0.46±0.00
NODE2VEC	24.43±0.92	22.53±0.88	22.26±0.83
GCN	19.89±1.51	18.45±1.40	18.67±1.32
GRAPHSAGE	18.53±2.85	17.24±2.64	16.55±2.40
MATRIXFACTORIZATION	81.65±9.15	32.28±4.28	32.29±0.94

C.1 ogbl-ppa: Protein-Protein Association Network

The ogbl-ppa dataset is an undirected, unweighted graph. Nodes represent proteins from 58 different species, and edges indicate biologically meaningful associations between proteins, *e.g.*, physical interactions, co-expression, homology or genomic neighborhood [80]. We provide a graph object constructed from training edges (*i.e.*, no validation and test edges are contained). Each node contains a 58-dimensional one-hot feature vector that indicates the species that the corresponding protein comes from.

Prediction task. The task is to predict new association edges given the training edges. The evaluation is based on how well a model ranks positive test edges over negative test edges. Specifically, we rank each positive edge in the validation/test set against 3,000,000 randomly-sampled negative edges, and count the ratio of positive edges that are ranked at the K -th place or above (Hits@ K). We found $K = 100$ to be a good threshold to rate a model’s performance in our initial experiments. Overall, this metric is much more challenging than ROC-AUC because the model needs to consistently rank the positive edges higher than *nearly all* the negative edges.

Dataset splitting. We provide a biological throughput split of the edges into training/validation/test edges. Training edges are protein associations that are measured experimentally by a high-throughput technology (*e.g.*, cost-effective, automated experiments that make large scale repetition feasible [8, 60, 102]) or are obtained computationally (*e.g.*, via text-mining). In contrast, validation and test edges contain protein associations that can only be measured by low-throughput, resource-intensive experiments performed in laboratories. In particular, the goal is to predict a particular type of protein association, *e.g.*, physical protein-protein interaction, from other types of protein associations (*e.g.*, co-expression, homology, or genomic neighborhood) that can be more easily measured and are known to correlate with associations that we are interested in.

Discussion. Our initial benchmarking results are shown in Table 12. First, the MLP baseline¹⁷ performs extremely poorly, which is to be expected since the node features are not rich in this dataset. Surprisingly, both GNN baselines (GCN, GRAPHSAGE) and NODE2VEC fail to overfit on the training data and show similar performances across training/validation/test splits. The poor training performance of GNNs suggests that *positional* information, which cannot be captured by GNNs alone [101], might be crucial to fit training edges and obtain meaningful node embeddings. On the other hand, we see that MATRIXFACTORIZATION, which learns a distinct embedding for each node (thus, it can express any positional information of nodes), is indeed able to overfit on the training data, while also reaching better validation and test performance. However, the poor generalization performance still encourages the development of new research ideas to close this gap, *e.g.*, by injecting positional information into GNNs or by developing more sophisticated negative sampling techniques.

C.2 ogbl-collab: Author Collaboration Network

The ogbl-collab dataset is an undirected graph, representing a subset of the collaboration network between authors indexed by MAG [87]. Each node represents an author and edges indicate the collaboration between authors. All nodes come with 128-dimensional features, obtained by averaging the word embeddings of papers that are published by the authors. All edges are associated with two types of meta-information: the year and the edge weight, representing the number of co-authored papers published in that year. The graph can be viewed as a dynamic multi-graph since there can be multiple edges between two nodes if they collaborate in more than one year.

¹⁷Here we obtain node embeddings by applying a linear layer to the raw one-hot node features.

Table 13: Results for `ogbl-collab`.

Method	Use most recent edges	Hits@50 (%)		
		Training	Validation	Test
MLP	✗	45.70±1.66	24.02±1.45	19.27±1.29
NODE2VEC	✗	99.73±0.36	57.03 ±0.52	48.88 ±0.54
GCN	✗	84.28±1.78	52.63±1.15	44.75±1.07
GRAPHSAGE	✗	93.58±0.59	56.88±0.77	48.10±0.81
MATRIXFACTORIZATION	✗	100.00±0.00	48.96±0.29	38.86±0.29
GCN	✓	84.28±1.78	52.63±1.15	47.14±1.45
GRAPHSAGE	✓	93.58±0.59	56.88±0.77	54.63 ±1.12

Prediction task. The task is to predict the author collaboration relationships in a particular year given the past collaborations. As the task is a time-series problem, it is natural for models to incorporate the most recent edge information to make prediction, *e.g.*, use validation edges when predicting test edges. The evaluation metric is similar to `ogbl-ppa` in Appendix C.1, where we would like the model to rank true collaborations higher than false collaborations. Specifically, we rank each true collaboration among a set of 100,000 randomly-sampled negative collaborations, and count the ratio of positive edges that are ranked at K -place or above (Hits@ K). We found $K = 50$ to be a good threshold in our preliminary experiments.

Dataset splitting. We split the data according to time, in order to simulate a realistic application in collaboration recommendation. Specifically, we use the collaborations until 2017 as training edges, those in 2018 as validation edges, and those in 2019 as test edges.

Discussion. Our initial benchmarking results are shown in Table 13. First, we consider the conventional setting where validation edges are used only for model selection. From the upper half of Table 13, we see that NODE2VEC achieves the best results, followed by the two GNN models and MATRIXFACTORIZATION. This can be explained by the fact that positional information, *i.e.*, past collaborations, is a much more indicative feature for predicting future collaboration than solely relying on the average paper representations of authors, *i.e.*, the same research interest. Notably, MATRIXFACTORIZATION achieves nearly perfect training results, but cannot transfer the good results to the validation and test splits, even when heavy regularization is applied. Overall, it is fruitful to explore injecting positional information into GNNs, and develop better regularization methods. This dataset further provides a unique research opportunity for dynamic multi-graphs. To demonstrate the potential benefit of time-series modeling, we use the same GCN and GRAPHSAGE models as before but at test time, we additionally incorporate the most recent edges (*i.e.*, validation edges) as input to the models. From the lower half of Table 13, we see that the test performances of both GNN models increase significantly by using validation edges at the inference time. One promising direction to further increase the performance is to treat edges at different timestamps differently, as recent collaborations may be more indicative about the future collaborations than the past ones.

C.3 `ogbl-ddi`: Drug-Drug Interaction Network

The `ogbl-ddi` dataset is a homogeneous, unweighted, undirected graph, representing the drug-drug interaction network [90]. Each node represents an FDA-approved or experimental drug. Edges represent interactions between drugs and can be interpreted as a phenomenon where the joint effect of taking the two drugs together is considerably different from the expected effect in which drugs act independently of each other.

Prediction task. The task is to predict drug-drug interactions given information on already known drug-drug interactions. The evaluation metric is similar to `ogbl-collab` discussed in Appendix C.2, where we would like the model to rank true drug interactions higher than non-interacting drug pairs. Specifically, we rank each true drug interaction among a set of approximately 100,000 randomly-sampled negative drug interactions, and count the ratio of positive edges that are ranked at K -place or above (Hits@ K). We found $K = 20$ to be a good threshold in our preliminary experiments.

Table 14: Results for `ogbl-ddi`.

Method	Hits@20 (%)		
	Training	Validation	Test
NODE2VEC	37.82±1.35	32.92±1.21	23.26±2.09
GCN	63.95±2.17	55.50±2.08	37.07±5.07
GRAPHSAGE	72.24±0.45	62.62 ±0.37	53.90 ±4.74
MATRIXFACTORIZATION	56.56±13.88	33.70±2.64	13.68±4.75

Dataset splitting. We develop a *protein-target split*, meaning that we split drug edges according to what proteins those drugs target in the body. As a result, the test set consists of drugs that predominantly bind to different proteins from drugs in the train and validation sets. This means that drugs in the test set work differently in the body, and have a rather different biological mechanism of action than drugs in the train and validation sets. The protein-target split thus enables us to evaluate to what extent the models can generate practically useful predictions [36], *i.e.*, non-trivial predictions that are not hindered by the assumption that there exist already known and very similar medications available for training.

Discussion. Our initial benchmarking results are shown in Table 14. Since `ogbl-ddi` does not contain any node features, we omit the graph-agnostic MLP baseline for this experiment. Furthermore, for GCN and GRAPHSAGE, node features are also represented as distinct embeddings and learned in an end-to-end manner together with the GNN parameters.

Interestingly, both the GNN models and the MATRIXFACTORIZATION approach achieve significantly higher training results than NODE2VEC. However, only the GNN models are able to transfer this performance to the test set to some extent, suggesting that relational information is crucial to allow the model to generalize to unseen interactions. Notably, most of the models show high performance variance, which can be partly attributed to the dense nature of the graph and the challenging data split. We further perform the conventional random split of edges, where we find GRAPHSAGE is able to achieve 80.88±2.42% test Hits@20. This indicates that the protein-target split is indeed more challenging than the conventional random split. Overall, `ogbl-ddi` presents a unique challenge of predicting out-of-distribution links in dense graphs.

C.4 `ogbl-citation`: Paper Citation Network

The `ogbl-citation` dataset is a directed graph, representing the citation network between a subset of papers extracted from MAG [87]. Similar to `ogbn-arxiv` in Appendix B.3, each node is a paper with 128-dimensional WORD2VEC features that summarizes its title and abstract, and each directed edge indicates that one paper cites another. All nodes also come with meta-information indicating the year the corresponding paper was published.

Prediction task. The task is to predict missing citations given existing citations. Specifically, for each source paper, two of its references are randomly dropped, and we would like the model to rank the missing two references higher than 1,000 negative reference candidates. The negative references are randomly-sampled from all the previous papers that are not referenced by the source paper. The evaluation metric is Mean Reciprocal Rank (MRR), where the reciprocal rank of the true reference among the negative candidates is calculated for each source paper, and then the average is taken over all source papers.

Dataset splitting. We split the edges according to time, in order to simulate a realistic application in citation recommendation (*e.g.*, a user is writing a new paper and has already cited several existing papers, but wants to be recommended additional references). To this end, we use the most recent papers (those published in 2019) as the source papers for which we want to recommend the references. For each source paper, we drop *two* papers from its references—the resulting two dropped edges (pointing from the source paper to the dropped papers) are used respectively for validation and testing. All the rest of the edges are used for training.

Discussion. Our initial benchmarking results are shown in Table 15, where the directed graph is converted to an undirected one for simplicity. Here, the GNN models achieve the best results,

Table 15: **Results for ogbl-citation.**
[†]Requires a GPU with 40GB of memory

Method	MRR		
	Training	Validation	Test
MLP	0.2889±0.0014	0.2898±0.0014	0.2904±0.0013
NODE2VEC	0.6831±0.0011	0.5944±0.0011	0.5964±0.0011
GCN [†]	0.9064±0.0100	0.8449 ±0.0108	0.8456 ±0.0110
GRAPHSAGE [†]	0.8891±0.0079	0.8217±0.0086	0.8228±0.0084
MATRIXFACTORIZATION	0.9171±0.0179	0.5311±0.0565	0.5316±0.0565
NEIGHBORSAMPLING	0.8621±0.0008	0.8048±0.0013	0.8048±0.0015
CLUSTERGCN	0.8754±0.0033	0.7999±0.0027	0.8021±0.0029
GRAPHSAINTE	0.8626±0.0046	0.7933±0.0046	0.7943±0.0043

followed by MATRIXFACTORIZATION and NODE2VEC. Among the GNNs, GCN performs better than GRAPHSAGE. However, these GNNs use full-batch training; thus, they are not scalable and require more than 40GB of GPU memory to train, which is intractable on most of the GPUs available today. Hence, we also experiment with the scalable mini-batch training techniques of GNNs, NEIGHBORSAMPLING, CLUSTERGCN, and GRAPHSAINTE. Interestingly, we see from Table 15 that these techniques give worse performance than their full-batch counterpart, which is in contrast to the node classification datasets (*e.g.*, ogbn-products and ogbn-mag), where the mini-batch-based models give stronger generalization performances. This limitation presents a unique challenge for applying the mini-batch techniques to link prediction, differently from those pertaining to node prediction. Overall, ogbl-citation provides a research opportunity to further improve GNN models and their scalable mini-batch training techniques in the context of link prediction.

C.5 ogbl-wikikg: Wikidata Knowledge Graph

The ogbl-wikikg dataset is a Knowledge Graph (KG) extracted from the Wikidata knowledge base [85]. It contains a set of triplet edges (head, relation, tail), capturing the different types of relations between entities in the world, *e.g.*, *Canada* $\xrightarrow{\text{citizen}}$ *Hinton*. We retrieve all the relational statements in Wikidata and filter out rare entities. Our KG contains 2,500,604 entities and 535 relation types.

Prediction task. The task is to predict new triplet edges given the training edges. The evaluation metric follows the standard filtered metric widely used in KGs [14, 78, 81, 96]. Specifically, we corrupt each test triplet edges by replacing its head or tail with randomly-sampled 1,000 negative entities (500 for head and 500 for tail), while ensuring the resulting triplets do not appear in KG. The goal is to rank the true head (or tail) entities higher than the negative entities, which is measured by Mean Reciprocal Rank (MRR).

Dataset splitting. We split the triplets according to time, simulating a realistic KG completion scenario that aims to fill in missing triplets that are not present at a certain timestamp. Specifically, we downloaded Wikidata at three different time stamps¹⁸ (May, August, and November of 2015), and constructed three KGs where we only retain entities and relation types that appear in the earliest May KG. We use the triplets in the May KG for training, and use the additional triplets in the August and November KGs for validation and test, respectively. Note that our dataset split is different from the existing Wikidata KG dataset that adopts a conventional random split [89], which does not reflect the practical usage.

Discussion. Our benchmark results are provided in Table 16, where the upper-half baselines are implemented on a single commodity GPU with 11GB memory, while the bottom-half baselines are

¹⁸Available at <https://archive.org/search.php?query=creator%3A%22Wikidata+editors%22>

Table 16: **Results for ogbl-wikikg.**
[†]Requires a GPU with 48GB of memory.

Method	MRR		
	Training (Unfiltered)	Validation (Filtered)	Test (Filtered)
TRANSE	0.3326±0.0041	0.2314±0.0035	0.2535±0.0036
DISTMULT	0.4131±0.0057	0.3142±0.0066	0.3434±0.0079
COMPLEX	0.4605±0.0020	0.3612±0.0063	0.3877±0.0051
ROTATE	0.3469±0.0055	0.2366±0.0043	0.2681±0.0047
TRANSE (6×dim) [†]	0.6491±0.0022	0.4587±0.0031	0.4536±0.0028
DISTMULT (6×dim) [†]	0.4339±0.0011	0.3403±0.0009	0.3612±0.0030
COMPLEX (6×dim) [†]	0.4712±0.0045	0.3787±0.0036	0.4028±0.0033
ROTATE (6×dim) [†]	0.6084±0.0025	0.3613±0.0031	0.3626±0.0041

implemented on a high-end GPU with 48GB memory.¹⁹ Training MRR in Table 16 is an *unfiltered* metric,²⁰ as filtering is computationally expensive for the large number of training triplets.

First, we see from the upper-half of Table 16 that when the limited embedding dimensionality is used, COMPLEX performs the best among the four baselines. With the increased dimensionality, all four models are able to achieve higher MRR on training, validation and test sets, as seen from the bottom-half of Table 16. This suggests the importance of using a sufficient large embedding dimensionality to achieve good performance in this dataset. Interestingly, although TRANSE performs the worst with the limited dimensionality, it obtains the best performance with the increased dimensionality. Nevertheless, the extremely low test MRR²¹ suggests that our realistic KG completion dataset is highly non-trivial. It presents a realistic generalization challenge of *discovering* new triplets based on existing ones, which necessitates the development of KG models with more robust and generalizable reasoning capability. Furthermore, this dataset presents an important challenge of effectively scaling embedding models to large KGs—naïvely training KG embedding models with reasonable dimensionality would require a high-end GPU, which is extremely costly and not scalable to even larger KGs. A promising approach to improve scalability is to distribute training across multiple commodity GPUs [52, 105, 106]. A different approach is to share parameters across entities and relations, so that a smaller number of embedding parameters need to be put onto the GPU memory at once.

C.6 ogbl-biokg: Biomedical Knowledge Graph

The ogbl-biokg dataset is a Knowledge Graph (KG), which we created using data from a large number of biomedical data repositories. It contains 5 types of entities: diseases (10,687 nodes), proteins (17,499), drugs (10,533 nodes), side effects (9,969 nodes), and protein functions (45,085 nodes). There are 51 types of directed relations connecting two types of entities, including 39 kinds of drug-drug interactions, 8 kinds of protein-protein interaction, as well as drug-protein, drug-side effect, drug-protein, function-function relations. All relations are modeled as directed edges, among which the relations connecting the same entity types (*e.g.*, protein-protein, drug-drug, function-function) are always symmetric, *i.e.*, the edges are bi-directional.

¹⁹Given a fixed 11GB GPU memory budget, we adopt 100-dimension embeddings for DISTMULT and TRANSE. Since ROTATE and COMPLEX require the entity embeddings with the real and imaginary parts, we train these two models with the dimensionality of 50 for each part. On the other hand, on the high-end GPU with 48GB memory, we are able to train all the models with 6× larger embedding dimensionality.

²⁰This means that the training MRR is computed by ranking against randomly-selected negative entities without filtering out triplets that appear in KG. The unfiltered metric has the systematic bias of being smaller than the filtered counterpart (computed by ranking against “true” negative entities, *i.e.*, the resulting triplets do not appear in the KG) [14].

²¹Note that our test MRR on ogbl-wikikg is computed using only 500 negative entities per triplet, which is much less than the number of negative entities used to compute MRR in the existing KG datasets, such as FB15K and FB15K-237 (around 15,000 negative entities). Nevertheless, ROTATE gives either lower or comparable test MRR on ogbl-wikikg compared to FB15K and FB15K-237 [78].

Table 17: Results for ogbl-biokg.

Method	MRR		
	Training (Unfiltered)	Validation (Filtered)	Test (Filtered)
TRANSE	0.5145 \pm 0.0005	0.7456 \pm 0.0003	0.7452 \pm 0.0004
DISTMULT	0.5250 \pm 0.0006	0.8055 \pm 0.0003	0.8043 \pm 0.0003
COMPLEX	0.5315 \pm 0.0006	0.8105 \pm 0.0001	0.8095 \pm 0.0007
ROTATE	0.5363 \pm 0.0007	0.7997 \pm 0.0002	0.7989 \pm 0.0004

This dataset is relevant to both biomedical and fundamental ML research. On the biomedical side, the dataset allows us to get better insights into human biology and generate predictions that can guide downstream biomedical research. On the fundamental ML side, the dataset presents challenges in handling a noisy, incomplete KG with possible contradictory observations. This is because the ogbl-biokg dataset involves heterogeneous interactions that span from the molecular scale (*e.g.*, protein-protein interactions within a cell) to whole populations (*e.g.*, reports of unwanted side effects experienced by patients in a particular country). Further, triplets in the KG come from sources with a variety of confidence levels, including experimental readouts, human-curated annotations, and automatically extracted metadata.

Prediction task. The task is to predict new triplets given the training triplets. The evaluation protocol is exactly the same as ogbl-wikikg in Appendix C.5, except that here we only consider ranking against entities *of the same type*. For instance, when corrupting head entities of the protein type, we only consider negative protein entities.

Dataset splitting. For this dataset, we adopt a random split. While splitting the triplets according to time is an attractive alternative, we note that it is incredibly challenging to obtain accurate information as to when individual experiments and observations underlying the triplets were made. We strive to provide additional dataset splits in future versions of the OGB.

Discussion. Our benchmark results are provided in Table 17, where we adopt 2000-dimensional embeddings for DISTMULT and TRANSE, and 1000-dimensional embeddings for the real and imaginary parts of ROTATE and COMPLEX. Negative sampling is performed only over entities of the same types. Similar to Table 16 in Appendix C.5, training MRR in Table 17 is an *unfiltered* metric.²²

Among the four models, COMPLEX achieves the best test MRR, while TRANSE gives significantly worse performance compared to the other models. The worse performance of TRANSE can be explained by the fact that TRANSE cannot model symmetric relations [81] that are prevalent in this dataset, *e.g.*, protein-protein and drug-drug relations are all symmetric. Overall, it is of great practical interest to further improve the model performance. A promising direction is to develop a more specialized method for the *heterogeneous* knowledge graph, where multiple node types exist and the entire graph follows the pre-defined schema.

D Comprehensive Descriptions of OGB Graph Property Prediction

We currently provide 4 datasets, adopted from 3 distinct application domains, for predicting the properties of entire graphs or subgraphs. Specifically, ogbg-molhiv and ogbg-molpcba are molecular graphs originally curated by Wu *et al.* [92] (*cf.* Appendix D.1), ogbg-ppa is a set of protein-protein association subgraphs [108] (*cf.* Appendix D.2), and ogbg-code is a collection of ASTs of source code [43] (*cf.* Appendix D.3).

The different datasets are highly diverse in their graph structure, as shown in Table 2. For example, compared with the other graph datasets, the biological subgraphs, ogbg-ppa, have much larger number of nodes per graph, as well as much denser and clustered graph structure, as seen by the large average node degree, large average clustering coefficient, and large graph diameter.

²²In Table 17, training MRR is lower than validation and test MRR because it is an *unfiltered* metric (computed by ranking against randomly-selected negative entities), and is expected to give systematically lower MRR than the filtered metric (computed by ranking against “true” negative entities, *i.e.*, the resulting triplets do not appear in the KG).

This is contrast to the molecular graphs, `ogbg-molhiv` and `ogbg-molpcba`, as well as the ASTs, `ogbg-code`, both of which are tree-like graphs—in fact, ASTs are exactly trees—with small average node degrees, small average clustering coefficient, and large average graph diameter. Despite the similarity, the molecular graphs and the ASTs are distinct in that the ASTs have much larger number of nodes with well-defined root nodes.

Baselines. We consider the following representative GNNs as our baselines unless otherwise specified. GNNs are used to obtain node embeddings, which are then pooled to give the embedding of the entire graph. Finally, a linear model is applied to the graph embedding to make predictions.

- **GCN:** Graph Convolutional Networks [48].
- **GCN+VIRTUAL NODE:** GCN that performs message passing over augmented graphs with virtual nodes, *i.e.*, additional nodes that are connected to all nodes in the original graphs [34, 44, 55].
- **GIN:** Graph Isomorphism Network [94].
- **GIN+VIRTUAL NODE:** GIN that performs message passing over augmented graphs with virtual nodes.

To include edge features, we follow Hu *et al.* [40] and add transformed edge features into the incoming node features. For all the experiments, we use 5-layer GNNs, average graph pooling, a hidden dimensionality of 300, and a tuned dropout ratio $\in \{0.0, 0.5\}$.

D.1 `ogbg-mol*`: Molecular Graphs

The `ogbg-molhiv` and `ogbg-molpcba` datasets are two molecular property prediction datasets of different sizes: `ogbg-molhiv` (small) and `ogbg-molpcba` (medium). They are adopted from the MOLECULENET [92], and are among the largest of the MOLECULENET datasets. Besides the two main molecule datasets, we also provide the 10 other MOLECULENET datasets, which are summarized and benchmarked in Appendix F. These datasets can be used to stress-test molecule-specific methods [46, 97] and transfer learning [40]. All the molecules are pre-processed using RDKit [51]. Each graph represents a molecule, where nodes are atoms, and edges are chemical bonds. Input node features are 9-dimensional, containing atomic number and chirality, as well as other *additional* atom features such as formal charge and whether the atom is in the ring. Input edge features are 3-dimensional, containing bond type, bond stereochemistry as well as an *additional* bond feature indicating whether the bond is conjugated. Note that the above additional features are not needed to uniquely identify molecules, and are not adopted in the previous work [40, 44]. In the experiments, we perform an ablation study on the molecule features and find that including the additional features improves generalization performance.

Prediction task. The task is to predict the target molecular properties as accurately as possible, where the molecular properties are cast as binary labels, *e.g.*, whether a molecule inhibits HIV virus replication or not. For evaluation metric, we closely follow Wu *et al.* [92]. Specifically, for `ogbg-molhiv`, we use ROC-AUC for evaluation. For `ogbg-molpcba`, as the class balance is extremely skewed (only 1.4% of data is positive) and the dataset contains multiple classification tasks, we use the Average Precision (AP) averaged over the tasks as the evaluation metric.²³

Dataset splitting. We adopt the *scaffold splitting* procedure that splits the molecules based on their two-dimensional structural frameworks. The scaffold splitting attempts to separate structurally different molecules into different subsets, which provides a more realistic estimate of model performance in prospective experimental settings. The scaffold splitting was originally proposed by Wu *et al.* [92] and has been adopted by the follow-up works [40, 44, 70, 97]; however, the precise implementation differs significantly across works, making their results not directly comparable to each other. In OGB, we aim to standardize the scaffold split by adopting its most challenging version where test molecules are maximally diverse.

Discussion. Benchmarking results are given in Tables 18 and 19. We see that GIN with the additional features and VIRTUAL NODES provides the best performance in the two datasets. In Appendix F, we show that even for the other MOLECULENET datasets, the additional features consistently improve

²³Wu *et al.* [92] originally used a closely-related metric, PRC (Precision Recall Curve)-AUC, but Davis and Goadrich [21] showed that AP is more appropriate to summarize the non-convex nature of PRC.

Table 18: Results for ogbg-molhiv.

Method	Additional Features	Virtual Node	ROC-AUC (%)		
			Training	Validation	Test
GCN	✗	✓	88.65±1.01	83.73±0.78	74.18±1.22
	✓	✗	88.65±2.19	82.04±1.41	76.06±0.97
	✓	✓	90.07±4.69	83.84±0.91	75.99±1.19
GIN	✗	✓	93.89±2.96	84.1±1.05	75.2±1.30
	✓	✗	88.64±2.54	82.32±0.90	75.58±1.40
	✓	✓	92.73±3.80	84.79 ±0.68	77.07 ±1.49

Table 19: Results for ogbg-molpcba.

Method	Additional Features	Virtual Node	AP (%)		
			Training	Validation	Test
GCN	✗	✓	36.25±0.71	23.88±0.22	22.91±0.37
	✓	✗	28.04±0.58	20.59±0.33	20.20±0.24
	✓	✓	38.25±0.50	24.95±0.42	24.24±0.34
GIN	✗	✓	45.70±0.61	27.54±0.25	26.61±0.17
	✓	✗	37.05±0.31	23.05±0.27	22.66±0.28
	✓	✓	46.96±0.57	27.98 ±0.25	27.03 ±0.23

generalization performance. In OGB, we therefore include the additional node/edge features in our molecular graphs.

We further report the performance on the random splitting, keeping the split ratio the same as the scaffold splitting. We find the random split to be much easier than scaffold split. On random splits of ogbg-molhiv and ogbg-molpcba, the best GIN achieves the ROC-AUC of 82.73±2.02% (5.66 percentage points higher than scaffold) and AP of 34.40±0.90% (7.37 percentage points higher than scaffold), respectively. The same trend holds true for the other MOLECULENET datasets, e.g., the best GIN performance on the random split of ogbg-moltox21 is 86.03±1.37%, which is 8.46 percentage points higher than that of the best GIN for the scaffold split (77.57±0.62% ROC-AUC). These results highlight the challenges of the scaffold split compared to the random split, and opens up a fruitful research opportunity to increase the out-of-distribution generalization capability of GNNs.


D.2 ogbg-ppa: Protein-Protein Association Network

The ogbg-ppa dataset is a set of undirected protein association neighborhoods extracted from the protein-protein association networks of 1,581 different species [80] that cover 37 broad taxonomic groups (e.g., mammals, bacterial families, archaeans) and span the tree of life [42]. To construct the neighborhoods, we randomly selected 100 proteins from each species and constructed 2-hop protein association neighborhoods centered on each of the selected proteins [108]. We then removed the center node from each neighborhood and subsampled the neighborhood to ensure the final protein association graph is small enough (less than 300 nodes). Nodes in each protein association graph represent proteins, and edges indicate biologically meaningful associations between proteins. The edges are associated with 7-dimensional features, where each element takes a value between 0 and 1 and represents the strength of a particular type of protein protein association such as gene co-occurrence, gene fusion events, and co-expression.

Prediction task. Given a protein association neighborhood graph, the task is a 37-way multi-class classification to predict what taxonomic group the graph originates from. The ability to successfully tackle this problem has implications for understanding the evolution of protein complexes across species [22], the rewiring of protein interactions over time [73, 108], the discovery of functional

Table 20: Results for `ogbg-ppa`.

Method	Virtual Node	Accuracy (%)		
		Training	Validation	Test
GCN	✗	97.68±0.22	64.97±0.34	68.39±0.84
	✓	97.00±1.00	65.11±0.48	68.57±0.61
GIN	✗	97.55±0.52	65.62±1.07	68.92±1.00
	✓	98.28±0.46	66.78±1.05	70.37±1.07

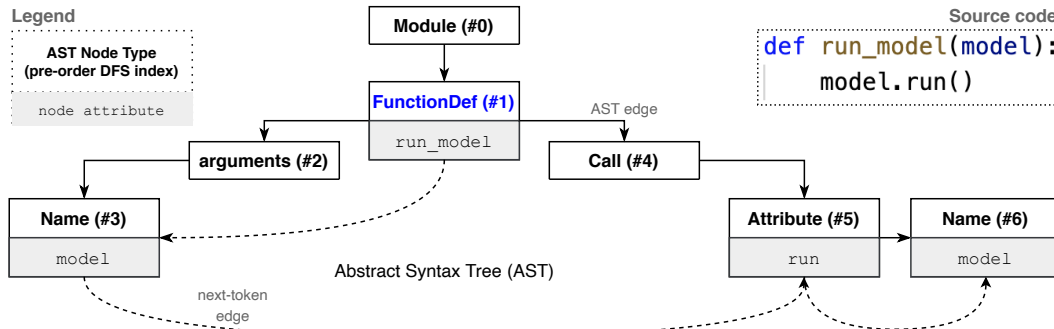Figure 5: Example input graph in `ogbg-code`, obtained by augmenting the original Python AST.

associations between genes even for otherwise rarely-studied organisms [19], and would give us insights into key bioinformatics tasks, such as biological network alignment [61].

Dataset splitting. Similar to `ogbn-proteins` in Appendix B.2, we adopt the *species split*, where the neighborhood graphs in validation and test sets are extracted from protein association networks of species that are *not* seen during training but belong to one of the 37 taxonomic groups. This split stress-tests the model’s capability to extract graph features that are essential to the prediction of the taxonomic groups, which is important for biological understanding of protein associations.

Discussion. Benchmarking results are given in Table 20. Interestingly, similar to the `ogbg-mol*` datasets, GIN with VIRTUAL NODE provides the best performance. Nevertheless, the generalization gap is huge (almost 30 percentage points). For reference, we also experiment with the random splitting scenario, where we use the same model (GIN+VIRTUAL NODE) on the same split ratio. On the random split, the test accuracy is $92.91 \pm 0.27\%$, which is more than 20 percentage points higher than the species split. This again encourages future research to improve the out-of-distribution generalization with more challenging and meaningful split procedure.

D.3 `ogbg-code`: Abstract Syntax Tree of Source Code

The `ogbg-code` dataset is a collection of Abstract Syntax Trees (ASTs) obtained from approximately 450 thousands Python method definitions. Methods are extracted from a total of 13,587 different repositories across the most popular projects on GITHUB (where “popularity” is defined as number of stars and forks). Our collection of Python methods originates from GITHUB CodeSearchNet [43]²⁴, a collection of datasets and benchmarks for machine-learning-based code retrieval. The authors paid particular attention to avoid common shortcomings of previous source code datasets [2], such as duplication of code and labels, low number of projects, random splitting, etc. In `ogbg-code`, we contribute an additional feature extraction step, which includes: AST edges, AST nodes (associated with features such as their types and attributes), tokenized method name. Altogether, `ogbg-code` allows us to capture source code with its underlying graph structure, beyond its token sequence representation.

Prediction task. The task is to predict the sub-tokens forming the method name, given the Python

²⁴<https://github.com/github/CodeSearchNet>

Table 21: Results for `ogbg-code`.

Method	Virtual Node	F1 score (%)		
		Training	Validation	Test
GCN	✗	44.81 \pm 2.79	29.73 \pm 0.14	31.63 \pm 0.18
	✓	45.76 \pm 2.28	30.62 \pm 0.07	32.63 \pm 0.13
GIN	✗	44.97 \pm 3.91	29.81 \pm 0.14	31.63 \pm 0.20
	✓	47.01 \pm 2.10	30.20 \pm 0.16	32.04 \pm 0.18

method body represented by AST and its node features—*i.e.*, node type (from a pool of 97 types), node attributes (such as variable names, with a vocabulary size of 10002), depth in the AST, pre-order traversal index (as illustrated in Figure 5). This task is often referred to in the literature as “code summarization” [3, 6, 7], because the model is trained to find succinct and precise description (*i.e.*, the method name chosen by the developer) for a complete logical unit (*i.e.*, the method body). Code summarization is a representative task in the field of machine learning for code not only for its straightforward adoption in developer tools, but also because it is a proxy measure for assessing how well a model captures the code semantic [5]. Following Alon *et al.* [6, 7], we use an F1 score to evaluate predicted sub-tokens against ground-truth sub-tokens.²⁵ The average length of a method name in the ground-truth is 2.6 sub-tokens, following a power-law distribution.

Dataset splitting. We adopt a *project split* [2], where the ASTs for the train set are obtained from GITHUB projects that do not appear in the validation and test sets. This split respects the practical scenario of training a model on a large collection of source code (obtained, for instance, from the popular GITHUB projects), and then using it to predict method names on a separate code base. The project split stress-tests the model’s ability to capture code’s semantics, and avoids a model that trivially memorizes the idiosyncrasies of training projects (such as the naming conventions and the coding style of a specific developer) to achieve a high test score.

Discussion. Benchmarking results are given in Table 21, where we add “next-token edges” on top of the AST (as illustrated in Figure 5) to better capture the semantics of code graphs [25].²⁶ For the decoder, we use independent linear classifiers to predict sub-tokens at each position of the sub-token sequence.²⁷ The evaluation is performed against the ground-truth sub-tokens. We see from Table 21 that GCN with VIRTUAL NODES provides the best performance. Nevertheless, we observe a huge generalization gap (more than 10 percentage points). For reference, we also experiment with the random splitting scenario, where we apply the same model (GCN+VIRTUAL NODE) on the same split ratio. On the random split, the test F1 score is 36.58 \pm 0.30%, which is approximately 4 percentage points higher than that of the project split in Table 21, indicating that the project split is indeed harder than the random split. Overall, this dataset presents an interesting research opportunity to improve out-of-distribution generalization under the meaningful project split, with a number of fruitful future directions: how to leverage the fact that the original graphs are actually trees with well-defined root nodes, how to pre-train GNNs to improve generalization [40], and how to design a better encoder-decoder architecture with the graph data. To facilitate these directions, we provide enough meta-information, such as the original code snippet as well as an easy-to-use script to transform raw Python code snippets into the ASTs.

²⁵The previous works find that the F1 score over sub-tokens is suitable to assess the quality of a method name prediction, as the semantic of a method name depends solely on its sub-tokens. Note that the F1 score does not take the sub-token ordering into account; thus, “run_model” and “model_run” are considered as exact match.

²⁶The inverse edges are also added to allow bidirectional message passing. The edge direction is recorded in the edge features.

²⁷Although the F1 score is order-insensitive, in our preliminary experiments, we find that our order-sensitive decoder performs slightly better than order-insensitive decoder (predicting whether each vocabulary is included in the target sequence or not). During training, all the target sequences are truncated to the length of 5 (Covering 99% of the target sequences), and vocabulary size of 5,000 is used for prediction (covering 90% of the sub-tokens in the target sequences). We additionally added one vocabulary “UNK” to handle any rare/unknown sub-tokens. Predicting “UNK” sub-token is counted as false positive when the F1 score is calculated.

E OGB Package

The OGB package is designed to make the pipeline of Figure 2 easily accessible to researchers, by automating the data loading and the evaluation parts. OGB is fully compatible with PYTORCH and its associated graph libraries: PYTORCH GEOMETRIC and DEEP GRAPH LIBRARY. OGB additionally provides library-agnostic dataset objects that can be used by any other Python deep learning frameworks such as TENSORFLOW [1] and MXNET [16]. Below, we explain the data loading (*cf.* Appendix E.1) and evaluation (*cf.* Appendix E.2). For simplicity, we focus on the task of the graph property prediction (*cf.* Appendix 5) using PYTORCH GEOMETRIC. For the other tasks, libraries, and more details, refer to <https://ogb.stanford.edu>.

E.1 OGB Data Loaders

The OGB package makes it easy to obtain a dataset object that is fully compatible with PYTORCH GEOMETRIC. As shown in Code Snippet 1, it can be done with only a single line of code, with the end-users only needing to specify the name of the dataset. The OGB package will then download, process, store, and return the requested dataset object. Furthermore, the standardized dataset splitting can be readily obtained from the dataset object.

```
>>> from ogb.graphproppred import PygGraphPropPredDataset
>>> dataset = PygGraphPropPredDataset(name="ogbg-molpcba")
# Pytorch Geometric dataset object
>>> split_idx = dataset.get_idx_split()
# Dictionary containing train/valid/test indices.
>>> train_idx = split_idx["train"]
# torch.tensor storing a list of training indices.
```

Code Snippet 1: OGB Data Loader

E.2 OGB Evaluators

OGB also enables standardized and reliable evaluation with the `ogb.*.Evaluator` class. As shown in Code Snippet 2, the end-users first specify the dataset they want to evaluate their models on, after which the users can learn the format of the input they need to pass to the `Evaluator` object. The input format is dataset-dependent. For example, for the `ogbg-molpcba` dataset, the `Evaluator` object requires as input a dictionary with `y_true` (a matrix storing the ground-truth binary labels²⁸), and `y_pred` (a matrix storing the scores output by the model). Once the end-users pass the specified dictionary as input, the `Evaluator` object returns the model performance that is appropriate for the dataset at hand, *e.g.*, the Average Precision for `ogbg-molpcba`.

```
>>> from ogb.graphproppred import Evaluator
# Get Evaluator for ogbg-molpcba
>>> evaluator = Evaluator(name = "ogbg-molpcba")
# Learn about the specification of input to the Evaluator.
>>> print(evaluator.expected_input_format)
# Prepare input that follows input spec.
>>> input_dict = {"y_true": y_true, "y_pred": y_pred}
# Get the model performance.
result_dict = evaluator.eval(input_dict)
```

Code Snippet 2: OGB Evaluator

²⁸The shape of the matrix is the number of data points times the number of tasks. The matrix can be either a PYTORCH tensor or NUMPY array.

Table 22: **Summary of ogbg-mol* datasets.** For all the datasets, we use the scaffold split with the split ratio of 80/10/10.

Category	Name	#Graphs	Average #Nodes	Average #Edges	#Tasks	Task Type	Metric
Molecular Graph ogbg-mol	tox21	7,831	18.6	19.3	12	Binary class.	ROC-AUC
	toxcast	8,576	18.8	19.3	617	Binary class.	ROC-AUC
	mov	93,087	24.2	26.3	17	Binary class.	AP
	bace	1,513	34.1	36.9	1	Binary class.	ROC-AUC
	bbbp	2,039	24.1	26.0	1	Binary class.	ROC-AUC
	clintox	1,477	26.2	27.9	2	Binary class.	ROC-AUC
	sider	1,427	33.6	35.4	27	Binary class.	ROC-AUC
	esol	1,128	13.3	13.7	1	Regression	RMSE
	freesolv	642	8.7	8.4	1	Regression	RMSE
	lipo	4,200	27.0	29.5	1	Regression	RMSE

F More Benchmark Results on ogbg-mol* Datasets

Here we perform benchmark experiments on the other 10 datasets from MOLECULENET [92]. The datasets are summarized in Table 22. The detailed description of each dataset is provided in Wu *et al.* [92]. We use the same experimental protocol and hyper-parameters as in Appendix D.1. The dropout rate is fixed to 0.5. As evaluation metrics, we adopt ROC-AUC for all the binary classification datasets except for ogbg-molmov that exhibits significant class imbalance (only 0.2% of labels are positive). For the ogbg-molmov dataset, we use Average Precision (AP), which is a more appropriate metric for heavily-imbalanced data [21, 92]. For the regression datasets, we adopt Root Mean Squared Error (RMSE); the lower, the better.

The benchmark results for each dataset are provided in Tables 23–32. We observe the followings.

- The additional features almost always help improve generalization performance. In fact, on top of GIN+VIRTUAL NODE, including the additional features gives either comparable or improved performance on 9 out of the 10 datasets (except for ogbg-molbace in Table 26). This motivates us to include these additional features in our OGB molecular graphs.
- Adding VIRTUAL NODES often improves generalization performance; for example, on top of GIN, adding VIRTUAL NODES gives either comparable or improved performance on 9 out of the 10 datasets (except for ogbg-clintox in Table 28).
- The optimal GNN architectures (GCN or GIN) vary across the datasets. This raises a natural question: can we design a GNN architecture that performs well *across* the molecule datasets?

Altogether, we hope our extensive benchmark results on a variety of molecule datasets provide useful baselines for further research on molecule-specific graph ML models.

Table 23: Results for ogbg-moltox21.

Method	Add. Feat.	Virt. Node	ROC-AUC (%)		
			Training	Validation	Test
GCN	✗	✓	90.01±1.81	81.12±0.37	75.51±1.00
	✓	✗	92.06±0.93	79.04±0.19	75.29±0.69
	✓	✓	93.28±2.18	82.05±0.43	77.46±0.86
GIN	✗	✓	93.13±0.94	81.47±0.3	76.21±0.82
	✓	✗	93.06±0.88	78.32±0.48	74.91±0.51
	✓	✓	93.67±1.03	82.17±0.35	77.57±0.62

Table 25: Results for ogbg-molmv.

Method	Add. Feat.	Virt. Node	AP (%)		
			Training	Validation	Test
GCN	✗	✓	6.67±3.87	8.48±1.58	2.48±2.83
	✓	✗	22.72±6.9	21.4±1.46	11.39±2.87
	✓	✓	23.64±7.12	22.1±1.98	10.98±2.91
GIN	✗	✓	26.49±7.24	15.74±2.19	7.91±2.13
	✓	✗	17.94±4.06	19.00±2.15	8.78±2.07
	✓	✓	25.95±7.85	17.42±1.32	9.84±2.71

Table 27: Results for ogbg-molbbbp.

Method	Add. Feat.	Virt. Node	ROC-AUC (%)		
			Training	Validation	Test
GCN	✗	✓	90.42±3.82	93.46±0.27	68.62±2.19
	✓	✗	96.97±1.31	94.74±0.31	68.87±1.51
	✓	✓	98.29±1.79	95.95±0.40	67.80±2.35
GIN	✗	✓	94.06±1.85	94.66±0.35	69.88±1.70
	✓	✗	95.99±2.44	94.83±0.52	68.17±1.48
	✓	✓	97.70±1.71	95.68±0.40	69.71±1.92

Table 29: Results for ogbg-molsider.

Method	Add. Feat.	Virt. Node	ROC-AUC (%)		
			Training	Validation	Test
GCN	✗	✓	73.82±1.02	59.86±0.81	61.65±1.06
	✓	✗	82.74±2.99	64.64±0.82	59.60±1.77
	✓	✓	77.50±2.58	61.88±0.89	59.84±1.54
GIN	✗	✓	72.37±0.78	59.84±0.86	57.75±1.14
	✓	✗	80.13±2.91	64.14±1.24	57.60±1.40
	✓	✓	76.60±1.38	62.41±0.99	57.57±1.56

Table 31: Results for ogbg-molfreesolv.

Method	Add. Feat.	Virt. Node	RMSE		
			Training	Validation	Test
GCN	✗	✓	1.163±0.157	2.744±0.201	2.413±0.195
	✓	✗	0.982±0.109	2.582±0.297	2.640±0.239
	✓	✓	1.219±0.153	2.922±0.185	2.186±0.120
GIN	✗	✓	1.006±0.225	2.567±0.19	2.307±0.340
	✓	✗	1.205±0.360	2.342±0.378	2.755±0.349
	✓	✓	0.934±0.138	2.181±0.205	2.151±0.295

Table 24: Results for ogbg-moltoxcast.

Method	Add. Feat.	Virt. Node	ROC-AUC (%)		
			Training	Validation	Test
GCN	✗	✓	88.89±0.88	70.52±0.34	66.33±0.35
	✓	✗	85.21±1.69	67.48±0.33	63.54±0.42
	✓	✓	89.89±0.8	71.65±0.38	66.71±0.45
GIN	✗	✓	85.51±0.59	69.62±0.66	66.18±0.68
	✓	✗	84.65±1.56	68.62±0.63	63.41±0.74
	✓	✓	86.42±0.49	72.32±0.35	66.13±0.50

Table 26: Results for ogbg-molbase.

Method	Add. Feat.	Virt. Node	ROC-AUC (%)		
			Training	Validation	Test
GCN	✗	✓	87.85±5.08	78.99±2.03	71.44±4.01
	✓	✗	91.74±1.90	73.74±1.49	79.15±1.44
	✓	✓	91.16±2.86	80.25±1.43	68.93±6.95
GIN	✗	✓	87.84±1.75	77.21±1.01	76.41±2.68
	✓	✗	92.07±2.62	73.30±1.95	72.97±4.00
	✓	✓	92.04±5.77	80.81±1.71	73.46±5.24

Table 28: Results for ogbg-molclintox.

Method	Add. Feat.	Virt. Node	ROC-AUC (%)		
			Training	Validation	Test
GCN	✗	✓	83.11±5.72	88.78±1.48	68.66±4.95
	✓	✗	98.14±0.91	99.24±0.47	91.30±1.73
	✓	✓	97.35±1.30	99.57±0.15	88.55±2.09
GIN	✗	✓	86.12±5.50	90.79±1.10	61.79±4.77
	✓	✗	96.31±1.77	98.54±0.48	88.14±2.51
	✓	✓	93.51±1.78	99.18±0.53	84.06±3.84

Table 30: Results for ogbg-molesol.

Method	Add. Feat.	Virt. Node	RMSE		
			Training	Validation	Test
GCN	✗	✓	0.883±0.096	1.128±0.032	1.143±0.075
	✓	✗	0.629±0.041	1.022±0.034	1.114±0.036
	✓	✓	0.758±0.147	0.991±0.04	1.015±0.096
GIN	✗	✓	0.746±0.158	0.921±0.045	1.026±0.063
	✓	✗	0.628±0.041	1.007±0.028	1.173±0.057
	✓	✓	0.675±0.131	0.878±0.036	0.998±0.066

Table 32: Results for ogbg-mollipo.

Method	Add. Feat.	Virt. Node	RMSE		
			Training	Validation	Test
GCN	✗	✓	0.669±0.058	0.855±0.032	0.823±0.029
	✓	✗	0.662±0.046	0.816±0.024	0.797±0.023
	✓	✓	0.545±0.041	0.766±0.011	0.771±0.016
GIN	✗	✓	0.488±0.029	0.749±0.018	0.741±0.024
	✓	✗	0.479±0.027	0.742±0.011	0.757±0.018
	✓	✓	0.399±0.023	0.679±0.014	0.704±0.015