

# Robust Face Recognition via Sparse Representation

Allen Y. Yang  
<[yang@eecs.berkeley.edu](mailto:yang@eecs.berkeley.edu)>

April 18, 2008, NIST



# Face Recognition: “Where amazing happens”



# Face Recognition: “Where amazing happens”



**Figure:** Steve Nash, Kevin Garnett, Jason Kidd.

# Sparse Representation

## Sparsity

A signal is sparse if most of its coefficients are (approximately) zero.



# Sparse Representation

## Sparsity

A signal is sparse if most of its coefficients are (approximately) zero.

### ① Sparsity in frequency domain



Figure: 2-D DCT transform.

### ② Sparsity in spatial domain



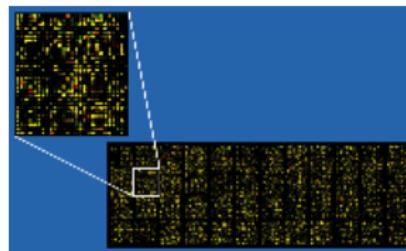


Figure: Gene microarray data.


- Sparsity in human visual cortex [Olshausen & Field 1997, Serre & Poggio 2006]

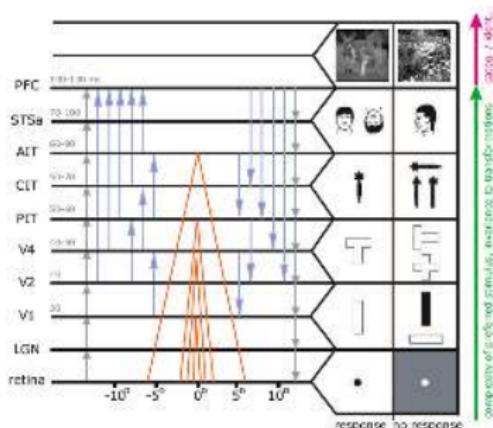

- Sparsity in human visual cortex [Olshausen & Field 1997, Serre & Poggio 2006]

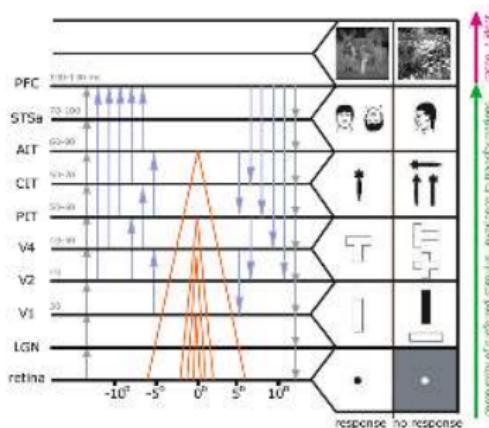

- Feed-forward:** No iterative feedback loop.
- Redundancy:** Average 80-200 neurons for each feature representation.
- Recognition:** Information exchange between stages is not about individual neurons, but rather **how many neurons as a group fire together**.

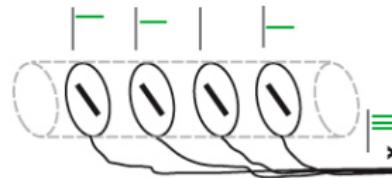

# Problem Formulation

## ① Notation

- Training: For  $K$  classes, collect training samples  $\{\mathbf{v}_{1,1}, \dots, \mathbf{v}_{1,n_1}\}, \dots, \{\mathbf{v}_{K,1}, \dots, \mathbf{v}_{K,n_K}\} \in \mathbb{R}^D$ .
- Test: Present a new  $\mathbf{y} \in \mathbb{R}^D$ , solve for  $\text{label}(\mathbf{y}) \in [1, 2, \dots, K]$ .




# Problem Formulation

## ① Notation

- Training: For  $K$  classes, collect training samples  $\{\mathbf{v}_{1,1}, \dots, \mathbf{v}_{1,n_1}\}, \dots, \{\mathbf{v}_{K,1}, \dots, \mathbf{v}_{K,n_K}\} \in \mathbb{R}^D$ .
- Test: Present a new  $\mathbf{y} \in \mathbb{R}^D$ , solve for label( $\mathbf{y}$ )  $\in [1, 2, \dots, K]$ .

## ② Data representation in (long) vector form via stacking

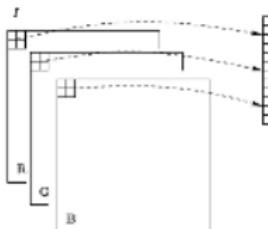


**Figure:** Assume 3-channel  $640 \times 480$  image,  $D = 3 \cdot 640 \cdot 480$ .

# Problem Formulation

## ① Notation


- Training: For  $K$  classes, collect training samples  $\{\mathbf{v}_{1,1}, \dots, \mathbf{v}_{1,n_1}\}, \dots, \{\mathbf{v}_{K,1}, \dots, \mathbf{v}_{K,n_K}\} \in \mathbb{R}^D$ .
- Test: Present a new  $\mathbf{y} \in \mathbb{R}^D$ , solve for label( $\mathbf{y}$ )  $\in [1, 2, \dots, K]$ .

## ② Data representation in (long) vector form via stacking

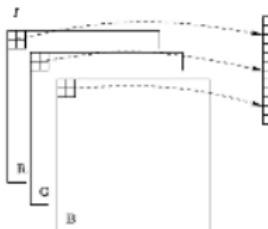

**Figure:** Assume 3-channel  $640 \times 480$  image,  $D = 3 \cdot 640 \cdot 480$ .

## ③ Mixture subspace model for face recognition [Belhumeur et al. 1997, Basri & Jacobs 2003]

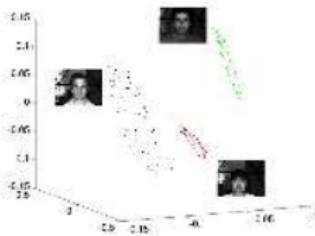

# Classification of Mixture Subspace Model

① Assume  $\mathbf{y}$  belongs to Class  $i$



$$\begin{aligned}\mathbf{y} &= \alpha_{i,1}\mathbf{v}_{i,1} + \alpha_{i,2}\mathbf{v}_{i,2} + \cdots + \alpha_{i,n_i}\mathbf{v}_{i,n_i}, \\ &= \mathbf{A}_i\boldsymbol{\alpha}_i,\end{aligned}$$

where  $\mathbf{A}_i = [\mathbf{v}_{i,1}, \mathbf{v}_{i,2}, \dots, \mathbf{v}_{i,n_i}]$ .

# Classification of Mixture Subspace Model

- ① Assume  $\mathbf{y}$  belongs to Class  $i$



$$\begin{aligned}\mathbf{y} &= \alpha_{i,1}\mathbf{v}_{i,1} + \alpha_{i,2}\mathbf{v}_{i,2} + \cdots + \alpha_{i,n_i}\mathbf{v}_{i,n_i}, \\ &= A_i\alpha_i,\end{aligned}$$

where  $A_i = [\mathbf{v}_{i,1}, \mathbf{v}_{i,2}, \dots, \mathbf{v}_{i,n_i}]$ .

- ② Nevertheless, Class  $i$  is the **unknown** variable we need to solve:

Sparse representation  $\mathbf{y} = [A_1, A_2, \dots, A_K] \begin{bmatrix} \alpha_1 \\ \alpha_2 \\ \vdots \\ \alpha_K \end{bmatrix} = A\mathbf{x} \in \mathbb{R}^{3 \cdot 640 \cdot 480}$ .

# Classification of Mixture Subspace Model

- ① Assume  $\mathbf{y}$  belongs to Class  $i$




$$\begin{aligned}\mathbf{y} &= \alpha_{i,1}\mathbf{v}_{i,1} + \alpha_{i,2}\mathbf{v}_{i,2} + \cdots + \alpha_{i,n_i}\mathbf{v}_{i,n_i}, \\ &= A_i\alpha_i,\end{aligned}$$

where  $A_i = [\mathbf{v}_{i,1}, \mathbf{v}_{i,2}, \dots, \mathbf{v}_{i,n_i}]$ .

- ② Nevertheless, Class  $i$  is the **unknown** variable we need to solve:

Sparse representation  $\mathbf{y} = [A_1, A_2, \dots, A_K] \begin{bmatrix} \alpha_1 \\ \alpha_2 \\ \vdots \\ \alpha_K \end{bmatrix} = A\mathbf{x} \in \mathbb{R}^{3 \cdot 640 \cdot 480}$ .

- ③  $\mathbf{x}_0 = [0 \dots 0 \ \alpha_i^T \ 0 \dots 0]^T \in \mathbb{R}^n$ .

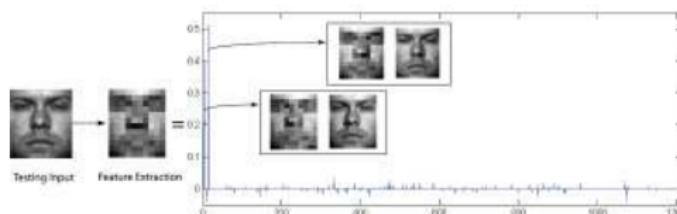

Sparse representation encodes membership!

# Dimensionality Reduction

- ① Construct linear projection  $R \in \mathbb{R}^{d \times D}$ ,  $d$  is the **feature dimension**.

$$\tilde{\mathbf{y}} \doteq R\mathbf{y} = RA\mathbf{x}_0 = \tilde{A}\mathbf{x}_0 \in \mathbb{R}^d.$$

$\tilde{A} \in \mathbb{R}^{d \times n}$ , but  $\mathbf{x}_0$  is unchanged.



# Dimensionality Reduction


- ① Construct linear projection  $R \in \mathbb{R}^{d \times D}$ ,  $d$  is the **feature dimension**.

$$\tilde{\mathbf{y}} \doteq R\mathbf{y} = RA\mathbf{x}_0 = \tilde{A}\mathbf{x}_0 \in \mathbb{R}^d.$$

$\tilde{A} \in \mathbb{R}^{d \times n}$ , but  $\mathbf{x}_0$  is unchanged.

- ② Holistic features

- Eigenfaces [Turk 1991]
- Fisherfaces [Belhumeur 1997]
- Laplacianfaces [He 2005]

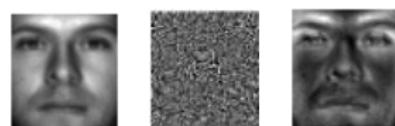


- ③ Partial features



- ④ Unconventional features

- Downsampled faces
- Random projections



# $\ell^1$ -Minimization

## ① Ideal solution: $\ell^0$ -Minimization

$$(P_0) \quad \mathbf{x}^* = \arg \min_{\mathbf{x}} \|\mathbf{x}\|_0 \text{ s.t. } \tilde{\mathbf{y}} = \tilde{\mathbf{A}}\mathbf{x}.$$

$\|\cdot\|_0$  simply counts the number of nonzero terms.  
However, generally  $\ell^0$ -minimization is *NP-hard*.

# $\ell^1$ -Minimization

- ① Ideal solution:  $\ell^0$ -Minimization

$$(P_0) \quad \mathbf{x}^* = \arg \min_{\mathbf{x}} \|\mathbf{x}\|_0 \text{ s.t. } \tilde{\mathbf{y}} = \tilde{\mathbf{A}}\mathbf{x}.$$

$\|\cdot\|_0$  simply counts the number of nonzero terms.

However, generally  $\ell^0$ -minimization is *NP-hard*.

- ② Compressed sensing: Under mild condition,  $\ell^0$ -minimization is equivalent to

$$(P_1) \quad \mathbf{x}^* = \arg \min_{\mathbf{x}} \|\mathbf{x}\|_1 \text{ s.t. } \tilde{\mathbf{y}} = \tilde{\mathbf{A}}\mathbf{x},$$

where  $\|\mathbf{x}\|_1 = |x_1| + |x_2| + \dots + |x_n|$ .

# $\ell^1$ -Minimization

## ① Ideal solution: $\ell^0$ -Minimization

$$(P_0) \quad \mathbf{x}^* = \arg \min_{\mathbf{x}} \|\mathbf{x}\|_0 \text{ s.t. } \tilde{\mathbf{y}} = \tilde{\mathbf{A}}\mathbf{x}.$$

$\|\cdot\|_0$  simply counts the number of nonzero terms.

However, generally  $\ell^0$ -minimization is *NP-hard*.


## ② Compressed sensing: Under mild condition, $\ell^0$ -minimization is equivalent to

$$(P_1) \quad \mathbf{x}^* = \arg \min_{\mathbf{x}} \|\mathbf{x}\|_1 \text{ s.t. } \tilde{\mathbf{y}} = \tilde{\mathbf{A}}\mathbf{x},$$

where  $\|\mathbf{x}\|_1 = |x_1| + |x_2| + \dots + |x_n|$ .

## ③ $\ell^1$ -Ball

- $\ell^1$ -Minimization is convex.
- Solution equal to  $\ell^0$ -minimization.

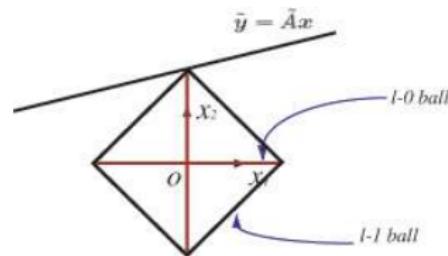

# $\ell^1$ -Minimization Routines

## • Matching pursuit [Mallat 1993]

- ① Find most correlated vector  $\mathbf{v}_i$  in  $A$  with  $\mathbf{y}$ :  $i = \arg \max \langle \mathbf{y}, \mathbf{v}_j \rangle$ .
- ②  $A \leftarrow A^{(i)}$ ,  $x_i \leftarrow \langle \mathbf{y}, \mathbf{v}_i \rangle$ ,  $\mathbf{y} \leftarrow \mathbf{y} - x_i \mathbf{v}_i$ .
- ③ Repeat until  $\|\mathbf{y}\| < \epsilon$ .

## • Basis pursuit [Chen 1998]

- ① Start with number of sparse coefficients  $m = 1$ .
- ② Select  $m$  linearly independent vectors  $B_m$  in  $A$  as a basis

$$\mathbf{x}_m = B_m^\dagger \mathbf{y}.$$

- ③ Repeat swapping one basis vector in  $B_m$  with another vector not in  $B_m$  if improve  $\|\mathbf{y} - B_m \mathbf{x}_m\|$ .
- ④ If  $\|\mathbf{y} - B_m \mathbf{x}_m\|_2 < \epsilon$ , stop; Otherwise,  $m \leftarrow m + 1$ , repeat Step 2.

## • Quadratic solvers: $\mathbf{y} = A\mathbf{x}_0 + \mathbf{z} \in \mathbb{R}^d$ , where $\|\mathbf{z}\|_2 < \epsilon$

$$\mathbf{x}^* = \arg \min \{\|\mathbf{x}\|_1 + \lambda \|\mathbf{y} - A\mathbf{x}\|_2\}$$


[LASSO, Second-order cone programming]: Much more expensive.

## Matlab Toolboxes for $\ell^1$ -Minimization

- **$\ell^1$ -Magic** by Candes
- **SparseLab** by Donoho
- **cvx** by Boyd

# Sparse Representation Classification

Solve  $(P_1) \Rightarrow \mathbf{x}_1$ .

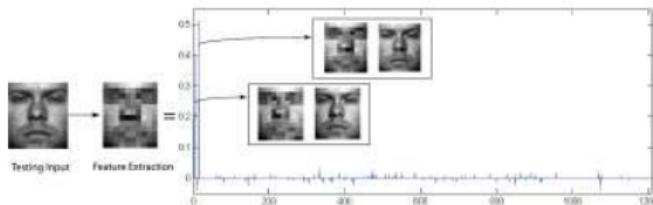


① Project  $\mathbf{x}_1$  onto face subspaces:

$$\delta_1(\mathbf{x}_1) = \begin{bmatrix} \alpha_1 \\ 0 \\ \vdots \\ 0 \end{bmatrix}, \delta_2(\mathbf{x}_1) = \begin{bmatrix} 0 \\ \alpha_2 \\ \vdots \\ 0 \end{bmatrix}, \dots, \delta_K(\mathbf{x}_1) = \begin{bmatrix} 0 \\ 0 \\ \vdots \\ \alpha_K \end{bmatrix}. \quad (1)$$

# Sparse Representation Classification

Solve  $(P_1) \Rightarrow \mathbf{x}_1$ .

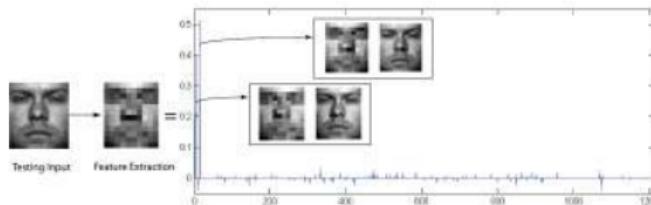


① Project  $\mathbf{x}_1$  onto face subspaces:

$$\delta_1(\mathbf{x}_1) = \begin{bmatrix} \alpha_1 \\ 0 \\ \vdots \\ 0 \end{bmatrix}, \delta_2(\mathbf{x}_1) = \begin{bmatrix} 0 \\ \alpha_2 \\ \vdots \\ 0 \end{bmatrix}, \dots, \delta_K(\mathbf{x}_1) = \begin{bmatrix} 0 \\ 0 \\ \vdots \\ \alpha_K \end{bmatrix}. \quad (1)$$

② Define residual  $r_i = \|\tilde{\mathbf{y}} - \tilde{A}\delta_i(\mathbf{x}_1)\|_2$  for Subject  $i$ :

- $\text{id}(\mathbf{y}) = \arg \min_{i=1, \dots, K} \{r_i\}$

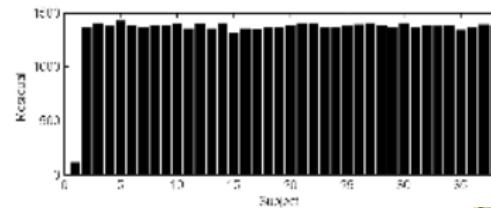

## Partial Features on Extended Yale B Database




Features	Nose	Right Eye	Mouth & Chin
Dimension	4,270	5,040	12,936
SRC [%]	87.3	93.7	98.3
nearest-neighbor [%]	49.2	68.8	72.7
nearest-subspace [%]	83.7	78.6	94.4
Linear SVM [%]	70.8	85.8	95.3

SRC: sparse-representation classifier


# Extension I: Outlier Rejection

- $\ell^1$ -Coefficients for invalid images

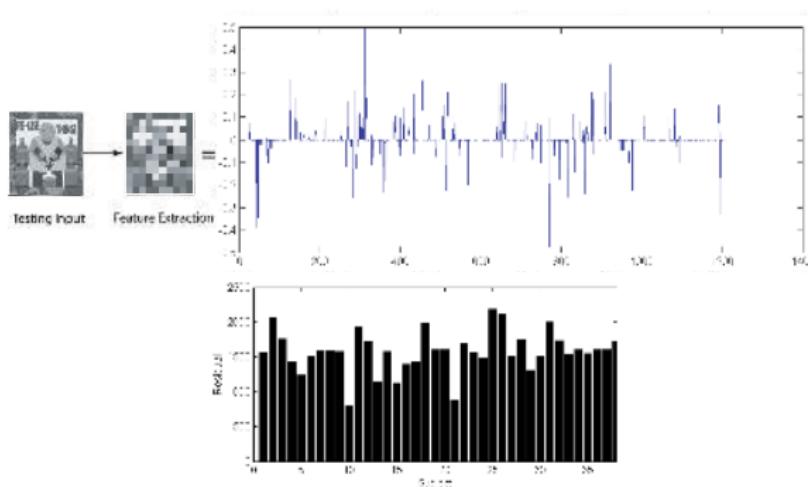

# Extension I: Outlier Rejection

- $\ell^1$ -Coefficients for invalid images

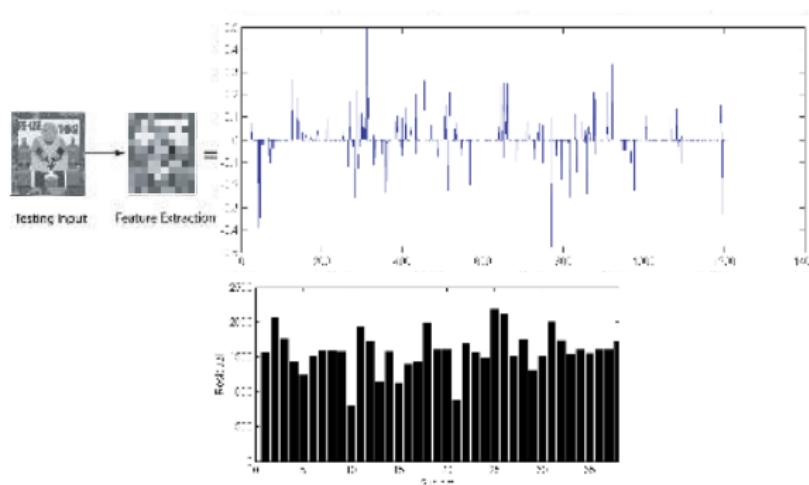

## Outlier Rejection

When  $\ell^1$ -solution is not sparse or concentrated to one subspace, the test sample is invalid.

$$\text{Sparsity Concentration Index: } \text{SCI}(\mathbf{x}) \doteq \frac{K \cdot \max_i \|\delta_i(\mathbf{x})\|_1 / \|\mathbf{x}\|_1 - 1}{K - 1} \in [0, 1].$$



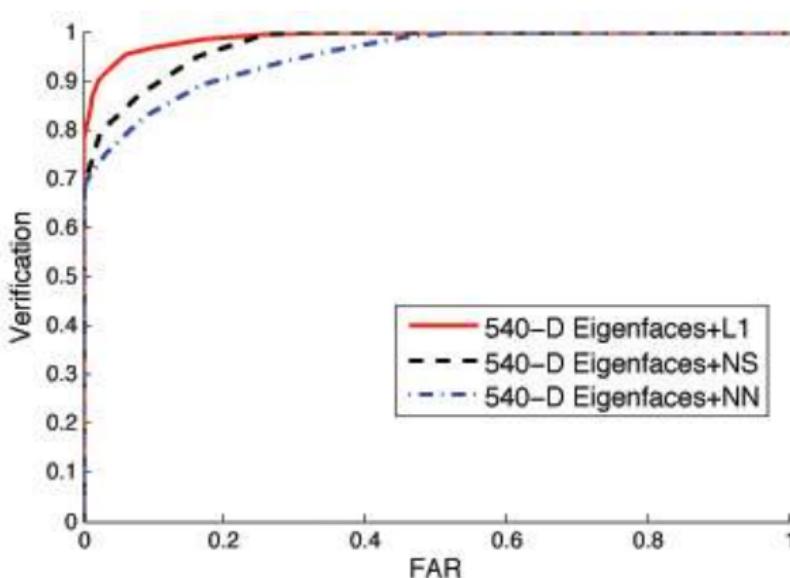


Figure: ROC curve on Eigenfaces and AR database.

# Extension II: Occlusion Compensation

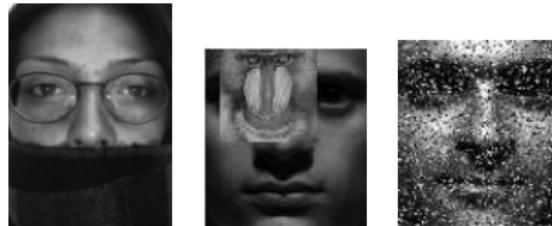

## Extension II: Occlusion Compensation

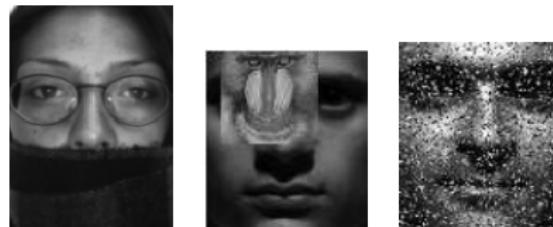

- ① Sparse representation + sparse error

$$\mathbf{y} = \mathbf{Ax} + \mathbf{e}$$



- ② Occlusion compensation

$$\mathbf{y} = (\mathbf{A} \quad | \quad \mathbf{I}) \begin{pmatrix} \mathbf{x} \\ \mathbf{e} \end{pmatrix} = \mathbf{Bw}$$

# AR Database



Figure: Training samples for Subject 1.

# AR Database



Figure: Training samples for Subject 1.



(a) random corruption

(b) occlusion

# AR Database

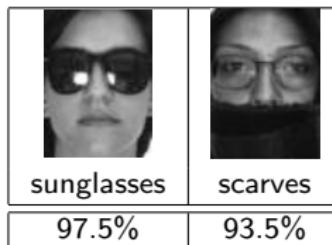


Figure: Training samples for Subject 1.



(a) random corruption

(b) occlusion



Berkeley

# Future Directions

## Open problems:

- ① Pose variation
- ② Scalability to > 1000 subjects



# Future Directions

## Open problems:

- ① Pose variation
- ② Scalability to > 1000 subjects

## Other databases:

- ① Multi-PIE (about 350 subjects)
- ② Chinese CASPEAL (about 1000-3000 subjects )

# Future Directions

## Open problems:

- ① Pose variation
- ② Scalability to > 1000 subjects

## Other databases:

- ① Multi-PIE (about 350 subjects)
- ② Chinese CASPEAL (about 1000-3000 subjects )

**Wish list:** Because few algorithm succeed under all-weather conditions (illumination, expression, pose, disguise), we are looking forward to a comprehensive database

- ① large number of subjects
- ② carefully controlled subclasses

# Acknowledgments

## Collaborators

- **Berkeley:** Prof. Shankar Sastry
- **UIUC:** Prof. Yi Ma, John Wright, Arvind Ganesh

## Funding Support

- ARO MURI: Heterogeneous Sensor Networks (HSNs)

## References

- Robust Face Recognition via Sparse Representation, (in press) **PAMI**, 2008.
- <http://www.eecs.berkeley.edu/~yang>

