International Journal of Modern Physics D Vol. 20, No. 10 (2011) 2075–2079 © World Scientific Publishing Company DOI: 10.1142/S0218271811020202



THE VIRGO INTERFEROMETER FOR GRAVITATIONAL WAVE DETECTION

T. ACCADIA¹¹, F. ACERNESE^{5ac}, F. ANTONUCCI^{8a}, P. ASTONE^{8a}, G. BALLARDIN², F. BARONE^{5ac}, M. BARSUGLIA¹, Th. S. BAUER^{13a} M.G. BEKER^{13a}, A. BELLETOILE¹¹, S. BIRINDELLI^{14a}, M. BITOSSI^{7a}, M. A. BIZOUARD 10a , M. BLOM 13a , C. BOCCARA 10b , F. BONDU 14b L. $BONELLI^{7ab}$, R. $BONNAND^{12}$, V. $BOSCHI^{7a}$, L. $BOSI^{6a}$, B. $BOUHOU^1$, S. BRACCINI^{7a}, C. BRADASCHIA^{7a}, A. BRILLET^{14a}, V. BRISSON^{10a}, R. BUDZYŃSKI^{16b}, T. BULIK^{16cd}, H. J. BULTEN^{13ab}, D. BUSKULIC¹¹ C. BUY¹, G. CAGNOLI^{3a}, E. CALLONI^{5ab}, E. CAMPAGNA^{3ab}, B. CANUEL², F. CARBOGNANI², F. CAVALIER 10a , R. CAVALIERI², G. CELLA 7a , E. CESARINI^{3b}, E. CHASSANDE-MOTTIN¹, A. CHINCARINI⁴, F. CLEVA^{14a} E. $COCCIA^{9ab}$, C. N. $COLACINO^{7a}$, J. $COLAS^2$, A. $COLLA^{8ab}$, M. $COLOMBINI^{8b}$ A. CORSI^{8a}, J.-P. COULON^{14a}, E. CUOCO², S. D'ANTONIO^{9a}, V. DATTILO², M. DAVIER 10a , R. DAY 2 , R. DE ROSA 5ab , G. DEBRECZENI 17 , M. del PRETE 7ac . L. DI FIORE 5a , A. DI LIETO 7ab , M. DI PAOLO EMILIO 9ac , A. DI VIRGILIO 7a , A. DIETZ 11 , A. DIETZ 11 , M. DRAGO 15cd , V. FAFONE 9ab , I. FERRANTE 7ab , F. FIDECARO^{7ab}, I. FIORI², R. FLAMINIO¹², J.-D. FOURNIER^{14a}, J. FRANC¹² S. FRASCA^{8ab}, F. FRASCONI^{7a}, A. FREISE*, M. GALIMBERTI¹², L. GAMMAITONI^{6ab}, F. GARUFI^{5ab}, M. E. GÁSPÁR¹⁷, G. GEMME⁴, E. GENIN², A. GENNAI 7a , A. GIAZOTTO 7a , R. GOUATY 11 , M. GRANATA 1 , C. GREVERIE 14a , G. M. GUIDI 3ab , J.-F. HAYAU 14b , H. HEITMANN 14 P. HELLO^{10a}, S. HILD**, D. HUET², P. JARANOWSKI^{16e}, I. KOWALSKA^{16c}, A. KRÓLAK^{16af}, N. LEROY^{10a}, N. LETENDRE¹¹, T. G. F. LI^{13a}, M. LORENZINI 3a , V. LORIETTE 10b , G. LOSURDO 3a , E. MAJORANA 8a , I. MAKSIMOVIC 10b , N. MAN 14a , M. MANTOVANI 7ac , F. MARCHESONI 6a , F. MARION¹¹, J. MARQUE², F. MARTELLI^{3ab}, A. MASSEROT¹¹, C. MICHEL¹² L. MILANO^{5ab}, Y. MINENKOV^{9a}, M. MOHAN², J. MOREAU^{10b}, N. MORGADO¹² A. MORGIA^{9ab}, S. MOSCA^{5ab}, V. MOSCATELLI^{8a}, B. MOURS¹¹, I. NERI^{6ab}, F. NOCERA², G. PAGLIAROLI 9ac , L. PALLADINO 9ac , C. PALOMBA 8a , F. PAOLETTI 7a,2 , S. PARDI 5ab , M. PARISI 5b , A. PASQUALETTI², R. PASSAQUIETI^{7ab}, D. PASSUELLO^{7a}, G. PERSICHETTI^{5ab}, M. PICHOT^{14a} F. PIERGIOVANNI^{3ab}, M. PIETKA^{16e}, L. PINARD¹², R. POGGIANI^{7ab}, M. PRATO⁴, G. A. PRODI^{15ab}, M. PUNTURO^{6a}, P. PUPPO^{8a} D. S. RABELING 13ab , I. RÁCZ 17 , P. RAPAGNANI 8ab , V. RE 15ab , T. REGIMBAU^{14a}, F. RICCI^{8ab}, F. ROBINET^{10a}, A. ROCCHI^{9a}, L. ROLLAND¹¹. R. ROMANO^{5ac}, D. ROSIŃSKA^{16g}, P. RUGGI², B. SASSOLAS¹², D. SENTENAC², L. SPERANDIO 9ab , R. STURANI 3ab , B. SWINKELS², A. TONCELLI^{7ab}, M. TONELLI^{7ab}, O. TORRE^{7ac}, E. TOURNEFIER¹¹, F. TRAVASSO^{6ab}, G. VAJENTE^{7ab}, J. F. J. VAN DEN BRAND^{13ab}, S. VAN DER PUTTEN^{13a}, M. VASUTH¹⁷, M. VAVOULIDIS^{10a} G. VEDOVATO 15c , D. VERKINDT 11 , F. VETRANO 3ab , A. VICERÉ 3ab , J.-Y. VINET^{14a}, H. VOCCA^{6a}, M. WAS^{10a} and M. YVERT¹¹

¹ AstroParticule et Cosmologie (APC), CNRS: UMR7164-IN2P3-Observatoire de Paris-Université Denis Diderot-Paris 7 - CEA: DSM/IRFU ² European Gravitational Observatory (EGO), I-56021 Cascina (Pi), Italy

³ INFN, Sezione di Firenze, I-50019 Sesto Fiorentino^a; Università degli Studi di Urbino 'Carlo Bo', I-61029 Urbino^b, Italy

> ⁴INFN, Sezione di Genova; I-16146 Genova, Italy

⁵INFN, sezione di Napoli ^a; Università di Napoli 'Federico II'^b, Complesso Universitario di Monte S.Angelo, I-80126 Napoli; Università di Salerno, Fisciano, I-84084 Salerno^c, Italy

⁶ INFN, Sezione di Perugia^a; Università di Perugia^b, I-6123 Perugia,Italy

⁷INFN, Sezione di Pisa^a; Università di Pisa^b; I-56127 Pisa; Università di Siena, I-53100 Siena^c, Italy ⁸INFN, Sezione di Roma^a; Università 'La Sapienza'^b, I-00185 Roma, Italy

⁹ INFN, Sezione di Roma Tor Vergata^a; Università di Roma Tor Vergata^b; Università dell'Aquila, I-67100 L'Aquila^c, Italy

 ^{10}LAL , Université Paris-Sud, IN2P3/CNRS, F-91898 Orsay a ; ESPCI, CNRS, F-75005 Paris b , France

¹¹Laboratoire d'Annecy-le-Vieux de Physique des Particules (LAPP), IN2P3/CNRS, Université de Savoie, F-74941 Annecy-le-Vieux, France

> ¹²Laboratoire des Matériaux Avancés (LMA), IN2P3/CNRS, F-69622 Villeurbanne, Lyon, France

¹³ Nikhef, National Institute for Subatomic Physics,
P.O. Box 41882, 1009 DB Amsterdam^a; VU University Amsterdam,
De Boelelaan 1081, 1081 HV Amsterdam^b, The Netherlands

14 Université Nice-Sophia-Antipolis, CNRS,
 Observatoire de la Côte d'Azur, F-06304 Nice^a;
 Institut de Physique de Rennes, CNRS,
 Université de Rennes 1, 35042 Rennes^b; France

 15 INFN, Gruppo Collegato di Trento a and Università di Trento b , $_{I\text{-}38050\ Povo,\ Trento,\ Italy}$

INFN, Sezione di Padova^c and Università di Padova^d, I-35131 Padova, Italy

¹⁶ IM-PAN 00-956 Warsaw^a; Warsaw Univ. 00-681 Warsaw^b;
 Astro. Obs. Warsaw Univ. 00-478 Warsaw^c;
 CAMK-PAN 00-716 Warsaw^d; Białystok Univ. 15-424 Biał ystok^e;
 IPJ 05-400 Świerk-Otwock^f; Inst. of Astronomy 65-265 Zielona Góra^g, Poland
 ¹⁷ RMKI, H-1121 Budapest, Konkoly Thege Miklós út 29-33, Hungary

* University of Birmingham, Birmingham, B15 2TT, United Kingdom

** University of Glasgow, Glasgow, G12 8QQ, United Kingdom The Virgo interferometer for gravitational wave detection is described. During the commissioning phase that followed the first scientific data taking run an unprecedented sensitivity was obtained in the range 10–60 Hz. Since then an upgrade program has begun, with the aim of increasing the sensitivity, mainly through the introduction of fused silica wires to suspend mirrors and by increasing the Finesse of the Fabry–Perot cavities. Plans until the shutdown for the construction of the Advanced Virgo detector are given as well as the status of the upgrade.

Keywords: Gravitational waves; interferometer; thermal noise.

1. The Virgo Interferometer

The Virgo interferometer¹ has been built and is operated by a French–Italian collaboration, joined recently by The Netherlands and now also including Polish and Hungarian groups. It is located in Cascina, 15 km from Pisa (Italy). The Virgo interferometer is part of a global network, together with the two LIGO² interferometers in Hanford (WA) and Livingston (LA) and the GEO600³ detector, located near Hannover (Germany), which aims to detect signals in the 10–10⁴ Hz band. This network would significantly improve its performance with the inclusion of LCGT⁴ in Japan or AIGO⁵ in Australia. Gravitational wave detection capability is complemented by the AURIGA, EXPLORER and NAUTILUS¹ resonant bar detectors in the 850–950 Hz band, although with a spectral sensitivity one order of magnitude smaller. Recently the International Pulsar Timing Array² was formed aiming to detect gravitational waves at 10⁻⁹–10⁻⁶ Hz.

The first Virgo Science Run (VSR1) was performed in 2007. Data were taken and analysed jointly with LIGO in the framework of a data sharing Memorandum of Understanding between the LIGO Scientific Collaboration (LSC) and the Virgo Collaboration. Years 2008 and 2009 were dedicated to the completion of Virgo commissioning, reaching essentially the design sensitivity at low frequency and thus confirming the performance of the seismic isolation system and the reliability of the overall choices made in that direction. The second Virgo Science Run (VSR2), performed jointly with the LSC Science Run 6 (S6) confirmed the excellent behavior of the Virgo interferometer and led to the decision to use mirrors with fused silica suspension fibers for scientific data collection.

This article describes the main characteristics of the Virgo interferometer and presents recent results on the performance of the interferometer.

2. The Apparatus and Its Performance

The Virgo detector uses 21 kg fused silica mirrors as test masses that are suspended by Superattenuators, which provide seismic isolation down to 4 Hz. The Superattenuators implement a cascade of harmonic oscillators obtained with pendula for the horizontal degrees of freedom and Maraging steel springs for the vertical motion. Sufficient attenuation is obtained for excitations with a frequency higher than 4 Hz, higher than the system resonance frequencies. Rotational degrees of freedom have even lower resonant frequencies. Although the measurement is performed along one

direction only, achieving sufficient attenuation in all degrees of freedom is essential to reduce noise to the required level, due to the unavoidable presence of residual coupling between degrees of freedom.

The last stage of the suspension consists of a marionette that can steer the mirror and move it along the beam direction. Forces are applied to the mirror by means of coils attached to a reference (or recoil) mass, which is seismically isolated by the same Superattenuator. In Virgo the wires used to suspend the mirrors were of C85 carbon steel, with low dissipation in order to reduce thermal noise. In the Virgo+ upgrade a monolithic assembly will be used by bonding fused silica wires to the mirror. A significant improvement in thermal noise due to the lower dissipation in the fibers is expected.

The optical setup to compare the length of two 3 km arms in perpendicular directions is based on the Michelson interferometer. The arms contain Fabry–Perot cavities with a Finesse of 50, which will be increased to 150 in the Virgo+ upgrade. Light coming back from the interferometer is reflected back by a Power Recycling mirror. Thermal deformation effects have proven to be significant, introducing aberrations, and for VSR2 a Thermal Compensation System using CO₂ lasers to heat portions of the input mirrors was introduced.

The light is produced by a high power laser which is phase-locked to a master laser and sent through a 144 m long mode cleaner to the interferometer. Frequency stabilization uses the mode cleaner and the interferometer itself, once their servo loops have been closed. This is called Second Stage Frequency Stabilization (SSFS). The gravitational wave signal is obtained from variations in the light intensity at the output of the interferometer once the instrument is tuned on the dark fringe. The interferometer has a complex feedback system to maintain an accurate working point which is reached in a few minutes by applying an automated procedure.

The VSR2 run started on July 7, 2010 and lasted until January 8, 2010, when the installation of monolithic suspensions began. A duty cycle of more than 80% was achieved, counting also the routine maintenance operations, with a reach for an optimally oriented binary neutron star system of about 20 Mpc with a Signal-to-Noise-Ratio (SNR) of 8. The glitch rate with a threshold of SNR of 10 was 0.01 Hz. Fig. 1 shows the achieved sensitivity together with the Virgo design curve.

3. Virgo+ Status and Perspectives

The main step for the upgrade consists of suspending four new mirrors that will provide a Finesse of 150 instead of 50. This introduces, among others effects, an increased thermal load on the cavity mirrors. With lower dissipation in the silica fibres a reduction in thermal noise of up to one order of magnitude is expected. At present the monolithic input mirrors have been produced and are ready to be suspended, while the end mirrors are entering the assembly phase. Recovery of Science mode is planned for the end of July 2010. It can be seen from the predicted sensitivity curve (Fig. 1) that achieving the Virgo+ sensitivity, which may require quite some time, will be a significant step toward the Advanced detectors.

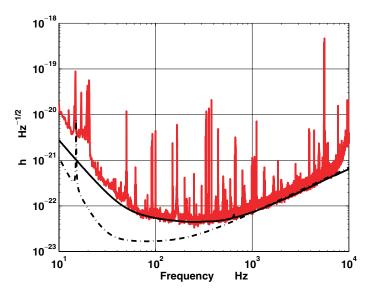


Fig. 1. Virgo sensitivity during VSR2 (red). Design sensitivities for Virgo (black solid) and Virgo+ (black dashed). (Color online)

Acknowledgments

The authors acknowledge the support of the Italian Istituto Nazionale di Fisica Nucleare and the French Centre National de la Recherche Scientifique for the construction and operation of the Virgo detector. In addition, the authors acknowledge the support of the research by the Foundation for Fundamental Research on Matter of the Netherlands Organization for Scientific Research, the Polish Ministry of Science and Higher Education grant N N203 387237, the FOCUS Programme of Foundation for Polish Science and the European Associated Laboratory Astrophysics Poland–France, the Italian Ministry for Education, University and Research through grant PRIN 2007NXMBHP.

References

- F. Acernese et al. (Virgo Collab), Class. Quant. Grav. 25 (2008) 114045.
- 2. B. P. Abbott et al. (LSC Collab.), Rep. Prog. Phys. 72 (2009) 076901.
- H. Grote et al. (GEO 600 Collab.), Class. Quant. Grav. 25 (2008) 114043.
- 4. K. Kuroda et al. (LCGT Collab.), Class. Quant. Grav. 23 (2006) S215.
- A. C. Searle et al., Physical Review D 73 (2006) 124014.
- 6. L. Baggio et al., Phys. Rev. Lett. **94** (2005) 241101.
- 7. P. Astone et al., Class. Quantum Grav. 23 (2006) S57.
- 8. G. Hobbs *et al.*, The international pulsar timing array project: using pulsars as a gravitational wave detector, to appear in *Class. Quantum Grav.*
- 9. F. Acernese et al. (Virgo Collab.), Astrop. Phys. 23 (2005) 557.