

## Perspective

# What Does ChatGPT Say: The DAO from Algorithmic Intelligence to Linguistic Intelligence

By Fei-Yue Wang, *Fellow, IEEE*, Qinghai Miao, *Senior Member, IEEE*, Xuan Li, Xingxia Wang, Yilun Lin

THE well-known ancient Chinese philosopher Lao Tzu (老子) or Laozi (6th~4th century BC during the *Spring and Autumn* period) started his classic *Tao Teh Ching* 《道德经》 or *Dao De Jing* (see Fig.1) with six Chinese characters: “道(Dao)可(Ke)道(Dao)非(Fei)常(Chang)道(Dao)”, which has been traditionally interpreted as “道可道,非常道” or “The Dao that can be spoken is not the eternal Dao”. However, modern archaeological discoveries in 1973 and 1993 at Changsha, Hunan, and Jingmen, Hubei, China, have respectively indicated a new, yet more natural and simple interpretation: “道,可道,非常道”, or “The Dao, The Speakable Dao, The Eternal Dao”.

Note that in Chinese language, word Dao has the same meaning as “Meta” in Metaverse and is identical as the Chinese words for road and journey.

In terms of Artificial Intelligence research and development, the new interpretation can be considered as a “Generalized Gödel Theorem”, [1–3], i.e., there are three levels of intelligence: 1) The Dao or Algorithmic Intelligence (AI), 2) the Speakable Dao, or Linguistic Intelligence (LI), 3) the Eternal Dao or Imaginative Intelligence (II), and they are bounded by the following relationship,

$$AI \ll LI \ll II.$$

As illustrated in “Where Does AlphaGo Go: From Church-Turing Thesis to AlphaGo Thesis and beyond”[4], AlphaGo was a milestone in Algorithmic Intelligence with algorithms

Citation: F.-Y. Wang, Q. Miao, X. Li, X. Wang, and Y. Lin, “What does ChatGPT say: The DAO from algorithmic intelligence to linguistic intelligence,” *IEEE/CAA J. Autom. Sinica*, vol. 10, no. 3, pp. 575–579, Mar. 2023.

F.-Y. Wang and X. Wang are with the School of Artificial Intelligence, University of Chinese Academy of Sciences, Beijing 100049, China, and also with the State Key Laboratory for Management and Control of Complex Systems, Chinese Academy of Sciences, Beijing 100190, China (e-mail: feiyue.wang@ia.ac.cn; wangxingxia2022@ia.ac.cn).

Q. Miao, the corresponding author, is with the School of Artificial Intelligence, University of Chinese Academy of Sciences, Beijing 100049, China (e-mail: miaoqh@ucas.ac.cn).

X. Li is with Virtual Reality Fundamental Research Laboratory, Department of Mathematics and Theories, Peng Cheng Laboratory, Shenzhen 518000, China (e-mail: lix05@pcl.ac.cn).

Y. Lin is with Urban Computing Lab, Department of Applied Research, Shanghai AI Laboratory, Shanghai 200232, China (e-mail: linyilun@pjlab.org.cn).

Digital Object Identifier 10.1109/JAS.2023.123486

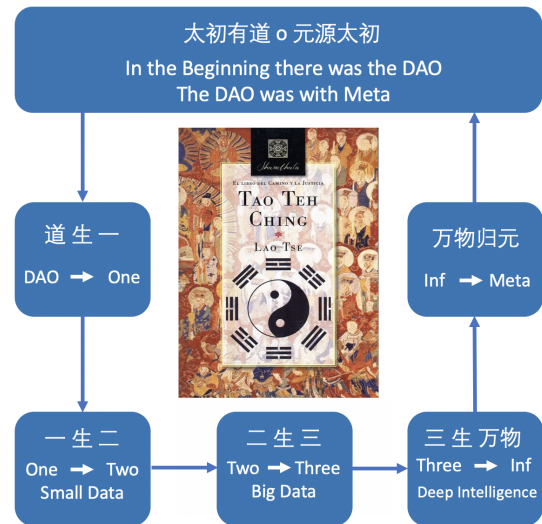


Fig. 1. The DAO to Intelligence = AI + LI + II.

for deep, generative, and reinforcement learning. Now, ChatGPT has been emerged as the new milestone for Linguistic Intelligence in the form of questions and answers. What does ChatGPT really say? What should we expect for the next milestone in intelligent science and technology? What are their impacts to our life and society?

Based on our previous reports[5, 6], and recent developments in Blockchain and Smart Contracts based DeSci and DAO for decentralized autonomous organizations and operations[7, 8], several workshops have been organized to address those important issues, and the main results have been summarized briefly in this perspective.

## Historic Perspective

ChatGPT is the result of decades of hard work by generations in AI research and development. Early research can be traced back to Expert Systems, and in recent years it has been driven by breakthroughs in natural language processing (NLP). Fig.2 illustrates its brief history and related techniques.

Since the 1960s, people have tried to build intelligent systems, which act like human experts who can help us solve problems in a specific domain. The first attempt, DENDRAL[9], led by Feigenbaum, was a rule-based chemical analysis expert system. However, it finally faded out together

with other expert systems such as MYCIN, XCON, etc. People tried to find better knowledge representations than rules. In 1980s, Lenat proposed the idea of encoding human common sense and building it into a knowledge base. This is the well-known CYC[10] project, however, it had not been applied successfully in real-world applications.

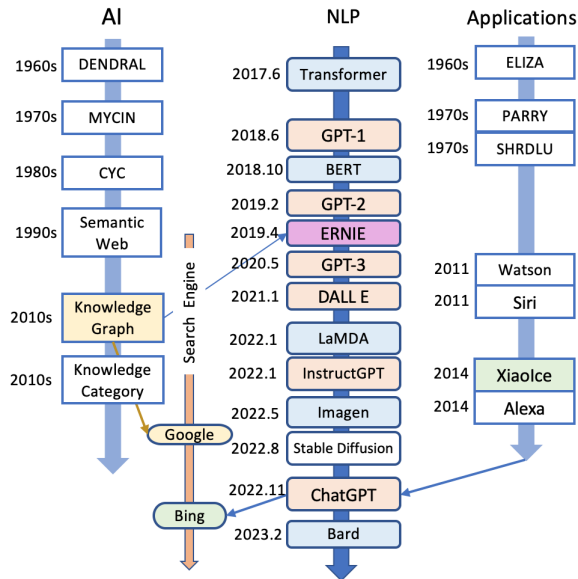


Fig. 2. A brief history of ChatGPT and related areas.

In 1990s, Berners-Lee proposed the Semantic Web[11], trying to make machines in the World Wide Web understand information and connect them through the network. But the Semantic Web didn't meet expectations either. By 2012, Google released the Knowledge Graph and brought it into practical application through their search engine, which greatly improved the user experience.

Another route is Chatbot, which can be traced back to ELIZA [12] in 1960s and PARRY in 1970s. They respectively imitated a psychiatrist and a psychiatric patient, playing the role of psychotherapy and doctor training. SHRDLU [13] was a different framework that integrates methods such as natural language processing, knowledge representation, and planning. It was based on a virtual world of building blocks, which communicates with humans through a display to help human players build blocks. The next 30 years were uneventful, but the accumulation of knowledge base (graph) laid the foundation for subsequent leaps. As the scale of knowledge graphs increases, the capabilities of the question answering system begin to attract attention. In 2011, IBM Watson [14] defeated the top human players in *Jeopardy!* In the same year, Siri, as a widely used conversational assistant, entered the lives of ordinary people through the iPhone.

Although Microsoft started a little late, it launched Xiaoice [15] in 2014, demonstrating its capabilities in multiple AI fields. Today, Microsoft integrated ChatGPT into Bing, replaced the knowledge graph with a pre-trained large model. Through the binding of ChatGPT with Bing, Microsoft is redefining the search engine.

From the semantic network to the knowledge graph, the symbol-based knowledge system has not brought revolutionary applications. In recent years, another technical route, that is, the pre-trained large model based on deep networks (especially Transformers) is making great progress. In 2018, OpenAI released the GPT-1. By 2020, the number of GPT-3 parameters has reached 175 billion, and the subsequent GPT-3.5 has become the basis of ChatGPT. Almost at the same time, Google's BERT series continued to expand. Multi-modal pre-training large models are also developing rapidly. A series of AIGC (AI Generated Content) projects such as DALL-E, Imagen(Video), and Stable Diffusion are vigorously promoting AI development into a new era at a new perspective. This wave of technology will promote and speed up the development and application of digital human techniques.

### The Impact

Right now, ChatGPT is one of the biggest stories in tech. This new tool unlocks the creativity lying dormant in an untapped wave of makers that find unexpected ways to showcase their imaginative abilities. For instance, ChatGPT can respond in different styles, and even different languages. If you didn't know it was AI behind, it could easily be mistaken for a chat with a real human. Outside of basic conversations, people have been showcasing how it is doing their jobs or tasks for them - using it to help with writing articles and academic papers, writing entire job applications, and even helping to write code. What is more, Microsoft successfully integrated OpenAI's GPT software into the Bing search engine.

While ChatGPT is a great help, it's worth taking everything with a grain of salt. ChatGPT is "not particularly innovative," and "nothing revolutionary," says LeCun, Meta's chief AI scientist. Coincidentally, ChatGPT has gotten under the skin of many commentators. Among them, apparently, is Elon Musk, the CEO of Twitter and one of the founders of OpenAI, which created ChatGPT. Elon has recently criticized several of the chatbot's answers. In addition, Stack Overflow has temporarily banned users from sharing answers to coding queries generated by ChatGPT, because the average rate of getting correct answers from ChatGPT is too low. This is all because ChatGPT sometimes writes plausible-sounding but incorrect or nonsensical answers.

The ChatGPT community indicates that supervised training misleads the model because the ideal answer depends on what the model knows, rather than what the human demonstrator knows. The main reason for this phenomenon is that RLHF, reinforcement learning by human feedback [16], does not work well. ChatGPT is trained using reinforcement learning with human-in-the-loop, 40 human labelers to be exact. Traditional chatbots only view this research as a CPS (cyber-physical systems) problem, that is, a system in which computing (or networking) resources are tightly integrated and coordinated with physical resources. However, the theory of CPS is no longer adequate for dealing with human-in-the-loop systems (ChatGPT). It is important to integrate human performance and model performance organically and subtly in order to enable humans to provide more effective feedback. In order to make chatbots systems operate efficiently and effectively, we

consider it necessary to introduce the concept of CPSS [17] (Cyber-Physical-Social Systems), which incorporates both human and social factors. In the future, any research on AI-based chatbot systems must be conducted with a multidisciplinary approach involving the physical, social, and cognitive sciences, and CPSS will be key to the successful construction and deployment of such systems [18].

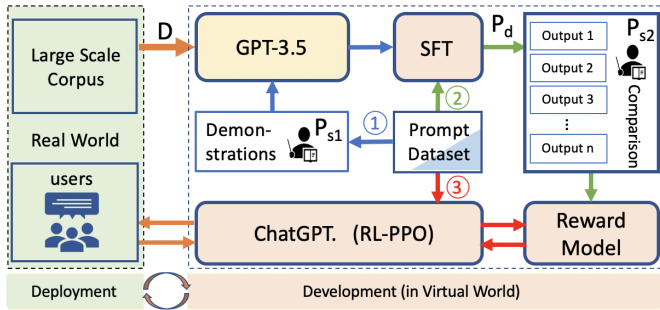


Fig. 3. Principle of ChatGPT from perspective of Parallel Learning.

### ChatGPT and Parallel Intelligence

Since the end of 2022, ChatGPT has shocked almost every corner of the world. So, what exactly is ChatGPT? Why is it so powerful? How was it born?

First of all, ChatGPT is a Transformer-based language model that is pre-trained based on a large amount of text corpus and then fine-tuned based on specialized data [16]. This enables it to generate coherent and contextually appropriate text, capable of multiple tasks such as text completion, text generation, and conversational AI, etc.

The resources to train ChatGPT include a pre-trained language model (GPT-3.5), a distribution of prompts, and a team of labelers. As shown in Fig.3, the methodology comprises three steps. Step 1 (blue arrows) is to fine-tune the GPT-3.5 model with demonstration data from human labelers based on sampled prompts. The result is the Supervised Fine-Tuned (SFT) policy. Step 2 (green arrows) starts from feeding a prompt to SFT and gets multiple outputs from it. Then the outputs are ranked by human labelers to construct a comparison dataset, which is used to train a Reward Model (RM). Then, Step 3 (red arrows) starts from the supervised policy with a new prompt, succeeded by a reinforcement learning process with rewards from the RM trained in Step 2. Step 2 and Step 3 are iterated continuously to get better policies.

From the perspective of Parallel Learning and Parallel Intelligence [19–26], the ChatGPT methodology is a double-loop pipeline with one descriptive learning, one predictive learning, and two prescriptive learning. As shown in Fig.3, the real world, where a huge amount of text corpus is collected, and the artificial world, where demonstration data are generated to train a policy with RLHF, run in parallel. The descriptive learning ( $D$  in Fig.3) is the mapping from the real world to the artificial world, and the result is the pretrained language model GPT-3.5, which can be regarded as an implicit knowledge base about the world. Although GPT-3.5 is powerful, it needs guidelines to perform in the way human users wanted, and

that's why we take three steps introduced above. Step 1 can be seen as the first prescriptive learning ( $P_{s1}$ ) process, in which the policy is aligned with human demonstrations. Step 2 starts with predictive learning ( $P_d$ ) by producing multiple outputs, and ends with prescriptive learning ( $P_{s2}$ ) to rank the outputs by incorporating human preference. Step 3 is actually an automated process of Step 2 using reinforcement learning with the Reward Model. Steps 2 and 3 form the inner loop to iteratively optimize the policy with increasing comparison data. In addition, the interaction between development and deployment is the outer loop with feedback from social users (instead of labelers).

### The DAO to the Future of Linguistic Intelligence

We can travel back to the future of linguistic intelligence by studying the history of language. Language cannot exist without human collaboration. A plethora of new words and hot stems have emerged in response to the ever-increasing complexity of communication needs. Machine linguistic intelligence, on the other hand, is more of a symbiotic relationship, relying on the development of the Internet to achieve a highly human-like conversational experience based on the massive absorption of human linguistic information while lacking the ability to generate new concepts.

To overcome this limitation and empower AI with the same concept creation capabilities as humans, machines must have the same communication requirements as people. The formation of organizations is the primary driver of communication needs. In production environments, IOT (Internet of Things) devices, web crawlers, distributed storage, machine learning tools, and other components designed by architects have long been organized centrally. As the complexity of intelligent systems continues to increase, their design pattern is gradually shifting from single program multiple data (SPMD) to multiple program multiple data (MPMD) [27].

This centralized, predetermined organization is not, however, the most prevalent type of organizations in human society. In contrast, the vast majority of human society's systems, such as political and economic systems, are decentralized and federated. AI systems have not been structured in this manner because their task processes are relatively fixed and arbitrated by third parties. Nonetheless, as tasks become more complex, particularly as they evolve from linguistic to imaginative intelligence, task processes must frequently be customized and allow for human involvement throughout, and it is difficult to find enough arbitrators. In the Film Industry, for instance, directors must consider integrating the script, shots, and soundtrack, and communicate with the producer in a timely manner throughout the process. With current end-to-end solutions, it is difficult to accomplish such tasks, and it is also challenging to train models using human feedback, as appreciation of such artwork varies widely.

Decentralized autonomous organizations (DAOs) [18, 28, 29] are a promising solution to this issue. Decentralization could facilitate an evolution in the organizational structure of intelligence. Research has discovered that, unlike the current intelligent systems designed by human architects, self-organized intelligent systems can be freely combined in a

competitive manner, resulting in a more flexible and efficient architecture [27, 30]. In addition, DAO contributes to a shift in the interaction between AI and humans. AI can currently only interact with humans as a final product, and participation in the training process requires specialized knowledge. DAO can provide a simple and diverse incentive structure for this. As we have observed in the financial markets, AI and AI, as well as AI and its human creators, can collaborate for rewards in DAOs in response to the constantly varying demands in high frequency. In fact, traditional AI research topics such as federated learning [31], model aggregation [32] and multi-agent systems [33] have explored this area, and the DAO community has already adopted numerous concepts. We believe the next step in the development of linguistic intelligence will involve combining DAOs to achieve self-organization and human compatibility.

Experts familiar with large-scale models are aware that ChatGPT lacks revolutionary technical advantages, and there are still many obstacles to commercial deployment. Nonetheless, we are pleased with ChatGPT's growing popularity, as it will benefit large-scale model research and, hopefully, revolutionize linguistics intelligence research and the coming Intelligent Industries or the Age of Industries 5.0.

#### ACKNOWLEDGMENT

This work was partially supported by the National Key R&D Program of China (2020YFB2104001), the National Natural Science Foundation of China (62271485, 61903363, 62203250, U1811463). We thank Drs. Yonglin Tian, Bai Li, Wenbo Zheng and Wenwen Ding for their participation and discussion in our Distributed/Decentralized Hybrid Workshops (DHW).

#### REFERENCES

- [1] F.-Y. Wang, "Hierarchical structure and linguistic description for complex decision networks: A evaluation programming approach," *PARCS Report, University of Arizona, Tucson, Arizona, USA*, 1999.
- [2] F.-Y. Wang, "Guanzi and complexity control," *Technical Report, Intelligent Control and Systems Engineering Center, CAS, China*, 2001.
- [3] F.-Y. Wang, "New IT and new axial age: The origin and goal of the future," *Exploration and Free Views*, vol. 10, pp. 23–27, 2017.
- [4] F.-Y. Wang *et al.*, "Where does AlphaGo go: From Church-Turing Thesis to AlphaGo Thesis and beyond," *IEEE/CAA Journal of Automatica Sinica*, vol. 3, no. 2, pp. 113–120, 2016.
- [5] F.-Y. Wang, "Intelligent industries and industrial revolution: The imaginative DAO to continuous ownership and new economics of parallel supply-demand ecology," *PEW 2020*, 2020.
- [6] F.-Y. Wang, "DeSci for DeDAO in CPSS: Parallel intelligence and intelligent industries for smart societies," *DHW on DeSci*, 2022.
- [7] F.-Y. Wang, "Parallel management: The DAO to smart ecological technology for complexity management intelligence," *Acta Automatica Sinica*, vol. 48, no. 11, pp. 2655–2669, 2022.
- [8] W. Ding *et al.*, "Desci based on Web3 and DAO: A comprehensive overview and reference model," *IEEE Transactions on Computational Social Systems*, vol. 9, no. 5, pp. 1563–1573, 2022.
- [9] R. K. Lindsay *et al.*, "DENDRAL: A case study of the first expert system for scientific hypothesis formation," *Artificial Intelligence*, vol. 61, no. 2, pp. 209–261, 1993.
- [10] D. Lenat *et al.*, "CYC: Using common sense knowledge to overcome brittleness and knowledge acquisition bottlenecks," *AI Magazine*, vol. 6, no. 4, pp. 65–85, 1985.
- [11] N. Shadbolt *et al.*, "The semantic web revisited," *IEEE Intelligent Systems*, vol. 21, no. 3, pp. 96–101, 2006.
- [12] J. Weizenbaum, "ELIZA-A computer program for the study of natural language communication between man and machine," *Communications of the ACM*, vol. 9, no. 1, pp. 36–45, 1966.
- [13] T. Winograd, "Understanding natural language," *Cognitive Psychology*, vol. 3, no. 1, pp. 1–191, 1972.
- [14] D. Ferrucci *et al.*, "Watson: Beyond jeopardy!" *Artificial Intelligence*, vol. 199, pp. 93–105, 2013.
- [15] L. Zhou, J. Gao, D. Li *et al.*, "The design and implementation of XiaoIce, an empathetic social chatbot," *Computational Linguistics*, vol. 46, no. 1, pp. 53–93, 2020.
- [16] L. Ouyang *et al.*, "Training language models to follow instructions with human feedback," *arXiv preprint arXiv:2203.02155*, 2022.
- [17] F.-Y. Wang, "The emergence of intelligent enterprises: From CPS to CPSS," *IEEE Intelligent Systems*, vol. 25, no. 4, pp. 85–88, 2010.
- [18] F.-Y. Wang, "The DAO to metacontrol for metasystems in metaverses: The system of parallel control systems for knowledge automation and control intelligence in CPSS," *IEEE/CAA Journal of Automatica Sinica*, vol. 9, no. 11, pp. 1899–1908, 2022.
- [19] L. Li, Y. Lin, N. Zheng *et al.*, "Parallel learning: A perspective and a framework," *IEEE/CAA Journal of Automatica Sinica*, vol. 4, no. 3, pp. 389–395, 2017.
- [20] F.-Y. Wang *et al.*, "Steps toward parallel intelligence," *IEEE/CAA Journal of Automatica Sinica*, vol. 3, no. 4, pp. 345–348, 2016.
- [21] P. Ye *et al.*, "Parallel cognition: Hybrid intelligence for human-machine interaction and management," *Frontiers of Information Technology & Electronic Engineering*, vol. 23, no. 12, pp. 1765–1779, 2022.
- [22] J. Lu, X. Wang, X. Cheng *et al.*, "Parallel factories for smart industrial operations: From big AI models to field foundational models and scenarios engineering," *IEEE/CAA Journal of Automatica Sinica*, vol. 9, no. 12, pp. 2079–2086, 2022.
- [23] Y. Shen *et al.*, "Parallel sensing in metaverses: Virtual-real interactive smart systems for "6S" sensing," *IEEE/CAA Journal of Automatica Sinica*, vol. 9, no. 12, pp. 2047–2054, 2022.
- [24] J. Yang *et al.*, "Parallel manufacturing for industrial metaverses: A new paradigm in smart manufacturing," *IEEE/CAA Journal of Automatica Sinica*, vol. 9, no. 12, pp. 2063–2070, 2022.
- [25] F.-Y. Wang, "Parallel intelligence in metaverses: Welcome to Hanoi!" *IEEE Intelligent Systems*, vol. 37, no. 1, pp. 16–20, 2022.
- [26] Q. Miao *et al.*, "Parallel learning: Overview and perspective for computational learning across Syn2Real and Sim2Real," *IEEE/CAA Journal of Automatica Sinica*, vol. 10, no. 3, pp. 603–631, 2023.
- [27] P. Barham, A. Chowdhery, J. Dean *et al.*, "Pathways: Asynchronous distributed dataflow for ml," *Proceedings of Machine Learning and Systems*, vol. 4, pp. 430–449, 2022.
- [28] F.-Y. Wang, "The metaverse of mind: Perspectives on DeSci for DeEco and DeSoc," *IEEE/CAA Journal of Automatica Sinica*, vol. 9, no. 12, pp. 2043–2046, 2022.
- [29] X. Wang, M. Kang, H. Sun *et al.*, "DeCASA in agriverse: Parallel agriculture for smart villages in metaverses," *IEEE/CAA Journal of Automatica Sinica*, vol. 9, no. 12, pp. 2055–2062, 2022.
- [30] P. Moritz *et al.*, "Ray: A distributed framework for emerging AI applications," in *Proceedings of the 13th USENIX Symposium on Operating Systems Design and Implementation (OSDI 18)*, 2018, pp. 561–577.
- [31] F.-Y. Wang *et al.*, "Federated data: Toward new generation of credible and trustable artificial intelligence," *IEEE Transactions on Computational Social Systems*, vol. 8, no. 3, pp. 538–545, 2021.
- [32] M. A. Ganaie *et al.*, "Ensemble deep learning: A review," *Engineering Applications of Artificial Intelligence*, vol. 115, p. 105151, 2022.
- [33] J. Qin, Q. Ma, Y. Shi, and L. Wang, "Recent advances in consensus of multi-agent systems: A brief survey," *IEEE Transactions on Industrial Electronics*, vol. 64, no. 6, pp. 4972–4983, 2017.

#### ABOUT THE AUTHOR

**Fei-Yue Wang** (Fellow, IEEE) received his Ph.D. degree in computer and systems engineering from the Rensselaer Polytechnic Institute, Troy, NY, USA, in 1990. He joined The University of Arizona in 1990 and became a Professor and the Director of the Robotics and Automation Laboratory and the Program in Advanced Research for Complex Systems. In 1999, he founded the Intelligent Control and Systems Engineering Center at the Institute of Automation, Chinese Academy of Sciences (CAS), Beijing, China, under the support of the Outstanding Chinese Talents Program from the State Planning Council, and in 2002, was appointed as the Director of the Key Laboratory of Complex Systems and Intelligence Science, CAS, and Vice President of Institute of Automation, CAS in 2006. He found CAS Center for Social Computing and Parallel Management in 2008, and became the

State Specially Appointed Expert and the Founding Director of the State Key Laboratory for Management and Control of Complex Systems in 2011. His current research focuses on methods and applications for parallel intelligence, social computing, and knowledge automation. He is a Fellow of INCOSE, IFAC, ASME, and AAAS. In 2007, he received the National Prize in Natural Sciences of China, numerous best papers awards from IEEE Transactions, and became an Outstanding Scientist of ACM for his work in intelligent control and social computing. He received the IEEE ITS Outstanding Application and Research Awards in 2009, 2011, and 2015, respectively, the IEEE SMC Norbert Wiener Award in 2014, and became the IFAC Pavel J. Nowacki Distinguished Lecturer in 2021.

Since 1997, he has been serving as the General or Program Chair of over 30 IEEE, INFORMS, IFAC, ACM, and ASME conferences. He was the President of the IEEE ITS Society from 2005 to 2007, the IEEE Council of RFID from 2019 to 2021, the Chinese Association for Science and Technology, USA, in 2005, the American Zhu Kezhen Education Foundation from 2007 to 2008, the Vice President of the ACM China Council from 2010 to 2011, the Vice President and the Secretary General of the Chinese Association of Automation from 2008 to 2018, the Vice President of IEEE Systems, Man, and Cybernetics Society from 2019 to 2021. He was the Founding Editor-in-Chief (EiC) of the International Journal of Intelligent Control and Systems from 1995 to 2000, IEEE ITS Magazine from 2006 to 2007, IEEE/CAA JOURNAL OF AUTOMATICA SINICA from 2014-2017, China's Journal of Command and Control from 2015-2021, and China's Journal of Intelligent Science and Technology from 2019 to 2021. He was the EiC of the IEEE Intelligent Systems from 2009 to 2012, IEEE TRANSACTIONS on Intelligent Transportation Systems from 2009 to 2016, IEEE TRANSACTIONS ON COMPUTATIONAL Social Systems from 2017 to 2020. Currently, he is the President of CAA's Supervision Council, and the EiC of IEEE Transaction on Intelligent Vehicles.

**Qinghai Miao** (Senior Member, IEEE) received his Ph.D. degree in control theory and control engineering from the Graduate University of Chinese

Academy of Sciences, Beijing, China, in 2007. From 2017 to 2018, he was a Visiting Scholar with the School of Informatics, the University of Edinburgh, UK. He is currently an Associate Professor with the School of Artificial Intelligence, University of Chinese Academy of Sciences. His research interests include parallel intelligence, machine learning, computer vision, computer graphics, intelligent transportation systems.

**Xuan Li** received his Ph.D. degree in Control Science and Engineering from the Beijing Institute of Technology, Beijing, China, in 2020. After that, he joined the Peng Cheng Laboratory and became a postdoctoral researcher at the Virtual Reality Laboratory. From October 2018 to October 2019, he was a Visiting Scholar at the Department of Computer Science, Stony Brook University, Stony Brook, NY, USA. He is enrolled in the Young Elite Scientists Sponsorship Program of China Association of Science and Technology in 2022. His research interests include scenarios engineering, image synthesis, computer vision, bionic vision computing, intelligent transportation systems, and machine learning.

**Xingxia Wang** is currently pursuing the Ph.D. degree in pattern recognition and intelligent system with the School of Artificial Intelligence, University of Chinese Academy of Sciences, Beijing, China, and the State Key Laboratory for Management and Control of Complex Systems, Institute of Automation, Chinese Academy of Sciences, Beijing. Her research interests include parallel oil fields, artificial intelligence, and fault diagnosis of industrial processes.

**Yilun Lin** received his Ph.D. degree in control science and engineering from The State Key Laboratory of Management and Control for Complex Systems, Institute of Automation, Chinese Academy of Sciences, China, in 2019. He is currently a research scientist and the principal investigator of Urban Computing Lab, Shanghai AI Laboratory. His research interests include social computing, urban computing, intelligent transportation systems, parallel intelligence, parallel learning, deep learning, reinforcement learning and privacy-preserving computing.