

# 1 Estimating Traffic Volumes for Signalized Intersections Using 2 Connected Vehicle Data

3 Jianfeng Zheng<sup>1</sup> and Henry X. Liu<sup>1,2\*</sup>

4 1:Department of Civil and Environmental Engineering, University of Michigan;

5 2:University of Michigan Transportation Research Institute;

6 \*Corresponding Author

## 7 **Abstract**

8 Recently the connected vehicle (CV) technology has received significant attention with active ef-  
9 forts of pilot deployments supported by the US Department of Transportation (USDOT). At signalized  
10 intersections, CVs may serve as mobile sensors, providing opportunities of reducing dependencies on  
11 conventional vehicle detectors for signal operation. However, most of the existing studies mainly focus  
12 on scenarios that penetration rates of CVs reach certain level, e.g., 25%, which may not be feasible in the  
13 near future. How to utilize data from a small number of CVs to improve traffic signal operation remains  
14 an open question. In this work, we develop an innovative approach to estimate traffic volume, a key  
15 input to many signal optimization algorithms, using GPS trajectory data from CV or navigation devices  
16 under low market penetration rates. To estimate traffic volumes, we model vehicle arrivals at signalized  
17 intersections as a time-dependent Poisson process, which can account for signal coordination. The es-  
18 timation problem is formulated as a maximum likelihood problem given multiple observed trajectories  
19 from CVs approaching to the intersection. An expectation maximization (EM) procedure is derived to  
20 solve the estimation problem. Two case studies were conducted to validate our estimation algorithm.  
21 One uses the CV data from the Safety Pilot Model Deployment (SPMD) project, in which around 2800  
22 CVs were deployed in the City of Ann Arbor, MI. The other uses vehicle trajectory data from users of  
23 a commercial navigation service in China. Mean absolute percentage error (MAPE) of the estimation  
24 is found to be 9% to 12%, based on benchmark data manually collected and data from loop detectors.  
25 Considering the existing scale of CV deployments, the proposed approach could be of significant help to  
26 traffic management agencies for evaluating and operating traffic signals, paving the way of using CVs for  
27 detector-free signal operation in the future.

- 1           **Keyword:** Connected Vehicle, Mobile Data, GPS Trajectory, Traffic Signal, Vehicle-to-Infrastructure
- 2           Communication, Traffic Volume Estimation, Safety Pilot Model Deployment (SPMD) Project

# 1 Introduction

2 Signalized intersections are indispensable parts of urban traffic networks. Currently, over 300,000 traffic  
3 signals exist in the U.S., accounting for \$82.7 billion public investments (NTOC, 2012). With two-thirds of  
4 urban vehicle miles traveled on signal controlled roads (McCracken, 1996), signalized intersections have often  
5 become hot-spots of traffic congestion, causing 295 million vehicle-hours of delay annually<sup>1</sup>. Considering the  
6 amount of traffic signals and their impact to the traffic network, it is critical to operate traffic signals  
7 efficiently. However, the majority of signals in the U.S. are only re-timed once every 2-5 years, despite of a  
8 high benefit-cost ratio for signal re-timing (Sunkari, 2004). This is primarily due to the labor costs for the  
9 retiming process. With tightening budgets and resources nowadays, maintaining efficient signal operation  
10 has become a challenging task for many traffic management agencies.

11 Recent advent of connected vehicle (CV) introduces great opportunities of reforming the conventional  
12 traffic signal operation. Currently, many traffic signals in the U.S. are still fixed-time signals, which are  
13 not responsive to fluctuated traffic demands. For traffic signals to accommodate varying demands, vehicle  
14 detectors, e.g., inductance loop detectors or video detectors, need to be installed and maintained properly.  
15 This inevitably incurs significant cost for the public agencies. With the vehicle-to-infrastructure (V2I)  
16 communication, CVs can continuously report their status to roadside equipment (RSE) at intersections,  
17 working as mobile sensors. Therefore, CVs hold great potential to reduce or even eliminate the needs for  
18 fixed-location detectors in the existing signal systems. When penetration rates are low, the CV data could  
19 be used to generate performance measures for fine-tuning traffic signals periodically. When penetration rates  
20 are high, it becomes viable to operate adaptive signal control that solely depends on CV input.

21 Considering these potentials, deploying V2I systems at signalized intersections has been an important  
22 part of CV pilot deployment, exemplified by the installation of RSEs at intersections in the Safety Pilot Model  
23 Deployment (SPMD) project (Gay and Kniss, 2015), the upcoming CV pilot deployment (Masters, 2016), as  
24 well as in the Smart City development supported by the US Department of Transportation (USDOT). Along  
25 with the deployment efforts, a number of CV-based signal control algorithms have also been proposed.  
26 However, the signal control algorithms proposed in the previous studies mainly focus on scenarios that  
27 penetration rates of CVs reach certain levels, e.g., 25%, which may not be feasible in the near future. In  
28 addition, most of the existing studies rely on simulated data which may not capture real-world characteristics  
29 of CVs, e.g. communication performance or GPS accuracy. Therefore, the proposed algorithms may not be  
30 transferable to the practice. How to utilize real-world CV data under low penetration rate environment to

---

<sup>1</sup> Congestion Reduction Toolbox. U.S. DOT FHWA. [www.fhwa.dot.gov/congestion/toolbox](http://www.fhwa.dot.gov/congestion/toolbox).

1 improve traffic signal operation remains as an open question.

2 Aiming to answer this question, this work develops an innovative approach that uses data from CVs to  
3 estimate traffic volumes at signalized intersections, particularly under low penetration rate environment. It  
4 has been well known that traffic volumes are the very key inputs to designing and optimizing traffic signal  
5 operation. In conventional signal systems, vehicle arrival information can only be obtained from detectors at  
6 fixed locations. Different from the detector data, CV data provide detailed trajectories, albeit from a small  
7 percentage of vehicles. The comparison is illustrated in Figure 1. The challenge here is to estimate overall  
8 arrival information using limited CV trajectories. (For example, about 3%-12% traffic in the City of Ann  
9 Arbor, MI, are CVs because of the SPMD Project)

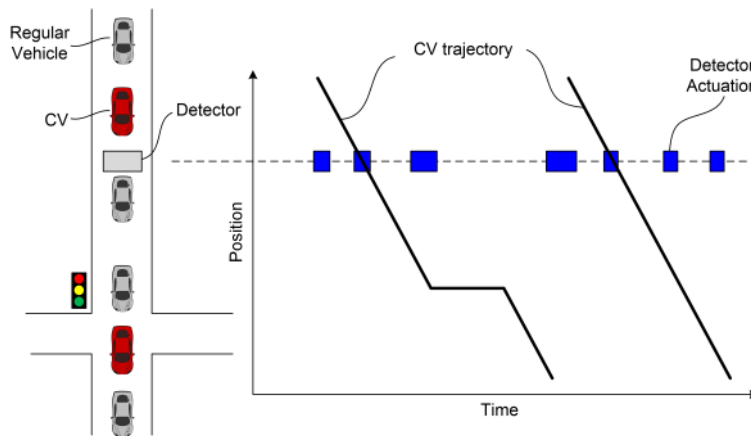


Figure 1: Illustration of CV data versus detector data

10 In this work, the above challenge will be addressed through leveraging historical CV data and the repet-  
11 itive patterns of vehicle arrivals at signalized intersections. In the proposed algorithm, vehicle arrivals at  
12 intersections are modeled as a time-dependent Poisson process with a time dependent factor characterizing  
13 arrival types. For volume estimation, an expectation maximization (EM) procedure is derived that can  
14 incorporate different types of CV trajectories. To evaluate the performance of the proposed algorithm, two  
15 case studies were conducted: the first case study utilized real-world CV data received by a RSE in the SPMD  
16 project; the second case study utilized vehicle trajectory data from users of a route navigation service. To  
17 the best of our knowledge, this research is the first attempt of exploring real-world CV or GPS trajectory  
18 data under low penetration rate environment for volume estimation at signalized intersections. Our ultimate  
19 goal is to use CV data to develop a detector-free signal control system in the future.

20 The rest of this paper is organized as follows. Section 2 presents a review of relevant work for traffic  
21 signal control with CVs, as well as traffic state estimation at intersections with probe vehicle. Section 3  
22 briefly introduces the SPMD project and CV data. Section 4 describes the methodology for estimating

1 traffic arrivals. Section 5 presents the two case studies using vehicle trajectory data. Conclusions and future  
2 research are discussed in Section 6.

## 3 **2 Relevant Work**

4 Traffic signal control with CVs has captured substantial attention in the past several years. Many  
5 existing studies focus on developing real-time traffic signal control with CVs, through either extending signal  
6 actuation mechanism or minimizing vehicle delay based on a traffic model (Agbolosu-Amison et al., 2008;  
7 Milanés et al., 2012; He et al., 2012; Lee et al., 2013b,a; He et al., 2014; Guler et al., 2014; Feng et al.,  
8 2015; Goodall et al., 2016). However, most of the proposed adaptive signal control algorithms require high  
9 penetration rates of CVs, e.g., 25%. Such high penetration rates may not be achievable in the near future.  
10 A notable exception is (Day and Bullock, 2016) which conducted a proof-of-concept study using CV data  
11 in a low penetration rate environment for optimizing signal coordination. However, the data used in (Day  
12 and Bullock, 2016) were sampled from fixed location vehicle detectors so vehicle trajectories were not used  
13 in their study. The problem of estimating traffic volume from vehicle trajectories, which is a fundamental  
14 input for signal operation, is also not tackled.

15 On the other hand, with increasing availability of GPS data from cell phones and navigation units,  
16 substantial efforts have been carried out for traffic state estimation using vehicle trajectory data. Exemplified  
17 by the Mobile Century project (Hoh et al., 2008; Work et al., 2008; Herrera et al., 2010), a large group of  
18 existing studies used GPS data to estimate traffic speed and travel time (Turner and Holdener, 1995; Chen  
19 and Chien, 2001; Long Cheu et al., 2002; Hellinga and Fu, 2002; Nanthawichit et al., 2003; Bhaskar et al.,  
20 2011; Jenelius and Koutsopoulos, 2013; Zheng and Van Zuylen, 2013).

21 Recently, several studies have also been conducted for real-time queue length estimation at signalized  
22 intersections. These approaches can be grouped into two main categories, one based on a probabilistic  
23 approach and the other using shockwave theory. Comert and his colleague derived analytical expressions  
24 of conditional probability of queue length based on the probability of observing probe vehicles in a queue  
25 (Comert and Cetin, 2009; Comert, 2013, 2016). Hao et al. proposed a Bayesian Network based model for  
26 estimating the probability of probe vehicle positions in vehicle arrivals (Hao et al., 2013, 2014). Another  
27 category focuses on applying the shock-wave theory by (Lighthill and Whitham, 1955; Richards, 1956) for  
28 queue length estimation with vehicle trajectory data. Ban et al., proposed to estimate traffic delay using  
29 travel time sampled from mobile sensors (Ban et al., 2009). The methodology was later extended for real-time  
30 estimation of queue length in (Ban et al., 2011; Hao et al., 2015). Cetin proposed a procedure for queue length  
31 estimation with over-saturated traffic conditions by identifying critical points of traffic shockwave (Cetin,  
32 2012). Christofa et al. proposed a procedure to detect queue spillback using trajectory data with signal

1 status information at both subject and upstream intersections (Christofa et al., 2013). Li et al. proposed  
2 a data fusion procedure for queue length estimation, leveraging data from both probe vehicles and loop  
3 detectors (Li et al., 2013). Sun & Ban applied the variation formulation of traffic flow model by (Daganzo,  
4 2005) for reconstructing all vehicle trajectories based on probe vehicle data (Sun and Ban, 2013). Their key  
5 idea was to obtain flow information based on probe vehicle speeds, assuming that arrivals between two probe  
6 vehicles were uniform.

7 In the aforementioned studies, the primary focus is on estimating real-time performance measures at iso-  
8 lated intersections. However, estimating traffic volumes, which are critical for offline optimization of signal  
9 operation, has yet been studied. A notable exception is (Ban and Gruteser, 2010), which proposed an esti-  
10 mator for volume estimation using sampled travel time and delay pattern estimated from (Ban et al., 2009).  
11 However, the algorithm relies on accurate delay estimation, which requires a relatively high penetration rate  
12 ( $>20\%$ ) as reported in (Ban et al., 2009). This, however, would be difficult in a near future. In this work,  
13 we aim to fill in the gap for volume estimation using CV data with low penetration rates. We believe that  
14 the proposed methodology would be an important building block of utilizing CV or vehicle trajectory data  
15 for traffic signal re-timing, and eventually achieving detector-free signal operation in the future.

### 16 **3 Data from the Safety Pilot Model Deployment (SPMD) Project**

17 In this paper, we use CV trajectory and signal status data collected in the SPMD project. The SPMD  
18 project was conducted by the University of Michigan Transportation Research Institute (UMTRI) for eval-  
19 uating operation applicability of CV technology in a real-world, concentrated environment, and also for  
1 quantifying the benefits of CV safety applications and user acceptance<sup>2</sup>. In the project, since August 2012,  
2 UMTRI has equipped about 2800 vehicles with dedicated short range communication (DSRC) devices and  
3 deployed RSEs at 27 locations including 19 intersections. An illustration of RSE deployment in the project  
4 is shown in Figure 2. The basic safety messages (BSM) received by the RSEs have been continuously col-  
5 lected and archived in the UMTRI database. Sample data from the SPMD project are also available at the  
6 Research Data Exchange<sup>3</sup>.

---

<sup>2</sup>SPMD Project <http://safetypilot.umtri.umich.edu/>

<sup>3</sup> FHWA Research Data Exchange: [www.its-rde.net](http://www.its-rde.net)

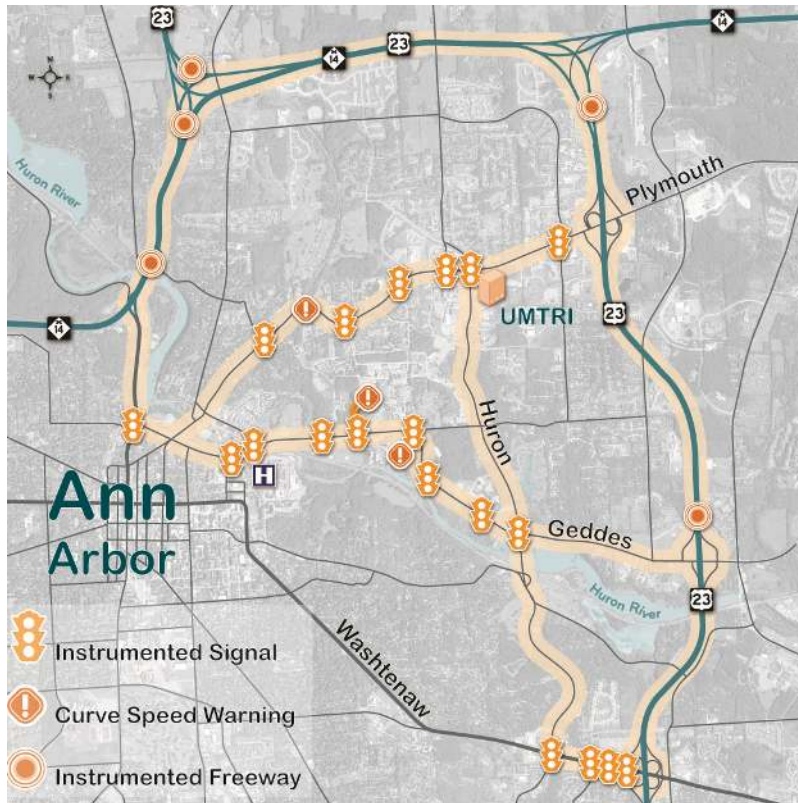


Figure 2: Deployments of RSEs in the SPMD project (Source: <http://safetypilot.umtri.umich.edu/>)

## 7 BSM data from RSEs

- 1 A sample of processed BSM data received by a RSE is shown in Figure 3. Only a subset of data fields
- 2 are used in our investigation, including device ID of a RSE (RxDevice), device ID of a CV sending the BSMs
- 3 (TxDevice), GPS position and speed of the CV, and timestamp when the BSM was received by a RSE.

RSE ID	CV ID	Gentime (second)	Latitude	Longitude	Speed (m/s)
18013	35	281203941.949	42.30465	-83.70778	4.78
18013	35	281203942.249	42.30465	-83.70776	4.7
18013	35	281203942.349	42.30465	-83.70776	4.66
18013	35	281203942.449	42.30465	-83.70775	4.68
18013	35	281203942.549	42.30465	-83.70774	4.68

Figure 3: Sample BSM data received by RSEs

## 4 Signal status data from SPaT messages

- 5 The SPaT (signal phase and timing) data broadcast by the RSEs have also been collected at deployed
- 6 intersections. The SPaT data contain information of signal status that can be used as the input for “signal

7 aware” CV applications, e.g., red light violation warning or eco-approach/departure assistance. Here, only a  
 8 portion of the data fields in the SPaT are used, including: timestamp when a message was generated, signal  
 9 phase ID and signal status. A sample of SPaT data is shown in Figure 4.

<b>Time Stamp</b>	<b>Phase ID</b>	<b>Phase Status</b>
<b>2015-9-1,0:6:48.837</b>	2	Red
<b>2015-9-1,0:6:48.837</b>	2	Red
<b>2015-9-1,0:6:48.837</b>	1	Green
<b>2015-9-1,0:6:48.837</b>	1	Green

Figure 4: Sample signal status data from SPaT messages broadcast by RSEs

## 10 Data processing

11 The GPS information from BSM and signal status data are processed in the following manner. We first  
 12 select an interested movement, its associated signal phase, and an interested time period, e.g., 8AM-9AM, for  
 13 investigation. We then select GPS data associated with the movement and time period, based on direction  
 14 of CV trajectories, and also prepare corresponding signal status data. Then, based on road geometry, we  
 15 calculate CVs’ longitudinal position along the road from GPS positions, and generate time-space trajectories.  
 16 We also map GPS time into signal clock time. This is done by finding the green start when a CV passes  
 17 the stop bar, and subtracting the green start time from CV trajectory time, so that we have signal clock  
 18 time for the CV trajectory, i.e., time using green start as zero. With the time in signal clock, we can  
 19 aggregate trajectories to calculate the time dependent factor, similar to the cyclic profile generated from  
 20 vehicle detectors (Abbas et al., 2001; Zheng et al., 2014; Day and Bullock, 2016). The time dependent factor  
 21 is then used with CV trajectories to estimate traffic volumes, the details of which is presented in the next  
 22 section.

## 23 4 Methodology

1 In order to estimate traffic volume, our basic idea is to take advantage of vehicle arrival information in  
 2 vehicle trajectories. The arrival information can be reflected from the status whether a vehicle stopped or  
 3 not. An example is shown in Figure 5. In the figure, CV1 passed the intersection with a stop and CV2  
 4 without a stop. Then, based on CV1’s stopping position or departure time, we can calculate number of  
 5 vehicles queuing in front of it. Based on the trajectory of CV2 without a stop, we know that if vehicle queue  
 6 existed, the queue would not be long enough to impact CV2. In other words, the upper bound of possible  
 7 vehicle arrivals between CV1 and CV2 can be calculated based on the trajectory of CV2. By combining



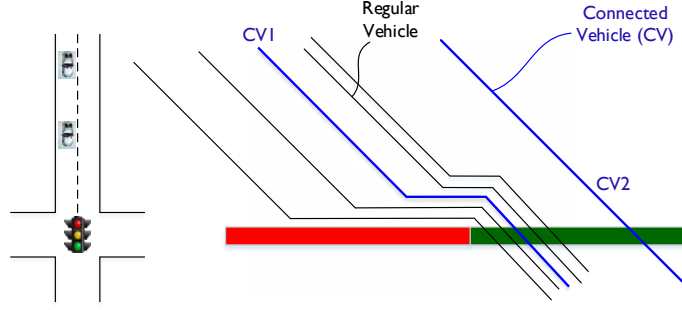


Figure 5: Illustration of vehicle arrival information in trajectories

8 these arrival information from vehicle trajectories, volume of overall vehicle arrivals can be estimated.

9 The inputs to our estimation algorithm include vehicle trajectories approaching to an intersection as well  
 10 as traffic signal status. For a CV trajectory, the information being utilized includes its projected arrival time  
 11 with free flow speed at the stop bar  $t_{f,i}$ , its departure time at the stop bar  $t_{d,i}$ , the type of event indicating  
 12 whether a CV stopped or not  $s_i$ , and the subscript  $i$  as the index of the event. For each CV trajectory, we  
 13 can retrieve the following vector  $X_i$ , for the key information of trajectories. Then, the estimation only needs  
 14 to use the information within the vector, instead of the raw trajectory data.

$$X_i = (t_{f,i}, t_{d,i}, s_i)^T$$

15 For CV without a stop, the projected arrival time at stop bar is equal to the departure time, as:  $t_{f,i} = t_{d,i}$ .

1 For a CV with a stop, we can estimate its projected arrival time  $t_{f,i}$  as:

$$t_{f,i} = t_{s,i} + \frac{l_i}{v_f} \quad (1)$$

2 Where:  $t_{s,i}$  is time when the CV came to a stop,  $l_i$  is the distance of its stopping position to the stop  
 3 bar, and  $v_f$  is the free flow speed.

4 To incorporate signal information, we also treat the red signals as a type of events. Here, we assume  
 5 that no residual queue exists at the start of red signal. With this assumption, we only focus on estimation  
 6 with non-saturated traffic conditions, leaving estimation with over-saturated traffic conditions in our future  
 7 research. For each red signal, we can also prepare the trajectory information vector as:

$$X_j = (t_{f,j}, t_{d,j}, s_j)^T, \text{ with } t_{f,j} = t_{r,j}, t_{d,j} = t_{g,j}$$

8       Where:  $t_{r,j}$  is the time of red start for cycle  $j$ , and  $t_{g,j}$  for green start. Here,  $s_j$  is set as -1, indicating that  
9 this event is corresponding to a red signal. Denoting red signal as an event is for the ease of data processing  
10 so that we can calculate inter arrival period between arrivals of CVs and starting time of red signals easily.  
11       These two vectors are the main input to the estimation process in the next section.

#### 12 4.1 Modeling Traffic Arrivals as a Time-Dependent Poisson Process

13 During a selected Time of Day (TOD) period, we assume that traffic arrivals follow a time-dependent Poisson  
14 process with an arrival rate of  $\lambda p(t^{(c)})$ . Here,  $t^{(c)}$  indicates time within a signal cycle, the superscript  $(c)$   
15 indicates that the time is measured using a signal clock,  $\lambda$  denotes the mean arrival rate, and  $p(t^{(c)})$  is the  
16 time dependent factor proportional to the arrival rate at  $t^{(c)}$ , i.e., the fraction of total arrivals at  $t^{(c)}$  over  
17 the entire signal cycle. In traffic engineering literature, Poisson process is a common choice to model traffic  
18 arrivals at intersections. The additional assumption that arrival rates are dependent on the time in a signal  
19 cycle is to account for impacts from signal coordination. With the signal coordination, traffic departures  
20 at the upstream intersection would be grouped as platoons, leading to nonhomogeneous arrivals at subject  
21 intersection. The time-dependent Poisson process is used to characterize the non-homogeneous arrivals.

22       Defining  $N(t_1, t_2)$  as the accumulative number of arrivals from time  $t_1$  to  $t_2$ , we have:

$$N(t_1, t_2) \sim \text{Poisson}(\Lambda(t_1, t_2))$$

23       Where:  $\Lambda(t_1, t_2) = \int_{t_1}^{t_2} \lambda p(C(t)) dt = \lambda \int_{t_1}^{t_2} p(C(t)) dt$ , indicating arrival rate between  $t_1$  and  $t_2$ , and also  
24 for simplifying notations.  $C : t \rightarrow t^{(c)}$ , maps the time of a day,  $t$ , to time in signal cycle clock,  $t^{(c)}$ .  $\lambda$  is the  
25 mean arrival rate across the investigation period.

26       By aggregating CV trajectories, we can calculate the time dependent factor  $p(t^{(c)})$  based on the following  
27 equation:


$$p(t^{(c)}) = \frac{1}{N} \sum_{i=1}^N I\{C(t_{f,i}) = t^{(c)}\} \quad (2)$$

1       Where:  $I\{C(t_{f,i}) = t^{(c)}\}$  is an indicator equal to 1 if the projected arrival time is in  $t^{(c)}$  interval, and 0  
2 otherwise, and  $N$  is the total number of CV trajectories. For the ease of data processing, we discretize time  
3 with 1-sec interval.


4       Here, the equation essentially calculates fraction of CV arrivals during  $t^{(c)}$  interval from total CV arrivals  
5 during a cycle. We use the fraction of CV arrivals as the estimate of the fraction of traffic, including both  
6 CV and non-CV. Essentially, this assumes that CVs are homogeneously distributed in cycle arrivals for a  
7 particular movement during the investigation period. However, across different movements, we allow the

8 penetration rates to be different, which are observed in cases studies in the later sections.

9       Given the Poisson arrival process, the likelihood function for observing all valid CV trajectories can be  
10 formulated by taking advantage of the inter-arrival time and the corresponding number of non-CV arrivals  
11 between two consecutive CV trajectories received at RSE. As mentioned earlier, two types of CV trajectories  
1 are considered: 1. CV trajectory with a stop at an intersection, and 2. CV trajectory that traverses the  
2 intersection without a stop. Between the projected arrival times of two stopped CVs, or between the projected  
3 arrival time of one stopped CV and the start of a red signal, the number of non-CV arrivals can be calculated  
4 based on the CVs' departure time. If a CV without a stop is observed, then queues at intersection, if exist,  
1 are not long enough to affect the non-stopped CV. Thus, the maximum number of vehicle arrivals before the  
2 CV can be calculated. Illustrations of the two types of CVs are shown in Figure 6, along with notations for  
3 calculation later on.

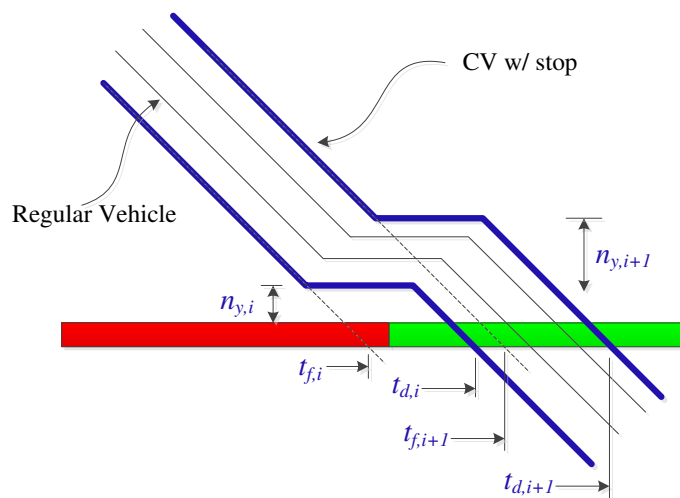

(a) CV with a stop

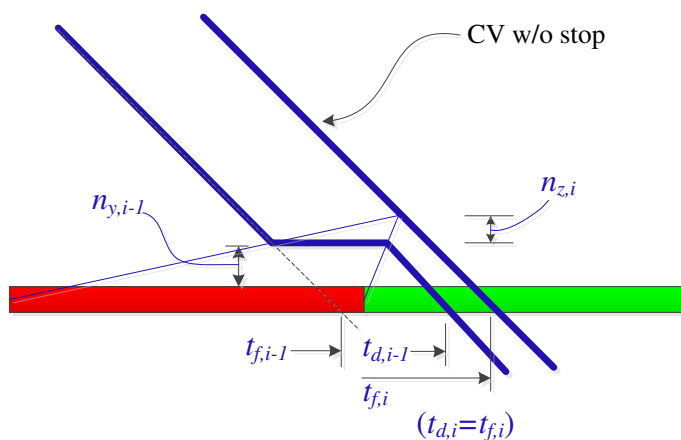

(b) CV without stop

Figure 6: Illustrations of two different types of CV trajectories

4

5 For each CV trajectory, we can calculate the probability of occurrence according to the following cases:

6 **Case 1.** If  $s_i = 1$ ,  $s_{i-1} = -1$  or  $1$ , indicating a CV trajectory with a stop is observed after red start or  
 7 after the arrival of another stopped CV, we have:

$$N(t_{f,i-1}, t_{f,i}) = n_{y,i}, N(t_{f,i-1}, t_{f,i}) \sim \text{Poisson}(\lambda P_{y,i})$$

8      Where:  $n_{y,i} = \left\lfloor \frac{G(t_{d,i-1}, t_{d,i})}{h_s} \right\rfloor$ , denoting the number of departures during the inter-arrival period  $[t_{f,i-1}, t_{f,i}]$ .  
9       $h_s$  is the saturated headway, and  $P_{y,i} = \frac{\Lambda(t_{f,i-1}, t_{f,i})}{\lambda} = \int_{t_{f,i-1}}^{t_{f,i}} p(C(t)) dt$ , for simplifying notations.  $G(t_{d,i-1}, t_{d,i})$   
10      is the effective green time from time  $t_{d,i-1}$ , to  $t_{d,i}$ . The subscript  $y$  denotes that the observations are for  
11      stopped CVs. The illustration is also shown in Figure 6a.

12      **Case 2.** If  $s_i = 2$ ,  $s_{i-1} = -1$  or 1, indicating a CV trajectory without a stop is observed after red start  
13      or after a stopped CV. Accordingly, we have:

$$N(t_{f,i-1}, t_{f,i}) \leq n_{z,i}, N(t_{f,i-1}, t_{f,i}) \sim \text{Poisson}(\lambda P_{z,i})$$

14      Where:  $n_{z,i} = \left\lfloor \frac{G(t_{d,i-1}, t_{d,i})}{h_s} \right\rfloor$ ,  $P_{z,i} = \frac{\Lambda(t_{f,i-1}, t_{f,i})}{\lambda} = \int_{t_{f,i-1}}^{t_{f,i}} p(C(t)) dt$ . The subscript  $z$  denotes that the  
15      observations are for non-stopped CVs. The illustration is also shown in Figure 6b.

16      Besides these two cases, two other cases of trajectories also exist: 1. stopped CV arriving after a non-  
17      stopped CV in the same cycle, and 2. non-stopped CV arriving after another non-stopped CV, also in the  
18      same cycle. For the first case, the stop of the CV would not be caused by queues or red signal, but likely by  
19      other factors, e.g., mid-block entry of other vehicles. For the second case, after the arrival of a non-stopped  
20      CV, we know that the queues must have been cleared and the rest of CVs in the same cycle would travel  
21      with free-flow speed. The trajectory therefore does not provide useful information for volume estimation.  
22      Accordingly, both cases are considered as invalid or trivial observations, and are not used in the estimation.

23      Based on the discussion, the likelihood of observing all valid CV trajectories can be calculated with the  
24      following equation, with  $\mathbf{Y}$  as the collection of observations for all stopped CVs, and  $\mathbf{Z}$  for all non-stopped  
1      CVs.

$$L(Y, Z|\lambda) = \prod_{i=1}^n \left\{ \frac{(\lambda P_{y,i})^{n_{y,i}} e^{-(\lambda P_{y,i})}}{n_{y,i}!} \right\} \prod_{j=1}^m \left\{ \sum_{k=0}^{n_{z,j}} \frac{(\lambda P_{z,j})^k e^{-(\lambda P_{z,j})}}{k!} \right\} \quad (3)$$

2      Now, we can estimate  $\lambda$  for the traffic volume using maximum likelihood estimator (MLE). However, due  
3      to the summation inside the product operation in Equation 3, it is difficult to obtain a closed form of the  
4      MLE. Instead of seeking for a closed form, we use the Expectation Maximization (EM) algorithm for the  
5      estimation.

## 6      4.2 Estimating Parameter Using Expectation Maximization (EM)

7      The Expectation Maximization (EM) algorithm is an iterative procedure to find the MLE mostly suitable

8 when unobserved or partially observed variables exist. The EM algorithm consists of two main steps: the  
9 E-step and the M-step. The E-step calculates the conditional expectation of unobserved or partially observed  
10 variables based on initialized parameters, and the conditional expectation of the likelihood. Then, the M-  
11 step searches for an optimal update of the parameters through maximizing the likelihood. The two steps  
12 are iterated until updates converge. For the details of the EM algorithm, interested readers are referred to  
13 (Bilmes et al., 1998). In our case, CV trajectories with stop provide direct information of number of arrivals,  
14 while trajectories without a stop only provide information of upper bounds of the number of arrivals, i.e.,  
15 partial information. Considering this, the EM algorithm would be a proper choice for our estimation.

16 For the E-Step, denoting  $\hat{n}_{z,i}$  as the true value of accumulated number of arrivals by time  $t_{z,i}$  corre-  
1 sponding to a CV trajectory without a stop, we have the log-likelihood for the complete data sequence  
2 as:

$$\begin{aligned}
LL^c &= \sum_{i=1}^n \ln p(n_{y,i} | \lambda P_{y,i}) + \sum_{i=1}^m \ln p(\hat{n}_{z,i} | \lambda P_{z,i}) \\
&= \sum_{i=1}^n \left[ \ln \frac{(\lambda P_{y,i})^{n_{y,i}} e^{-\lambda P_{y,i}}}{n_{y,i}!} \right] + \sum_{i=1}^m \left[ \ln \frac{(\lambda P_{z,i})^{\hat{n}_{z,i}} e^{-\lambda P_{z,i}}}{\hat{n}_{z,i}!} \right] \\
&= \sum_{i=1}^n [n_{y,i} (\ln \lambda + \ln P_{y,i}) - \lambda P_{y,i} - \ln n_{y,i}!] \\
&\quad + \sum_{i=1}^m [\hat{n}_{z,i} (\ln \lambda + \ln P_{z,i}) - \lambda P_{z,i} - \ln \hat{n}_{z,i}!]
\end{aligned} \tag{4}$$

3 Then, the expectation of the log-likelihood can be expressed as:

$$Q(\lambda | \lambda^{(s)}) = E(LL^c | \lambda^{(s)}) = C + \sum_{i=1}^n [n_{y,i} \ln \lambda - \lambda P_{y,i}] + \sum_{i=1}^m [\hat{n}_{z,i} \ln \lambda - \lambda P_{z,i}] \tag{5}$$

4 We will use the conditional mean as the estimate of the unobserved  $\hat{n}_{z,i}$ , given  $n_{z,i}$ . We have:

$$\hat{n}_{z,i} | n_{z,i}, \lambda^{(s)} = \sum_{k=0}^{n_{z,i}} k \Pr(\hat{n}_{z,i} = k | \hat{n}_{z,i} \leq n_{z,i}, \lambda^{(s)}) = \sum_{k=0}^{n_{z,i}} k \frac{\frac{(\lambda^{(s)} P_{z,i})^k}{k!}}{\sum_{l=0}^{n_{z,i}} \frac{(\lambda^{(s)} P_{z,i})^l}{l!}} \tag{6}$$

5 Finally, in the M-step, by setting the derivative of  $Q(\lambda | \lambda^{(s)})$  with respect to  $\lambda$  as zero, we have an equation  
6 for updating  $\lambda$ , as:

$$\lambda^{(s+1)} = \frac{\sum_{i=1}^n n_{y,i} + \sum_{i=1}^m \hat{n}_{z,i}}{\sum_{i=1}^n P_{y,i} + \sum_{i=1}^m P_{z,i}} \tag{7}$$

7 The equations 6, 7 complete the EM iteration for the estimation.

## 8 5 Case Studies

9 To evaluate the proposed estimation algorithm, two case studies were conducted. The first case study  
10 utilized CV data received by a RSE in the SPMD project. The second case study utilized GPS data from  
11 users of a navigation service. These two types of data essentially contain similar information. However, data  
12 from CV are in 10 Hz sampling frequency while data from navigation devices are in 1 Hz frequency. Also,  
13 the studied intersection in the first study was controlled by the SCOOT adaptive signal system, while in the  
14 second case study, the intersection was controlled by a fixed-time signal.

### 15 5.1 Case Study 1: Using CV Data from a RSE

16 In the first case study, we analyzed data from Intersection of Plymouth Rd. & Green Rd., one of the deployed  
17 intersections in the SPMD project. CV data used were collected from 04/25/16 to 05/13/16. An illustration  
1 of the intersection geometry is shown in Figure 7, together with the ring-and-barrier diagram for traffic signal  
2 in operation. Here, our investigation focused only on EB through, WB through, as well as SB through and  
3 left-turn traffic, corresponding to phase 1, 2 and 4. The NB approach is a single-lane road adjacent to the  
4 parking lot of a shopping plaza. At the NB approach, traffic from the driveways and parking lots frequently  
5 affected vehicles traveling at the NB approach, resulting in additional queues and vehicle-stops not caused  
6 by the traffic signal. Since the stop and queuing information play key roles in our estimation, we exclude  
7 the analysis for the NB traffic, considering the noises caused by the traffic from the parking lot.

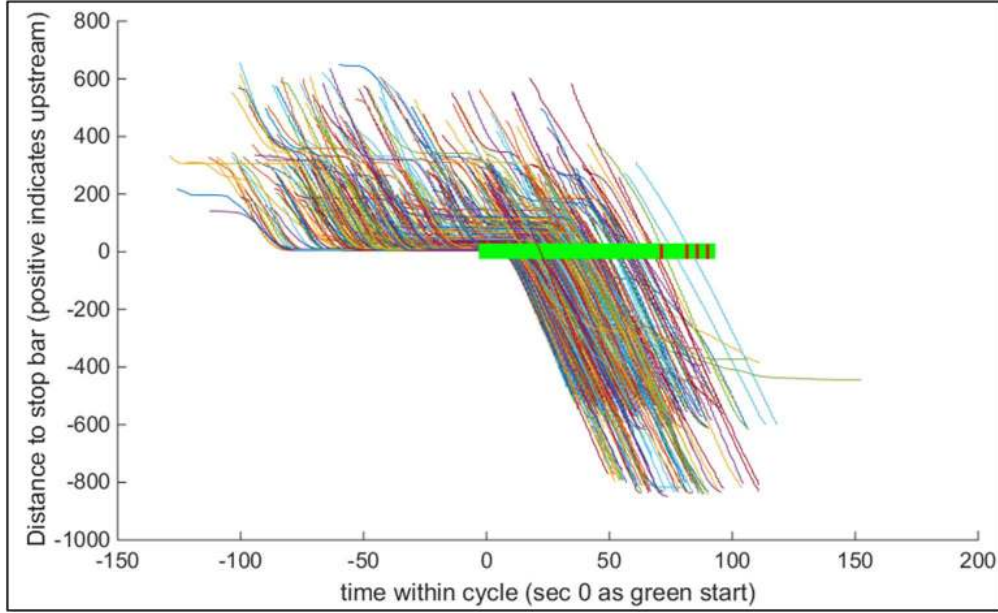


Figure 7: Illustration of investigated intersections


8

1 For each interested approach, trajectories of CVs were first processed as time-space plots with time as  
 2 the horizontal axis and distance to the stop bar as the vertical axis. The trajectories are shown in Figure  
 3 8a. With the SCOOT adaptive signal system, at this intersection, the cycle length, red and green duration  
 4 all varied from cycle to cycle. To select a common reference point in a signal cycle, we use the start of green  
 5 as time 0 in the plot for simplicity. The stop bar position is used as 0 origin along the y-axis. The distance  
 6 increases upstream along y-axis. That is, vehicles travel from locations of positive distances to negative  
 7 distances.





(a) Sample CV trajectories

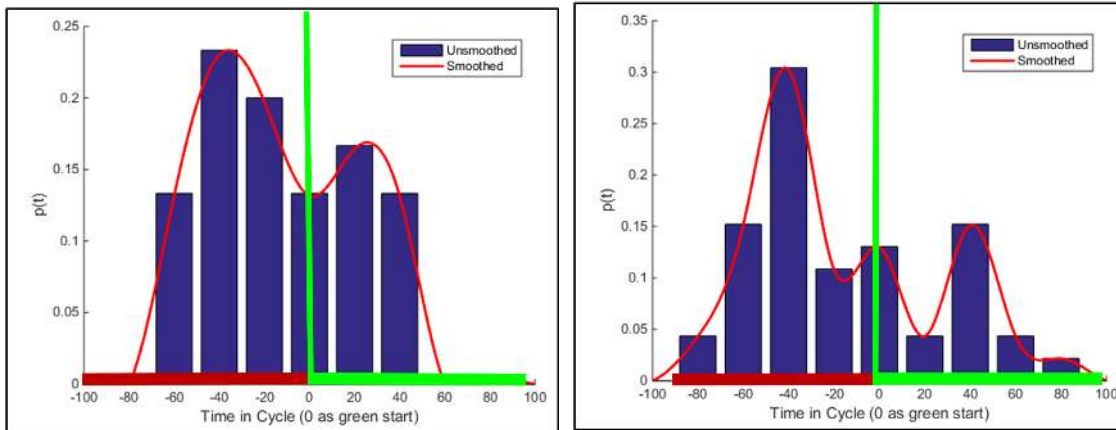

(b) Time dependent factor for 11AM-12 PM period (left) and 6 PM-7 PM period (right)

Figure 8: Illustration of CV trajectories (a) and time dependent factor (b) for EB through movement

8

1 The CV trajectories were aggregated according to different TOD periods with 1-hour intervals across dif-  
 2 ferent days, to first calculate time-dependent factors  $p(t)$ . For different TOD periods, substantially different  
 3  $p(t)$  were observed with two examples shown in Figure 8b. The differences in  $p(t)$  are likely due to differences  
 4 in both traffic patterns and signal settings in the two different TOD periods. Then, the EM procedure was  
 5 implemented for the estimation.

6 For validation purpose, hourly volumes were also manually collected for two days, i.e., 04/25/16 and  
 7 04/26/16, from 11:00 AM to 7:00 PM. Using the measured volumes, we calculated the penetration rates of

8 CVs, shown in Figure 9. Overall, the penetration rates ranged from 3% to 12%, varying over the selected  
 9 periods. The rates also varied substantially at different approaches, with lower CV penetration rates at the  
 10 EB and WB approach, i.e., the main approaches, and higher rates at the SB approach, a minor approach.  
 11 This variation could be due to that the SB approach connects to residential areas close to the University of  
 12 Michigan, that would have larger population of participants of the SPMD project.

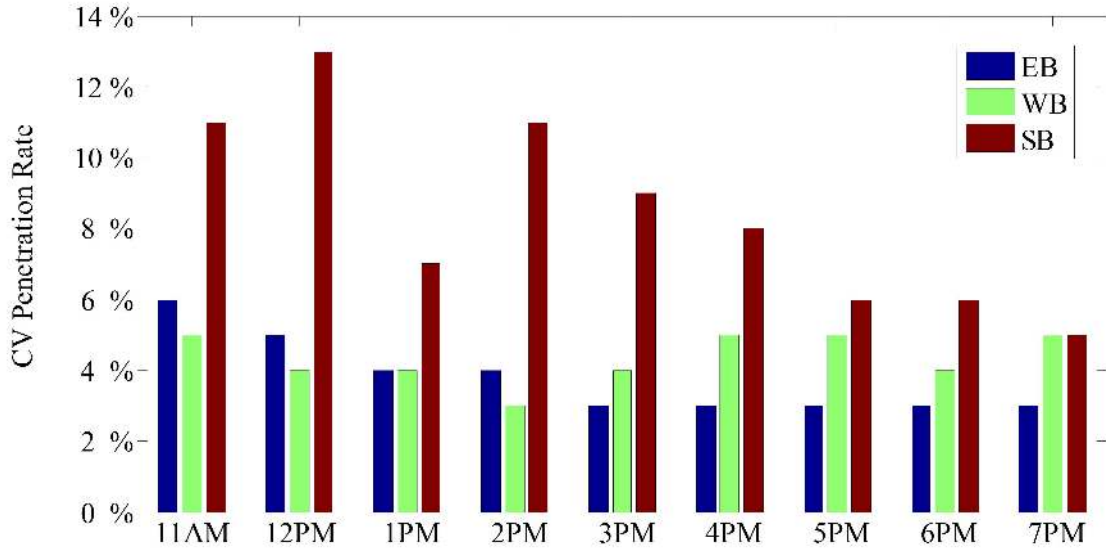


Figure 9: CV penetration rates over time of day

13

14 The observed volumes were then used for comparing with the estimated volumes, with results shown in  
 15 Figure 10. The three cases are shown in three sub-figures, respectively. In the figure, the yellow bars show  
 1 the estimated volume, and the blue bars show the observed volumes, both in units of vehicle per hour per  
 2 lane (vphpl). Substantial different traffic patterns exists in the three cases. For example, clear afternoon  
 3 peak existed in both EB and SB cases, but not in WB case. Regarding the estimation, the estimated volumes  
 4 are generally closed to the observed volumes for all the three cases. To further quantify the accuracy, we  
 5 calculated the Mean Absolute Percentage Error (MAPE) for the estimation based on the following formula,  
 6 indicated as well in the figure.

$$MAPE = \frac{1}{N} \sum_{i=1}^N \frac{|Vol_{o,i} - Vol_{e,i}|}{Vol_{o,i}} \quad (8)$$

7 Where:  $Vol_{o,i}$  is the observed volume, and  $Vol_{e,i}$  is the estimated volume, during i-th interval.

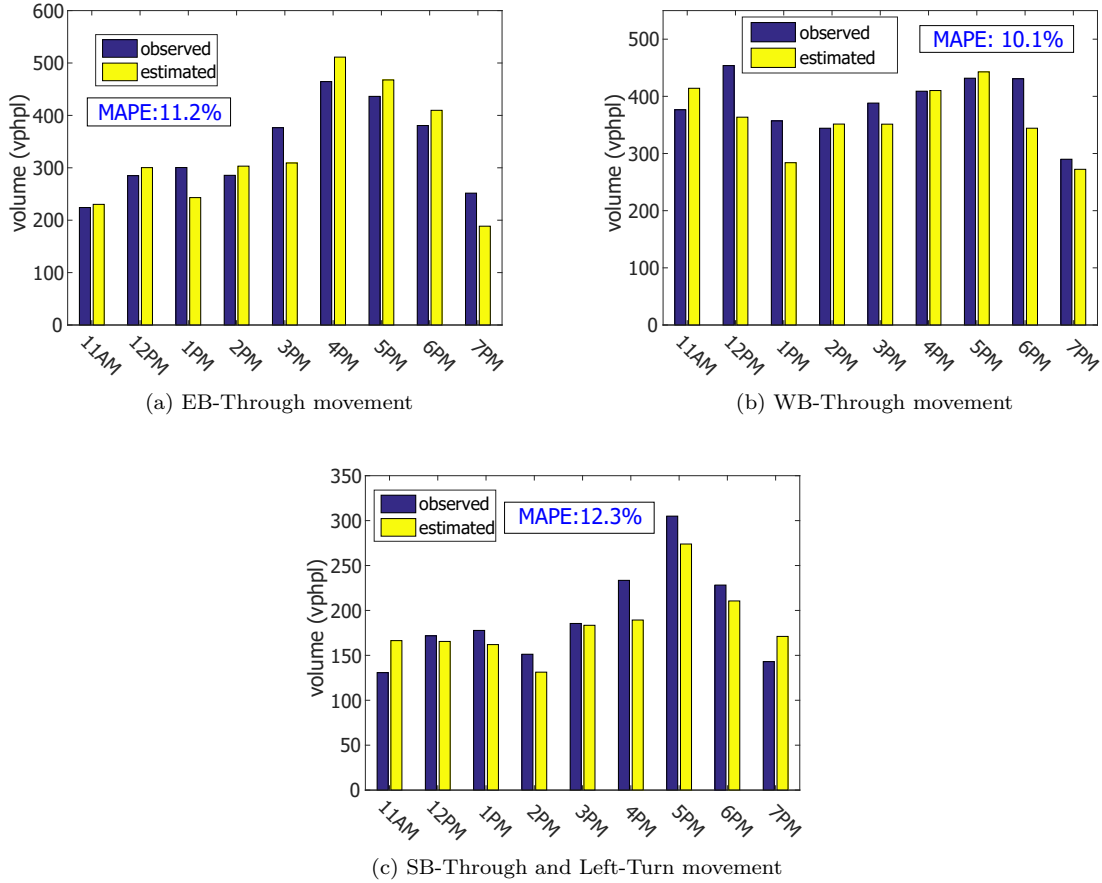


Figure 10: Comparison between observed volume with estimated volume using SPMD data

8

9 The MAPEs are 11.2%, 10.1% and 12.3% for EB, WB and SB approach, respectively, indicating rea-  
10 sonable accuracy of the proposed procedure. Among the 3 approaches, however, the estimation for the SB  
1 approach performs the worst among all three phases, despite the largest CV penetration rates. This is likely  
2 due to that the arrival patterns are more stable at the EB and WB approaches with signal coordination,  
3 than that at the SB approach, i.e., a minor approach. Additionally, with the lowest traffic volumes at the  
4 SB approach, the total number of observed CV trajectories at the SB approach is similar to that at the  
5 EB and WB approach, which could imply that the sample size also play an important role rather than the  
6 penetration rate alone. Nonetheless, the results show encouraging estimation accuracy using CV data with  
7 overall low penetration rates in the investigated cases.

## 8 5.2 Case Study 2: Using Data from a Route Navigation Service

9 In the second case study, we utilized data collected from drivers using a navigation service in the City of  
10 Shenzhen, China. The data were collected on workdays between 06/13/2016 and 06/30/2016 on LongXiang  
11 Rd. The illustration of data sample is shown in Figure 11, in which the color indicates vehicle speed. For  
1 the analysis, we focused on a selected approach at an intersection and estimated traffic volumes using the  
2 proposed procedure. The estimation was then validated using data from loop detectors for the approach.  
3 The selected approach and intersection are indicated with the purple arrow and circle in Figure 11.

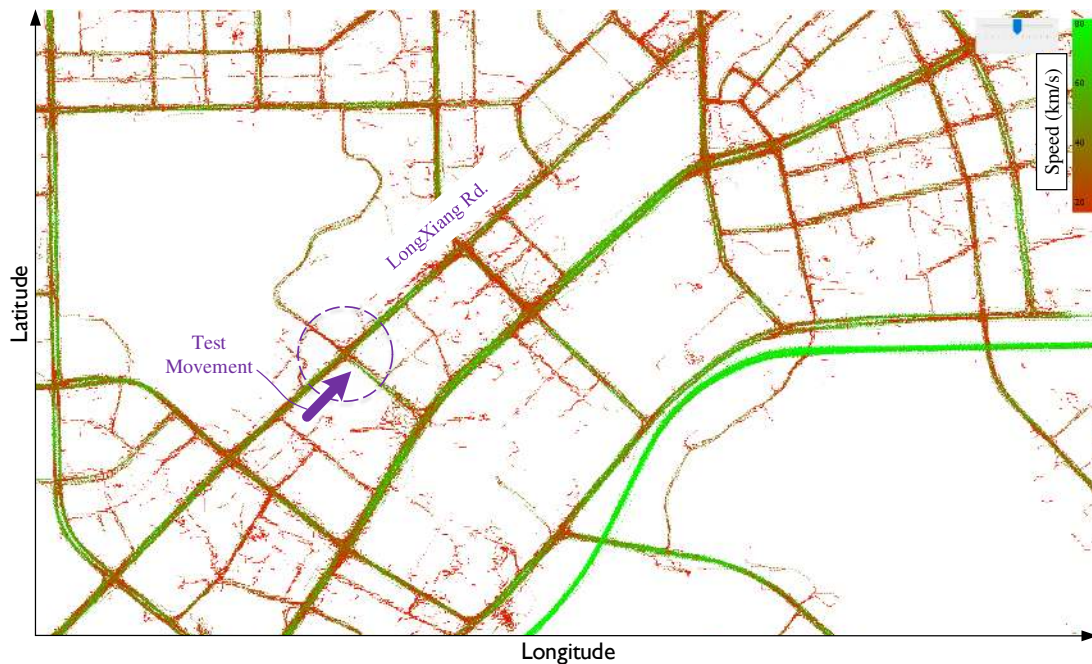


Figure 11: Illustration of GPS data from navigation service users

4

5 At the selected intersection, Intersection LongXiang Rd. & YiCui Rd., a sample set of the GPS trajec-  
6 tories between the adjacent upstream and downstream intersections for the through movement is shown in  
7 Figure 12. The time of each GPS data point was also converted to time within a signal cycle.

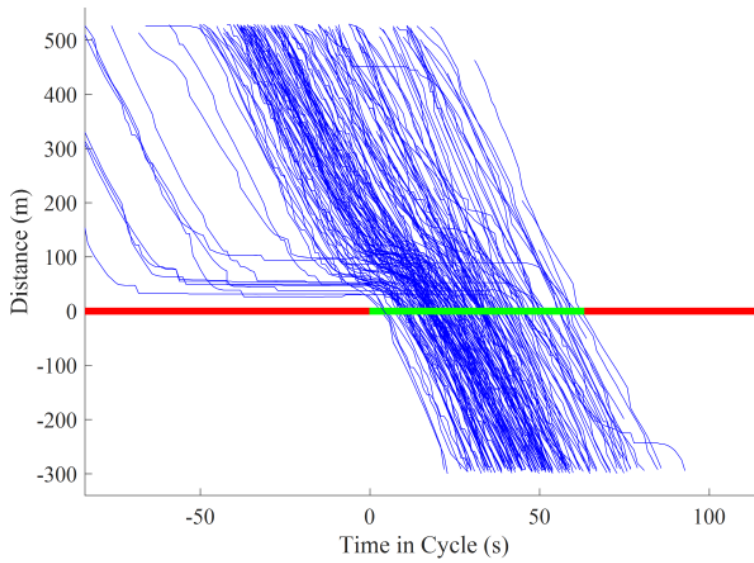


Figure 12: Trajectories of converted trajectory data from navigation user

1

2 For validation purposes, volume data were also obtained for the selected approach from loop detectors on  
 3 07/12/2016. Based on the detector data, we calculated the penetration rates of the navigation users for the  
 4 through movement. The results are shown in Figure 13. In general, the penetration rates were between 0.5%  
 5 to 2%. The penetration rates also varied substantially across different time of day, with the peak penetration  
 6 rates occurring around 11AM and 3 PM.

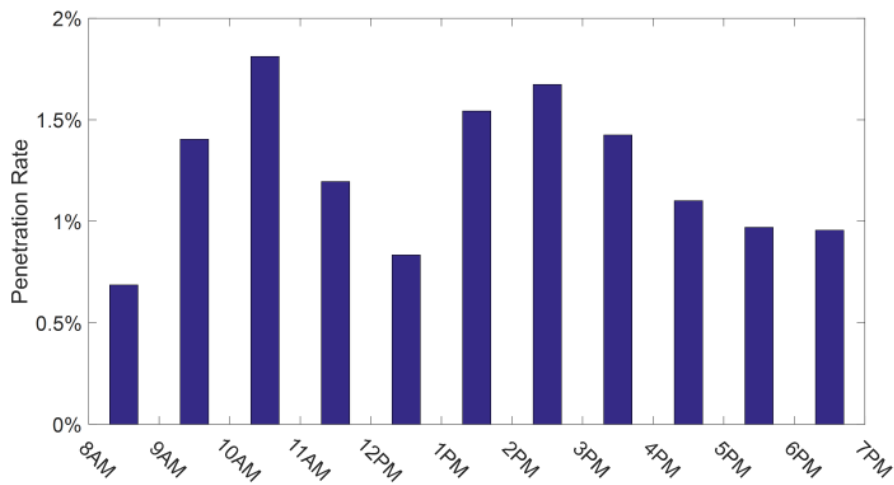


Figure 13: Penetration rates of the navigation users over time of day

7

8 The volume estimation results are shown in Figure 14. In this case, we did not observe clear morning  
 9 peak and afternoon peak, and the traffic volumes are rather similar throughout a day, in the range between  
 10 200 vphpl to 500 vphpl. Regarding the estimation accuracy, the estimated volumes are generally close to  
 11 the observed volumes. The MAPE of the estimation is 9.2% for the selected approach. The overall trend of  
 12 estimation is similar to that in Case Study 1. However, the estimation errors in Case Study 2 are slightly  
 13 smaller than those in Case Study 1, despite lower penetration rates. This is most likely because that the  
 14 traffic signal in Case Study 2 was in a fixed-timed mode, while the signal in Case Study 1 was controlled by  
 15 the SCOOT adaptive control system. Therefore, the time-dependent factors or the cyclical profiles in Case  
 16 Study 2 are more consistent from cycle to cycle, than those in Case Study 1, hence yielding better estimation  
 17 results.


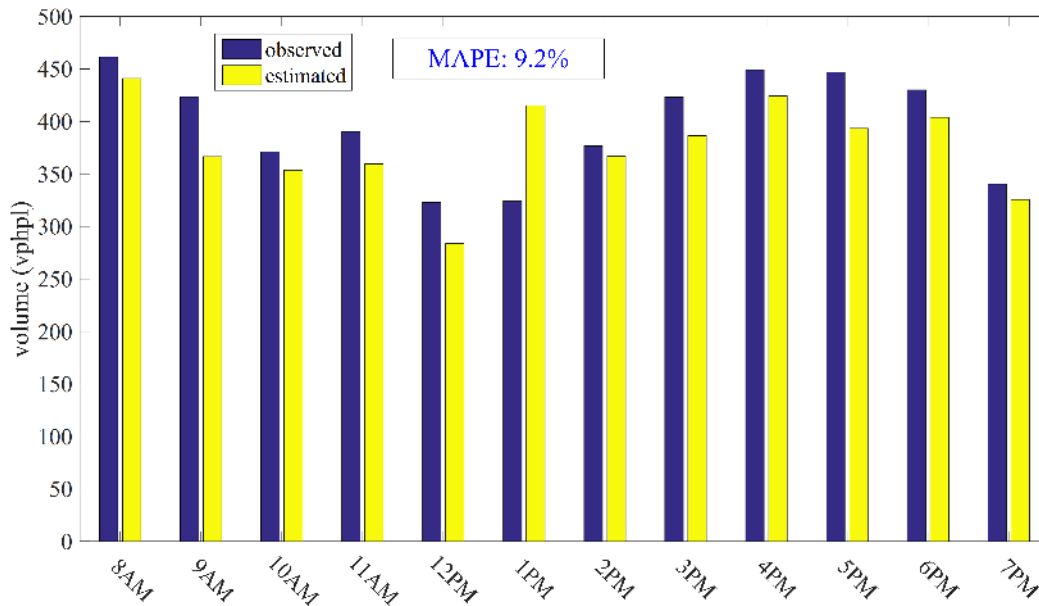


Figure 14: Comparison between observed volume with estimated volume using data from navigation users for hourly volumes


1

2 In addition to hourly volume estimation, we further estimate the 30-min volume and 10-min volume, to  
 3 test the performance of the proposed method for different estimation intervals. The estimation results are  
 4 summarized in Figure 15. The upper figure shows results for 30-min volume estimation, and lower figure  
 5 shows results for 10-min volume estimation. For 30-min volumes, the estimations are closed to the observed  
 6 volumes with a MAPE of 11.5%, showing reasonable estimation accuracy for the 30-min volumes. For 10-min  
 1 volumes, although we can observe that the main trend of estimated volumes follows the observation, with a

2 MAPE of 18.7%. However, the estimation performance is much less consistent with the largest estimation  
 3 errors around 40% to 50%. (Note that, estimation at 2PM yields an error over 100%. However, this is likely  
 4 caused by the abnormally low detector volume due to a detector error) The inconsistency would be likely  
 5 due to the low number of CV trajectories within the 10-min windows for estimation input.

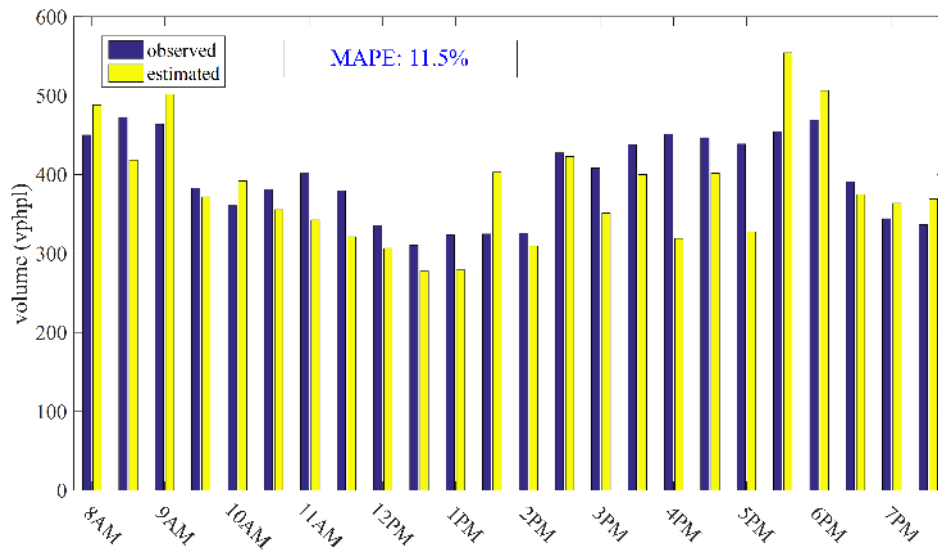

(a) 30-min volume estimation

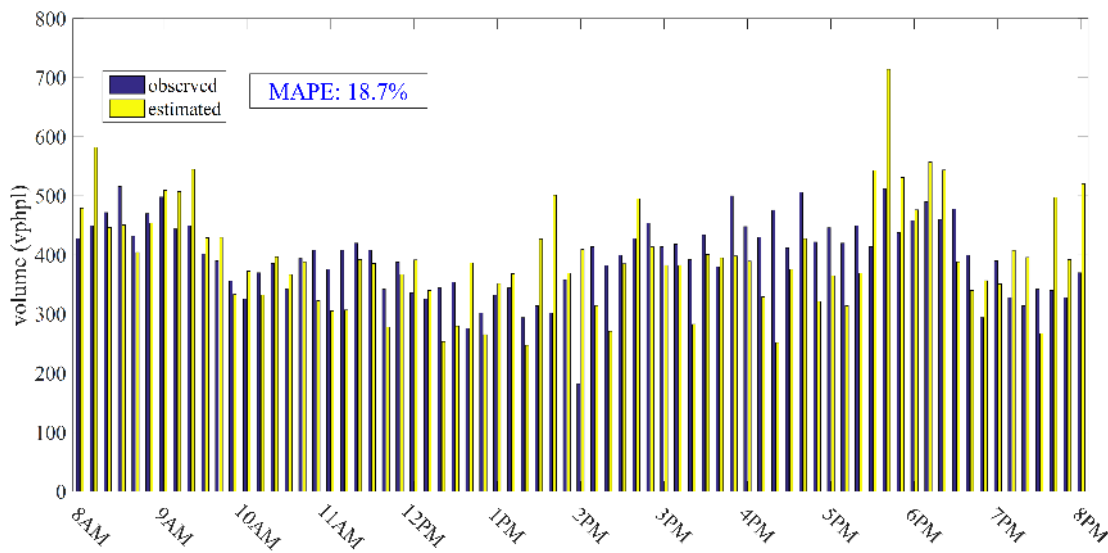

(b) 10-min volume estimation

Figure 15: Comparison between observation and estimation for 30-min volume (sub-Figure a) and 10-min volume (sub-Figure b)

6

7 To illustrate the use of the estimated volume data for assisting signal operation, we estimate the hourly-

8 volume for four other intersections along the LongXiang Rd. and generated a time-space diagram (TS-  
 9 Diagram) based on the estimated volumes and the time dependent factors. The TS-Diagram is a convenient  
 10 and popular tool for traffic engineers to evaluate performance of signal coordination, and to fine-tune signal  
 11 settings if necessary. The procedure to construct TS-Diagram is based on (Zheng et al., 2015), and the result  
 12 is shown in Figure 16 for the LongXiang corridor with the 5 intersections for time period 8 AM-9 AM.

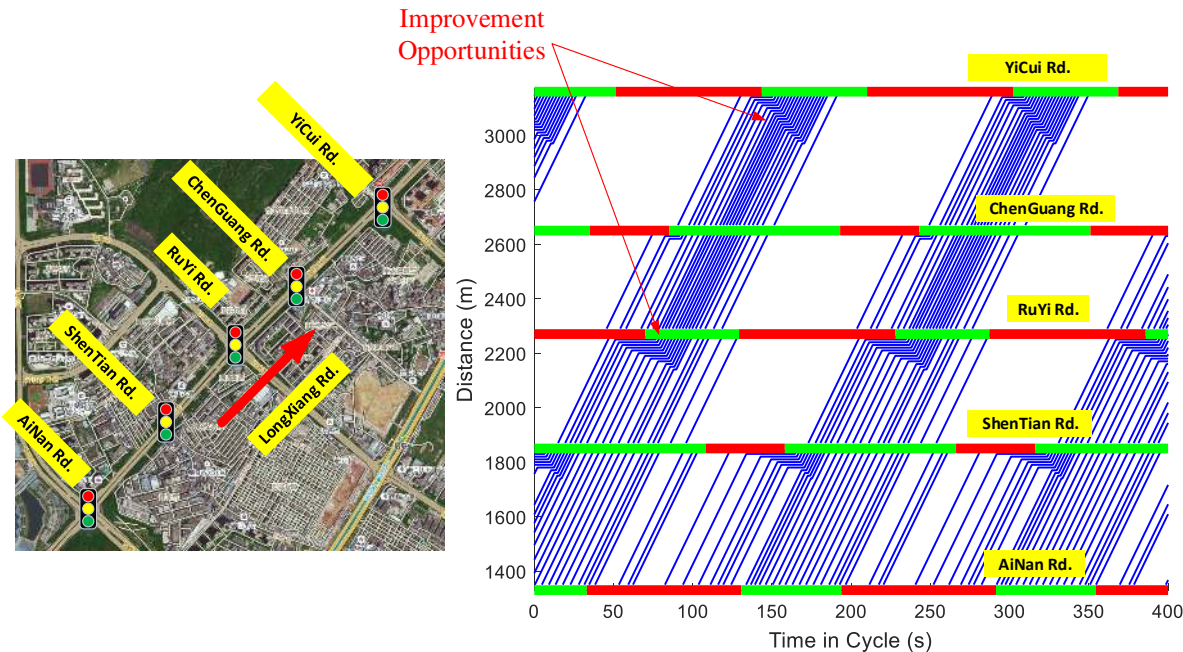


Figure 16: Time-Space diagram for the tested segment

13

14 From Figure 16, it can be seen that, in general, the signals were coordinated well with traffic traveling  
 1 in free-flow speed for the most of the time. However, for Intersection ShenTian Rd. & LongXiang Rd. and  
 2 Intersection YiCui Rd. & LongXiang Rd., vehicle delay exist and could potentially be reduced by adjusting  
 3 offsets at these two intersections, indicating improvement opportunities at these two intersections.

## 4 6 Conclusion and Future Research

5 With the rapid development of CV technology, paradigm shift may be brought to the traffic signal systems.  
 6 The data from CVs provide invaluable opportunities to reduce or even eliminate the needs for conventional  
 7 traffic detectors. In the near future with low penetration rates, data from CVs could be particularly useful



8 to generate offline performance measure for traffic signal systems and adjust signal operation periodically,  
9 e.g., two weeks or a month. This potential is especially beneficial for improving fixed time signal operation.

10 In this paper, we developed an innovative method to estimate traffic volumes using trajectories data from  
11 CVs or trajectories data from navigation devices. For existing traffic signals, the traffic volumes are the key  
12 inputs to signal optimization, as well as to many other traffic engineering practices. Considering that CV  
13 deployments are still in their early stages, the focus of the proposed approach is to accommodate low CV  
14 penetration rates, for instance, below 10% in the City of Ann Arbor, MI. In the proposed approach, we mod-  
15 eled the traffic arrivals as a time dependent Poisson process and derived an EM procedure for the estimation.  
16 Based on the time-dependent Poisson process, the method can accommodate coordinated intersections, as  
17 well as isolated intersections, for traffic volume estimation. We tested the estimation procedure with two  
18 case studies using real-world CV data from the SPMD project and vehicle trajectory data from navigation  
19 service users, respectively. Comparing with volume data collected manually and data from loop detectors,  
20 reasonable accuracy of the estimations was found, with MAPE in range of 9% to 12%, for volume of intervals  
21 in 30 minutes and 1 hour, and MAPE of 19% for volume of 10-minute interval. We believe that the proposed  
22 methodology would be an important building block of utilizing CV data for adjusting or re-timing traffic  
23 signals.

24 This research is but the first step of exploring trajectories data from CV or navigation devices for assisting  
25 traffic signal operation, and it can be extended in several directions. One of the directions is to improve the  
26 estimation algorithm for estimation with short intervals, e.g., cycle-by-cycle estimation, through data fusion  
27 of both historical data and real-time data. Such real-time volume estimation is critical for adaptive signal  
28 control, and will be one of the focuses of our future work. In addition, the proposed estimation is sensitive to  
29 interrupted traffic from adjacent parking lots or driveways which introduce significant noises to the vehicle  
30 trajectories. Thus, the proposed algorithm is mostly suitable for estimation at signalized intersections where  
31 no sink/source exists nearby the stop bar. Also, due to the assumption that no residual queue exists at start  
1 of signal cycles, the proposed approach is not suitable for estimation with over-saturated traffic conditions.  
2 We intend to address these limitations in our future work. Lastly, while the current focus is on estimating  
3 traffic arrival information, developing systematic approaches for traffic signal re-timing, regarding offsets,  
4 green splits, and cycle lengths as well as TOD schedules, will be another focus of our future work.

## 5 **Acknowledgment**

6 Partial funding for this research was provided by the Department of Energy under Award No. DE-EE0007212.  
7 The views expressed in this paper are those of the authors alone.

## 8 References

- 9 Abbas, M., Bullock, D., and Head, L. (2001). Real-time offset transitioning algorithm for coordinating traffic  
10 signals. *Transportation Research Record: Journal of the Transportation Research Board*, (1748):26–39.
- 11 Agbolosu-Amison, S. J., Park, B., and Center, M.-A. U. T. (2008). Performance evaluation of dynamic gap-  
12 out feature using stochastic optimization method and software in the loop simulation. Technical report,  
13 Mid-Atlantic Universities Transportation Center.
- 14 Ban, X. and Gruteser, M. (2010). Mobile sensors as traffic probes: addressing transportation modeling and  
15 privacy protection in an integrated framework. In *Traffic and Transportation Studies 2010*, pages 750–767.
- 16 Ban, X., Herring, R., Hao, P., and Bayen, A. (2009). Delay pattern estimation for signalized intersections  
17 using sampled travel times. *Transportation Research Record: Journal of the Transportation Research*  
18 *Board*, (2130):109–119.
- 19 Ban, X. J., Hao, P., and Sun, Z. (2011). Real time queue length estimation for signalized intersections using  
20 travel times from mobile sensors. *Transportation Research Part C: Emerging Technologies*, 19(6):1133–  
21 1156.
- 22 Bhaskar, A., Chung, E., and Dumont, A.-G. (2011). Fusing loop detector and probe vehicle data to estimate  
23 travel time statistics on signalized urban networks. *Computer-Aided Civil and Infrastructure Engineering*,  
24 26(6):433–450.
- 25 Bilmes, J. A. et al. (1998). A gentle tutorial of the em algorithm and its application to parameter estimation  
26 for gaussian mixture and hidden markov models. *International Computer Science Institute*, 4(510):126.
- 27 Cetin, M. (2012). Estimating queue dynamics at signalized intersections from probe vehicle data: Method-  
28 ology based on kinematic wave model. *Transportation Research Record: Journal of the Transportation*  
1 *Research Board*, (2315):164–172.
- 2 Chen, M. and Chien, S. (2001). Dynamic freeway travel-time prediction with probe vehicle data: Link  
3 based versus path based. *Transportation Research Record: Journal of the Transportation Research Board*,  
4 (1768):157–161.
- 5 Christofa, E., Argote, J., and Skabardonis, A. (2013). Arterial queue spillback detection and signal control  
6 based on connected vehicle technology. *Transportation Research Record: Journal of the Transportation*  
7 *Research Board*, (2356):61–70.

- 8 Comert, G. (2013). Simple analytical models for estimating the queue lengths from probe vehicles at traffic  
9 signals. *Transportation Research Part B: Methodological*, 55:59–74.
- 10 Comert, G. (2016). Queue length estimation from probe vehicles at isolated intersections: Estimators for  
11 primary parameters. *European Journal of Operational Research*, 252(2):502–521.
- 12 Comert, G. and Cetin, M. (2009). Queue length estimation from probe vehicle location and the impacts of  
13 sample size. *European Journal of Operational Research*, 197(1):196–202.
- 14 Daganzo, C. F. (2005). A variational formulation of kinematic waves: basic theory and complex boundary  
15 conditions. *Transportation Research Part B: Methodological*, 39(2):187–196.
- 16 Day, C. M. and Bullock, D. M. (2016). Opportunities for detector-free signal offset optimization with limited  
17 connected vehicle market penetration: A proof-of-concept study. *Transportation Research Record*.
- 18 Feng, Y., Head, K. L., Khoshmaghani, S., and Zamanipour, M. (2015). A real-time adaptive signal control  
19 in a connected vehicle environment. *Transportation Research Part C: Emerging Technologies*, 55:460–473.
- 20 Gay, K. and Kniss, V. (2015). Safety pilot model deployment lessons learned and recommendations for future  
21 connected vehicle activities. Technical report, USDOT FHWA-JPO-16-363.
- 22 Goodall, N. J., Smith, B. L., and Park, B. (2016). Microscopic estimation of freeway vehicle positions from  
23 the behavior of connected vehicles. *Journal of Intelligent Transportation Systems*, 20(1):45–54.
- 24 Guler, S. I., Menendez, M., and Meier, L. (2014). Using connected vehicle technology to improve the efficiency  
25 of intersections. *Transportation Research Part C: Emerging Technologies*, 46:121–131.
- 26 Hao, P., Ban, X., and Whon Yu, J. (2015). Kinematic equation-based vehicle queue location estimation  
27 method for signalized intersections using mobile sensor data. *Journal of Intelligent Transportation Systems*,  
1 19(3):256–272.
- 2 Hao, P., Ban, X. J., Guo, D., and Ji, Q. (2014). Cycle-by-cycle intersection queue length distribution  
3 estimation using sample travel times. *Transportation research part B: methodological*, 68:185–204.
- 4 Hao, P., Sun, Z., Ban, X. J., Guo, D., and Ji, Q. (2013). Vehicle index estimation for signalized intersections  
5 using sample travel times. *Transportation Research Part C: Emerging Technologies*, 36:513–529.
- 6 He, Q., Head, K. L., and Ding, J. (2012). Pamscod: Platoon-based arterial multi-modal signal control with  
7 online data. *Transportation Research Part C: Emerging Technologies*, 20(1):164–184.

- 8 He, Q., Head, K. L., and Ding, J. (2014). Multi-modal traffic signal control with priority, signal actuation  
9 and coordination. *Transportation Research Part C: Emerging Technologies*, 46:65–82.
- 10 Hellinga, B. R. and Fu, L. (2002). Reducing bias in probe-based arterial link travel time estimates. *Trans-*  
11 *portation Research Part C: Emerging Technologies*, 10(4):257–273.
- 12 Herrera, J. C., Work, D. B., Herring, R., Ban, X. J., Jacobson, Q., and Bayen, A. M. (2010). Evaluation of  
13 traffic data obtained via gps-enabled mobile phones: The mobile century field experiment. *Transportation*  
14 *Research Part C: Emerging Technologies*, 18(4):568–583.
- 15 Hoh, B., Gruteser, M., Herring, R., Ban, J., Work, D., Herrera, J.-C., Bayen, A. M., Annavaram, M., and  
16 Jacobson, Q. (2008). Virtual trip lines for distributed privacy-preserving traffic monitoring. In *Proceedings*  
17 *of the 6th international conference on Mobile systems, applications, and services*, pages 15–28. ACM.
- 18 Jenelius, E. and Koutsopoulos, H. N. (2013). Travel time estimation for urban road networks using low  
19 frequency probe vehicle data. *Transportation Research Part B: Methodological*, 53:64–81.
- 20 Lee, J., Park, B., and Yun, I. (2013a). Cumulative travel-time responsive real-time intersection control  
21 algorithm in the connected vehicle environment. *Journal of Transportation Engineering*, 139(10):1020–  
22 1029.
- 23 Lee, J., Park, B. B., Malakorn, K., and So, J. J. (2013b). Sustainability assessments of cooperative vehicle  
24 intersection control at an urban corridor. *Transportation Research Part C: Emerging Technologies*, 32:193–  
25 206.
- 26 Li, J.-Q., Zhou, K., Shladover, S., and Skabardonis, A. (2013). Estimating queue length under connected  
27 vehicle technology: Using probe vehicle, loop detector, and fused data. *Transportation Research Record:*  
28 *Journal of the Transportation Research Board*, (2356):17–22.
- 29 Lighthill, M. J. and Whitham, G. B. (1955). On kinematic waves. ii. a theory of traffic flow on long crowded  
1 roads. In *Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences*,  
2 volume 229, pages 317–345. The Royal Society.
- 3 Long Cheu, R., Xie, C., and Lee, D.-H. (2002). Probe vehicle population and sample size for arterial speed  
4 estimation. *Computer-Aided Civil and Infrastructure Engineering*, 17(1):53–60.
- 5 Masters, J. (2016). Making the right connections. *ITS International*, pages 9–11.
- 6 McCracken, J. (1996). Demonstration project 93–making the most of today’s technology. *Public Roads*,  
7 59(3).

- 8 Milanés, V., Villagra, J., Godoy, J., Simó, J., Pérez, J., and Onieva, E. (2012). An intelligent v2i-based  
9 traffic management system. *Intelligent Transportation Systems, IEEE Transactions on*, 13(1):49–58.
- 10 Nanthawichit, C., Nakatsuji, T., and Suzuki, H. (2003). Application of probe-vehicle data for real-time traffic-  
11 state estimation and short-term travel-time prediction on a freeway. *Transportation Research Record:  
12 Journal of the Transportation Research Board*, (1855):49–59.
- 13 NTOC (2012). 2012 national traffic signal report card.
- 14 Richards, P. I. (1956). Shock waves on the highway. *Operations research*, 4(1):42–51.
- 15 Sun, Z. and Ban, X. J. (2013). Vehicle trajectory reconstruction for signalized intersections using mobile  
16 traffic sensors. *Transportation Research Part C: Emerging Technologies*, 36:268–283.
- 17 Sunkari, S. (2004). The benefits of retiming traffic signals. *Institute of Transportation Engineers. ITE  
18 Journal*, 74(4):26.
- 19 Turner, S. M. and Holdener, D. J. (1995). Probe vehicle sample sizes for real-time information: The houston  
20 experience. In *Vehicle Navigation and Information Systems Conference, 1995. Proceedings. In conjunction  
21 with the Pacific Rim TransTech Conference. 6th International VNIS. 'A Ride into the Future'*, pages 3–10.  
22 IEEE.
- 23 Work, D. B., Tossavainen, O.-P., Blandin, S., Bayen, A. M., Iwuchukwu, T., and Tracton, K. (2008). An  
24 ensemble kalman filtering approach to highway traffic estimation using gps enabled mobile devices. In  
25 *Decision and Control, 2008. CDC 2008. 47th IEEE Conference on*, pages 5062–5068. IEEE.
- 513 Zheng, F. and Van Zuylen, H. (2013). Urban link travel time estimation based on sparse probe vehicle data.  
514 *Transportation Research Part C: Emerging Technologies*, 31:145–157.
- 515 Zheng, J., Liu, H., and Misgen, S. (2015). Fine-tuning time-of-day transitions for arterial traffic signals.  
516 *Transportation Research Record: Journal of the Transportation Research Board*, (2488):32–40.
- 517 Zheng, J., Liu, H., Misgen, S., Schwartz, K., Green, B., and Anderson, M. (2014). Use of event-based traffic  
518 data in generating time-space diagrams for evaluation of signal coordination. *Transportation Research  
519 Record: Journal of the Transportation Research Board*, (2439):94–104.