



University of Groningen

Organic non-volatile memories from ferroelectric phase-separated blends

Asadi, Kamal; De Leeuw, Dago M.; De Boer, Bert; Blom, Paul W. M.

Published in: Nature Materials

DOI: 10.1038/nmat2207

IMPORTANT NOTE: You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.

Document Version Publisher's PDF, also known as Version of record

Publication date: 2008

Link to publication in University of Groningen/UMCG research database

Citation for published version (APA): Asadi, K., De Leeuw, D. M., De Boer, B., & Blom, P. W. M. (2008). Organic non-volatile memories from ferroelectric phase-separated blends. *Nature Materials*, 7(7), 547-550. https://doi.org/10.1038/nmat2207

Copyright Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

The publication may also be distributed here under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license. More information can be found on the University of Groningen website: https://www.rug.nl/library/open-access/self-archiving-pure/taverneamendment.

Take-down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Downloaded from the University of Groningen/UMCG research database (Pure): http://www.rug.nl/research/portal. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.

Supplementary Information

Organic non-volatile memories from ferroelectric phase separated blends

Kamal Asadi¹, Dago M. de Leeuw^{1,2}, Bert de Boer¹, and Paul W. M. Blom¹

¹Zernike Institute for Advanced Materials, University of Groningen, Nijenborgh 4, NL-9747 AG, Groningen, The Netherlands.

²*Philips Research Laboratories, High Tech Campus 4, NL-5656AE, Eindhoven, The Netherlands.*

The morphology of the bulk heterojunction based on P(VDF-TrFE):P3HT (10:1) was investigated with a scanning near-field optical microscope of WiTec (Alpha SNOM) that simultaneously records the topography (Fig. 1a) and the transmitted light intensity at λ =454 nm (Fig. 1b). Figure 1 demonstrates the phase separation into interpenetrating networks on the order of several tens to several hundreds of nanometers.

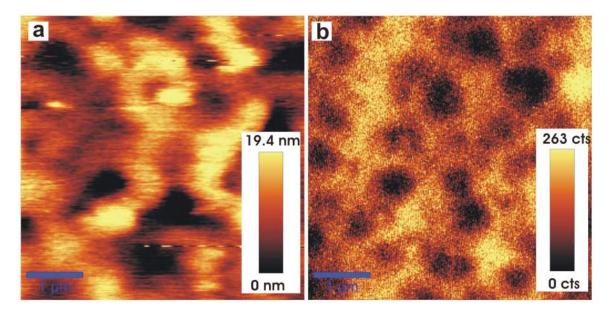


Figure 1 *Scanning near-field optical microscopy images of the topography (a) and of the transmitted light intensity (b) of a spin coated blend of P(VDF-TrFE):P3HT (10:1).*

Further investigations of the interfacial morphology was conducted with atomic force microscopy (NanoScope IV-Veeco Instruments). The results (Fig. 2) clearly shows the formation of the two different phases at the interface, where the uniform phase is the region-random, non-crystalline P3HT, and the crystalline phase is P(VDF-TrFE) which is formed upon annealing of the blend. These results demonstrate the phase separation on a length scale of hundreds of nanometers.

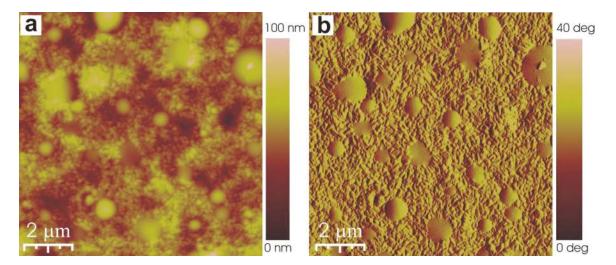


Figure 2 Atomic force microscopy images of the topography (a) and of the phase
(b) of a spin coated blend of P(VDF-TrFE):P3HT (10:1).